

Construction of CCC and ZCCS Through Additive Characters Over Galois Field

Gobinda Ghosh

Department of Mathematics

IIT Patna

Bihta, Patna, Bihar

Email: gobinda_1921ma06@iitp.ac.in

Sudhan Majhi

Department of ECE.

IISc Bangalore, Karnataka, India

Email: smajhi@iisc.ac.in

Subhabrata Paul

Department of Mathematics.

IIT Patna

Bihta, Patna, Bihar

Email: subhabrata@iitp.ac.in

Abstract—With the rapid progression in wireless communication technologies, especially in multicarrier code-division multiple access (MC-CDMA), there is a need of advanced code construction methods. Traditional approaches, mainly based on generalized Boolean functions, have limitations in code length versatility. This paper introduces a novel approach to constructing complete complementary codes (CCC) and Z-complementary code sets (ZCCS), for reducing interference in MC-CDMA systems. The proposed construction, distinct from Boolean function-based approaches, employs additive characters over Galois fields $\text{GF}(p^r)$, where p is prime and r is a positive integer. First, we develop CCCs with lengths of p^r , which are then extended to construct ZCCS with both unreported lengths and sizes of np^r , where n are arbitrary positive integers. The versatility of this method is further highlighted as it includes the lengths of ZCCS reported in prior studies as special cases, underscoring the method's comprehensive nature and superiority.

I. INTRODUCTION

The advancement of wireless communication technologies, particularly in the field of multicarrier code-division multiple access (MC-CDMA), is a critical area of research in today's rapidly evolving digital era. Traditional code construction methods, primarily based on generalized Boolean functions, have been instrumental yet exhibit certain constraints, particularly in terms of code length versatility. This paper introduces a new approach to the development of complete complementary codes (CCC) and Z-complementary code sets (ZCCS), which are essential for reducing interference in wireless communication systems.

Fan *et al.* [1] significantly contributed to the development of ZCCS for MC-CDMA systems, a pivotal advancement highlighted in their study [1]. These ZCCSs, distinguished by their zero correlation zone (ZCZ), play a crucial role in enhancing the performance of MC-CDMA, particularly in quasi-synchronous channels by enabling interference-free operations without the need for power adjustment [2]. Research in the area of ZCCS has spanned various construction methodologies, both direct [3]–[9] and indirect [10]–[12].

Existing methods in the current literature are limited in terms of the lengths and sizes available for optimal ZCCS. This constraint has motivated our research to explore new methodologies for constructing ZCCS with novel lengths and sizes previously unattained in the existing literature. Our

novel approach diverges from traditional boolean function-based methodologies by employing additive characters over finite Galois fields. This innovative approach enables the construction of CCC with lengths of p^r , and ZCCS with both unreported lengths and sizes of np^r , where n, r are arbitrary positive integers. Furthermore, the versatility of this method is exemplified by the fact that the lengths of ZCCS can be included in those reported in important previous studies, such as those in [7], [9], [13] as special cases within our broader framework.

The structure of the rest of this work is organized as follows: Section II delves into essential preliminary concepts. The methodology for constructing CCC is detailed in Section III. Section IV is dedicated to the proposed methodology for the development of ZCCS. The paper concludes with key findings and observations in Section V.

II. PRELIMINARY

In this section, we lay the foundational concepts and essential lemmas that will be integral to our proposed construction approach.

Definition 1. Let $\mathbf{a} = (a_0, \dots, a_{l-1})$ and $\mathbf{b} = (b_0, \dots, b_{l-1})$ be two complex valued sequences. We define the aperiodic cross-correlation function (ACCF) between \mathbf{a} and \mathbf{b} as

$$\Phi(\mathbf{a}, \mathbf{b})(\tau) = \begin{cases} \sum_{k=0}^{l-1-\tau} a_k \bar{b}_{k+\tau}, & 0 \leq \tau < l, \\ \sum_{k=0}^{l+\tau-1} a_{k-\tau} \bar{b}_k, & -l < \tau < 0, \\ 0, & \text{otherwise,} \end{cases} \quad (1)$$

where \bar{b}_k denotes the complex conjugate of b_k . If \mathbf{a} is equal to \mathbf{b} , then the resulting function is termed the aperiodic auto-correlation function (AACF) of \mathbf{a} , denoted as $\Phi(\mathbf{a})$.

Definition 2. Consider the collection of sequences $\mathbf{D}_i = \{\mathbf{a}_k^i : 0 \leq k < m\}$ and $\mathbf{D}_j = \{\mathbf{a}_k^j : 0 \leq k < m\}$, each comprising m sequences. For each sequence \mathbf{a}_k^i , it is represented as $(a_{k,0}^i, \dots, a_{k,l-1}^i)$. The aperiodic cross-correlation sum (ACCS) for these two sets of sequences, \mathbf{D}_i and \mathbf{D}_j , is defined by:

$$\Phi(\mathbf{D}_i, \mathbf{D}_j)(\tau) = \sum_{k=0}^{m-1} \Phi(\mathbf{a}_k^i, \mathbf{a}_k^j)(\tau).$$

Definition 3. Consider $\mathbf{D} = \{\mathbf{D}_0, \dots, \mathbf{D}_{s-1}\}$ as a collection of p such sequence sets. The code set \mathbf{D} is defined as a (s, m, l, z) -ZCCS (refer to [7]) if it satisfies the following criteria:

$$\Phi(\mathbf{D}_{\nu_1}, \mathbf{D}_{\nu_2})(\tau) = \begin{cases} ml, & \tau = 0, \nu_1 = \nu_2, \\ 0, & 0 < |\tau| < z, \nu_1 = \nu_2, \\ 0, & |\tau| < z, \nu_1 \neq \nu_2, \end{cases} \quad (2)$$

when $z = l, s = n$ it refers as CCC with parameter $(p, p, l) - \text{CCC}$.

Lemma 1. [14] For a (s, m, l, z) -ZCCS configuration, it is established that $s \leq m \lfloor \frac{l}{z} \rfloor$, where s, m, l , and z represent the number of users, the number of sub-carriers, the code length, and the ZCZ width, respectively. The ZCCS is considered optimal when

$$s = m \left\lfloor \frac{l}{z} \right\rfloor, \quad (3)$$

where $\lfloor \cdot \rfloor$ denotes floor function.

A. Characters on Finite Fields

In this section, we discuss the concept of characters on finite fields, as detailed in [15], [16].

Let p be a prime number and $q = p^r$ for some positive integer r and $GF(q)$ be a finite Galois field of order $q = p^r$. The absolute trace from the field $GF(q)$ to its prime subfield $GF(p)$ is given by:

$$\begin{aligned} \text{Tr} : GF(q) &\rightarrow GF(p) \\ c &\mapsto c + c^p + c^{p^2} + \dots + c^{p^{r-1}}. \end{aligned}$$

A additive character χ_b where $b \in GF(q)$ is a homomorphism from $GF(q)$ to the field of complex number \mathbf{C} defined by

$$\chi_b(c) = e^{\frac{2\pi i}{p} \text{Tr}(bc)}, \text{ for all } c \in GF(q).$$

When $b = 1$ it is called a canonical additive character. Furthermore, any additive character over $GF(q)$ can be derived as:

$$\chi_b(c) := \chi_1(bc), \text{ for } b, c \in GF(q).$$

Let χ_a and χ_b be additive characters of $GF(q)$. Then the orthogonality relations for these characters are given by:

$$\sum_{c \in GF(q)} \chi_a(c) \overline{\chi_b(c)} = \begin{cases} q, & \text{if } a = b \\ 0, & \text{if } a \neq b. \end{cases}$$

III. CONSTRUCTIONS OF CCC

Let $q = p^r$ and α be a primitive element of $GF^*(q)$, where $GF^*(q)$ is the nonzero elements of $GF(q)$. For $0 \leq i \leq q-1$ we define

$$a(i) = \begin{cases} 0 & \text{if } i = 0, \\ \alpha^{i-1} & \text{for } 0 < i \leq p^r - 1. \end{cases} \quad (4)$$

For any integer $0 \leq k \leq q-1$ we define the vector representation as $\mathbf{k} = (k_1, k_2, \dots, k_r)$, where

$$k = \sum_{i=1}^r k_i p^{i-1},$$

$0 \leq k_i \leq p-1$. Let $0 \leq k, l \leq q-1$ and $S_{k,l}$ be the function defined from $\{0, 1, \dots, q-1\}$ to the field of complex number \mathbf{C} defined by

$$S_{k,l}(i) = \omega_p^{(\mathbf{k} \cdot \mathbf{i}) + \text{Tr}(a(i)a(l))}, \quad (5)$$

where \mathbf{k} and \mathbf{i} are the vectors corresponding to k and i respectively and \cdot denote usual dot product. We define the sequence corresponding to $S_{k,l}$ as

$$\psi(S_{k,l}) = (S_{k,l}(0), S_{k,l}(1), \dots, S_{k,l}(q-1)).$$

Theorem 1. Let $q = p^r$ and α be the primitive element in $GF^*(q)$ and $S_{k,l}$ be the function defined in (5), now consider the ordered set of sequences or code as

$$\psi(S_k) = \{\psi(S_{k,l}) : 0 \leq l \leq q-1\}. \quad (6)$$

Define the set of codes as

$$S = \{\psi(S_k) : 0 \leq k \leq q-1\}. \quad (7)$$

Then the code set S forms CCC with parameter (p^r, p^r, p^r) .

Proof. Let $\psi(S_{k_1})$ and $\psi(S_{k_2})$ be two codes in S . The ACCF between $\psi(S_{k_1})$ and $\psi(S_{k_2})$ is defined as

$$\begin{aligned} \Phi(\psi(S_{k_1}), \psi(S_{k_2}))(\tau) &= \sum_{l=0}^{p^r-1} \sum_{i=0}^{p^r-1-\tau} \omega_p^{(\mathbf{k}_1 \cdot \mathbf{i}) - (\mathbf{k}_2 \cdot (\mathbf{i} + \tau))} \omega_p^{\text{Tr}(a(i)a(l)) - \text{Tr}(a(i+\tau)a(l))} \\ &= \sum_{i=0}^{p^r-1-\tau} \left(\sum_{l=0}^{p^r-1} \chi_{a(i)}(a(l)) \overline{\chi_{a(i+\tau)}(a(l))} \right) \omega_p^{(\mathbf{k}_1 \cdot \mathbf{i}) - (\mathbf{k}_2 \cdot (\mathbf{i} + \tau))} \end{aligned} \quad (8)$$

1) Case 1 ($k_1 \neq k_2$): In this case we have two subcases

a) Subcase ($\tau \neq 0$): In this case we have

$$\sum_{l=0}^{p^r-1} \chi_{a(i)}(a(l)) \overline{\chi_{a(i+\tau)}(a(l))} = 0.$$

b) Subcase ($\tau = 0$): In this case we have

$$\sum_{i=0}^{p^r-1} \omega_p^{(\mathbf{k}_1 \cdot \mathbf{i}) - (\mathbf{k}_2 \cdot \mathbf{i})} = 0.$$

2) Case 2 ($k_1 = k_2$): In this case we have two following subcases

a) Subcase ($\tau \neq 0$): In this case we have

$$\sum_{l=0}^{p^r-1} \chi_{a(i)}(a(l)) \overline{\chi_{a(i+\tau)}(a(l))} = 0.$$

b) Subcase ($\tau = 0$): In this case we have

$$\Phi(\psi(S_{k_1}), \psi(S_{k_1})(0) = p^{2r}.$$

Hence combining case 1 and case 2 we conclude that the code set S forms CCC with parameter (p^r, p^r, p^r) . \square

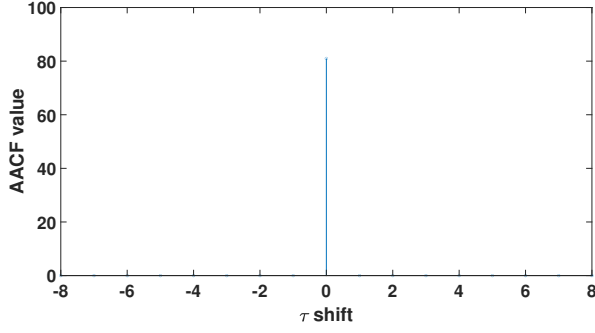


Fig. 1. Auto-correlation result of any set of array from \mathcal{S}

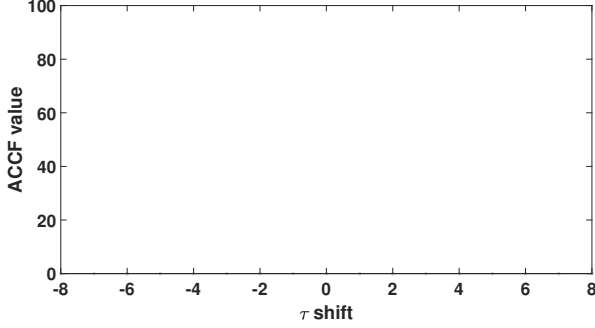


Fig. 2. Cross-correlation result of any set of array from \mathcal{S}

Example 1. Let $r = 2, p = 3$ and consider the Galois field $F_3[x]/\langle x^2 + x + 2 \rangle = GF(3^2)$. Let α be a primitive element with $\alpha^2 + \alpha + 2 = 0$. Consider the function $S_{k,l} : \{0, 1, \dots, 8\} \rightarrow \mathbf{C}$ given by

$$S_{k,l}(i) = \omega_3^{\mathbf{k} \cdot \mathbf{i} + Tr((a(i)a(l)))},$$

where $0 \leq i, k, l \leq 8$. Therefore we have

$$\psi(S_k) = \{\psi(S_{k,l}) : 0 \leq l \leq 8\},$$

where

$$\psi(S_{k,l}) = (S_{k,l}(0), S_{k,l}(1), \dots, S_{k,l}(8)),$$

and

$$S_{k,l}(i) = \omega_3^{\mathbf{k} \cdot \mathbf{i}} \chi_{a(i)}(a(l)).$$

Hence the set

$$S = \{\psi(S_k) : 0 \leq k \leq 8\}, \quad (9)$$

forms CCC with parameter $(9, 9, 9)$. Fig. 1 and Fig. 2 show the auto and cross-correlation results of any two codes from S .

IV. CONSTRUCTIONS OF ZCCS

Let p_1, p_2, \dots, p_l be l primes and $q' = q \prod_{i=1}^l p_i$. Define the function $G_{k,l} : \{0, 1, \dots, q' - 1\} \rightarrow \mathbf{C}$ by

$$G_{k,l}^{\mathbf{c}}(i') = S_{k,l}(i) \prod_{m=1}^l \omega_{p_m}^{c_m i_m},$$

where

$$i' = i + i_1 q + i_2 p_1 q + \dots + i_l p_{l-1} \dots p_1 q,$$

and $0 \leq i \leq q - 1$ and $0 \leq i_t \leq p_t - 1, 1 \leq t \leq l$. We define the sequence corresponding to $G_{k,l}^{\mathbf{c}}$ as $\psi(G_{k,l}^{\mathbf{c}})$ where

$$\psi(G_{k,l}^{\mathbf{c}}) = (G_{k,l}^{\mathbf{c}}(0), G_{k,l}^{\mathbf{c}}(1), \dots, G_{k,l}^{\mathbf{c}}(q' - 1)).$$

Theorem 2. Consider the ordered set of sequences or code set as

$$\psi(G_k^{\mathbf{c}}) = \{\psi(G_{k,l}^{\mathbf{c}}) : 0 \leq l \leq q - 1\}.$$

Define the code set

$$T = \{\psi(G_k^{\mathbf{c}}) : 0 \leq k \leq q - 1, 0 \leq c_i \leq p_i - 1\}.$$

Then the code set T forms an optimal ZCCS with parameter (nq, q, q, nq) where $n = \prod_{i=1}^l p_i$.

Proof. For $0 < \tau \leq q - 1$, the ACCF between $\psi(G_k^{\mathbf{c}})$ and $\psi(G_{k'}^{\mathbf{c}'})$ can be derived as

$$\begin{aligned} & \Phi(\psi(G_k^{\mathbf{c}}), \psi(G_{k'}^{\mathbf{c}'}))(\tau) \\ &= \Phi(\psi(S_k), \psi(S_{k'}))(\tau) \prod_{\alpha=0}^l \sum_{\alpha=0}^{p_i-1} \prod_{t=1}^l \omega_{p_t}^{(c_t - c'_t)(\alpha_t)} \\ &+ \Phi(\psi(S_k), \psi(S_{k'}))(\tau - q) \prod_{\alpha=0}^l \sum_{\alpha=0}^{p_i-2} \prod_{t=1}^l \omega_{p_t}^{(c_t(\alpha_t) - c'_t(\alpha'_t))} \end{aligned} \quad (10)$$

where

$$\alpha = \alpha_1 + \sum_{i=2}^l \left(\prod_{j=1}^{i-1} p_j \right) \alpha_i, \quad \alpha + 1 = \alpha'_1 + \sum_{i=2}^l \left(\prod_{j=1}^{i-1} p_j \right) \alpha'_i,$$

and $0 \leq \alpha_t, \alpha'_t \leq p_t - 1$. From Theorem 1 and (10) we have

$$\Phi(\psi(G_k^{\mathbf{c}}), \psi(G_{k'}^{\mathbf{c}'}))(\tau) = 0. \quad (11)$$

For $\tau = 0$, the ACCF between $\psi(G_k^{\mathbf{c}})$ and $\psi(G_{k'}^{\mathbf{c}'})$ can be derived as

$$\begin{aligned} & \Phi(\psi(G_k^{\mathbf{c}}), \psi(G_{k'}^{\mathbf{c}'}))(0) \\ &= \Phi(\psi(S_k), \psi(S_{k'}))(0) \prod_{\alpha=0}^l \sum_{\alpha=0}^{p_i-1} \prod_{t=1}^l \omega_{p_t}^{(c_t - c'_t)(\alpha_t)} \\ &= \Phi(\psi(S_k), \psi(S_{k'}))(0) \prod_{t=1}^l \left(\sum_{\alpha_t=0}^{p_t-1} \omega_{p_t}^{(c_t - c'_t)(\alpha_t)} \right). \end{aligned} \quad (12)$$

To derive the ACCF between $\psi(G_k^{\mathbf{c}})$ and $\psi(G_{k'}^{\mathbf{c}'})$ we have the following cases

1) Case 1 ($k \neq k'$): In this case we have

$$\Phi(\psi(S_k), \psi(S_{k'}))(0) = 0, \quad (13)$$

by theorem 1. Therefore, from (12) and (13) we have

$$\Phi(\psi(G_k^{\mathbf{c}}), \psi(G_{k'}^{\mathbf{c}'}))(0) = 0.$$

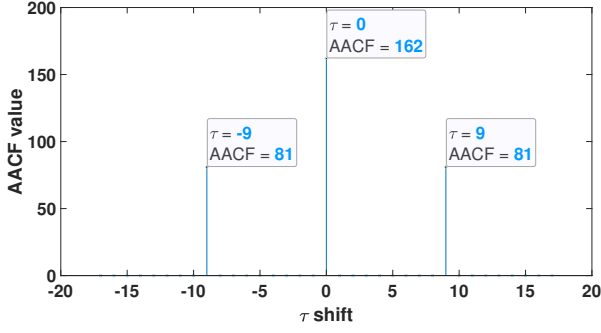


Fig. 3. Auto-correlation result of any set of array from T

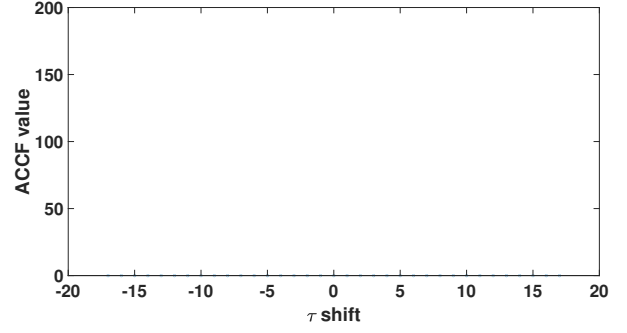


Fig. 4. Cross-correlation result of any set of array from T

- 2) Case 2 ($\mathbf{c} \neq \mathbf{c}'$): Then at least one of c_t and c'_t deffers. In this case, we have

$$\sum_{\alpha_t=0}^{p_t-1} \omega_{p_t}^{(c_t-c'_t)(\alpha_t)} = 0. \quad (14)$$

Therefore from (14) and (12) we have

$$\Phi(\psi(G_k^{\mathbf{c}}), \psi(G_{k'}^{\mathbf{c}'}))(0) = 0.$$

- 3) Case 3 ($\mathbf{c} = \mathbf{c}'$), $k = k'$: In this case we have

$$\Phi(\psi(G_k^{\mathbf{c}}), \psi(G_{k'}^{\mathbf{c}'}))(0) = q^2 \left(\prod_{i=1}^l p_i \right).$$

Hence by (11), case 1, case 2 and case 3 we conclude that the set T forms optimal ZCCS with parameter (nq, q, q, nq) . \square

Example 2. Let $p_1 = 2, q = 9$ and $S_{k,l} : \{0, 1, \dots, 8\} \rightarrow \mathbf{C}$ be the function as defined in example 1. We define the function $G_{k,l} : \{0, 1, \dots, 17\} \rightarrow \mathbf{C}$ by

$$G_{k,l}^{\mathbf{c}}(i') = S_{k,l}(i) \omega_{p_1}^{c_1 i_1},$$

where $i' = i + i_1 9$ and $0 \leq i \leq 8$ and $0 \leq i_1 \leq 1$. Consider

$$\psi(G_k^{\mathbf{c}}) = \{\psi(G_{k,l}^{\mathbf{c}}) : 0 \leq l \leq 8\},$$

where

$$\psi(G_{k,l}^{\mathbf{c}}) = (G_{k,l}^{\mathbf{c}}(0), G_{k,l}^{\mathbf{c}}(1), \dots, G_{k,l}^{\mathbf{c}}(17)).$$

Hence by theorem 2 the code set

$$T = \{\psi(G_k^{\mathbf{c}}) : 0 \leq k \leq 8, 0 \leq c_1 \leq 1\},$$

forms optimal ZCCS with parameter $(18, 9, 9, 18)$. Fig. 3 and Fig. 4 shows the auto and cross-correlation result from any codes from T in example 2.

Remark 1. Our proposed construction method generates ZCCS of length np^r , where $n = \prod_{i=1}^l p_i$ and each p_i is a prime number. By choosing specific values such as $l = 1, p = 2$, and $p_1 = 3$, our construction yields ZCCS of length $3 \cdot 2^r$. This indicates that the ZCCS lengths described in [9]

TABLE I
COMPARISON WITH EXISTING OPTIMAL ZCCS

Source	Based On	Length	Users	ZCZ
[17]	Boolean function	q^m	q^{v+1}	q
[9]	Boolean function	$3 \cdot 2^m$	2^{k+1}	2^m
[7]	Boolean function	$\prod_{i=1}^l p_i 2^m$	$(\prod_{i=1}^l p_i 2^{n+1})$	2^m
[13]	Boolean function	$R 2^m$	$R 2^{k+1}$	2^m
Proposed	Galois Field	np^r	np^r	p^r

can be considered as a special case within our framework. Furthermore, with an appropriate selection of n, p , and r , it can be observed that the ZCCS lengths mentioned in [7], [13] also emerge as special cases of our construction.

V. CONCLUSION

This work proposes new optimal ZCCS, which are useful in wireless communication especially in MC-CDMA systems to accommodate a larger number of users. Our approach diverges from the conventional generalized Boolean function-based constructions. By utilizing additive characters over finite Galois fields, we have developed CCC and ZCCS. The CCC in our proposed construction has a length of the form p^r . For the ZCCS, both the length and sizes are characterized by np^r , where n, r are any positive numbers, and p is a prime number. This particular length and user capacity of the proposed ZCCS are previously unreported in the literature. Additionally, several existing lengths of ZCCS are encompassed as special cases within our framework.

REFERENCES

- [1] P. Fan, W. Yuan, and Y. Tu, "Z-complementary binary sequences," *IEEE Signal Process. Lett.*, vol. 14, no. 8, pp. 509–512, 2007.
- [2] H. Chen, *The next generation CDMA technologies*. : John Wiley & Sons, 2007.
- [3] S. Wu and C. Chen, "Optimal Z-complementary sequence sets with good peak-to-average power-ratio property," *IEEE Signal Process. Lett.*, vol. 25, no. 10, pp. 1500–1504, 2018.
- [4] P. Sarkar and S. Majhi, "A direct construction of optimal ZCCS with maximum column sequence PMEPR two for MC-CDMA system," *IEEE Commun. Lett.*, vol. 25, no. 2, pp. 337–341, 2020.
- [5] S. Wu, A. Şahin, Z. Huang, and C. Chen, "Z-complementary code sets with flexible lengths from generalized Boolean functions," *IEEE Access*, vol. 9, pp. 4642–4652, 2020.
- [6] B. Shen, H. Meng, Y. Yang, and Z. Zhou, "New constructions of Z-complementary code sets and mutually orthogonal complementary sequence sets," *Designs, Codes and Cryptography*, pp. 1–19, 2022.

- [7] G. Ghosh, S. Majhi, P. Sarkar, and A. K. Upadhaya, "Direct construction of optimal Z-complementary code sets with even lengths by using generalized Boolean functions," *IEEE Signal Process. Lett.*, vol. 29, pp. 872–876, 2022.
- [8] P. Sarkar, A. Roy, and S. Majhi, "Construction of Z-complementary code sets with non-power-of-two lengths based on generalized Boolean functions," *IEEE Commun. Lett.*, vol. 24, no. 8, pp. 1607–1611, 2020.
- [9] C. Xie, Y. Sun, and Y. Ming, "Constructions of optimal binary Z-complementary sequence sets with large zero correlation zone," *IEEE Signal Process. Lett.*, vol. 28, pp. 1694–1698, 2021.
- [10] A. Adhikary and S. Majhi, "New construction of optimal aperiodic Z-complementary sequence sets of odd-lengths," vol. 55, no. 19, pp. 1043–1045, 2019.
- [11] T. Yu, A. R. Adhikary, Y. Wang, and Y. Yang, "New class of optimal Z-complementary code sets," *IEEE Signal Process. Lett.*, vol. 29, pp. 1477–1481, 2022.
- [12] A. Adhikary and S. Majhi, "New construction of optimal aperiodic Z-complementary sequence sets of odd-lengths," *Electron. Lett.*, vol. 55, no. 19, pp. 1043–1045, 2019.
- [13] G. Ghosh, S. Majhi, and S. Paul, "Construction of optimal binary z-complementary code sets with new lengths using generalized boolean function," *Cryptography and Communications*, vol. 15, no. 5, pp. 979–993, 2023.
- [14] Z. L. Liu, Y. L. Guan, B. C. Ng, and H.-H. Chen, "Correlation and set size bounds of complementary sequences with low correlation zone," *IEEE Trans. Commun.*, vol. 59, no. 12, pp. 3285–3289, 2011.
- [15] R. Lidl and H. Niederreiter, *Finite fields*. Cambridge university press, 1997, no. 20.
- [16] K. Ireland and M. I. Rosen, *A classical introduction to modern number theory*. Springer Science & Business Media, 1990, vol. 84.
- [17] B. Shen, H. Meng, Y. Yang, and Z. Zhou, "New constructions of Z-complementary code sets and mutually orthogonal complementary sequence sets," *Des. Codes Cryptogr.*, vol. 91, no. 2, pp. 353–371, 2023.