

BIRD-PCC: BI-DIRECTIONAL RANGE IMAGE-BASED DEEP LIDAR POINT CLOUD COMPRESSION

Chia-Sheng Liu¹, Jia-Fong Yeh¹, Hao Hsu¹, Hung-Ting Su¹, Ming-Sui Lee¹, Winston H. Hsu^{1,2}

¹ National Taiwan University ² Mobile Drive Technology

ABSTRACT

The large amount of data collected by LiDAR sensors brings the issue of LiDAR point cloud compression (PCC). Previous works on LiDAR PCC have used range image representations and followed the predictive coding paradigm to create a basic prototype of a coding framework. However, their prediction methods give an inaccurate result due to the negligence of invalid pixels in range images and the omission of future frames in the time step. Moreover, their handcrafted design of residual coding methods could not fully exploit spatial redundancy. To remedy this, we propose a coding framework BIRD-PCC. Our prediction module is aware of the coordinates of invalid pixels in range images and takes a bidirectional scheme. Also, we introduce a deep-learned residual coding module that can further exploit spatial redundancy within a residual frame. Experiments conducted on SemanticKITTI and KITTI-360 datasets show that BIRD-PCC outperforms other methods in most bitrate conditions and generalizes well to unseen environments.

Index Terms— Compression, Deep Learning, LiDAR, Point Clouds, Range Image.

1. INTRODUCTION

Recently, LiDAR point cloud compression (PCC) has been gaining attention in multimedia compression. By providing 3D information, LiDAR point clouds are used to perceive the surrounding environment in the scenario of autonomous driving. However, the storage or transmission of LiDAR data is costly. This is why we delve into the challenging problem of LiDAR point cloud compression in this paper.

There are two mainstream approaches for LiDAR PCC. One is tree-based, and the other is range image-based. Tree-based approaches are memory-efficient but suffer from the resolution degradation issue, i.e., a decrease in the number of points in the reconstructed point cloud, as observed in [1]. Range image-based approaches utilize the operational mechanism of LiDAR and represent point clouds as range images through spherical projection. Figure 1 shows an overview of the recent range image-based approaches that follow the predictive coding paradigm. Sun et al. [2] propose an intra-coding method based on instance-based clustering. The in-

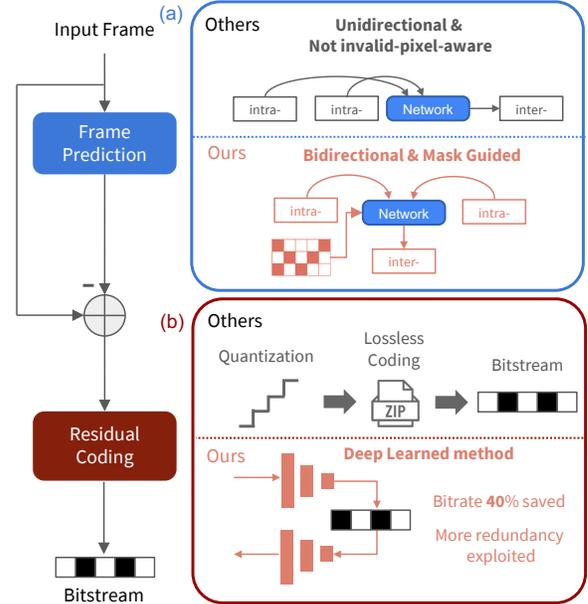


Fig. 1. Comparison between our method and others. (a) The prior method omits the coordinates of invalid pixels in range images, resulting in inaccurate predictions (shown in Figure 5). Also, it only takes the previous frames as reference frames. (b) The prior handcrafted methods are hard to capture complex dependencies, leading to inferior compression ratio.

sight of their approach is that the regions belonging to the same object have spatial dependencies. Their clustering algorithm segments a range image into disjoint regions. An average depth value is computed to replace all the pixel values for each region. Finally, the residual values between the ground truth and the average depth value are encoded. Wang et al. follow their work [2] and proposed R-PCC [1]. To improve the runtime of segmentation, they come up with a region-based clustering method by farthest point sampling. The above works [1, 2] only consider the spatial redundancy of a single frame, while the temporal redundancy is not leveraged. Subsequently, Sun et al. [3] are motivated by the traditional video coding standard and develop a coding architecture that considers both spatial and temporal redundancy. Given a frame sequence, their method first classifies every single frame into intra- or inter-frame. Then, the method in [2] is applied for intra-frame coding. As for inter-frame cod-

ing, a neural network consisting of convLSTM cells takes the frames of the previous time step as input, and performs frame-level predictions. Finally, the difference between the ground truth and the prediction is quantized and encoded by an off-the-shelf lossless coder such as bzip2, LZ4, or Deflate.

The prior works on range image-based method provide a good inspiration, while several aspects could be improved. First, the characteristics of range images are different from color images. Therefore, it is not a good practice to apply color image prediction algorithms directly on range images. The question of *how to leverage the properties of range images to develop a better compression algorithm* has still not been sufficiently explored. In this work, our prediction algorithm is aware of the coordinates of invalid pixels in the range images. Second, it is not optimal to perform unidirectional prediction, which only considers the frames in the previous time step. We show that bidirectional prediction could achieve higher accuracy. Third, there is still spatial redundancy existing in a residual frame. Applying quantization and then lossless coding leads to poor rate-distortion performance. As an alternative, we employ a deep-learned framework to deal with residual coding. With more redundancy exploited, better rate-distortion performance could our method achieve. To sum up, our contributions are threefold:

- We propose BIRD-PCC, a LiDAR point cloud compression framework leveraging the properties of range images and adopting a deep-learned residual coding approach.
- BIRD-PCC makes an accurate prediction by considering the coordinates of invalid pixels and employing a bidirectional scheme. Also, its residual coding module is more capable of exploring dependencies within residual frames.
- BIRD-PCC achieves a superior rate-distortion performance in most bitrate conditions and generalizes well to an unseen, larger dataset. At the same distortion level, it costs nearly 20% less bitrate than the baseline range image-based method.

2. RELATED WORK

Tree-based LiDAR Point Clouds Compression. The tree data structure is a memory-efficient representation for sparse point clouds. Draco [4] and MPEG G-PCC [5] are well-known tree-based methods with KD-tree and octree data structures, respectively, but neither uses deep-learned approaches. Recently, several deep-learned octree compression techniques have emerged. Huang et al. [6] propose to use stacks of MLPs that extract tree node features and predict the distribution of a node symbol, given the features of the ancestor nodes. To take temporal dependencies into account, Biswas et al. [7] propose using the node features from the

previous time step so that the entropy model can make a more accurate prediction of the distribution. To further exploit the dependencies between tree nodes, Fu et al. [8] propose an entropy model that considers not only ancestor nodes but also sibling nodes. Besides, they propose an attention mechanism for calculating the weights of different nodes.

Tree-based methods have been widely explored in recent years and thought of as solutions for LiDAR point cloud compression. However, the number of points of the decoded point cloud is not guaranteed to be the same as that of the original point cloud. This may lead to a divergence of resolution between the ground truth and the decoded point cloud, while range image-based methods do not suffer from this issue.

3. THE PROPOSED METHOD

3.1. Overview

Our compression pipeline is illustrated in Figure 2. The setting is consistent with prior works [1, 2, 3], focusing solely on 3D geometry coordinates rather than point attributes. Given a sequence of LiDAR point clouds, each point cloud is converted into a range image representation $\mathbf{x} = \{x_1, x_2, \dots, x_T\}$ following the formula in section III. of [1]. The range image sequence is then split into a bunch of coding units. For each coding unit, the first and last frames in the time steps are treated as intra-frames, while the middle k frames are treated as inter-frames. Note that k is a hyper-parameter, and we take $k = 1$ in this work. Assuming that at the time step t , the coding unit is denoted by $\{x_{t-1}, x_t, x_{t+1}\}$. R-PCC [1] is adopted to deal with intra-frame coding. As for inter-frame, our prediction module takes decoded intra-frame as reference frames and generates a prediction \bar{x} (section 3.2). The residual frame r_t is formulated as the difference between the ground truth frame x_t and the predicted frame \bar{x}_t . Subsequently, the residual frame is encoded into a bitstream through the residual coding module (section 3.3).

3.2. Inter-frame Prediction

A few research [12, 13, 14] has illustrated that a U-Net architecture with skip connections is capable of frame interpolation or extrapolation. A simple approach for frame prediction is to naively set the reference frames and predicted frames as the input and output of the U-Net, respectively. However, this will lead to a low-quality range image output. To address this issue, motion information like optical flow is commonly utilized to make a more accurate prediction in the field of deep-learned video compression [15, 16]. However, this strategy does not apply to range images due to the intrinsic difference between color images and range images.

It is noticed that several of the coordinates in the range image are invalid pixels, where the pixel values are zero. These invalid pixels are caused by the absence of LiDAR laser signal return. In our prediction design, we leverage this property

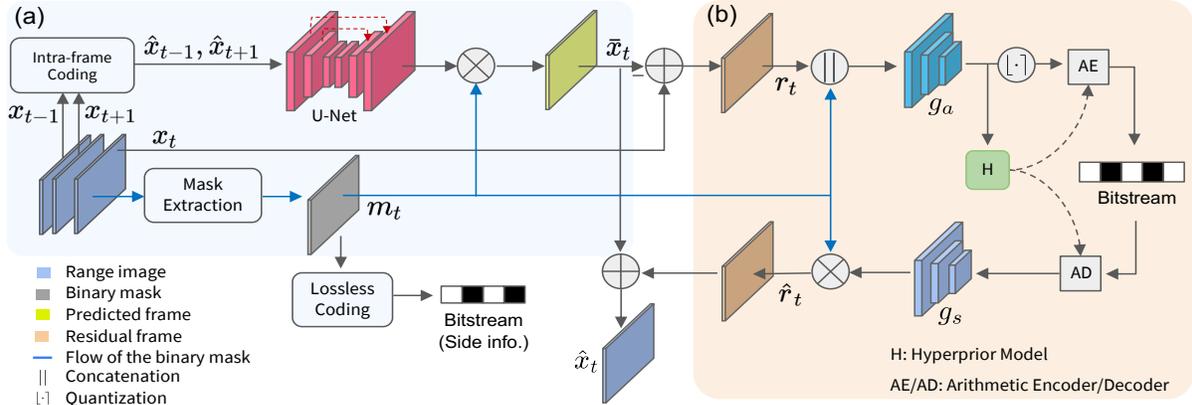


Fig. 2. Our inter-frame compression pipeline. (a) The prediction network takes decoded intra-frames $\hat{x}_{t-1}, \hat{x}_{t+1}$ and the mask m_t as inputs and generates a prediction \hat{x}_t . (b) The residual coding network g_a and g_s consist of stacks of convolutions, residual blocks [9] and attention blocks [10]. For more details about the hyperprior model, please refer to [11]. Note that both the encoded mask and the encoded residual frame should be considered as the bitstream to be stored or transmitted.

and demonstrate that the coordinates of these invalid pixels are essential information to perform an accurate prediction. Precisely, we extract a binary mask m_t from the inter-frame x_t following the formula shown below:

$$m_t(i, j) = \begin{cases} 0 & \text{if } x_t(i, j) = 0 \\ 1 & \text{if } x_t(i, j) \neq 0 \end{cases}, \quad (1)$$

where (i, j) is image coordinates. This binary mask is applied as a filter to the last layer of the U-Net, refining the prediction result. Note that the binary mask is considered as side information [17]. Thus, we losslessly encode it into a bitstream by bzip2. As for network training, the objective function is the L1 loss between the ground truth and the predicted frame.

3.3. Residual Frame Coding

The task of residual frame coding is to encode a residual frame into a bitstream. The method of prior work [1, 2, 3] first quantizes the residual frame and applies a lossless coder such as bzip2 to perform residual coding. However, the prediction in the former stage may not be accurate enough. Hence, there is spatial redundancy within a residual frame. The prior handcrafted methods are not capable of fully exploiting redundancy, leading to a poor compression ratio.

Our learning-based approach is motivated by the recent research on learned color image compression [9, 10, 11, 18]. A variational autoencoder (VAE) is adopted to achieve transform coding. We show that it is also applicable to LiDAR residual signals. Specifically, during the encoding stage, an encoder network g_a performs a non-linear transformation that maps the input from a pixel space into a latent space. To assist in the feature extraction performed by g_a , we concatenate the binary mask m_t and the input residual frame r_t . The resultant latent codes are then quantized and losslessly encoded

into a bitstream by an arithmetic coder [19]. In order to estimate the distributions of the quantized latent codes, several entropy models have been proposed [10, 11, 18]. We opt for the hyper-prior model [11] in our design due to its simplicity and efficiency. At the decoding stage, the decoder network g_s inversely transforms the quantized latent codes into a reconstructed residual frame \hat{r}_t . The binary mask m_t is applied as a filter to the last layer of g_s , refining the decoded residual frame. The Lagrangian training objective is a combination of rate and distortion (MSE), the same as [11].

4. EXPERIMENTAL RESULTS

4.1. Settings

Dataset. The prediction network and residual coding network are trained on 18.5k and 34k frames from the SemanticKITTI [20] dataset separately. The evaluations with baselines are conducted on the unseen, larger KITTI-360 [21] dataset.

Evaluation metrics. Bit-per-point (bpp) is adopted as our bitrate metric. As for the distortion metric, we use Chamfer distance which is also adopted and defined in [6, 22].

Baselines. Two tree-based baselines and one range image-based baseline are selected in experiments. Draco [4] is an open-source compression algorithm based on kd-tree released by Google. G-PCC [5] is a compression standard based on octree proposed by MPEG. R-PCC [1] is a range image-based method that only performs intra-frame coding.

4.2. Quantitative Results of Rate-distortion Curves

To show the generalizability of BIRD-PCC, we compare the rate-distortion performance with the selected baselines on the unseen KITTI-360 dataset. Figure 4(a) shows the quantitative results, indicating our method outperforms R-PCC at low bitrates and surpasses tree-based methods at high bitrates.

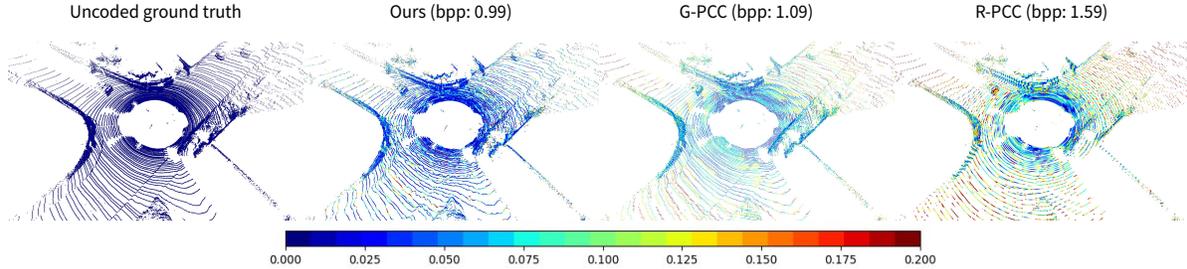


Fig. 3. Visualization of the ground truth and decoded point clouds of various compression methods. From left to right: Uncoded ground truth, Ours, G-PCC, and R-PCC. The error color bar is shown at the bottom. Best viewed in color and zoom-in.

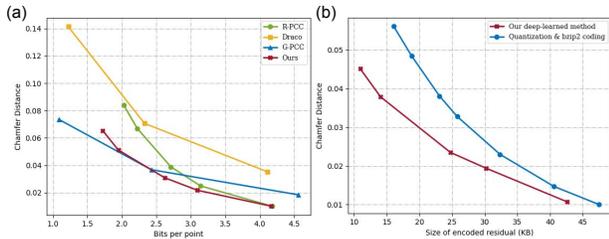


Fig. 4. Rate-distortion (RD) performance. (a) RD curves with our method and the baselines on KITTI-360. (b) RD curves with various residual coding methods on SemanticKITTI.

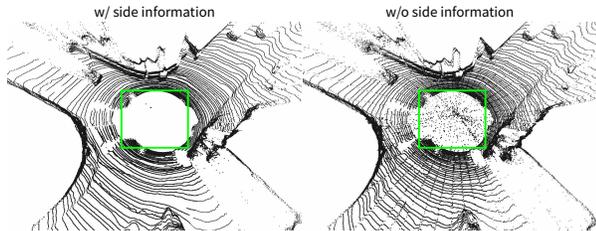


Fig. 5. The comparison of predicted frames w/ the mask (left) and w/o the mask (right) applied. The predicted frames back-projected to point clouds are shown. It is obvious that the center area bounded by the green region has more noise points in the case of not applying a mask.

4.3. Qualitative Results

In Figure 3, the decoded point clouds of our method, R-PCC, and G-PCC are visualized. Our method could achieve lower distortion while the bitrate is still less than the others. Moreover, our method maintains the distribution pattern of points, particularly apparent in the central o-shaped area where the point density should be high. However, octree-based G-PCC fails to maintain the pattern due to voxelization.

Table 1. Prediction results of various designs.

Method	L1 ↓	RMSE ^b ↓	Acc. @0.1 ^b ↑
Avg. dist. between frames	2.250	0.322	49.2%
Bidirectional w/o SI ^a	1.354	0.393	52.5%
Unidirectional w/ SI ^a	0.338	0.333	59.7%
Bidirectional w/ SI ^a	0.288	0.302	63.6%

^a SI: Side Information (Mask)

^b The RMSE and accuracy metric is defined in [3] and [22].

4.4. Ablation Study

Choice of prediction module. We compare the prediction quality of different choices of frameworks. In Table 1, we show the effect of the binary mask during frame prediction. Also, we compare the unidirectional approach [3] and the bidirectional approach. For the sake of fairness, we use the previous two frames as reference frames to make a prediction, and the network backbone is still a U-Net in the experiment of the unidirectional case. The experiments show that our design has the best prediction quality in all metrics. To exhibit the benefit of the binary mask, we visualize the prediction results in Figure 5.

Choice of residual coding module. Different methods of residual frame coding are compared, including our deep-learned method and the prior handcrafted method. The same residual frames are encoded by various methods under different bitrate conditions. The results are shown in Figure 4(b). It is worth mentioning that our method could achieve 40% less bitrate than the prior method at the same level of distortion.

5. CONCLUSIONS

With the growth of the amount of data captured by LIDAR sensors, it becomes increasingly worthwhile to explore how to compress this type of data effectively. In this paper, we present BIRD-PCC, aiming to find a solution for inter-frame coding for LiDAR point clouds. We use a bidirectional prediction framework and consider the coordinates of invalid pixels to make a more accurate prediction. In addition, we use a learning-based approach to exploit the redundancy in the residual frame more effectively. The experimental results on the KITTI-360 dataset show that the rate-distortion performance of BIRD-PCC outperforms the prior range image-based method and generalizes well to unseen environments.

6. ACKNOWLEDGEMENT

This work was supported in part by National Science and Technology Council, Taiwan, under Grant NSTC 111-2634-F-002-022, by Qualcomm through a Taiwan University Research Collaboration Project, and by NOVATEK fellowship.

7. REFERENCES

- [1] Sukai Wang, Jianhao Jiao, Peide Cai, and Lujia Wang, “R-pcc: A baseline for range image-based point cloud compression,” in *International Conf. on Robotics and Automation (ICRA)*. IEEE, 2022.
- [2] Xuebin Sun, Han Ma, Yuxiang Sun, and Ming Liu, “A novel point cloud compression algorithm based on clustering,” *IEEE Robot. Autom. Lett. (RA-L)*, 2019.
- [3] Xuebin Sun, Sukai Wang, Miaohui Wang, Zheng Wang, and Ming Liu, “A novel coding architecture for lidar point cloud sequence,” *IEEE Robot. Autom. Lett. (RA-L)*, 2020.
- [4] Google, “Draco,” <https://github.com/google/draco>.
- [5] D Graziosi, O Nakagami, S Kuma, A Zaghetto, T Suzuki, and A Tabatabai, “An overview of ongoing point cloud compression standardization activities: Video-based (v-pcc) and geometry-based (g-pcc),” *AP-SIPA Transactions on Signal and Information Processing*, 2020.
- [6] Lila Huang, Shenlong Wang, Kelvin Wong, Jerry Liu, and Raquel Urtasun, “Octsqueeze: Octree-structured entropy model for lidar compression,” in *Proc. of the IEEE/CVF Conf. on Computer Vision and Pattern Recognition (CVPR)*, 2020.
- [7] Sourav Biswas, Jerry Liu, Kelvin Wong, Shenlong Wang, and Raquel Urtasun, “Muscle: Multi sweep compression of lidar using deep entropy models,” *Advances in Neural Information Processing Systems*, 2020.
- [8] Chunyang Fu, Ge Li, Rui Song, Wei Gao, and Shan Liu, “Octattention: Octree-based large-scale contexts model for point cloud compression,” in *Proc. of the AAAI Conf. on Artificial Intelligence (AAAI)*, 2022.
- [9] Dailan He, Ziming Yang, Weikun Peng, Rui Ma, Hongwei Qin, and Yan Wang, “Elic: Efficient learned image compression with unevenly grouped space-channel contextual adaptive coding,” in *Proc. of the IEEE/CVF Conf. on Computer Vision and Pattern Recognition (CVPR)*, 2022.
- [10] Zhengxue Cheng, Heming Sun, Masaru Takeuchi, and Jiro Katto, “Learned image compression with discretized gaussian mixture likelihoods and attention modules,” in *Proc. of the IEEE/CVF Conf. on Computer Vision and Pattern Recognition (CVPR)*, 2020.
- [11] Johannes Ballé, David Minnen, Saurabh Singh, Sung Jin Hwang, and Nick Johnston, “Variational image compression with a scale hyperprior,” in *International Conf. on Learning Representations (ICLR)*, 2018.
- [12] Huaizu Jiang, Deqing Sun, Varun Jampani, Ming-Hsuan Yang, Erik Learned-Miller, and Jan Kautz, “Superslomo: High quality estimation of multiple intermediate frames for video interpolation,” in *Proc. of the IEEE/CVF Conf. on Computer Vision and Pattern Recognition (CVPR)*, 2018.
- [13] Lili Zhao, Xuhu Lin, Wenyi Wang, Kai-Kuang Ma, and Jianwen Chen, “Rangeinet: Fast lidar point cloud temporal interpolation,” in *International Conf. on Acoustics, Speech and Signal Processing (ICASSP)*, 2022.
- [14] B. Mersch, X. Chen, J. Behley, and C. Stachniss, “Self-supervised Point Cloud Prediction Using 3D Spatio-temporal Convolutional Networks,” in *Proc. of the Conf. on Robot Learning (CoRL)*, 2021.
- [15] Guo Lu, Wanli Ouyang, Dong Xu, Xiaoyun Zhang, Chunlei Cai, and Zhiyong Gao, “Dvc: An end-to-end deep video compression framework,” in *Proc. of the IEEE/CVF Conf. on Computer Vision and Pattern Recognition (CVPR)*, 2019.
- [16] Eirikur Agustsson, David Minnen, Nick Johnston, Johannes Balle, Sung Jin Hwang, and George Toderici, “Scale-space flow for end-to-end optimized video compression,” in *Proc. of the IEEE/CVF Conf. on Computer Vision and Pattern Recognition (CVPR)*, 2020.
- [17] Thomas M Cover, *Elements of information theory*, John Wiley & Sons, 1999.
- [18] David Minnen, Johannes Ballé, and George D Toderici, “Joint autoregressive and hierarchical priors for learned image compression,” in *Advances in Neural Information Processing Systems*, 2018.
- [19] Jorma Rissanen and Glen G Langdon, “Arithmetic coding,” *IBM Journal of research and development*, 1979.
- [20] J. Behley, M. Garbade, A. Milioto, J. Quenzel, S. Behnke, C. Stachniss, and J. Gall, “SemanticKITTI: A Dataset for Semantic Scene Understanding of LiDAR Sequences,” in *Proc. of the IEEE/CVF International Conf. on Computer Vision (ICCV)*, 2019.
- [21] Yiyi Liao, Jun Xie, and Andreas Geiger, “Kitti-360: A novel dataset and benchmarks for urban scene understanding in 2d and 3d,” *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2022.
- [22] Xuanyu Zhou, Charles R Qi, Yin Zhou, and Dragomir Anguelov, “Riddle: Lidar data compression with range image deep delta encoding,” in *Proc. of the IEEE/CVF Conf. on Computer Vision and Pattern Recognition (CVPR)*, 2022.