

Multi-modal Perception Dataset of In-water Objects for Autonomous Surface Vehicles

Mingi Jeong^{*1}, Arihant Chadda^{*2}, Ziang Ren¹, Luyang Zhao¹, Haowen Liu³, Monika Roznere¹,
Aiwei Zhang¹, Yitao Jiang¹, Sabriel Achong¹, Samuel Lensgraf¹, and Alberto Quattrini Li¹

Abstract—This paper introduces the first publicly accessible multi-modal perception dataset for autonomous maritime navigation, focusing on in-water obstacles within the aquatic environment to enhance situational awareness for Autonomous Surface Vehicles (ASVs). This dataset, consisting of diverse objects encountered under varying environmental conditions, aims to bridge the research gap in marine robotics by providing a multi-modal, annotated, and ego-centric perception dataset, for object detection and classification. We also show the applicability of the proposed dataset’s framework using deep learning-based open-source perception algorithms that have shown success. We expect that our dataset will contribute to development of the marine autonomy pipeline and marine (field) robotics. Please note this is a work-in-progress paper about our on-going research that we plan to release in full via future publication.

I. INTRODUCTION

A significant limitation in the research on autonomous maritime navigation is the lack of relevant multi-modal perception data. Thus, the goal of this paper is to describe the first multi-modal perception dataset set for public release in short order (Fig. 1). This dataset, consisting of in-water obstacles in the aquatic domain, aims to enhance situational awareness for ASVs. Situational awareness is a foundational task that undergirds autonomy, which is increasing in importance given the focus on ASVs for tasks such as environmental monitoring and automated transportation. This importance will only grow as marine trade increases to 90% of the share of world trade [1] and the expected size of the ASV market will grow to 2.7B USD by 2032 [2].

Understanding the locations of static and dynamic objects in the aquatic domain (**object detection**) and determining the types of these objects (**object classification**) are crucial tasks for navigational decision-making. Such processes are further useful for data association, to understand the speed and heading of approaching and risky objects. However, aquatic domain’s challenges including (1) unstructured navigational environments and (2) limited maneuverability of marine vehicles raise the importance of *early* and *accurate* state estimation of in-water obstacles for safe and efficient navigation. Consequently, marine vehicles, even human-driven

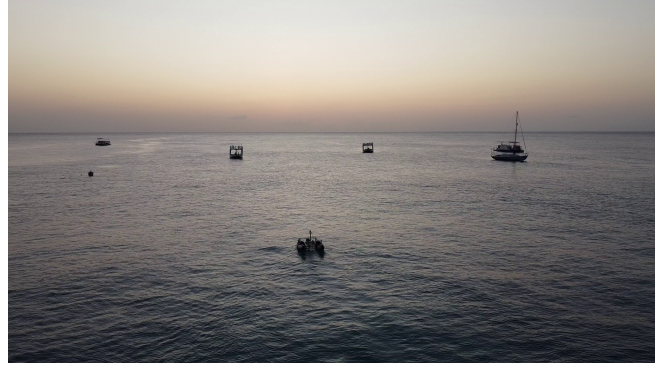


Fig. 1: Data collection of in-water objects by ASV in operation at Barbados, Carribean Sea.

vessels, naturally rely on **multi-modal** data for situational awareness, which aligns with the regulations (e.g., rule 5 *look-out*) explicitly covered by maritime Rules of the Road [3]. Effective cross-correlation of multi-modal data will be essential for robust maritime autonomy and will require high-quality, labeled, multi-modal datasets to enable capability creation as well as to validate performance.

Compared to the plethora of existing labeled multi-modal terrestrial datasets for self-driving cars [4]–[6], there is a surprising lack of equivalent aquatic datasets for ASVs. This scarcity is due to the high operational costs and the extensive effort required for labeling in the case of ASVs [7]. Among the few existing datasets in the aquatic domain, the open-source ones primarily consist of either (1) **single-modality** data that is typically image-based [8]–[15], or (2) lack **object labels** across the multiple modalities, which are essential for ground-truth evaluation [16]. This absence of multi-modal and ground-truth annotations significantly hinders the development of crucial ASV capabilities as noted in [15], [16], such as perception and collision avoidance, which rely on supervised deep learning, and by extension labeled data-driven, approaches proven successful in other domains [17]–[20].

To address limitations (1) and (2), we will release the first multi-modal labeled maritime dataset. Our dataset includes expeditions from 2021 to 2024 using our ASV platform *Catabot* and a human-driven vessel in different locations (United States, Barbados, and South Korea) covering various environments (both sea and fresh water), conditions (e.g., dusk, daylight), and encounters (e.g., head-on, crossing) with various objects. Such heterogeneous data collections are es-

* These authors contributed equally to the paper.

¹Department of Computer Science, Dartmouth College, Hanover, NH USA {mingi.jeong.gr, ziang.ren.gr, luyang.zhao.gr, monika.roznere.gr, aiwei.zhang.25, yitao.jiang.th, sabriel.l.achong.26, samuel.e.lensgraf.gr, aql}@dartmouth.edu.

²IQT Labs, Tysons, VA USA achadda@iqt.org.

³Department of Computer Science, University of Maryland College Park, College Park, MD USA hwl@umd.edu.

essential to create representative feature sets and, by extension, generalizable algorithms. The proposed dataset includes three classes (ship, buoy, and other) of labeled objects for detection and classification. We selected these labels according to the international traffic rule [3] and buoyage system [21]. In sum, the dataset is composed of 10,906 frames of time-synchronized LiDAR point clouds and RGB images. We also demonstrate the utility of the proposed dataset’s framework using deep learning-based open-source perception algorithms that have shown success in the terrestrial domain. We plan to release our dataset publicly for the community and expect it will contribute to development of state-of-the-art marine autonomy pipelines and accelerate the future of marine (field) robotics.

II. RELATED WORK

Self-driving car datasets focused on 3D perception, including [4]–[6], have been crucial for progress in terrestrial robotic perception, especially for tasks like object detection, classification, segmentation, and tracking. These collections frequently feature a range of sensors, employing either individual or combined data from cameras, LiDAR, and RADAR. Given the importance of these datasets, there is a push to develop specialized datasets for the marine domain to support the advancement of marine autonomy.

Maritime object detection and classification datasets mainly consist of a **single sensor modality**, i.e., camera sensors, used for different purposes. Key datasets include the first visible and infrared ship image dataset for autonomous navigation compliance [8], a large-scale maritime dataset with over 2 million images detailing vessel information from a community site [9], and a dataset of common ship types from coastal surveillance [10]. [11] introduced more variety with different water surface objects. However, most datasets were from stationary platforms, not from an **ego-centric perspective**. A significant onboard camera dataset exists [12] but is not public. Public datasets [13]–[15] from an autonomous surface vehicle focus on segmenting sea, sky, and environment without distinguishing specific marine objects.

Several **multi-modal** datasets [22]–[24] are available, targeting different aspects of marine perception but not directly focusing on **object detection** and **classification**. [22] covers inland waterway scenes using LiDAR, stereo cameras, RADAR, GPS, and IMUs, for water segmentation, SLAM, and stereo matching. [24] combines data from 10 cameras, RADAR, and LiDAR for object tracking. [23] collects data from a diverse set of sensors over a 7.5 km route, aiming at SLAM and docking. This lack of datasets in the marine domain, specifically missing the key situational awareness tasks previously described, hampers progress in marine autonomy.

III. DATASET GENERATION

A. Sensor Configurations

As shown in Fig. 2, we used our custom ASV *Catabot* and a human-driven boat installed with a sensor platform.



Fig. 2: Data collection platform (*left*): our custom ASV *Catabot*, (*right*): human-driven ship equipped with sensors.

Catabot is 2.68 m long, 1.55 m wide. The human-driven boat is 8.27 m long, 2.34 m wide. Both include a Global Positioning System (GPS) / Compass and Inertial Measurement Unit (IMU) with a flight controller unit, installed at the center line of the vehicle, to record proprioceptive data. We used a low-cost u-blox M8N GPS/Compass module. The flight controller hardware we used was a *Pixhawk 4* coupled with a 32-Bit Arm Cortex-M7 microcontroller with a 216 MHz clock speed and 2 MB of flash memory and 512 kB of RAM.

For exteroceptive data, we installed a RGB camera (Full-HD 1080P with CMOS OV2710 image sensor that can support Infrared (IR) during the nighttime) and a 64 channel LiDAR (Ouster OS1-64 gen2). The two exteroceptive sensors were located at the center line of the vehicles to ensure a sufficient horizontal field of view (Camera – 91.8°; LiDAR – 360° except for the blind sector due to occlusion caused by the vehicle structure) and vertical field of view (Camera – 75.5°; LiDAR – 45°). The LiDAR has a range of 120 m with a horizontal resolution of 0.35° and vertical resolution of 0.7°, while the camera sensor has a 640 × 480 pixel resolution. We performed intrinsic calibration of each sensor and an extrinsic calibration between LiDAR and the camera based on [25], [26].

B. Data Collection

We used a companion computer system (Intel NUC) and recorded proprioceptive (GPS, Compass, IMU) and exteroceptive (RGB camera, LiDAR) data via the Robot Operating System (ROS). Our Intel NUC computer with Ubuntu 18.04 installed has an Intel Core i7-8559U Processor (8M Cache, up to 4.50 GHz) with 1 TB of storage. The heterogeneous sensors operate at different time frequencies: we used a camera with a frequency of 30 Hz and LiDAR with a frequency of 10 Hz. We post-process the camera and LiDAR data by extracting raw images and point clouds under time synchronization using the `MessageFilter` package [27].

We collected relevant data in $\{sea, fresh\}$ waters with varying environmental conditions $\{day, dusk, dawn, night\}$. We controlled the ASV via either (1) autonomous waypoint following or (2) manual driving, while we manually navigated the human-driven boat. Fig. 3 shows the trajectories during data collection. Our dataset covers collections conducted between 2021 to 2024 in different geographic locations: Lake Sunapee, NH, USA; Lake Mascoma, NH, USA; Busan Port, South Korea; Holetown, Barbados.

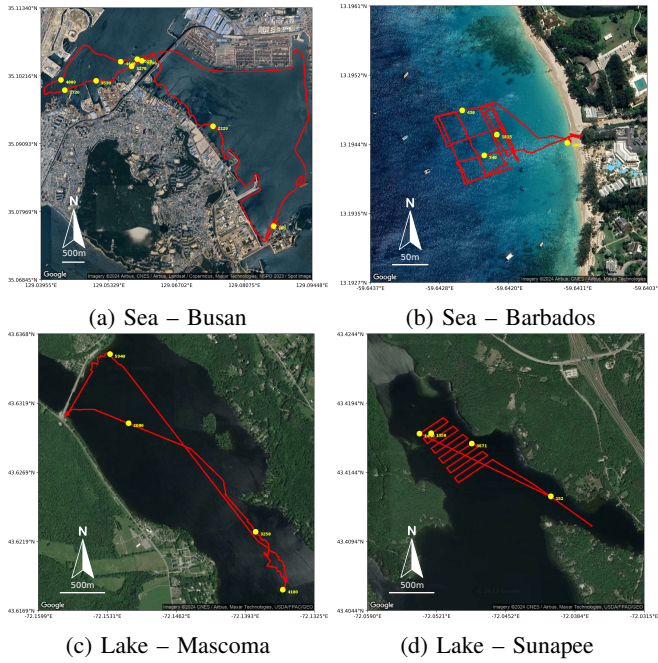


Fig. 3: Data collection trajectories in different locations. *yellow* points are key frames with objects encountered and corresponding annotations in the dataset.

C. Annotation Process

We provide annotations of three in-water object classes based on domain knowledge (example shown in Fig. 4): *ship*, *buoy*, and *other*, in both the camera imagery and LiDAR point clouds. More specifically, (1) the *ship class* represents all marine vehicles defined according to the international traffic rule [3]; (2) the *buoy class* represents artificial floating objects as defined by the International Maritime Buoyage System [21]; and (3) the *other class* represents any in-water objects that can be risky to maritime navigation, e.g., dock. We provide ontology documentation for labeling annotation consistency and dataset usage. For the LiDAR point clouds, we used an open-source labeling tool [28] with 3 rounds of annotation review by the team members. For the images, we used the 3rd party Amazon AWS Mechanical Turk annotation service in addition to the annotation by team members using the open-source Anylabelling [29] tool and model-assisted labeling using Meta Research’s Segment Anything Model (SAM) [30] with the same principle of review processes.

D. Dataset Characteristic

As described in detail below, we propose novel metrics (e.g., BEVE-P, BEVE-V, DVE) in addition to existing metrics (e.g., image entropy, occlusion percentage) in the literature that quantitatively evaluate the dataset’s characteristics with respect to the maritime domain to help analyze future benchmark algorithms.

Dataset Difficulty Metrics: To evaluate the difficulty characteristic of the dataset, inspired by [4], we propose and measure the following metrics tailored to the marine domain.

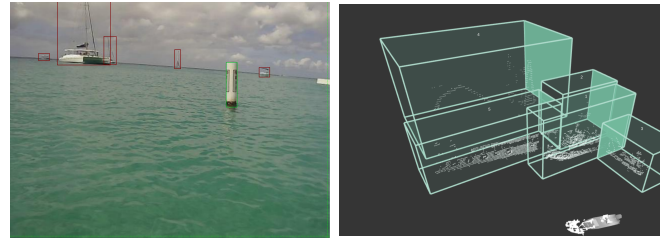


Fig. 4: Annotated result of an example image of ships and buoys in Barbados (left) and point clouds of ships in Busan (right).

- **Average Brightness:** Measures the overall light level in images, affecting object visibility.
- **Density:** The ratio of the area covered by objects to the total image area, indicating how crowded an image is.
- **Occlusion Percentage:** The proportion of object areas that overlap, showing how much objects hide each other.
- **Total Objects:** The count of objects in an image, indicating the potential complexity of the scene.
- **Minimum Area:** The size of the smallest object in the dataset, highlighting challenges in detecting small objects.
- **Objects Label and Area:** A list of objects and their sizes, providing insight into the variety and scale of objects present.

Dataset Complexity Metrics: To evaluate the complexity and variability of the dataset, we propose and measure the following metrics.

- **Image Complexity:** Measures the *image entropy* by first applying the convolutional Sobel operator to approximate the gradient at each image pixel and then calculating the Shannon entropy. Note, instead of the Sobel-based gradient, any other edge detection algorithm, such as Canny Edge detector, can work. Overall, image entropy describes the complexity of the dataset; a low value corresponds to images with less edges and possibly fewer interesting features, while a high value corresponds to images with significant amount of texture or information, each with their own challenges. This evaluation criterion is similar to the work done by [31] to evaluate the variation in the underwater dataset.
- **Birds-Eye-View Entropy with Pillar/Voxel (BEVE-P, BEVE-V):** Measures the *point cloud complexity* with respect to point pillar/voxel bin based on $BEV = \sum_{i=1}^K \left[\frac{k_i}{K} * \log\left(\frac{k_i}{K}\right) \right]$ where i stands for each pillar or voxel, K total number of points in that specific frame, and k_i the number of point clouds per each pillar or voxel.
- **Distance Variability Entropy (DVE):** Measures the *point cloud complexity* with respect to point pillar/voxel bin based on $DD = \sum_{i=1}^N \left[\frac{n_i}{N} * \log\left(\frac{n_i}{N}\right) \right]$ where i represents the i -th predefined distance interval, N total number of points in that specific frame, and n_i is the number of point clouds in the respective distance bucket ring.

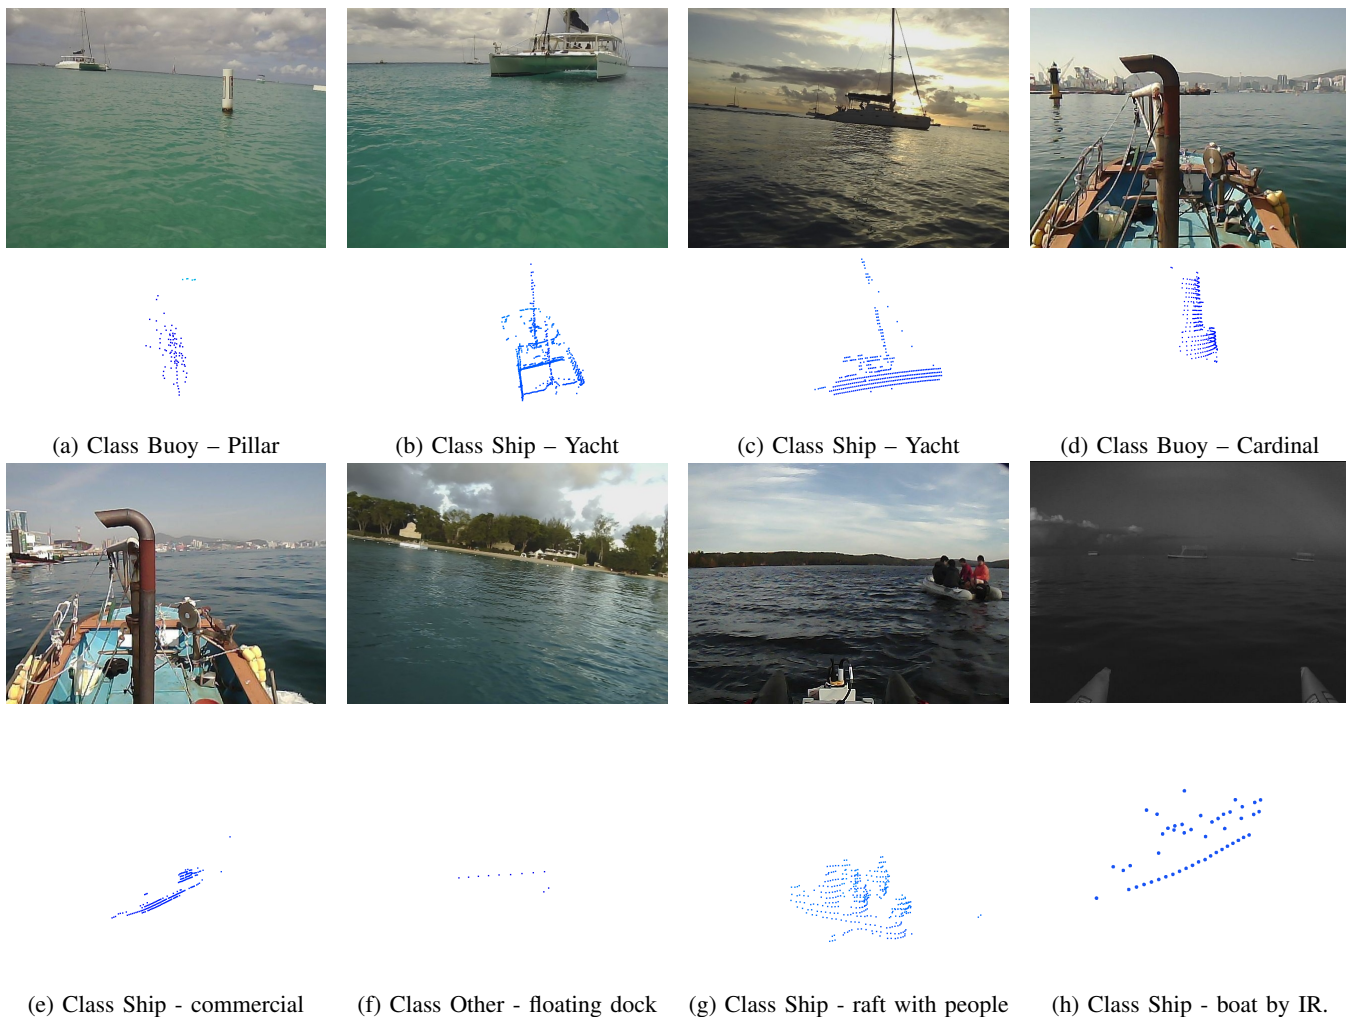


Fig. 5: In-water objects under varying environmental conditions in our dataset. (*top*): images; (*bottom*): point clouds. Note that the view angle of the point clouds is adjusted for the best visualization, regardless of the corresponding image of the object.

IV. DATASET EVALUATION

A. Collected Data

As shown in Fig. 5, our maritime perception dataset consists of various objects in water under varying conditions collected by the sensor platforms onboard ASVs or the human-driven ship. This annotated and ego-perspective dataset is first in the maritime domain, to the best of our knowledge with sufficiently large number of annotated frames (10,906). We believe it will be useful for training, validating, and benchmarking maritime perception.

Based on the proposed metric framework in Section III-D, we evaluate the characteristics within our dataset. (1) Fig. 6 shows ‘Density’, ‘Occlusion Percentage’, ‘Object Areas’, and ‘Total Objects’ across frames over time in an example sequence. This approach enables a clear visualization of trends and variations in the dataset, providing insights into its complexity and the challenges it presents at different points in time. (2) Fig. 7 shows the complexity of the dataset within the images collected. Compared to the [23] multi-modal

dataset, our dataset includes much more diverse scenes that can be useful for field testing of autonomy. Lastly, (3) Fig. 8 shows the proposed complexity metrics of the dataset within the collected point clouds, indicating that we have varying spatial distributions of in-water objects.

B. Perception Benchmark Running

We built a framework with our proposed dataset to run the perception benchmark for tasks such as object detection and object classification. We applied one of the most popular state-of-the-art benchmarks for images and point clouds, respectively, YOLOv5 [18] and PointPillar [17] as shown in Fig. 9. We applied a transfer learning approach and fine-tuned the pre-trained, open-sourced models in each case. Based on the ground truth labels generated in Section III-C, we will release a complete analytical toolset to run training tailored to the maritime domain and evaluations on different benchmarks, such as image-based, point cloud-based, and fusion-based algorithms.

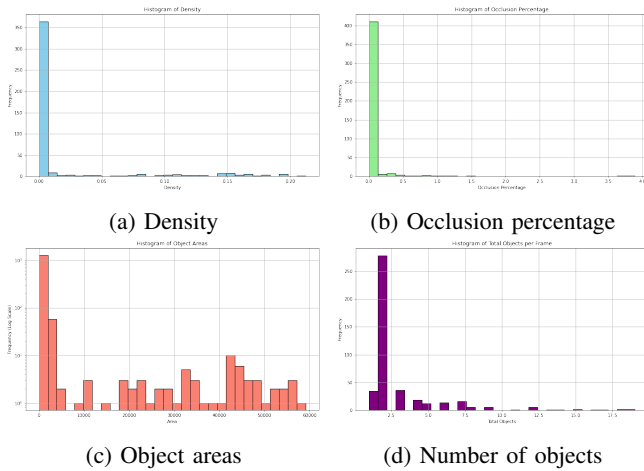


Fig. 6: Histograms of dataset difficulty metrics per frame of an example sequence `barbados_202302220530_1815`. The histograms can represent trends and variations, which are useful in understanding the challenges in the example sequence, e.g., the number of objects that ranges from 1 to 3 in the sequence.

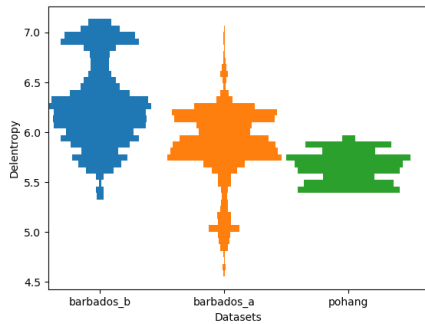


Fig. 7: Examples of RGB image delentropy in different sequences compared to Pohang dataset [23].

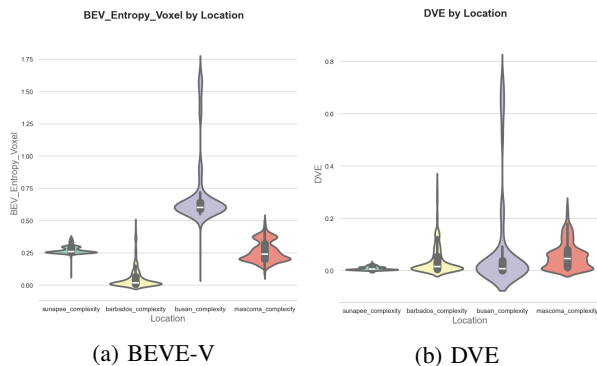


Fig. 8: Point cloud complexities across different locations in our dataset.

V. DISCUSSION AND FUTURE STEPS

This paper introduces the first soon-to-be publicly accessible multi-modal perception dataset for autonomous maritime



(a) YOLOv5 [18]



(b) PointPillar [17]

Fig. 9: Example of benchmarks running in our dataset.

navigation, focusing on in-water obstacles within the aquatic environment to enhance situational awareness for ASVs. Our dataset, comprising diverse in-water objects encountered under varying environmental conditions, aims to bridge the research gap in marine robotics by providing a multi-modal, annotated, and ego-centric perception dataset for object detection and classification.

Based on our dataset, we plan to rigorously evaluate benchmark algorithms, offering insights into the applicability and adaptability of these benchmarks which have not yet been explored in the maritime domain. Our future work will include integrating additional sensor configurations under varying weather conditions (e.g., rain, snow), such as marine RADAR and wide-field-of-view cameras, to enhance robustness.

ACKNOWLEDGMENT

We would like to thank Kizito Masaba, Julien Blanchet, Haesang Jeong, and Capt. Jinmyeong Lee for help with field experiments, and Korea Maritime and Ocean University, McGill Bellairs Research Institute, and the Eliassen family for our access to the experimental sites. This work is supported in part by the Burke Research Initiation Award, NSF CNS-1919647, 2144624, OIA1923004, and NH Sea Grant.

REFERENCES

- [1] U. Nations, *Review of Maritime Transport 2021*. United Nations Conference on Trade and Development, 2022.
- [2] *Unmanned Surface Vehicle Market Size, Share, Competitive Landscape and Trend Analysis Report by Size, by Application, by Mode of Operation: Global Opportunity Analysis and Industry Forecast, 2023-2032*. Allied Market Research, 2023.
- [3] International Maritime Organization, *Convention on the international regulations for preventing collisions at sea, 1972 (COLREGs)*, 1972.
- [4] A. Geiger, P. Lenz, C. Stiller, and R. Urtasun, "Vision meets robotics: The KITTI dataset," *International Journal of Robotics Research (IJRR)*, 2013.

- [5] H. Caesar, V. Bankiti, A. H. Lang, S. Vora, V. E. Liong, Q. Xu, A. Krishnan, Y. Pan, G. Baldan, and O. Beijbom, "Nuscenes: A multimodal dataset for autonomous driving," in *IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2019.
- [6] P. Sun, H. Kretzschmar, X. Dotiwalla, A. Chouard, V. Patnaik, P. Tsui, J. Guo, Y. Zhou, Y. Chai, B. Caine, V. Vasudevan, W. Han, J. Ngiam, H. Zhao, A. Timofeev, S. Ettinger, M. Krivokon, A. Gao, A. Joshi, Y. Zhang, J. Shlens, Z. Chen, and D. Anguelov, "Scalability in perception for autonomous driving: Waymo open dataset," in *IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2020.
- [7] S. Nirgudkar, M. DeFilippo, M. Sacarny, M. Benjamin, and P. Robinette, "MassMIND: Massachusetts Maritime Infrared Dataset," *The International Journal of Robotics Research*, vol. 42, no. 1–2, pp. 21–32, Jan. 2023.
- [8] M. M. Zhang, J. Choi, K. Daniilidis, M. T. Wolf, and C. Kanan, "VAIS: A dataset for recognizing maritime imagery in the visible and infrared spectrums," in *IEEE Conference on Computer Vision and Pattern Recognition Workshops (CVPRW)*, 2015, pp. 10–16.
- [9] E. Gundogdu, B. Solmaz, V. Yücesoy, and A. Koç, "MARVEL: A large-scale image dataset for maritime vessels," in *Asian Conference on Computer Vision*, 2016.
- [10] Z. Shao, W. Wu, Z. Wang, W. Du, and C. Li, "Seaships: A large-scale precisely annotated dataset for ship detection," *IEEE Transactions on Multimedia*, vol. 20, no. 10, pp. 2593–2604, 2018.
- [11] Z. Zhou, J. Sun, J. Yu, K. Liu, J. Duan, L. Chen, and C. L. P. Chen, "An image-based benchmark dataset and a novel object detector for water surface object detection," *Frontiers in Neurorobotics*, vol. 15, 2021.
- [12] P. Kaur, A. Aziz, D. Jain, H. Patel, J. Hirokawa, L. Townsend, C. Reimers, and F. Hua, "Sea situational awareness (seasaw) dataset," in *IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops (CVPRW)*, 2022, pp. 2578–2586.
- [13] M. Kristan, V. S. Kenk, S. Kovacic, and J. Pers, "Fast image-based obstacle detection from unmanned surface vehicles," *IEEE Transactions on Cybernetics*, vol. 46, pp. 641–654, 2015.
- [14] B. Bovcon, R. Mandeljc, J. Perš, and M. Kristan, "Stereo obstacle detection for unmanned surface vehicles by imu-assisted semantic segmentation," *Robotics and Autonomous Systems*, 2018.
- [15] B. Bovcon, J. Muhovic, D. Vranac, D. Mozetic, J. Pers, and M. Kristan, "MODS—A USV-Oriented Object Detection and Obstacle Segmentation Benchmark," *IEEE Transactions on Intelligent Transportation Systems*, vol. 23, no. 8, pp. 13 403–13 418, 2022.
- [16] T. Clunie, M. DeFilippo, M. Sacarny, and P. Robinette, "Development of a perception system for an autonomous surface vehicle using monocular camera, lidar, and marine radar," in *IEEE International Conference on Robotics and Automation (ICRA)*, May 2021, pp. 14 112–14 119.
- [17] A. H. Lang, S. Vora, H. Caesar, L. Zhou, J. Yang, and O. Beijbom, "Pointpillars: Fast encoders for object detection from point clouds," *IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 12 689–12 697, 2018.
- [18] Ultralytics, *ultralytics/yolov5: v7.0 - YOLOv5 SOTA Realtime Instance Segmentation*, <https://github.com/ultralytics/yolov5.com>, Accessed: 7th May, 2023, 2022. DOI: 10.5281/zenodo.7347926. [Online]. Available: <https://doi.org/10.5281/zenodo.7347926>.
- [19] W. Abdulla, *Mask r-cnn for object detection and instance segmentation on keras and tensorflow*, https://github.com/matterport/Mask_RCNN, 2017.
- [20] T. Yin, X. Zhou, and P. Krahenbuhl, "Center-based 3d object detection and tracking," in *IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, IEEE, Jun. 2021, pp. 11 779–11 788.
- [21] G. B. Admiralty, *IALA Maritime Buoyage System*. (Admiralty Charts and Publications). UK Hydrographic Office, 2018.
- [22] Y. Cheng, M. Jiang, J. Zhu, and Y. Liu, "Are we ready for unmanned surface vehicles in inland waterways? the USVInland Multisensor Dataset and Benchmark," *IEEE Robotics and Automation Letters*, vol. 6, pp. 3964–3970, 2021.
- [23] D. Chung, J. Kim, C. Lee, and J. Kim, "Pohang canal dataset: A multimodal maritime dataset for autonomous navigation in restricted waters," *The International Journal of Robotics Research*, vol. 42, no. 12, pp. 1104–1114, 2023.
- [24] Ø. K. Helgesen, K. Vasstein, E. F. Brekke, and A. Stahl, "Heterogeneous multi-sensor tracking for an autonomous surface vehicle in a littoral environment," *Ocean Engineering*, vol. 252, 2022.
- [25] J. Beltrán, C. Guindel, A. de la Escalera, and F. García, "Automatic extrinsic calibration method for lidar and camera sensor setups," *IEEE Transactions on Intelligent Transportation Systems*, 2022.
- [26] G. Pandey, J. McBride, S. Savarese, and R. Eustice, "Automatic targetless extrinsic calibration of a 3d lidar and camera by maximizing mutual information," *AAAI Conference on Artificial Intelligence*, vol. 26, no. 1, pp. 2053–2059, Sep. 2021.
- [27] *ROS message filter*, https://wiki.ros.org/message_filters, Accessed: 2023-09-30.
- [28] W. Zimmer, A. Rangesh, and M. M. Trivedi, "3d bat: A semi-automatic, web-based 3d annotation toolbox for full-surround, multimodal data streams," in *IEEE Intelligent Vehicles Symposium (IV)*, IEEE, 2019, pp. 1–8.
- [29] V. A. Nguyen, *Anylabeling - effortless data labeling with ai support*, <https://github.com/vietanhdev/anyletting>, 2023.
- [30] A. Kirillov, E. Mintun, N. Ravi, H. Mao, C. Rolland, L. Gustafson, T. Xiao, S. Whitehead, A. C. Berg, W.-Y. Lo, *et al.*, "Segment anything," in *IEEE/CVF International Conference on Computer Vision (ICCV)*, 2023, pp. 4015–4026.
- [31] O. Álvarez-Tuñón, H. Kanner, L. R. Marnet, H. X. Pham, J. le Fevre Sejersen, Y. Brodskiy, and E. Kayacan, "Mimir-uw: A multi-purpose synthetic dataset for underwater navigation and inspection," in *IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, IEEE, 2023, pp. 6141–6148.