

# An Efficient Sum-Rate Maximization Algorithm for Fluid Antenna-Assisted ISAC System

Qian Zhang, *Graduate Student Member, IEEE*, Mingjie Shao, *Member, IEEE*, Tong Zhang, *Member, IEEE*, Gaojie Chen, *Senior Member, IEEE*, Ju Liu, *Senior Member, IEEE*, and P. C. Ching, *Life Fellow, IEEE*

**Abstract**—This letter investigates a fluid antenna (FA)-assisted integrated sensing and communication (ISAC) system, with joint antenna position optimization and waveform design. We consider enhancing the sum-rate maximization (SRM) and sensing performance with the aid of FAs. Although the introduction of FAs brings more degrees of freedom for performance optimization, its position optimization poses a non-convex programming problem and brings great computational challenges. This letter contributes to building an efficient design algorithm by the block successive upper bound minimization and majorization-minimization principles, with each step admitting closed-form update for the ISAC waveform design. In addition, the extrapolation technique is exploited further to speed up the empirical convergence of FA position design. Simulation results show that the proposed design can achieve state-of-the-art sum-rate performance with at least 60% computation cutoff compared to existing works with successive convex approximation (SCA) and particle swarm optimization (PSO) algorithms.

**Index Terms**—Fluid antenna, integrated sensing and communication, proximal distance algorithm, extrapolated projected gradient

## I. INTRODUCTION

WITH the development of wireless networks, a large number of emerging applications, such as vehicle-to-everything (V2X), demand for joint communication and sensing capabilities in wireless communication systems [1]–[3]. Consequently, integrated sensing and communication (ISAC) has been proposed to allow communications and radar sensing to share the same frequency and hardware resources, thus improving spectral, energy, and hardware efficiency [4]–[7]. Currently, ISAC has gained widespread attention, e.g., waveform design [2], receive filter design [3], Cramér-Rao bound minimization [6], and ISAC-accelerated edge intelligence [7].

Moreover, since wireless communication systems perform more sophisticated tasks, their spectral efficiency should be further improved. Recently, fluid antennas (FAs) have provided more degrees of freedom for such a purpose. The increasing body of studies has shown that the optimized FA positions can benefit the communication performance, including spectral efficiency [8], security [9], and more recently ISAC [10], [11].

Qian Zhang, Mingjie Shao, and Ju Liu are with School of Information Science and Engineering, Shandong University, Qingdao 266237, China (qianzhang2021@mail.sdu.edu.cn; {mingjieshao, juliu}@sdu.edu.cn).

Tong Zhang is with the Institute of Intelligent Ocean Engineering, Harbin Institute of Technology (Shenzhen), Shenzhen, 518055, China (bennyzhang-tong@yahoo.com).

Gaojie Chen is with 5GIC & 6GIC, Institute for Communication Systems, University of Surrey, Guildford GU2 7XH, UK (gaojie.chen@surrey.ac.uk).

P. C. Ching is with the Department of Electronic Engineering, The Chinese University of Hong Kong, Hong Kong (e-mail: pching@ee.cuhk.edu.hk).

Corresponding authors: Ju Liu; Mingjie Shao.

In these works, the joint design with FA positions requires dedicated optimization techniques. In [10], deep reinforcement learning (DRL) was adopted to address FA-assisted ISAC problems, while DRL consumes a large amount of training data and time. In [11], the FAs with predetermined discrete positions were considered to balance the ISAC performance, and effective FA ports were activated by sparsity constraints. Moreover, movable antennas (MAs) with the same function as the FAs were proposed to enhance the ISAC system [12], [13]. In [12], the particle swarm optimization (PSO) algorithm was employed to design the MA positions for achieving better ISAC, while the PSO algorithm may have high computational overhead and the performance can be sensitive to the number of particles and searches. In [13], a reconfigurable intelligent surface (RIS) was used to assist the MA system in sensing non-line-of-sight targets, and the optimized MA positions were achieved by the successive convex approximation (SCA) algorithm. While the existing works have demonstrated the potential improvement of considering FAs in ISAC, the challenge of the high computational complexity of joint design remains a key issue, as also pointed out in [14].

This letter aims to alleviate the design computational complexity in ISAC systems under a proposed formulation for optimized sum-rate performance under sensing requirements. The development is based on the majorization-minimization (MM) principle, where a novel proximal distance algorithm (PDA) is proposed to obtain the closed-form waveform design in each iterative step, and an extrapolated projected gradient (EPG) algorithm is proposed to accelerate the convergence of the FA positions optimization. Simulation results show that the incorporation of FA is able to achieve over 30% performance gain compared to traditional ISAC without FAs. Such performance is achieved under a considerably reduced computational complexity compared to existing designs. In particular, the proposed design can save over 60% runtime compared to existing designs with SCA and PSO algorithms.

## II. SYSTEM MODEL

We consider a downlink transmission in an FA-assisted ISAC system, as shown in Fig. 1. The BS equipped with  $M$  FAs communicates with  $K$  single-antenna users and senses a point-like target at the same time. We assume that FAs can move in a linear array of length  $D$ . We denote  $t_m \in [0, D]$  as the position of the  $m$ th FA and the assembled vector  $\mathbf{t} = [t_1, t_2, \dots, t_M] \in \mathbb{R}^M$  as the antenna position vector (APV). In such an ISAC system, the BS transmits a dual-functional signal for sensing and communication, where the

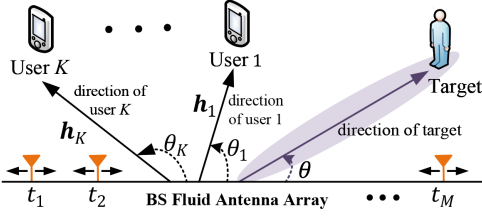


Fig. 1. The model of fluid antenna-assisted ISAC system.

BS-user channels are modeled by the following line-of-sight (LoS) model.

$$\mathbf{h}_k = \delta_k \mathbf{a}(\mathbf{t}, \theta_k), \quad k \in \mathcal{K} \triangleq \{1, 2, \dots, K\}, \quad (1)$$

where  $\mathbf{a}(\mathbf{t}, \theta_k) = [e^{jv_k t_1}, e^{jv_k t_2}, \dots, e^{jv_k t_M}]^T$ ;  $v_k = \frac{2\pi}{\lambda} \cos(\theta_k)$ ;  $\lambda$  is the wavelength;  $\theta_k$  is the angle of departure (AOD) of user  $k$ ; and  $\delta_k$  denotes the propagation gain.

We employ the linear beamformer to transmit the dual-functional signal, which is given by

$$\mathbf{x}_t = \sum_{k=1}^K \mathbf{w}_k s_k, \quad (2)$$

where  $\mathbf{w}_k$  is a linear beamformer for user  $k$ ;  $s_k$  is the data symbol for user  $k$ ; and  $s_k \sim \mathcal{CN}(0, 1)$ . Then, the  $k$ th user's received signal is given by

$$y_k = \mathbf{h}_k^H \mathbf{x}_t + n_k, \quad k \in \mathcal{K}, \quad (3)$$

where  $n_k \sim \mathcal{CN}(0, \sigma_k^2)$  denotes the noise at user  $k$ . The signal-to-interference-plus-noise ratio (SINR) of user  $k$  is denoted as

$$\gamma_k = \frac{|\mathbf{h}_k^H \mathbf{w}_k|^2}{\sum_{i=1, i \neq k}^K |\mathbf{h}_k^H \mathbf{w}_i|^2 + \sigma_k^2}, \quad k \in \mathcal{K}. \quad (4)$$

In the considered ISAC system, the transmitted signal should also sense a target in the interested direction [15]. This requires the ISAC system to provide sufficient pulse power along the target direction. To describe this, we provide the covariance matrix of  $\mathbf{x}_t$  as

$$\mathbf{R}_w = \mathbb{E}[\mathbf{x}_t \mathbf{x}_t^H] = \mathbf{W} \mathbf{W}^H,$$

where  $\mathbf{W} = [\mathbf{w}_1, \mathbf{w}_2, \dots, \mathbf{w}_M]$ . The probing power in the target direction can be expressed as [5], [6]

$$P(\mathbf{W}, \mathbf{t}, \theta) = \mathbf{a}^H(\mathbf{t}, \theta) \mathbf{R}_w \mathbf{a}(\mathbf{t}, \theta), \quad (5)$$

where  $\theta$  is the target direction's angle.

### III. BEAMFORMER AND APV OPTIMIZATION

We aim to optimize the beamformer and APV to maximize the multiuser sum rate while the radar probing power in the target direction is above a prefixed level. The problem formulation of the joint design is

$$\max_{\mathbf{W}, \mathbf{t}} \sum_{k=1}^K \log_2(1 + \gamma_k) \quad (6a)$$

$$\text{s.t. } \mathcal{C}_{\text{BS}} : \sum_{k=1}^K \|\mathbf{w}_k\|_2^2 \leq P_{\text{max}}, \quad (6b)$$

$$\mathcal{C}_t : P(\mathbf{W}, \mathbf{t}, \theta) \geq P_t, \quad (6c)$$

$$\mathcal{C}_{\text{FR}} : t_1 \geq 0, \quad t_M \leq D, \quad (6d)$$

$$\mathcal{C}_{\text{AC}} : t_m - t_{m-1} \geq D_0, \quad m = 2, 3, \dots, M. \quad (6e)$$

In problem (6), the constraint (6b) portrays the power budget at the BS; the constraint (6c) requires the probing power to be no less than a given threshold  $P_t$ ; constraints (6d) and (6e) restrict the FA positions in the interval  $[0, D]$ , and ensure that the inter-antenna spacing is no less than  $D_0$ , respectively.

Note that problem (6) is highly non-convex with respect to the design parameters  $(\mathbf{W}, \mathbf{t})$  since the objective and the constraint (6c) are non-convex. Plus, the design of FA positions amounts to the optimization of the unit circle manifold. These properties make problem (6) difficult to solve.

To achieve an efficient design algorithm for problem (6), we take advantage of the block variable structure and extend the block successive upper bound minimization (BSUM) method [16], [17] to handle it. The unique challenge is to incorporate FA positions in the development. We outline the key steps of the tailored algorithm as follows.

$$\min_{\mathbf{w}, \mathbf{t}, \mathbf{u}, \boldsymbol{\rho}} \mathcal{F}(\mathbf{w}, \mathbf{t}, \mathbf{u}, \boldsymbol{\rho}) \quad \text{s.t. } \mathcal{C}_{\text{BS}}, \mathcal{C}_{\text{FR}}, \mathcal{C}_{\text{AC}}, \mathcal{C}_t, \quad (7)$$

where

$$\mathcal{F}(\mathbf{w}, \mathbf{t}, \mathbf{u}, \boldsymbol{\rho}) = \sum_{k=1}^K [\mathbf{w}_k^H \mathbf{A}(\mathbf{t}) \mathbf{w}_k - 2\Re\{\mathbf{b}_k^H(\mathbf{t}) \mathbf{w}_k\} - \log(\rho_k)]$$

with  $\mathbf{u} \in \mathbb{C}^K$  and  $\boldsymbol{\rho} \in \mathbb{R}_{++}^K$  being introduced auxiliary variables;  $\mathbf{A}(\mathbf{t}) = \sum_{k=1}^K \rho_k |u_k|^2 \mathbf{h}_k(\mathbf{t}) \mathbf{h}_k^H(\mathbf{t}) + \sigma_k^2$ ;  $\mathbf{w} = [\mathbf{w}_1^T, \dots, \mathbf{w}_M^T]^T$ ,  $\mathbf{b}_k(\mathbf{t}) = \rho_k u_k \mathbf{h}_k(\mathbf{t})$ ; and  $\Re\{x\}$  denoting the real part of  $x$ . By leveraging the above transformation, we apply BSUM and obtain the following

$$\mathbf{u}^{\ell+1} = \arg \min_{\mathbf{u} \in \mathbb{C}^K} \mathcal{F}(\mathbf{w}^\ell, \mathbf{t}^\ell, \mathbf{u}, \boldsymbol{\rho}^\ell); \quad (8a)$$

$$\boldsymbol{\rho}^{\ell+1} = \arg \min_{\boldsymbol{\rho} \in \mathbb{R}_{++}^K} \mathcal{F}(\mathbf{w}^\ell, \mathbf{t}^\ell, \mathbf{u}^{\ell+1}, \boldsymbol{\rho}); \quad (8b)$$

$$\mathbf{w}^{\ell+1} = \arg \min_{\mathbf{w} \in \mathcal{C}_{\text{BS}} \cap \mathcal{C}_t} \mathcal{F}(\mathbf{w}, \mathbf{t}^\ell, \mathbf{u}^{\ell+1}, \boldsymbol{\rho}^{\ell+1}); \quad (8c)$$

$$\mathbf{t}^{\ell+1} = \arg \min_{\mathbf{t} \in \mathcal{C}_t \cap \mathcal{C}_{\text{FR}} \cap \mathcal{C}_{\text{AC}}} \mathcal{F}(\mathbf{w}^{\ell+1}, \mathbf{t}, \mathbf{u}^{\ell+1}, \boldsymbol{\rho}^{\ell+1}). \quad (8d)$$

Notably, the optimizations of  $\mathbf{u}$  in (8a) and  $\boldsymbol{\rho}$  in (8b) have closed-form solutions, which are given by

$$u_k^{\ell+1} = \frac{\mathbf{h}_k^H \mathbf{w}_k}{\sum_{i=1}^K |\mathbf{h}_k^H \mathbf{w}_i|^2 + \sigma_k^2}, \quad \rho_k^{\ell+1} = \frac{1}{1 - (u_k^{\ell+1})^* \mathbf{h}_k^H \mathbf{w}_k}$$

for any  $k \in \mathcal{K}$ ; and  $(\cdot)^*$  denotes the complex conjugate.

However, the optimizations of the beamformer  $\mathbf{w}$  and the APV  $\mathbf{t}$  do not have closed forms. We custom-build efficient algorithms for these two subproblems.

#### A. Beamformer Optimization

The subproblems (8c) involve coupled constraints, and the projections onto the coupled constraints can be difficult to calculate. To tackle this challenge, we propose a PDA that can effectively decouple the constraints and yield efficient closed-form updates. By PDA, we approximate (8c) by

$$\min_{\mathbf{w}} \mathcal{F}(\mathbf{w}) + \bar{\rho} \text{dist}^2(\mathbf{w}, \mathcal{C}_{\text{BS}}) + \bar{\rho} \text{dist}^2(\mathbf{w}, \mathcal{C}_t), \quad (9)$$

where  $\text{dist}(\mathbf{w}, \mathcal{X}) = \min_{\mathbf{y} \in \mathcal{X}} \|\mathbf{w} - \mathbf{y}\|_2$  is the distance function from a point  $\mathbf{w}$  to a set  $\mathcal{X}$ ;  $\bar{\rho} > 0$  is a given penalty parameter. Obviously, the problem (9) becomes close to the problem (8c) when  $\bar{\rho}$  is large.

---

**Algorithm 1** An Efficient PDA for Problem (8c)
 

---

- 1: **Input:** Initialize  $\bar{\rho} > 0$ ,  $\kappa > 1$ ,  $i = 1$ ,  $\mathbf{w}_k^0 = \mathbf{w}_k^1$ ,  $k \in \mathcal{K}$ .
  - 2: **Repeat:**
  - 3:    $\mathbf{z}_k^i = \mathbf{w}_k^i + \frac{i-1}{i+2}(\mathbf{w}_k^i - \mathbf{w}_k^{i-1})$ ;
  - 4:    $\mathbf{y}_k^i = \Pi_{\mathcal{C}_{\text{BS}}}(\mathbf{z}_k^i) + \Pi_{\mathcal{C}_t}(\mathbf{z}_k^i)$ ;
  - 5:    $\mathbf{w}_k^{i+1} = (\mathbf{A} + 2\bar{\rho}\mathbf{I})^{-1}(\bar{\rho}\mathbf{y}_k^i + \mathbf{b}_k)$ ;
  - 6:    $i = i + 1$ ;
  - 7:    $\bar{\rho} = \kappa\bar{\rho}$  every  $I$  iterations;
  - 8: **Until** stopping criterion is satisfied.
- 

Still, the distance function is variational and does not have an explicit expression. We address this issue by considering majorizing them by

$$\text{dist}(\mathbf{w}, \mathcal{C}_{\text{BS}}) \leq \|\mathbf{w} - \tilde{\mathbf{w}}_{\text{BS}}\|_2, \quad \text{dist}(\mathbf{w}, \mathcal{C}_t) \leq \|\mathbf{w} - \tilde{\mathbf{w}}_t\|_2, \quad (10)$$

where  $\tilde{\mathbf{w}}_{\text{BS}} = \Pi_{\mathcal{C}_{\text{BS}}}(\mathbf{w})$ ;  $\tilde{\mathbf{w}}_t = \Pi_{\mathcal{C}_t}(\mathbf{w})$ ; and the notation

$$\Pi_{\mathcal{X}}(\mathbf{y}) = \arg \min_{\mathbf{t} \in \mathcal{X}} \|\mathbf{t} - \mathbf{y}\|_2^2$$

denotes projecting  $\mathbf{y}$  onto  $\mathcal{X}$ . By meticulous calculation, we show that

$$[\tilde{\mathbf{w}}_{\text{BS}}]_k = \begin{cases} \mathbf{w}_k, & \text{if } \|\mathbf{w}\|_2^2 \leq P_{\text{max}}, \\ \frac{\sqrt{P_{\text{max}}}\mathbf{w}_k}{\|\mathbf{w}\|_2}, & \text{otherwise,} \end{cases}$$

$$[\tilde{\mathbf{w}}_t]_k = \begin{cases} \mathbf{w}_k, & \text{if } \sum_{k=1}^K \mathbf{w}_k^H \mathbf{a}(\mathbf{t}, \theta) \mathbf{a}^H(\mathbf{t}, \theta) \mathbf{w}_k \geq P_t, \\ (\mathbf{I} - \mu \mathbf{a}(\mathbf{t}, \theta) \mathbf{a}^H(\mathbf{t}, \theta))^{-1} \mathbf{w}_k, & \text{otherwise,} \end{cases}$$

where  $\mu = \frac{1}{\|\mathbf{a}(\mathbf{t}, \theta)\|^2} - \sqrt{\frac{\sum_{k=1}^K \mathbf{w}_k^H \mathbf{a}(\mathbf{t}, \theta) \mathbf{a}^H(\mathbf{t}, \theta) \mathbf{w}_k}{|\mathbf{a}^H(\mathbf{t}, \theta) \mathbf{a}(\mathbf{t}, \theta)|^2 P_t}}$ . The derivation of the projection  $\tilde{\mathbf{w}}_t$  is shown in Appendix A.

By the distance majorization, at iteration  $\mathbf{w}$ , one only needs to solve an unconstrained quadratic programming problem, given by

$$\min_{\mathbf{w}} \mathcal{F}(\mathbf{w}) + \bar{\rho} (\|\mathbf{w} - \tilde{\mathbf{w}}_{\text{BS}}\|_2^2 + \|\mathbf{w} - \tilde{\mathbf{w}}_t\|_2^2), \quad (11)$$

which has an optimal closed-form solution, i.e.,

$$\mathbf{w}_k = (\mathbf{A} + 2\bar{\rho}\mathbf{I})^{-1} [\bar{\rho}([\tilde{\mathbf{w}}_{\text{BS}}]_k + [\tilde{\mathbf{w}}_t]_k) + \mathbf{b}_k], \quad k \in \mathcal{K}. \quad (12)$$

The PDA was summarized in Algorithm 1. Note that we also apply the extrapolation in step 3, which was shown to be able to numerically accelerate the algorithmic convergence [18].

### B. APV Optimization

An EPG algorithm is proposed for handling problem (8d), which takes the following updates

$$\begin{aligned} \mathbf{t}^{i+1} &= \Pi_{\mathcal{C}_t \cap \mathcal{C}_{\text{FR}} \cap \mathcal{C}_{\text{AC}}}(\mathbf{z}^i - \eta \nabla_{\mathbf{t}} \mathcal{F}(\mathbf{z}^i | \mathbf{t}^i)), \\ \mathbf{z}^{i+1} &= \mathbf{t}^{i+1} + \zeta_{i+1}(\mathbf{t}^{i+1} - \mathbf{t}^i), \end{aligned} \quad (13)$$

where  $\eta > 0$  is the descent step length, which is obtained by the backtracking line search [19];  $\nabla_{\mathbf{t}} \mathcal{F}(\mathbf{z}^i | \mathbf{t}^i)$  denotes the gradient of  $\mathcal{F}$  at  $\mathbf{z}^i$ , and the parameter  $\zeta_{i+1} = \frac{\alpha_{i+1}-1}{\alpha_{i+1}}$ ,  $\alpha_{i+1} = \frac{1+\sqrt{1+4\alpha_i^2}}{2}$  with  $\alpha_1 = 0$ .

We show the implementation of the EPG algorithm in (13). Defining  $\mathbf{w}_k = \mathbf{a}_k + j\mathbf{b}_k$ ,  $\mathbf{C}_k = \mathbf{a}_k \mathbf{a}_k^T + \mathbf{b}_k \mathbf{b}_k^T$ ,  $\mathbf{D}_k = \mathbf{a}_k \mathbf{b}_k^T - \mathbf{b}_k \mathbf{a}_k^T$ ,  $\mathbf{g}_k = [g_{1,k}, g_{2,k}, \dots, g_{M,k}]^T$ ,  $\mathbf{q}_k =$

$[q_{1,k}, q_{2,k}, \dots, q_{M,k}]^T$ ,  $g_{m,k} = \cos(v_k t_m)$ , and  $q_{m,k} = \sin(v_k t_m)$  for any  $k \in \mathcal{K}$ , we have

$$\begin{aligned} f_{k,i} &= |\mathbf{a}^H(\mathbf{t}, \theta_k) \mathbf{w}_k|^2 = \mathbf{g}_k^T \mathbf{C}_i \mathbf{g}_k + \mathbf{q}_k^T \mathbf{C}_i \mathbf{q}_k + 2\mathbf{g}_k^T \mathbf{D}_i \mathbf{q}_k, \\ h_{k,k} &= \mathcal{R}\{\mathbf{a}^H(\mathbf{t}, \theta_k) \mathbf{w}_k\} = \mathbf{g}_k^T \mathbf{a}_k + \mathbf{q}_k^T \mathbf{b}_k. \end{aligned}$$

Thus, the derivatives of  $f_{k,i}$  and  $h_{k,k}$  with respect to  $\mathbf{t}$  gives

$$\begin{aligned} \frac{\partial f_{k,i}}{\partial \mathbf{t}} &= \frac{\partial f_{k,i}}{\partial \mathbf{g}_k} \frac{\partial \mathbf{g}_k}{\partial \mathbf{t}} + \frac{\partial f_{k,i}}{\partial \mathbf{q}_k} \frac{\partial \mathbf{q}_k}{\partial \mathbf{t}} \\ &= 2v_k [\text{diag}(\mathbf{g}_k)(\mathbf{C}_i \mathbf{q}_k - \mathbf{D}_i \mathbf{g}_k) - \text{diag}(\mathbf{q}_k)(\mathbf{C}_i \mathbf{g}_k + \mathbf{D}_i \mathbf{q}_k)], \\ \frac{\partial h_{k,k}}{\partial \mathbf{t}} &= \frac{\partial h_{k,k}}{\partial \mathbf{g}_k} \frac{\partial \mathbf{g}_k}{\partial \mathbf{t}} + \frac{\partial h_{k,k}}{\partial \mathbf{q}_k} \frac{\partial \mathbf{q}_k}{\partial \mathbf{t}} \\ &= v_k [\text{diag}(\mathbf{g}_k) \mathbf{b}_k - \text{diag}(\mathbf{q}_k) \mathbf{a}_k]. \end{aligned}$$

Next,  $\nabla_{\mathbf{t}} \mathcal{F}(\mathbf{t})$  can be derived and is given by

$$\nabla_{\mathbf{t}} \mathcal{F}(\mathbf{t}) = \sum_{k=1}^K \left\{ \rho_k |u_k|^2 \delta_k^2 \sum_{i=1}^K \frac{\partial f_{k,i}}{\partial \mathbf{t}} - 2\mathcal{R}\{\rho_k u_k^* \delta_k\} \frac{\partial h_{k,k}}{\partial \mathbf{t}} \right\}.$$

Moreover,  $\Pi_{\mathcal{C}_t \cap \mathcal{C}_{\text{FR}} \cap \mathcal{C}_{\text{AC}}}$  can be obtained by solving the following problem

$$\min_{\mathbf{t}} \|\mathbf{t} - \boldsymbol{\kappa}\|_2^2 \quad \text{s.t. } \mathbf{t} \in \mathcal{C}_t \cap \mathcal{C}_{\text{FR}} \cap \mathcal{C}_{\text{AC}}, \quad (14)$$

where  $\boldsymbol{\kappa}$  is a point to project. However, the constraint  $\mathcal{C}_t$  is non-convex. Therefore, we construct a concave quadratic surrogate function to minorize  $\mathbf{a}^H(\mathbf{t}, \theta) \mathbf{R}_w \mathbf{a}(\mathbf{t}, \theta)$  as

$$\mathbf{a}^H(\mathbf{t}, \theta) \mathbf{R}_w \mathbf{a}(\mathbf{t}, \theta) \geq g(\mathbf{t} | \tilde{\mathbf{t}}) \triangleq \mathbf{t}^T \mathbf{D} \mathbf{t} - 2\mathbf{d}^T \mathbf{t} + c, \quad (15)$$

where

$$\begin{aligned} \mathbf{D} &= -v^2 (\text{diag}(\mathbf{r}) - \mathbf{R}), \\ \mathbf{d}[n] &= v \sum_{m=1}^M |R_{mn}| \sin(f(\tilde{t}_n, \tilde{t}_m)) - v^2 \sum_{m=1}^M |R_{mn}| (\tilde{t}_n - \tilde{t}_m), \\ c &= \sum_{m=1}^M \sum_{n=1}^M |R_{mn}| [\cos(f(\tilde{t}_n, \tilde{t}_m)) + v \sin(f(\tilde{t}_n, \tilde{t}_m)) (\tilde{t}_n - \tilde{t}_m) \\ &\quad - \frac{1}{2} v^2 (\tilde{t}_n - \tilde{t}_m)^2], \end{aligned}$$

with  $\mathbf{r} = [\sum_{m=1}^M |R_{m1}|, \sum_{m=1}^M |R_{m2}|, \dots, \sum_{m=1}^M |R_{mM}|]$ ;  $v = \frac{2\pi}{\lambda} \cos(\theta)$ ;  $[\mathbf{R}]_{mn} = |R_{mn}|$ ;  $f(\tilde{t}_n, \tilde{t}_m) = v(\tilde{t}_n - \tilde{t}_m) + \angle R_{mn}$ ;  $\tilde{\mathbf{t}} = [\tilde{t}_1, \tilde{t}_2, \dots, \tilde{t}_M]^T$ ;  $R_{mn}$  is an element of the  $m$ th row and  $n$ th column of  $\mathbf{R}_w$  for  $n, m = 1, 2, \dots, M$ ; and  $\tilde{\mathbf{t}}$  denotes any determined value for  $\mathbf{t}$ .

Therefore, the problem (14) is reformulated as follows

$$\min_{\mathbf{t}} \|\mathbf{t} - \boldsymbol{\kappa}\|_2^2 \quad \text{s.t. } \mathbf{t} \in \mathcal{C}_q \cap \mathcal{C}_{\text{FR}} \cap \mathcal{C}_{\text{AC}}, \quad (16)$$

where the feasible space  $\mathcal{C}_q$  of  $\mathbf{t}$  is restricted by  $g(\mathbf{t} | \tilde{\mathbf{t}}) \geq P_t$ .

Problem (16) is a convex quadratically constrained quadratic program (QCQP) problem, which can be solved efficiently with off-the-shelf toolboxes, such as CVX.

### C. Computational Complexity Analysis

In this subsection, we analyze the complexity of the proposed BSUM algorithm in (8). The computational complexity of the BSUM algorithm is  $\mathcal{O}(M^{4.5} + M^2(MK + M + K))$ . This is because the overall complexity of the closed-form  $\mathbf{u}$ , as well as  $\boldsymbol{\rho}$ , is  $\mathcal{O}(M^2K)$ , the complexity for beamformer optimization (8c) is  $\mathcal{O}(M^3 + M^2K)$ , and the complexity for APV optimization (8d) is  $\mathcal{O}(M^{4.5} + M^3K)$ .

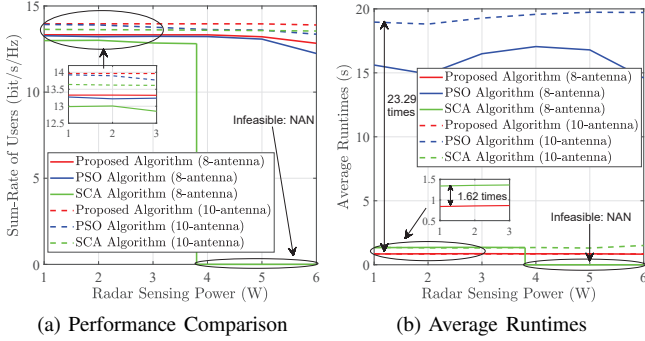


Fig. 2. Comparison between the proposed algorithm and existing algorithms,  $K = 2$ ,  $P_{max} = 30$  dBm.

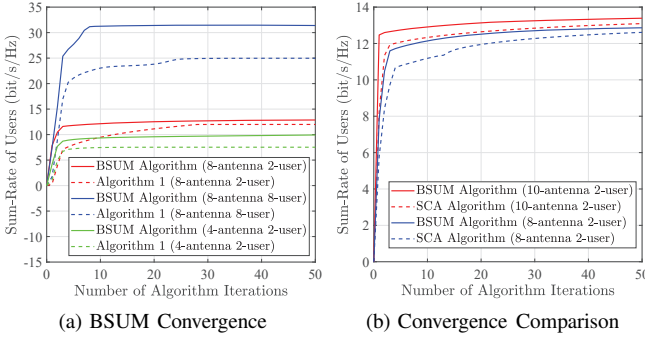


Fig. 3. Convergence of algorithms,  $P_{max} = 30$  dBm,  $P_t = 3$  W.

#### IV. SIMULATION RESULTS

In this section, the simulations demonstrate the proposed BSUM algorithm performance in FA-assisted ISAC systems. We set the parameters of FAs as  $D_0 = \lambda/2$ ,  $D = 10\lambda$ , and  $\lambda = 0.01$  m [20], [21]. In addition, we set  $\theta = 60^\circ$ ,  $\sigma_k^2 = -80$  dBm, and  $\delta_k = g_0 d_k^{-\alpha}$  for any  $k \in \mathcal{K}$ , where  $g_0 = -40$  dB and  $\alpha = 2.8$  denote the fading at 1 m reference distance and the path-loss exponent, respectively. Users are distributed on a circle centered at BS with radius 100m, i.e.,  $d_k = 100$  m for  $k \in \mathcal{K}$ . In this section, we consider two scenarios, i.e., the 2-user (underloaded) scenario and the 8-user (overloaded) scenario. For the 2-user scenario, we set  $\theta_1 = 90^\circ$  and  $\theta_2 = 120^\circ$ . For the 8-antenna scenario, we set  $\theta_1 = 10^\circ$ ,  $\theta_2 = 30^\circ$ ,  $\theta_3 = 80^\circ$ ,  $\theta_4 = 90^\circ$ ,  $\theta_5 = 120^\circ$ ,  $\theta_6 = 130^\circ$ ,  $\theta_7 = 150^\circ$ , and  $\theta_8 = 170^\circ$ .

To show the efficiency of our proposed algorithm, we compare the commonly used algorithms in FA system design, i.e., the SCA algorithm [13], [20] and the PSO algorithm [12], [22], [23]. As shown in Fig. 2, the proposed algorithm has a higher performance compared to the SCA algorithm and PSO algorithm. Meanwhile, the proposed algorithm can improve the speed of FA position configuration by 60% compared to the SCA algorithm, and by more than 20 times compared to the PSO algorithm. In particular, when  $M = 8$ , the SCA algorithm causes problem (8) to be infeasible as the sensing power increases, due to the fact that SCA reduces the feasible region. Moreover, as shown in Fig. 3 (a), the proposed BSUM algorithm can reach convergence within tens of iterations. From Fig. 3 (b), the proposed algorithm can achieve convergence faster than the SCA algorithm.

Fig. 4 shows the performance trade-off between multiuser

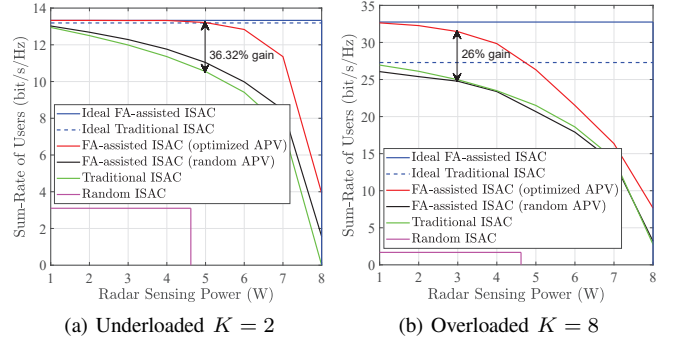


Fig. 4. Trade-off performance between multiuser sum rate and radar sensing power,  $M = 8$ ,  $P_{max} = 30$  dBm.

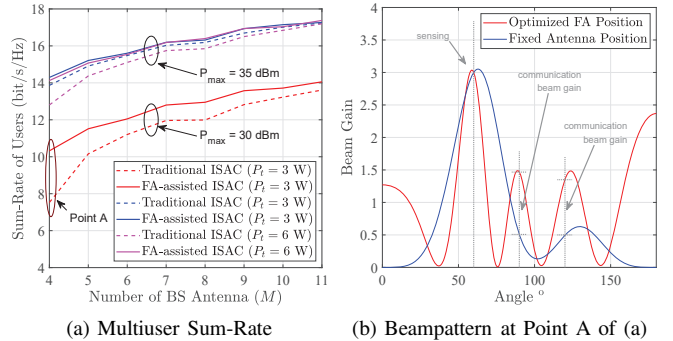


Fig. 5. Multiuser sum rate under different number of BS antenna,  $K = 2$ .

sum rate and radar sensing power under the underloaded scenario and the overloaded scenario. Next, we analyze the importance of FAs for enhancing the performance of ISAC systems from two aspects, i.e., the low sensing requirement and the high sensing requirement. From Fig. 4, under the low sensing requirements, the fixed position antenna (FPA) array in underloaded scenarios can provide enough DoF to serve users, and thus the FA array has a low enhancement of ISAC performance. However, in overload scenarios, the FPA array no longer has sufficient capability to serve users, while FA can greatly improve ISAC performance by providing higher space DoF. Moreover, the performance of FA-assisted ISAC can surpass the ideal performance of the traditional ISAC and achieve a great improvement. Finally, and importantly in Fig. 4 (a), randomized FAs position settings can still improve ISAC performance. Under the high sensing requirements, FAs achieve a marked improvement in ISAC performance compared to the FPA array in underloaded scenarios, which is because the FPA array cannot well balance high sensing power and multiuser communications. In addition, when the sensing power in the range of 1 W to 5 W in underloaded scenarios, the FA array ensures that the sum rate remains constant. In overloaded scenarios, the FA still has sufficient capacity to balance sensing and communication, providing considerable performance gain than the FPA array, as indicated in Fig. 4 (b).

Fig. 5 (a) shows that the performance difference between the FA array and the FPA array is larger when  $N$  is small, e.g.,  $N \in [4, 7]$ . This is due to the fact that the smaller  $N$  means a larger positional space achieving a higher DoF gain when the total range of the antenna array is  $[0, D] = [0, 10\lambda]$ . Further-

more, when  $P_t = 3\text{ W}$ , the performance difference between FA and FPA arrays decreases with increasing  $P_{max}$  due to the fact that the larger power budget provides higher power DoF, which corresponds to the case of low sensing requirements in Fig. 5 (a). When  $P_{max} = 35\text{ dBm}$ , the performance difference between FA and FPA arrays increases with the increase of  $P_t$ . This is because the higher sensing power makes the FPA array not sufficiently capable enough to provide better service to users, which corresponds to the case of high sensing requirement in Fig. 5 (a). Finally, we give the beampattern for point A in Fig. 5 (a), as shown in Fig. 5 (b). It can be seen that the FPA array is unable to provide the communication beam in the desired direction while guaranteeing the sensing requirement. In contrast, the communication beam in the desired direction can be achieved by optimizing the FA position, which provides a higher communication gain compared to the FPA array.

## V. CONCLUSION

This letter proposed an efficient algorithm for an FA-assisted ISAC system, aiming at maximizing the multiuser sum rates with the required sensing requirement. Relying on the MM algorithm, the PDA was proposed to iteratively update the closed-form beamformer, and the EPG was presented to efficiently configure the FA positions. Simulation results demonstrated that the proposed algorithm can realize FA position configuration more than 60% faster than the SCA and PSO algorithms.

## APPENDIX A

$\tilde{\mathbf{w}}_t$  can be derived by solving the following problem

$$\min_{\mathbf{w}} \|\mathbf{w} - \boldsymbol{\xi}\|_2^2 \quad \text{s.t.} \quad \sum_{k=1}^K \mathbf{w}_k^H \mathbf{a} \mathbf{a}^H \mathbf{w}_k \geq P_t, \quad (17)$$

where  $\boldsymbol{\xi} = [\boldsymbol{\xi}_1^T, \boldsymbol{\xi}_2^T, \dots, \boldsymbol{\xi}_K^T]^T$  is the point to project, and  $\mathbf{a}$  denotes  $\mathbf{a}(t, \theta)$  for short.

The Karush–Kuhn–Tucker (KKT) conditions associated with the above problem are given by

$$\begin{aligned} \frac{\partial \mathcal{L}}{\partial \mathbf{w}_k} &= 2(\mathbf{w}_k - \boldsymbol{\xi}_k) - 2\mu \mathbf{a} \mathbf{a}^H \mathbf{w}_k = 0, \quad k \in \mathcal{K}, \\ \sum_{k=1}^K \mathbf{w}_k^H \mathbf{a} \mathbf{a}^H \mathbf{w}_k &\geq P_t, \quad \mu \geq 0, \quad \mu \left( \sum_{k=1}^K \mathbf{w}_k^H \mathbf{a} \mathbf{a}^H \mathbf{w}_k - P_t \right) = 0, \end{aligned}$$

where  $\mu \geq 0$  is a dual variable. From the first line of KKT condition and Woodbury matrix identity, we get

$$\mathbf{w}_k^* = (\mathbf{I} - \mu \mathbf{a} \mathbf{a}^H)^{-1} \boldsymbol{\xi}_k = \left( \mathbf{I} + \frac{\mu \mathbf{a} \mathbf{a}^H}{1 - \mu \mathbf{a}^H \mathbf{a}} \right) \boldsymbol{\xi}_k, \quad (18)$$

By the complementary slackness, we know that if  $\sum_{k=1}^K \mathbf{w}_k^H \mathbf{a} \mathbf{a}^H \mathbf{w}_k > P_t$ , then  $\mu = 0$  must hold. Otherwise,  $\mu$  is chosen such that  $\sum_{k=1}^K \mathbf{w}_k^H \mathbf{a} \mathbf{a}^H \mathbf{w}_k = P_t$ , given by

$$\mu = \frac{1}{\|\mathbf{a}\|^2} - \sqrt{\frac{\sum_{k=1}^K \boldsymbol{\xi}_k^H \mathbf{a} \mathbf{a}^H \boldsymbol{\xi}_k}{|\mathbf{a}^H \mathbf{a}|^2 P_t}}. \quad (19)$$

The derivation is complete.

## REFERENCES

- [1] Y. Cui, F. Liu, X. Jing, and J. Mu, "Integrating sensing and communications for ubiquitous IoT: Applications, trends, and challenges," *IEEE Netw.*, vol. 35, no. 5, p. 158–167, Sep. 2021.
- [2] F. Liu, C. Masouros, A. Li, H. Sun, and L. Hanzo, "MU-MIMO communications with MIMO radar: From co-existence to joint transmission," *IEEE Trans. Wireless Commun.*, vol. 17, no. 4, pp. 2755–2770, Apr. 2018.
- [3] Y. Dong, F. Liu, and Y. Xiong, "Joint receiver design for integrated sensing and communications," *IEEE Commun. Lett.*, vol. 27, no. 7, pp. 1854–1858, Jul. 2023.
- [4] W. Saad, M. Bennis, and M. Chen, "A vision of 6G wireless systems: Applications, trends, technologies, and open research problems," *IEEE Netw.*, vol. 34, no. 3, p. 134–142, May 2019.
- [5] F. Liu, L. Zhou, C. Masouros, A. Li, W. Luo, and A. Petropulu, "Toward dual-functional radar-communication systems: Optimal waveform design," *IEEE Trans. Signal Process.*, vol. 66, no. 16, pp. 4264–4279, Aug. 2018.
- [6] F. Liu, Y. -F. Liu, A. Li, C. Masouros, and Y. C. Eldar, "Cramér-Rao bound optimization for joint radar-communication beamforming," *IEEE Trans. Signal Process.*, vol. 70, p. 240–253, Jan. 2022.
- [7] T. Zhang, G. Li, S. Wang, G. Zhu, G. Chen, and R. Wang, "ISAC-accelerated edge intelligence: Framework, optimization, and analysis," *IEEE Trans. Green Commun. Netw.*, vol. 7, no. 1, pp. 455–468, Mar. 2023.
- [8] K. -K. Wong, W. K. New, X. Hao, K. -F. Tong, and C. -B. Chae, "Fluid antenna system—Part I: Preliminaries," *IEEE Commun. Lett.*, vol. 27, no. 8, pp. 1919–1923, Aug. 2023.
- [9] B. Tang, H. Xu, K. -K. Wong, K. -F. Tong, Y. Zhang, and C. -B. Chae, "Fluid antenna enabling secret communications," *IEEE Commun. Lett.*, vol. 27, no. 6, pp. 1491–1495, Jun. 2023.
- [10] C. Wang, G. Li, H. Zhang, K. -K. Wong, Z. Li, D. W. K. Ng, and C. -B. Chae, "Fluid antenna system liberating multiuser MIMO for ISAC via deep reinforcement learning," *IEEE Trans. Wireless Commun.*, 2024, Early Access.
- [11] J. Zou, H. Xu, C. Wang, L. Xu, S. Sun, K. Meng, C. Masouros, and K. -K. Wong, "Shifting the ISAC trade-off with fluid antenna systems," *arXiv preprint arXiv:2405.05715*, 2024.
- [12] Z. Kuang, W. Liu, C. Wang, Z. Jin, J. Ren, X. Zhang, and Y. Shen, "Movable-antenna array empowered ISAC systems for low-altitude economy," *arXiv preprint arXiv:2406.07374*, 2024.
- [13] H. Wu, H. Ren, and C. Pan, "Movable antenna-enabled RIS-aided integrated sensing and communication," *arXiv preprint arXiv:2407.03228*, 2024.
- [14] K. -K. Wong, K. -F. Tong, and C. -B. Chae, "Fluid antenna system—part II: Research opportunities," *IEEE Commun. Lett.*, vol. 27, no. 8, pp. 1924–1928, Aug. 2023.
- [15] P. Stoica, J. Li, and Y. Xie, "On probing signal design for MIMO radar," *IEEE Trans. Signal Process.*, vol. 55, no. 8, p. 4151–4161, Aug. 2007.
- [16] Q. Shi, M. Razaviyayn, Z. -Q. Luo, and C. He, "An iteratively weighted MMSE approach to distributed sum-utility maximization for a MIMO interfering broadcast channel," *IEEE Trans. Signal Process.*, vol. 59, no. 9, pp. 4331–4340, Aug. 2011.
- [17] M. Shao and W. -K. Ma, "A simple way to approximate average robust multiuser MISO transmit optimization under covariance-based CSIT," in *IEEE Int. Conf. Acoustics, Speech Signal Process. (ICASSP)*. New Orleans, LA, USA, 2017, pp. 3504–3508.
- [18] Q. Li, Y. Liu, M. Shao, and W. -K. Ma, "Proximal distance algorithm for nonconvex QCQP with beamforming applications," in *Proc. IEEE Int. Conf. Acoust., Speech, Signal Process. (ICASSP)*. Barcelona, Spain, 2020, pp. 5155–5159.
- [19] S. Boyd, S. P. Boyd, and L. Vandenberghe, *Convex Optimization*. Cambridge, U.K.: Cambridge Univ. Press, 2004.
- [20] W. Ma, L. Zhu, and R. Zhang, "Multi-beam forming with movable-antenna array," *IEEE Commun. Lett.*, vol. 28, no. 3, pp. 697–701, Mar. 2024.
- [21] L. Zhu, W. Ma, and R. Zhang, "Modeling and performance analysis for movable antenna enabled wireless communications," *IEEE Trans. Wireless Commun.*, 2023, Early Access.
- [22] X. Pi, L. Zhu, Z. Xiao, and R. Zhang, "Multiuser communications with movable-antenna base station via antenna position optimization," in *Proc. GC Wkshpshop*. Kuala Lumpur, Malaysia, 2023, pp. 1386–1391.
- [23] Y. Zuo, J. Guo, B. Sheng, C. Dai, F. Xiao, and S. Jin, "Fluid antenna for mobile edge computing," *IEEE Commun. Lett.*, vol. 28, no. 7, pp. 1728–1732, Jul. 2024.