

# First-principle screening of structural, electronic and hydrogen storage properties of Vanadium based hydride perovskites $XVH_3$ ( $X = Li, K$ ).

Anupam<sup>1</sup>, Shyam Lal Gupta<sup>2</sup>, Vipin Kumar<sup>3</sup>, Sumit Kumar<sup>4</sup>, Sanjay Panwar<sup>1,\*</sup>, Diwaker<sup>3,\*\*</sup>

<sup>1</sup>School of Basic and Applied Sciences, Maharaja Agrasen University, Baddi, Solan, 174103, H P, INDIA

<sup>2</sup>Department of Physics, HarishChandra Research Institute, Prayagraj, Allahabad, 211019, U P, INDIA

<sup>3</sup>Department of Physics, SCVB Government College, Palampur, Kangra, 176061, H P, INDIA

<sup>4</sup>Department of Physics, Government College, Una, 174303, H P, INDIA

Email:- [diwakerphysics@gmail.com](mailto:diwakerphysics@gmail.com), [dr.spanwar@gmail.com](mailto:dr.spanwar@gmail.com)

## ABSTRACT

V-based  $XVH_3$  ( $X = Li, K$ ) hydrides perovskites are investigated for their hydrogen storage capacity using the WIEN2K code. To verify the stability of these hydrides, first-principles investigations are employed to examine their structural, electronic and hydrogen storage properties. According to structural studies these compositions hydrides are stable and part of the cubic space group (221 Pm-3m). We have examined many aspects of these compositions throughout, using the PBE-GGA exchange correlation potential. We obtained the energy versus volume curve and found the stable phase and structural parameter of these hydrides using equation of state given by Birch-Murnaghan's. These hydrides thermodynamic stability is expressed in terms of their gravimetric hydrogen storage capacity. The goal of this study is to compute the standard enthalpy of formation and thermal desorption to ascertain the stability of these hydrides. Based on band structure and density of state plots it is found that these compositions are metallic in nature. The study presents a preliminary theoretical approach for hydrogen storage applications of thermoelectric compositions, revealing their strong thermoelectric responses and potential for green energy sources.

**Keywords:** Hydrogen Storage, Perovskites, Li & K - metal-Hydrides, Gravimetric hydrogen storage capacity, Desorption temperature

## 1. Introduction

Perovskites and their exceptional qualities make them one of the most fascinating new materials for the twenty-first century. Perovskite has attracted a lot of attention and made substantial strides in energy storage, pollutant degradation, and optoelectronic devices in the last several decades because to its remarkable photoelectric and catalytic properties[1]. Materials with the crystal structure formula  $ABX_3$  are referred to as perovskites. These materials are further divided into two groups: organic-inorganic hybrid perovskite and inorganic perovskite.  $SrTiO_3$  is regarded as an excellent example of a perovskite due to its structure, which seems to be crystalline and disordered in the lower symmetric space group. The recent study on various transition metal hydrides [1-10], complex hydrides and carbon based compounds can be act as better alternative for green energy demand globally. Perovskite offers a potential role in the development of novel versions for hydrogen storage applications because to its fascinating physical and chemical features and affordable cost. Perovskites are intriguing and significant for technological applications due to their distinct blend of magnetic and electric properties. Alkali and alkaline earth metals, A and B, respectively, make up perovskites hydrides, which are ionic compounds with predicted band gaps of at least 2 eV. The stability trend of tolerance factors largely supports Goldschmidt's theory. The chemical compound known as perovskite hydrides, or  $ABX_3$ , has drawn interest lately as a potential viable hydrogen storage solution. Although perovskite materials have significant role in storing Hydrogen but no such significant compounds found in study or literature yet. So the materials which met the Hydrogen storing requirements are still being continuously searched [11-25]. Hydrogen storage materials frequently possess the following characteristics: 1) These materials have a lot

of hydrogen bonding.(2) they are big enough to store a lot of hydrogen; (3) they have catalytic properties that enhance the absorption of hydrogen; and (4) they have acceptable gravimetric hydrogen storage capacities that enhance the capacity to store hydrogen. The gravimetric densities of hydroxide perovskites typically range from 1.2 to 6.0 weight percent. Hydrogen may be stored more effectively and safely in metal hydride perovskites than in liquid or compressed gas phase [26–35]. Using density functional theory (DFT), the current work investigates the structural, electrical, and hydrogen storage characteristics of perovskite hydrides with a specific pairing of  $XVH_3$  ( $X = Li, K$ ) for hydrogen storage applications. In this study, we investigate the characteristics of the new perovskite hydrides  $XVH_3$  ( $X = Li, K$ ) for the first time.

## 2. Computational Details


The  $XVH_3$  ( $X = Li, K$ ) cubic phase structure is taken into consideration for all compositions by using space group 221 (pm3m). Different atoms have been allocated the following atomic positions: (0, 0, 0) for X, (0.5, 0.5, 0.5) for V, and (0, 0.5, 0.5), (0.5, 0, 0.5), and (0.5, 0.5, 0) for hydrogen (H1, H2, and H3), respectively. Based on Density Functional Theory, the correlation function Perdew Burke Ernzerhof (PBE) and the generalized gradient approximation (GGA) have been applied in all calculations. Birch-Murnaghan's equation of state is used to vary energy vs. volume in order to explore the structural characteristics and determine the stable phase of these perovskites. All these calculations will make use of 216 k-points, an RMT of 5.0, and an energy cutoff of -6.0 Ryd. The structural, electronic, and hydrogen storage properties of cubic compositions  $XVH_3$  ( $X = Li, K$ ) have been computed following geometry optimization. The WIEN2k code has been used for all calculations [14]. Thermal investigations has been done using BoltzTrap2 code.

## 3. Results and Discussion

The structural, electronic, and hydrogen storage capabilities of vanadium-based  $XVH_3$  ( $X = Li, K$ ) hydrides perovskites will be discussed in this section.

### 3.1 Structural Properties

$XVH_3$  ( $X = Li, K$ ) perovskites are members of space group 221(Pm-3m) and feature a cubic crystal structure. The Wyckoff positions of V are (0.5, 0.5, 0.5), of ( $X = Li, K$ ) are (0, 0, 0) and those of hydrogen (H1, H2, and H3) are (0, 0.5, 0.5), (0.5, 0, 0.5), and (0.5, 0.5, 0), respectively. Figure 1 shows the relaxed cubic crystal structure of  $XVH_3$  ( $X = Li, K$ ) hydrides perovskites. Figure 2 (a-b) displays energy vs volume graphs that illustrate the minimal ground state energy of these compositions. Additionally, structural properties including bulk modulus ( $B_0$ ), which indicates material hardness, ground state energy ( $E_0$ ), and pressure derivative of bulk modulus ( $B'$ ), which is listed in Table 1, have been computed using the Birch-Murnaghan equation of states.

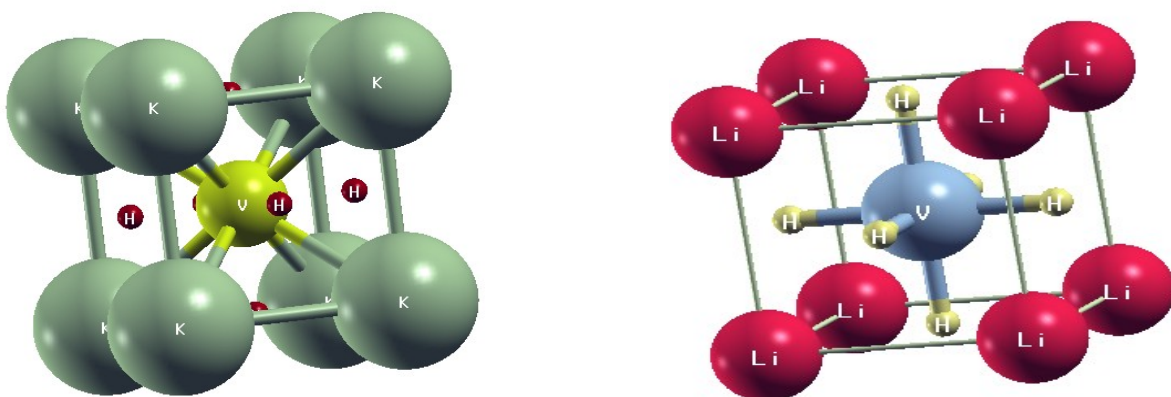

[a] [b]  
Fig. 1. Relaxed optimised structures of [a] KVH<sub>3</sub>[b] LiVH<sub>3</sub>

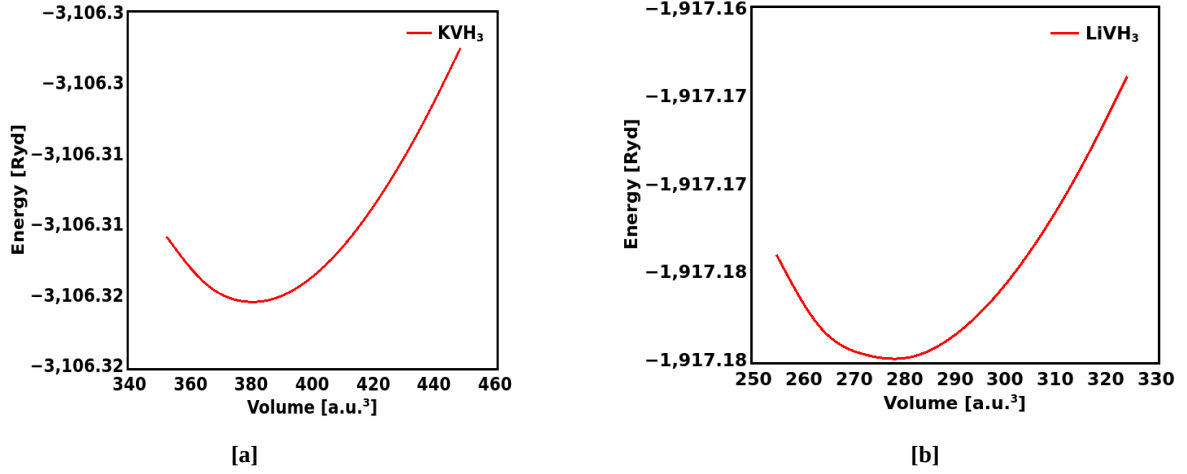


Fig. 2. Energy vs volume graphs for [a] KVH<sub>3</sub>[b] LiVH<sub>3</sub>


Table1

Lattice paramater [a (Å)], Bulk Modulus (B in Gpa), Volume (V<sub>0</sub> in Å<sup>3</sup>), Pressure derivative of Bulk modulus (B' in Gpa), Ground state energy [ E<sub>0</sub> (eV)], Enthalpy of formation [ ΔH<sub>f</sub> (KJ/mol.H<sub>2</sub>)], Gravimetric storage densities(C<sub>wt%</sub>), of XVH<sub>3</sub> (X = Li, K) perovskites.


Perovskites	a (Å)	B	V <sub>0</sub>	B'	E <sub>0</sub>	ΔH <sub>f</sub>	T <sub>d</sub>	C <sub>wt%</sub>
KVH <sub>3</sub>	3.8341	56.99	380.36	3.97	-3106.31	-626.31	4781	3.25
LiVH <sub>3</sub>	3.4505	80.15	277.21	4.62	-1917.18	-410.96	3137	4.97

### 3.2 Stability, enthalpy, decomposition temperature and hydrogen storage of the inter-metallic hydrides

The stability of intermetallic hydrides will be predicted using the enthalpy of production (ΔH<sub>f</sub>) and the decomposition temperature (T<sub>d</sub>). [7]. Phase stability and dehydrogenation properties are found for XVH<sub>3</sub> (X = Li, K) hydrides perovskites when comparing the computed value of enthalpy of formation (ΔH<sub>f</sub>) to the standard value of ΔH<sub>f</sub>, which is 40 kJ/mol.H<sub>2</sub>, as suggested by the U.S. Energy Department. The reactions that result in XVH<sub>3</sub> (X = Li, K) perovskites may be comprehended using the following equations.



and



Using Hess's law as given below

$$\Delta H = \Sigma E_{\text{tot}}(\text{products}) - \Sigma E_{\text{tot}}(\text{reactants})$$

Our compositions' enthalpy of formation can be computed as

$$\Delta H_f = E_{\text{tot}}(\text{KVH}_3) - E_{\text{tot}}(\text{KV}) - 3/2 * E_{\text{tot}}(\text{H}_2)$$

and

$$\Delta H_f = E_{\text{tot}}(\text{LiVH}_3) - E_{\text{tot}}(\text{LiV}) - 3/2 * E_{\text{tot}}(\text{H}_2)$$

Notably, we get a formation enthalpy of -626.31kJ/mol.H<sub>2</sub> and -410.96 kJ/mol.H<sub>2</sub> using the FP-LAPW technique. According to the US Department of Energy, for XVH<sub>3</sub> perovskites (where X=Li, K) these values are much higher than the ideal value of -40 kJ/mol.H<sub>2</sub>, proving these perovskites' exceptional thermodynamic stable. Further, the standard Gibb's energy ( $\Delta G$ ) relation is given as

$$\Delta G = \Delta H_f - T \Delta S$$

where  $\Delta H_f$  is fotation enthalpy and  $\Delta S$  is entropy change. is used to calculate decomposition temperature of XVH<sub>3</sub> (X = Li, K) hydrides perovskites. At equilibrium, the standards value of Gibb's energy is zero. Further, if we talk about the value of change in entropy i.e  $\Delta S$  it results from the way the hydrogen molecule changes during the dehydrogenation reaction as  $\Delta S = 130 \text{ J/mol.K}^{-1}$  Therefore, the thermal decomposition can be calculated using the relation given as

$$T = \Delta H_f / 130.$$

The better stability of these compositions was confirmed when we found that the decomposition temperature for KVH<sub>3</sub> was 4781 K and for LiVH<sub>3</sub> was 3137 K using the enthalpy of formation value from Table 1 in the aforementioned equation. Additionally, knowledge of these compositions' gravimetric hydrogen storage capacity is required in order for them to be applicable in the field of hydrogen storage applications. The term "gravimetric hydrogen storage capacity" refers to the amount of hydrogen that may be stored per mass unit of a substance. Using the equation below, the gravimetric hydrogen storage capacities for the compositions under study are determined.

$$C_{wt\%} = [n_H * m_H / M_{(KXH_3)} * 100] \%$$

Here,  $n_H$  = number of hydrogen,  $m_H$ = molar mass of hydrogen atom and  $M_{(KXH_3)}$ = molar mass of host compound. The gravimetric hydrogen storage capacity for these compositions comes out to be 3.25% and 4.97% for XVH<sub>3</sub> (X=Li, K) respectively.

### 3.3 Energy band topologies.and density of state plots.


The amazing electronic properties of perovskites, a class of materials with a distinctive crystal structure, have garnered a lot of interest lately. Because of its tunable bandgap, perovskite materials may be used in a wide range of applications, including photodetectors, solar cells, light-emitting diodes (LEDs), and hydrogen storage. Along the high symmetry sites in the first Brillouin zone, the energy band structure for XVH<sub>3</sub> (X = K, Li) hydrides perovskites is computed and displayed in Figures 3(a-b) [11–12]. The two compounds under DFT investigation appears to be metallic because there is no energy gap (E.F.) between the valance and conduction bands. To enhance the knowledge of the electronic contribution, the total density of state (T.D.O.S.) and partial density of state (P.D.O.S.) of XVH<sub>3</sub> (X = K, Li) have been calculated. The total density of states, or D.O.S., is a fundamental concept in solid-state physics that denotes the density of electronic states in a material at a certain energy level. It is the sum of all the contributions made by the electronic orbitals in a particular material throughout the range of all possible energies.

Fig. 4 (a-c) shows the plots T.D.O.S. and P.D.O.S. of XVH<sub>3</sub> (X = K, Li) hydrides perovskites. For KVH<sub>3</sub> and LiVH<sub>3</sub>, the greatest value of T.D.O.S. in the valence band is 0.9 states/eV and 0.75 states/eV, respectively. The understanding of the electronic structure of materials can be facilitated by the partial density of states, or P.D.O.S. It offers details on the density of states of a particular element or material's orbital. We note that a significant contribution has come from the d-states in case of KVH<sub>3</sub> and p states of LiVH<sub>3</sub>. The p- and d-states of KVH<sub>3</sub> and the s- and p-states of KZnH<sub>3</sub> make significant contributions between -5 to -3 eV. The maximal contribution to the conduction band (0 to 6 eV) has only been made by the s and d-states of both compounds.


### 3.3 Thermoelectic properties.

The world is now dealing with an energy crisis. To solve this issue, one needs eco-friendly, intelligent, and clean materials. The usage of thermoelectric materials, which transform waste heat into electrical energy, is therefore one way to solve the energy conundrum. Different thermoelectric properties are calculated as a function of ( $\mu - \epsilon_F$ ) at different temperatures, including the Seebeck coefficient (S), electrical conductivity ( $\sigma$ ), electronic thermal conductivity ( $k_e$ ), and power factor  $P F = S^2 \sigma / \tau$ . The outcomes, which guarantee our compositions' potential for


such applications, are displayed in figures 5 and 6. When a temperature gradient is introduced between two junctions, a phenomenon known as seeback coefficients is produced, which results in voltage. The Seebeck coefficient is displayed in Figures 5a and 6a for our compositions  $XVH_3$  ( $X = K, Li$ ). Plots show that at temperatures of 700 K and 300 K, respectively, the highest value of the Seebeck coefficient is  $S \sim .0015 \text{ V K}^{-1}$  for both  $KVH_3$  and  $LiVH_3$  and no significant change is observed in its value with variation in temperature. The electrical conductivity variation for  $XVH_3$  ( $X = K, Li$ ) as a function of chemical potential is shown in Figures 5b and 6b. The materials' thermoelectric qualities are closely correlated with their electrical conductivity.

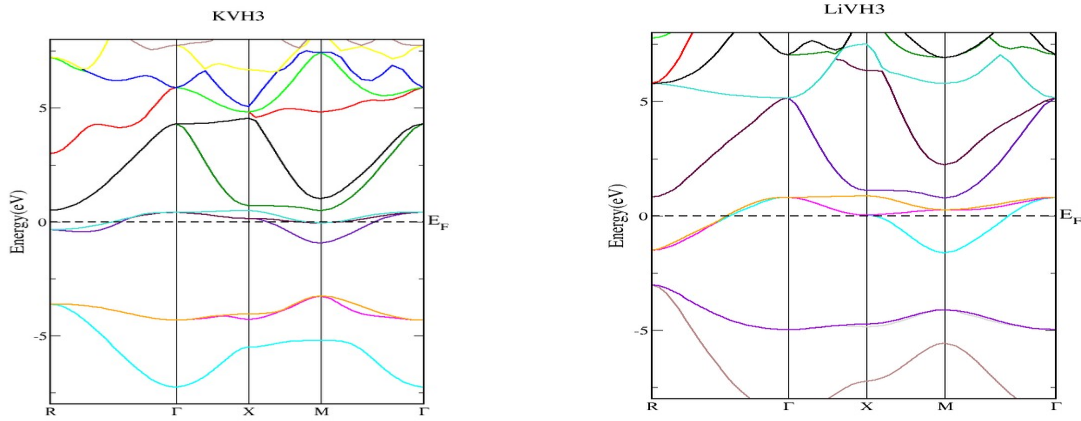


[a] [b]  
**Fig. 3. Energy Band structures for [a]  $KVH_3$  [b]  $LiVH_3$**

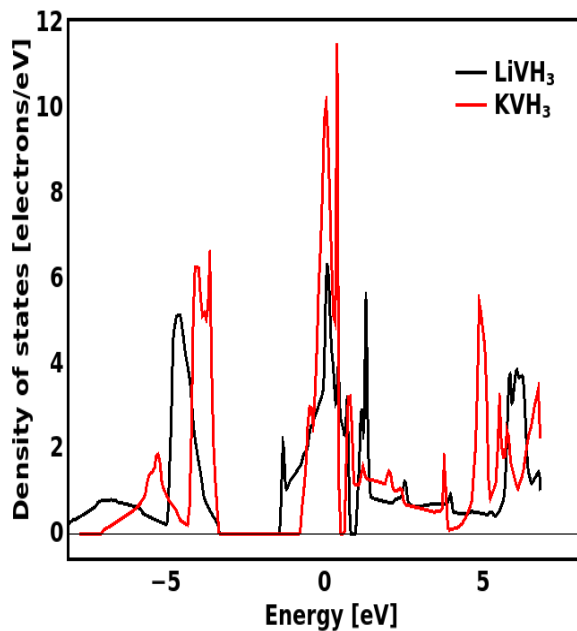

[a]

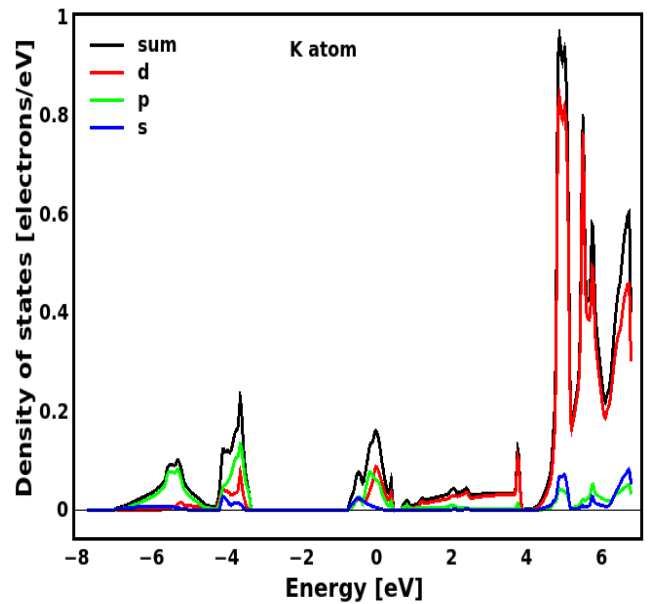


[b]

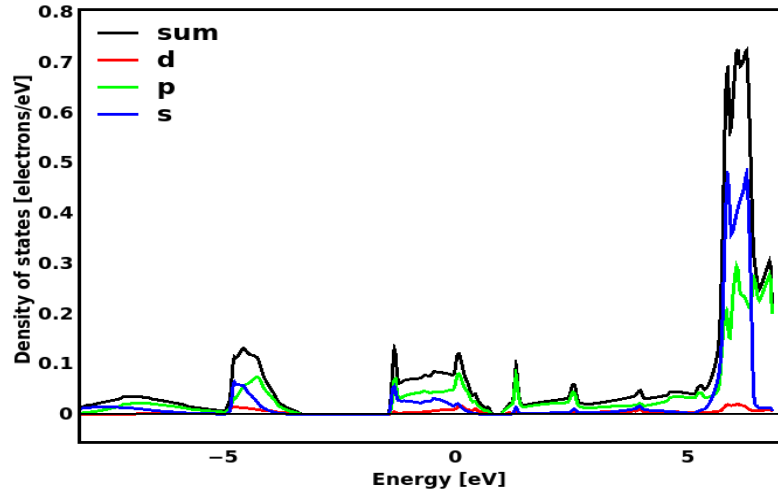


[c]  
Fig. 4. DOS/PDOS for XVH<sub>3</sub> (X=K, Li) [a] DOS [b] K [c] Li


Electrical conductivity, or the passage of electrons from high-temperature areas to low-temperature areas, is what produces current. At a temperature of 100K, the highest values of  $\sigma \sim 1.3 \times 10^{21} \Omega^{-1} \text{ms}$  and  $1.5 \times 10^{21} \Omega^{-1} \text{ms}$ , respectively, are found for these compositions, XVH<sub>3</sub> (X = K, Li). There are no appreciable variations in conductivity with rise in temperature. Furthermore, as shown by figures 5b and 6b, the equivalent value of electrical conductivity is also changing as the chemical potential increases. Thermal conductivity is the ability of a material to transfer heat which is a result of electron mobility and lattice vibrations. Figures 5c and 6c, which fluctuate according to chemical potential at various temperature ranges, depict the thermal conductivity. The thermal conductivity peak values for XVH<sub>3</sub> (X = K, Li) at 900K were around  $1.2 \times 10^{16} \text{ W m}^{-1} \text{ K}^{-1} \text{ s}^{-1}$  and  $1075 \times 10^{16} \text{ W m}^{-1} \text{ K}^{-1} \text{ s}^{-1}$ , respectively. This makes use of the fact that temperature and thermal conductivity are closely correlated and due to this reason these perovskite are suitable for high temperature thermoelectric applications. Power factor is expressed mathematically as  $PF = S^2\sigma/\tau$ .

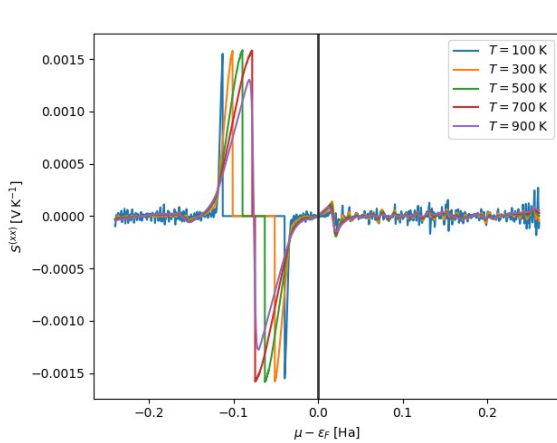


(a)

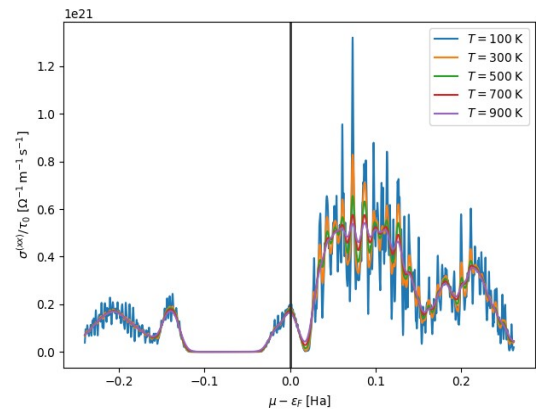

(b)

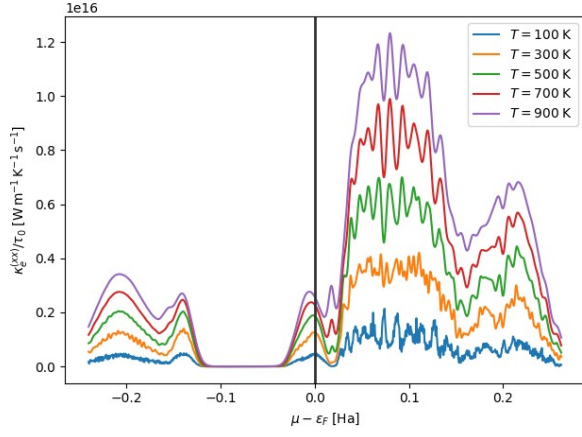


(c)

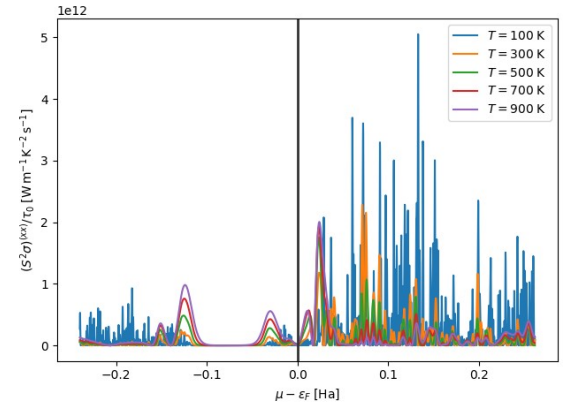


(d)


Fig. 5. [a] Seebeck coefficient ( $S$ ), [b] Electrical Conductivity ( $\sigma$ ), [c] Electronic thermal conductivity ( $\kappa_e$ ), [d] Power Factor ( $S^2\sigma/\tau$ ) as a function of  $(\mu - \epsilon_F)$  at different temperatures for KVH<sub>3</sub>.

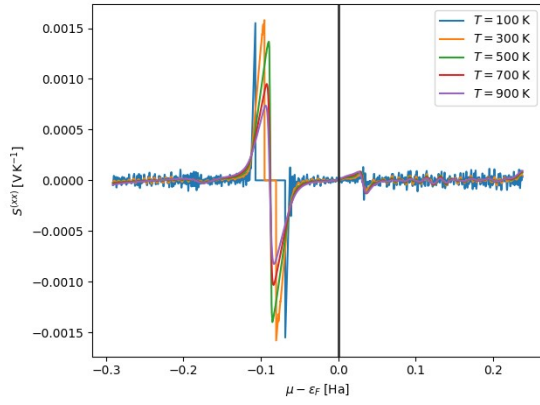


(a)

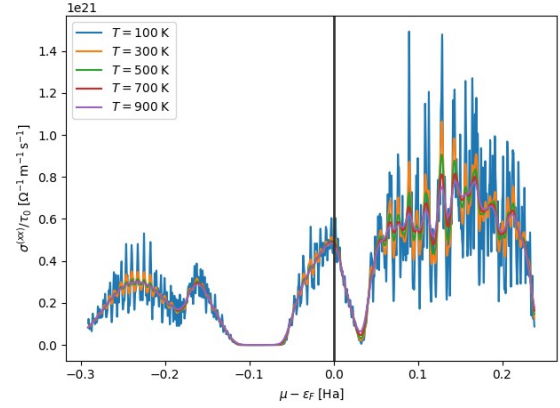

(b)

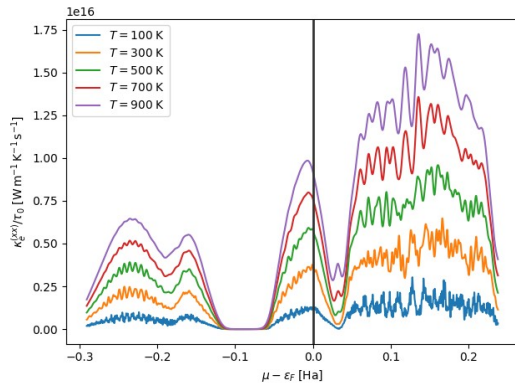

(c)

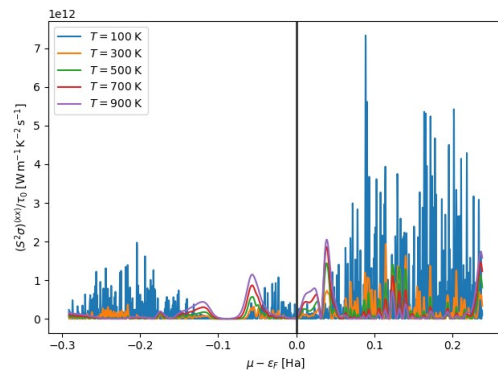

(d)

Fig. 5. [a] Seebeck coefficient (S), [b] Electrical Conductivity ( $\sigma$ ), [c] Electronic thermal conductivity ( $k_e$ ), [d] Power Factor ( $S^2\sigma/\tau_e$ ) as a function of ( $\mu-\epsilon_F$ ) at different temperatures for LiVH<sub>3</sub>.

The partial efficiency of a thermoelectric device is commonly determined by its power factor (PF). Figs. 5d and 6d display the (PF) for compositions XVH<sub>3</sub> (X = K, Li) as a function of chemical potential at different temperature ranges. The PF peaks at 100 K as the temperature rises. We deduced from the plots that the best values of (PF) for XVH<sub>3</sub> (X = K, Li) at temperature 100K were around  $5 \times 10^{12} \text{ W m}^{-1} \text{ K}^{-2} \text{ s}^{-1}$  and  $8 \times 10^{12} \text{ W m}^{-1} \text{ K}^{-2} \text{ s}^{-1}$  respectively. The study presents a preliminary theoretical approach for hydrogen storage applications of thermoelectric compositions, revealing their strong thermoelectric responses and potential for green energy sources.

#### 4. Conclusion

The structural, electronic, stability, enthalpy of formation along with decomposition temperature, and hydrogen storage of XVH<sub>3</sub> (X = K, Li) hydrides perovskites are studied using the DFT-based WIEN2k code. All compositions in space group Pm3m [no. 221] have a stable cubic structure, based on structural investigations. Plots of the density of states and energy band gap indicate that they are metallic in nature. Notably, the FP-LAPW approach gives us an enthalpy of formation as -626.31 kJ/mol.H<sub>2</sub> and -410.96 kJ/mol.H<sub>2</sub> for XVH<sub>3</sub> (X = K, Li) perovskites, which is substantially greater than the optimal value, which is -40 kJ/mol.H<sub>2</sub>, according to the US Department of Energy, indicating these perovskites are thermodynamically stable. Moreover, the calculated value of decomposition temperatures confirms the improved cyclability of hydrogen storage for these compositions. The investigated compositions have encouraging potential for storing hydrogen, as evidenced by their respective gravimetric hydrogen storage capacities of 3.25% and 4.97 % for XVH<sub>3</sub> (where X is K and Li). The study presents a preliminary theoretical approach for hydrogen storage applications of thermoelectric compositions, revealing their strong thermoelectric responses and potential for green energy sources.

#### References-

1. Shah SFA, Murtaza G, Ismail K, Raza HH, Khan IJ, First principle investigation of transition metal Hydrides LiXH<sub>3</sub> (X=Ti, Mn, and Cu) for hydrogen storage Journal of Computational Electronics, 2023, 22(4):1-9, [doi:10.1007/s10825-023-02065-1](https://doi.org/10.1007/s10825-023-02065-1)
2. Xu, N., Song, R., Zhang, J., Chen, Y., Chen, S, Li, S., Jaing, Z., Zhang, W.: First-principles study on hydrogen storage properties of the new hydride perovskite XAlH<sub>3</sub>(X=Na, K). Int. J. Hyd. Energy 60, 434-440 (2024). <https://doi.org/10.1016/j.ijhydene.2024.02.148>
3. Azeem, W, Shahzad, M. K., Wong, Y. H., Tahir, M.B.: Ab-initio calculations for the study of the hydrogen storage properties of CsXH<sub>3</sub> (X = Co, Zn) perovskite-type hydrides. Int. J. Hyd. Energy 50, 305-313 (2024) <https://doi.org/10.1016/j.ijhydene.2023.07.072>
4. Meera, A., Rehman, M A.: First-principles investigation for the hydrogen storage properties of AeSiH<sub>3</sub>(Ae = Li, K, Na, Mg) perovskite-type hydrides. Int. J. Hyd. Energy 55(D), 1435-1447 (2024). <https://doi.org/10.1016/j.ijhydene.2023.09.286>
5. Mitchell R. H., Thunder Bay, Ont., Canada, (2002). Perovskites: Modern and Ancient. Almaz Press Inc., Journal of Applied Crystallography 58(6):1075-1075. <https://doi.org/10.1107/S0108768102020220>
6. Sato, T., Noreus, D, Taeshita, H., Haussermann, U.: Hydrides with the perovskite structure: General bonding and stability considerations and the new representative CaNiH<sub>3</sub>. Journal of solid state chemistry 178(11), 3381-3388 (2005). <https://doi.org/10.1016/j.jssc.2005.08.026>
7. Anupam., Gupta, S.L., Kumar, S., Panwar, S., Diwaker: Ab initio studies of newly proposed zirconium based novel combinations of hydride perovskites ZrXH<sub>3</sub>(X = Zn, Cd) as hydrogen storage applications. Int. J. Hyd. Energy 55, 1465-1475 (2024). <https://doi.org/10.1016/j.ijhydene.2023.11.286>



8. Azeem, W., Shahzad, M. K., Wong, Y. H., Tahir, M.B.: Ab-initio calculations for the study of the hydrogen storage properties of CsXH<sub>3</sub> (X = Co, Zn) perovskite-type hydrides. *Int. J. Hyd. Energy* 50, 305-313 (2024). <https://doi.org/10.1016/j.ijhydene.2023.07.072>
9. Ghani, M. U., Sagir, M., Tahir, M.B., Ullah, S., Assri, M.A.: An extensive study of structural, electronic, elastic, mechanical and optical properties of XCdH<sub>3</sub> (X=K, Rb) for hydrogen storage applications: First-principles approach. *Int. J. Hyd. Energy* 55, 1265-1272 (2024). <https://doi.org/10.1016/j.ijhydene.2023.11.199>
10. Abaas, Z., Zafar, Z., Raza, H. H., Parveen, A., Shaikh, S.F.: Density-functional quantum analysis of optoelectronic, elastic, thermodynamic and hydrogen storage properties of AMgH<sub>3</sub>(A= be, ca) perovskite-type hydrides: Prospects for clean energy hydrogen-storage fuel and optoelectronic applications. *Int. J. Hyd. Energy* 60, 212-228 (2024). <https://doi.org/10.1016/j.ijhydene.2024.02.081>
11. Xu, N., Song, R., Zhang, J., Chen, Y., Chen, S, Li, S., Jaing, Z., Zhang, W.: First-principles study on hydrogen storage properties of the new hydride perovskite XAlH<sub>3</sub>(X=Na, K). *Int. J. Hyd. Energy* 60, 434-440 (2024). <https://doi.org/10.1016/j.ijhydene.2024.02.148>
12. Bahar, S., Tahiri, A., Jabar, A., Louzazini, M., Idiri, M, Bioud, H.: Computational assessment of MgXH<sub>3</sub>(X = Al, Sc and Zr) hydrides materials for hydrogen storage applications. *Int. J. Hyd. Energy* 58, 259-260 (2024). <https://doi.org/10.1016/j.ijhydene.2024.01.176>
13. Meera, A., Rehman, M A.: First-principles investigation for the hydrogen storage properties of AeSiH<sub>3</sub>(Ae = Li, K, Na, Mg) perovskite-type hydrides. *Int. J. Hyd. Energy* 55(D), 1435-1447 (2024). <https://doi.org/10.1016/j.ijhydene.2023.09.286>
14. Blaha P., Schwarz, K. Tran, F., Laskowaski, R., Madson, G. K. H, Marks, L. D.: WIEN2k: An APW+lo program for calculating the properties of solids, *The Journal of Chemical Physics*. 152(7), 074101 (2020). <https://doi.org/10.1063/1.5143061>
15. Rahman, N., Rauf, A., Husain, M., Sfina, N., Tirth, V., Sohail, M., ... & Khan, A. (2023). Probing the physical properties of M<sub>2</sub>LiCeF<sub>6</sub> (M= Rb and Cs) double perovskite compounds for prospective high-energy applications employing the DFT framework. *RSC advances*, 13(23), 15457-15466. <https://doi.org/10.1039/D3RA01451G>
16. Khan, N. U., Khan, U. A., Zaman, A., Algahtani, A., Al-Humaidi, J. Y., Tirth, V., ... & Ali, A. (2023). Insight to structural, electronic, optical and elastic properties of double perovskites Rb<sub>2</sub>XCrCl<sub>6</sub> (X= K, Na) via DFT study. *Journal of Physics and Chemistry of Solids*, 111479. <https://doi.org/10.1016/j.jpccs.2023.111479>
17. Noor, N. A., Iqbal, M. W., Zelai, T., Mahmood, A., Shaikh, H. M., Ramay, S. M., & Al-Masry, W. (2021). Analysis of direct band gap A<sub>2</sub>ScInI<sub>6</sub> (A= Rb, Cs) double perovskite halides using DFT approach for renewable energy devices. *Journal of Materials Research and Technology*, 13, 2491-2500. <https://doi.org/10.1016/j.jmrt.2021.05.080>
18. Mir, S. A., & Gupta, D. C. (2021). Understanding the origin of semiconducting ferromagnetic character along with the high figure of merit in Cs<sub>2</sub>NaMCl<sub>6</sub> (M= Cr, Fe) double perovskites. *Journal of Magnetism and Magnetic Materials*, 519, 167431. <https://doi.org/10.1016/j.jmmm.2020.167431>
19. Rafique, A., Usman, M., Rehman, J. U., Nazeer, A., Ullah, H., & Hussain, A. (2023). Investigation of structural, electronic, mechanical, optical and hydrogen storage properties of cobalt-based hydride-perovskites XCoH<sub>3</sub> (X= In, Mn, Sr, Sn, Cd) for hydrogen storage application. *Journal of Physics and Chemistry of Solids*, 181, 111559. <https://doi.org/10.1016/j.jpccs.2023.111559>
20. Tahir, M., Usman, M., Rehman, J. U., & Tahir, M. B. (2024). A first-principles study to investigate the physical properties of Sn-based hydride perovskites XSnH<sub>3</sub> (X= K, Li) for hydrogen storage application. *International Journal of Hydrogen Energy*, 50, 845-853. <https://doi.org/10.1016/j.ijhydene.2023.08.145>
21. Murad, M., Ali, Z., & Idrees, M. (2023). Hybrid DFT study of structural, electronic, magnetic and elastic properties of laves phase binary intermetallics RFe<sub>2</sub> (R= La, Ce, Pr and Nd). *Journal of Rare Earths*, 41(9), 1367-1375. <https://doi.org/10.1016/j.jre.2022.06.002>

22. Tasleem, S., & Tahir, M. (2020). Current trends in strategies to improve photocatalytic performance of perovskites materials for solar to hydrogen production. *Renewable and Sustainable Energy Reviews*, 132, 110073. <https://doi.org/10.1016/j.rser.2020.110073>
23. Umer, M., Murtaza, G., Ahmad, N., Ayyaz, A., Raza, H. H., Usman, A., ... & Manoharadas, S. (2024). First principles investigation of structural, mechanical, thermodynamic, and electronic properties of Al-based perovskites  $XAlH_3$  (X= K, Rb, Cs) for hydrogen storage. *International Journal of Hydrogen Energy*, 61, 820-830. <https://doi.org/10.1016/j.ijhydene.2024.02.333>
24. Ghaffar, N., Usman, M., Rehman, J. Ur, Hussain, A., Ali, S. Ali, M., & Ali, M. (2024). A DFT study to investigate physical properties and hydrogen storage capability of Mn-based hydride perovskites  $XMnH_3$  (X = Ba, Ca) for hydrogen storage application. *Inorganic Chemistry Communications*, 161, 112167. <https://doi.org/10.1016/j.inoche.2024.112167>
25. Guan, D., Shi, C., Xu, H., Gu, Y., Zhong, J., Sha, Y., ... & Shao, Z. (2023). Simultaneously mastering operando strain and reconstruction effects via phase-segregation strategy for enhanced oxygen-evolving electrocatalysis. *Journal of Energy Chemistry*, 82, 572-580. <https://doi.org/10.1016/j.jechem.2023.03.033>
26. Usman, M., ur Rehman, J., Tahir, M. B., Hussain, A., Alrobei, H., Alzaid, M., & Dahshan, A. (2023). First-principles calculations to investigate structural, electronics, optical, and mechanical properties of Bi-based novel fluoroperovskites  $TBiF_3$  (T= Hg, Xe) for optoelectronic applications. *Materials Science in Semiconductor Processing*, 160, 107399. <https://doi.org/10.1016/j.mssp.2023.107399>
27. Ayaz, U., Shazia, S., Abdullah, A., Husain, M., Rahman, N., & Bonyah, E. (2021). Ab initio investigation of structural, electronic, magnetic, elastic, and optical properties of Cs-based chloro-perovskites  $CsXCl_3$  (X= Be and Rh). *AIP Advances*, 11, 105215. <https://doi.org/10.1063/5.0065663>
28. Khalil, R. M., Hayat, S., Hussain, M. I., Rana, A. M., & Hussain, F. (2021). DFT based first principles study of novel combinations of perovskite-type hydrides  $XGaH_3$  (X= Rb, Cs, Fr) for hydrogen storage applications. *AIP Advances*, 11(2). <https://doi.org/10.1063/5.0037790>
29. Rehman, M. A., Alomar, S. Y., Rehman, B., Awais, M., Amjad, M., Sikiru, S., ... & Hamad, A. (2024). Hydrogen Storage Capacity of Lead-Free Perovskite  $NaMTH_3$  (M T= Sc, Ti, V): A DFT Study. *International Journal of Energy Research*, 2024. <https://doi.org/10.1155/2024/4009198>
30. Parvaiz, M. M., Khalil, A., Tahir, M. B., Ayub, S., Ali, T. E., & Masood, H. T. (2024). A DFT investigation on structural, electronic, magnetic, optical, elastic and hydrogen storage properties of Ru-based hydride-perovskites  $XRuH_3$  (X= Cr, V, Ni). *RSC advances*, 14(12), 8385-8396. <https://doi.org/10.1039/D4RA00204K>
31. Mir, S. A., & Gupta, D. C. (2020). Systematic investigation of the magneto-electronic structure and optical properties of new halide double perovskites  $Cs_2NaMCl_6$  (M= Mn, Co and Ni) by spin polarized calculations. *RSC advances*, 10(44), 26277-26287. <https://doi.org/10.1039/D0RA02817G>
32. Noor, N. A., Iqbal, M. W., Zelai, T., Mahmood, A., Shaikh, H. M., Ramay, S. M., & Al-Masry, W. (2021). Analysis of direct band gap  $A_2ScInI_6$  (A= Rb, Cs) double perovskite halides using DFT approach for renewable energy devices. *Journal of Materials Research and Technology*, 13, 2491-2500. <https://doi.org/10.1016/j.jmrt.2021.05.080>
33. Khan, N. U., Iqbal, J., Algahtani, A., Al-Humaidi, J. Y., Tirth, V., Safeen, K., ... & Zaman, A. (2023). Detail computational study about the structural, electronic, optical, and mechanical properties of  $RbVX_3$  (Cl, Br, I) halide perovskite materials. *RSC advances*, 13(33), 22958-22965. <https://doi.org/10.1039/D3RA03615D>
34. Mir, S. A., & Gupta, D. C. (2021). Understanding the origin of semiconducting ferromagnetic character along with the high figure of merit in  $Cs_2NaMCl_6$  (M= Cr, Fe) double perovskites. *Journal of Magnetism and Magnetic Materials*, 519, 167431. <http://dx.doi.org/10.1016/j.jmmm.2020.167431>
35. Humaidi J. Y. A., Ullah J., Khan N.U., Iqbal J., Khan S., Algahtani A., Tirth V., Mughanam T. A., Refat M. S. & Zaman, A. (2023). First-principle insight into the structural, electronic, elastic and optical properties of Cs-based double perovskites  $Cs_2XCrCl_6$  (X= K, Na). *RSC advances*, 13(30), 20966-20974. <https://doi.org/10.1039/D3RA03706A>