

Optimizing Container Loading and Unloading through Dual-Cycling and Dockyard Rehandle Reduction Using a Hybrid Genetic Algorithm

Md. Mahfuzur Rahman^{a,**}, Md Abrar Jahin^{a,1,**}, Md. Saiful Islam^a, M. F. Mridha^{b,*}

^a*Department of Industrial Engineering and Management, Khulna University of Engineering and Technology (KUET), Khulna, Okinawa Institute of Science and Technology Graduate University (OIST), Okinawa, 904-0412, Japan*

^b*Department of Computer Science, American International University-Bangladesh (AIUB), Dhaka, 1229, Bangladesh*

Abstract

This paper addresses the optimization of container unloading and loading operations at ports, integrating quay-crane dual-cycling with dockyard rehandle minimization. We present a unified model encompassing both operations: ship container unloading and loading by quay crane, and the other is reducing dockyard rehandles while loading the ship. We recognize that optimizing one aspect in isolation can lead to suboptimal outcomes due to interdependencies. Specifically, optimizing unloading sequences for minimal operation time may inadvertently increase dockyard rehandles during loading and vice versa. To address this NP-hard problem, we propose a hybrid genetic algorithm (GA) QCDC-DR-GA comprising one-dimensional and two-dimensional GA components. Our model, QCDC-DR-GA, consistently outperforms four state-of-the-art methods in maximizing dual cycles and minimizing dockyard rehandles. Compared to those methods, it reduced 15-20% of total operation time for large vessels. Statistical validation through a two-tailed paired t-test confirms the superiority of QCDC-DR-GA at a 5% significance level. The approach effectively combines QCDC optimization with dockyard rehandle minimization, optimizing the total unloading-loading time. Results underscore the inefficiency of separately optimizing QCDC and dockyard rehandles. Fragmented approaches, such as QCDC Scheduling Optimized by bi-level GA and GA-ILSRS (Scenario 2), show limited improvement compared to QCDC-DR-GA. As in GA-ILSRS (Scenario 1), neglecting dual-cycle optimization leads to inferior performance than QCDC-DR-GA. This emphasizes the necessity of simultaneously considering both aspects for optimal resource utilization and overall operational efficiency.

Keywords: Dual Cycling, Quay Crane, Dockyard Rehandles, Genetic Algorithm, 2D Crossover, 2D Mutation

1. Introduction

Trade is the essence of the global economy, whereas ports are the economic lifeline for countries. Today, almost 80% of the world's goods are carried by shipping containers. So, ships are crucial in this system. Therefore, countries

*Corresponding author

** Authors contributed equally

Email addresses: sm.mahfuz031@gmail.com (Md. Mahfuzur Rahman), abrar.jahin.2652@gmail.com (Md Abrar Jahin), saifuliem@iem.kuet.ac.bd (Md. Saiful Islam), firoz.mridha@aiub.edu (M. F. Mridha)

are competing to have large fleets. Nowadays, large vessels can carry over 25,000 containers. The operation to receive these mega-ships needs preparations. The goal and challenge of every port is now to reduce the turnaround time of vessels. For example, 15 years ago, the turnover time of a mega vessel was about 14 to 15 days (about 2 weeks); nowadays, it takes only 3 to 4 days, and they are targeting in the future to reduce the turnover time by 3 to 4 hours. There are so many methods and tricks that the shipping companies figured out over the years to make the process of loading and unloading the ship easier and quicker. In this research, we will introduce such a method.

The most expensive single unit of container handling equipment in port terminals is the Quay Cranes (QCs). As a result, QC availability is one of the main operational bottlenecks at ports (Chu and Huang, 2002). Ports can decrease ship turnaround time, increase productivity, and boost freight transportation system throughput by increasing QC efficiency (Goodchild and Daganzo, 2006). Our research addresses this key bottleneck to port productivity. The approach is low-cost to increase productivity; neither new infrastructure nor technologies are needed. Although our strategy would not fix the capacity issue in the long term, it can be applied more quickly than other approaches and be used in conjunction with other methods.

The majority of ports use the *single cycle* approach for QC operations in which the QC typically performs loading operations after all unloading tasks have been completed (see Figure 1 (a)).

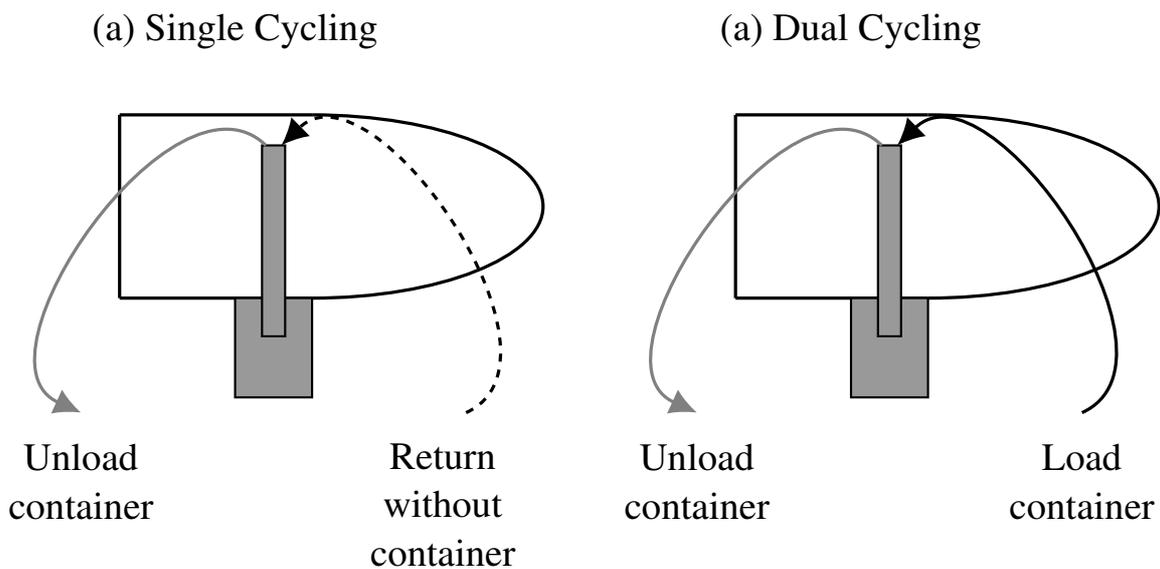


Figure 1: (a) Unloading Using Single Cycling; (b) Unloading and Loading with Double Cycling

Dual cycling strategy is an advanced technique to improve port efficiency of loading and unloading by eliminating some of the empty crane moves (see Figure 1 (b)). Because it allows the QC to do loading and unloading simultaneously at the same time (Goodchild and Daganzo, 2006). Maximizing the number of dual cycles would ultimately decrease a ship’s turnaround time. Goodchild also showed that the unloading sequence of a bay-stacks¹ impacts the

¹The definition of Bay is given in section 3, also see Figure 2.

number of dual cycles. So, an optimal solution remains for which the number of dual cycles will be maximum. He also suggested a greedy approach to find a heuristic solution instantly. After that, numerous researchers suggested several solutions to improve the dual cycling strategy. The mathematical model of quay crane dual-cycling scheduling (QCDCS) is considered a two-machine flow shop problem. It results in an NP-hard problem. Hence, metaheuristic algorithms, like *Genetic algorithm* (GA), would give the result much better and faster.

Another big issue while loading and unloading containers in ports is rehandling them in the dockyard. *Rehandling* is necessary while retrieving a container, known as a target container, that is not on the top of the stack. Moving a blocked container to a different stack can also result in further rehandles during the retrieval process (Sauri and Martin, 2011). Depending on the closest stack, lowest stack, and optimization method, the obstructed container may be shifted to that stack in the same yard bay. As rehandling is very time-consuming, ports aim to minimize the number of rehandles as much as possible. In this case, the mathematical model of minimizing the number of rehandles at the dockyard also results in an NP-hard problem. So, here, the GA would also give better results.

In contrast to the previous research, we noticed that the number of dual cycles may be maximized for a particular unloading sequence. Still, it can increase the number of dockyards rehandles. Similar issues will arise when we optimize dockyard rehandles separately without considering the unloading and loading operations. This work aimed to optimize the process in one model, providing an unloading sequence and a dockyard container arrangement, maximizing dual cycles, and minimizing dockyard rehandling. Moreover, we introduced a method called *Maximizing Quay Crane Dual Cycles and Minimizing Dockyard Rehandles by GA* (QCDC-DR-GA) to solve the model. Finally, we verified the algorithm's robustness by comparing it with results given by QCDCS Greedy Upper Bound, GA-QCDCS strategy, GA-ILSRS with single cycling, and GA-ILSRS with dual cycling separately.

This study presents seven significant contributions to the domain of container unloading-loading operations at ports:

1. This study empirically validates the correlation between the unloading sequence of stacks within a ship row and the occurrence of dockyard rehandles, particularly in the context of dual-cycling strategies.
2. We develop a comprehensive model that integrates dockyard and Quay Crane-Double Cycling (QCDC) operations, offering a holistic approach to optimizing container handling.
3. The paper introduces a novel hybrid GA approach to optimize the proposed model, enhancing efficiency and performance in container operations.
4. We propose a specialized GA, combining one-dimensional and two-dimensional GA techniques that are introduced to address the unique challenges of container handling optimization.
5. We conduct an extensive analysis of computational parameters within the GA framework to identify and implement the most influential parameters and methods tailored to the specific requirements of the container handling problem.

6. We provide the rationale behind selecting different strategies and methodologies at various stages of the GA optimization process, providing valuable insights into algorithmic decision-making.
7. Finally, we conduct a comprehensive benchmarking analysis, comparing the proposed strategy against four state-of-the-art algorithms. The superiority of our model is rigorously validated through statistical paired t-tests, demonstrating its effectiveness and reliability in optimizing container handling operations.

This article is structured in the following manner: The “[Literature Review](#)” section discusses the relevant literature on dual cycling and reducing rehandles. In the “[Problem Description](#)” section, we outline the problem statement. The “[Methodology](#)” section covers model formulation (objectives and constraints) and our approach, QCDC-DR-GA, including its workflow, strategies, and parameters. The “[Results](#)” section details scenario generation, computational experiments, and result analysis. Finally, the “[Conclusions](#)” section summarizes the work, highlights primary contributions, and suggests future directions.

2. Literature Review

A considerable volume of operational research has focused on resolving challenges in the realm of ports. These studies commonly concentrate on matters related to strategic design and planning, such as – the optimal number of berths and crane combinations ([Schonfeld and Sharafeldien, 1985](#)), the optimal size of storage space ([Kim and Kim, 2002](#)), determination of the number of AGVs required ([Vis et al., 2001](#)) and trade-offs between storage space and handling work ([Taleb-Ibrahimi et al., 1993](#)). Also, works have been done in operational scheduling in berth and quay cranes ([Park and Kim, 2003](#)), dispatching method for yard cranes and AGVs ([Kim and Bae, 1999](#)), and dynamic deployment and scheduling of yard cranes ([Zhang et al., 2002](#)) ([Chen et al., 2007](#)).

Since quay cranes are the main bottleneck in the efficient operation of container terminals, their operational efficiency determines the turnaround time of vessels in seaports ([Chu and Huang, 2002](#)). Hence, more work has been done to improve the efficiency of the quay crane operation. Kim and Park ([Kim and Park, 2004](#)) formulated a mixed-integer programming model that accounted for diverse constraints concerning quay crane operations. They introduced a heuristic search algorithm named “greedy randomized adaptive search procedure” to address this issue effectively. Tavakkoli et al. ([Tavakkoli-Moghaddam et al., 2009](#)) introduced a novel mixed-integer programming (MIP) model for solving the quay crane scheduling and assignment problem (QCSAP). Traditional methods struggle to solve this complex problem efficiently within reasonable timeframes. To address this, they presented a genetic algorithm (GA) as a solution for real-world scenarios. Also, Fu, Diabat, and Tsai ([Fu et al., 2014](#)), along with Diabat and Theodorou ([Diabat and Theodorou, 2014](#)), worked on combining quay crane assignment and scheduling problem. They also used the GA to find solutions. Their results showed that the GA was better and faster than another technique called Lagrangian relaxation.

The effectiveness of quay cranes relies on how well they work together with other equipment like yard trailers and cranes. Certain researchers investigated solving the integration scheduling problem to enhance coordination

and overall efficiency at container terminals. For example- Bish (Bish, 2003) introduced models and algorithms that brought together various sub-processes. These included finding suitable storage spots for unloaded containers, sending vehicles to specific containers, and planning the loading and unloading activities for quay and yard cranes. Chen et al. (Chen et al., 2007) created a comprehensive model to enhance the efficiency of the complete loading and unloading procedure. Zeng, Yang, and Hu (Zeng et al., 2011) created a model for recovering from disruptions in berth and quay crane schedules. However, the previously mentioned literature concerning scheduling primarily centers on the quay crane single cycling (QCSC) method, with relatively limited advancement in QCDCS scheduling literature.

2.1. Dual Cycling

Goodchild and Daganzo first introduced the QCDCS strategy (Goodchild and Daganzo, 2006). They formulated the double cycling problem as the 2-machine flow shop problem and proposed a greedy approach to generate a sequence for loading and unloading. They also ran a trial at Port of Tacoma, US (2003). In this trial, the revised meantime for a single cycle was 1 minute and 45 seconds, while for a double cycle, it was 2 minutes and 50 seconds. Consequently, double cycling resulted in a time saving of 40 seconds for each pair of containers subjected to the process. Later, in 2007 (Goodchild and Daganzo, 2007), they devised a framework for assessing QC performance. They also formulated a straightforward formula to forecast the effect on turn-around time. Their findings also revealed that employing a double-cycling approach could lead to a 10% reduction in operating time and a decrease in the demand for yard tractors and drivers. Song (Song, 2007) proposed a formula to find out the optimal starting point of double cycling that maximizes its frequency.

The above studies concentrated on implementing QCDCS for single quay cranes QCs. Their practical experiments revealed that this approach could enhance the productivity of each QC by around 10 to 20%. Then Zhang et al. (Zhang and Kim, 2009) suggested multiple QC double cycling models and solved a mixed integer programming model. At the same time, the sequence was generated using a constructive Jonson's rule with an effective local search method. D Ku and TS Arthanari (Ku and Arthanari, 2016) pointed out a flaw with the existing multiple QCDCS model that lets cycles that are not implementable.

Lee et al. (Lee et al., 2015) investigated the computational complexity of the QCDCS problem. They showed it can be formulated as a flow shop scheduling problem with series-parallel precedence constraints, solving it polynomially. For ease of implementation, they presented an optimal algorithm for the general QCDCS problem, a simplified version of Sidney's algorithm. Zeng et al. (Zeng et al., 2015) developed a mixed-integer programming model for QCDCS. The model considered the stowage plan of outbound containers and the operational sequence of QCs. A heuristic method called bi-level GA was designed to solve the model. Zhang et al. (Zhang et al., 2019) focused on overall handling efficiency and the system's stability of container terminals with double cycling. He et al. (2019) (He et al., 2020) solved a mixed integer programming model, which covers the main operational constraints (including multiple hatch-covers) in a container terminal. Zheng et al. (Zheng et al., 2020) presented a dynamic programming approach to solve the QCDCS problem optimally. Ahmed et al. (Ahmed et al., 2021) developed two simulation models and

implemented them based on a real-life case study considering uncertainties in the work task duration.

2.2. Reducing Rehandles

The issue of rehandling is typically connected to the arrangement of containers on ships and in yards. Some studies have addressed the rehandling problem by examining the containership stowage plan or the yard storage arrangements. They concentrated on refining the rehandling strategy based on specific loading sequences without considering how the loading sequence might impact rehandling. Kim (Kim, 1997) proposed a methodology to calculate the expected number of rehandles to pick up a random container and the total number of rehandles to pick up all the containers in a bay for a given initial stacking configuration. Imai et al. (Imai et al., 2006) formulated the issue as a multi-objective integer programming challenge. They employed the weighting method and acquired a collection of non-inferior solutions. Sauri and Martin (Sauri and Martin, 2011) suggested three stacking strategies, which consider the containers' arrival rates, departure rates, and storage yard characteristics, then developed a model to determine the number of rehandles. Lee et al. (Lee et al., 2009) proposed a novel approach that integrated yard truck scheduling and storage allocation and developed a hybrid insertion algorithm to solve this problem. Gharehgozli et al. (Caserta et al., 2011) presented a yard crane scheduling problem to carry out a set of container storage and introduced an algorithm based on the corridor method, designed to address the problem of relocating blocks within block stacking systems.

Various algorithms are employed to address relocation problems, but the GA is commonly adopted to conduct the solutions because of its efficiency. For example, Homayouni et al. (Homayouni et al., 2014) integrated the scheduling of quay cranes, AGVs, and handling platforms and proposed a GA to solve the problem. Ji et al. (Ji et al., 2015) presented an improved GA design to solve the model. Compared with earlier strategies and heuristics, they demonstrated the effectiveness of their optimization approach and algorithm.

Previous research tackled parts of optimizing container handling, such as maximizing dual cycles or minimizing dockyard rehandles, but not both simultaneously. This work bridges the gap by proposing a unified model that optimizes both aspects simultaneously. Our QCDC-DR-GA algorithm finds the ideal unloading sequence and dockyard layout to maximize dual cycles and minimize rehandles. Proven effective against existing methods, it offers a holistic solution for efficient container handling at ports.

3. Problem Description

The layout of the containers, as shown in Figure 2 on a ship or in the port yard, can be modeled as a three-dimensional matrix. Generally, the three dimensions are named rows, bays, and tiers (see Figure 2). Containers are stacked one above the other and arranged in rows. A row is stretched across the width of the bay or ship. Nowadays, some vessels can hold up to 30 stacks in a row and up to 30 rows (40-foot containers) along the length.

QCs usually process unloading and loading across the ship bay. In the QCSC method, loading operations can only be done after completing the unloading operations. However, in the QCDC method, a QC performs unloading and loading operations simultaneously in a particular ship bay.

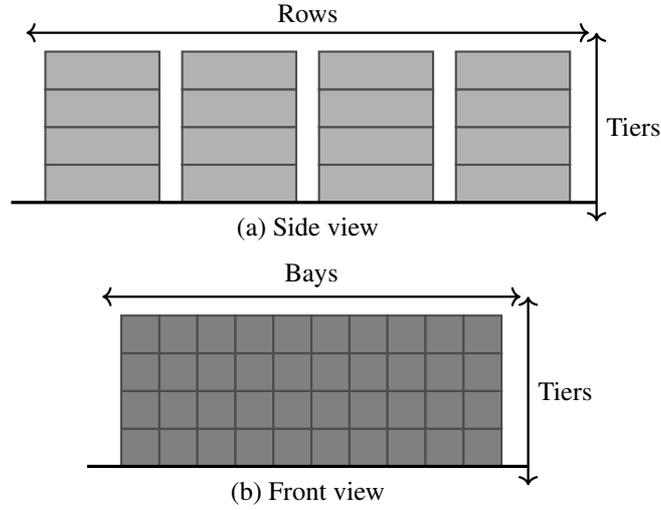


Figure 2: Illustration of the container arrangement at dockyard or ship. The rows, bays, and tiers are the three axes of the container storing system, where (a) and (b) are the top view and front view, respectively.

The operating cycle of a QC can be broken down into the following parts:

- (i) Locking and unlocking the trolley with the container.
- (ii) Horizontal movement of the trolley (with container).
- (iii) Vertical movement of the trolley (with container).

3.1. Case Consideration


After the arrival of a vessel in port with a set of containers to be unloaded and a loading plan for a set of containers, Let U_c and L_c are the numbers of containers to be unloaded and loaded, where c is the stack number. Figure 3 illustrates an example used in this work.

Let S be the set of stacks in a row. $|s| = N$ denotes the number of stacks in the set S , and P a permutation of set S telling the ordering of the stacks. For example, in Figure 3 (a), the set of stacks is $S = \{A, B, C, D\}$. Then $P(1) = A$, $P(2) = B$, $P(3) = C$ and $P(4) = D$. How the order in which the stacks within each row are handled affects the total number of cycles is explained by Goodchild (2006) (Goodchild and Daganzo, 2006). He explained (graphically) that there is an optimum sequence of the set S for which the number of cycles w is minimum.


3.1.1. Generic Double Cycling Method

- (i) Select any unloading permutation, P' . Unload all the containers of the first stack and then the second stack, and proceed in this manner until all stacks have been unloaded.

- (ii) Select a loading permutation, P , and load the stacks according to that permutation. Loading can be started in any stack when it becomes empty or contains only containers that would not be unloaded at this port. Once loading has been initiated on a stack, continue the process until that stack is fully loaded.

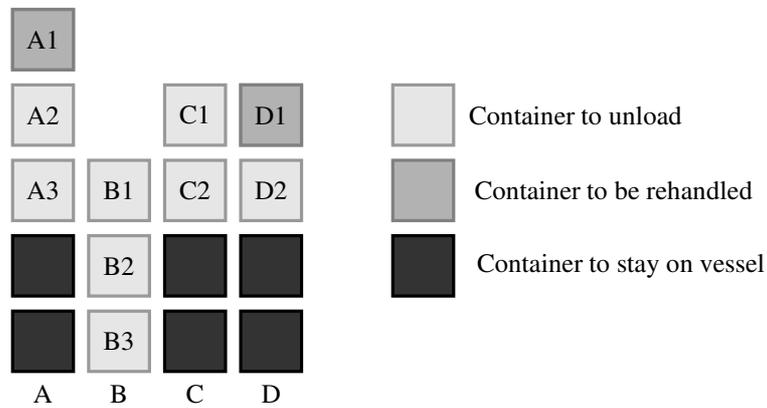

(a) Unloading-plan of a vessel

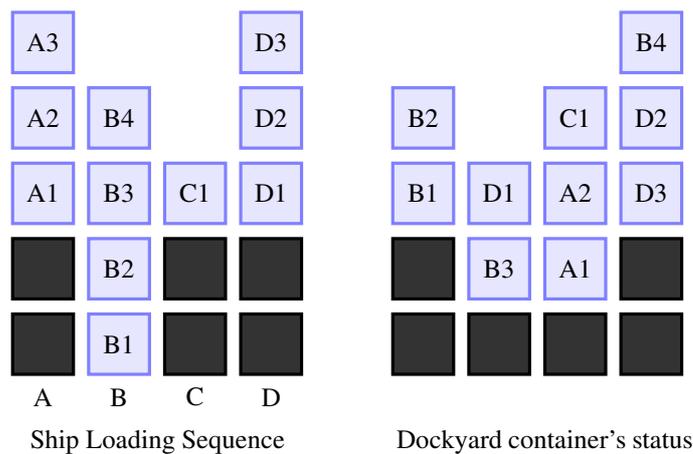

(b) Loading plan of the vessel

Figure 3: Illustration of unloading and loading plan of a ship row.

3.1.2. Number of Rehandles in Dockyard

Rehandles occur when the desired container is not on the top of any stacks. As we've said in the assumption [vi], we followed the nearest lowest stack strategy. It is the integration of the nearest stack strategy and lowest stack strategy. We've integrated them because of the difficulty of applying the lowest stack strategy in real-life scenarios. Otherwise, the lowest stack strategy gives better results in reducing rehandles.

The example shown in Figure 3 (b) the number of rehandles for the described strategy and given loading sequence is 3.

4. Methodology

4.1. Mathematical Model

The QCDC problem is modeled as a two-machine flow shop problem.

4.1.1. Assumptions

In this research, we will assume the following conditions:

- (i) The containers by the dockside are prepared for loading as needed.
- (ii) The unloaded containers are immediately removed from the area and kept in the right place.
- (iii) Rehandles of the containers on the ship are counted with both unloading and loading containers.
- (iv) Rehandles on the ship are replaced in the same stack from which they were removed.
- (v) In this work, we consider that rehandles on the ship are moved between the vessel and the apron. But in reality, some of the rehandles may only be moved between stacks on the vessel.
- (vi) The rehandles in the dockyard are done following the nearest stack strategy in which the rehandled container is put on the nearest lowest stack.
- (vii) The turnaround time of a vessel is a measure of QC efficiency, and the goal of a QCDC is to reduce the total turnaround time. A proxy for that is the total number of single cycles (w_s) and dual cycles (w_d) required to unload and load the vessel.
- (viii) We will finish unloading and loading one row before shifting the crane lengthwise along the ship to the next row. Due to the difficulty with the lateral movement of the QC along the ship, it is not feasible to perform double cycling across two rows.
- (ix) No interruptions happen due to inbound vehicles or cranes.

4.1.2. Symbols and Decision Variables

The notations are as follows:

m : Bay of containers in the yard

n : Stack of containers in the yard

o : Tier of containers in the yard

U_c : Number of containers to unload in stack $c \in S$

L_c : Number of containers to load in stack $c \in S$

TU_c : Completion time of unloading $c \in S$

TL_c : Completion time of loading $c \in S$

T : Total completion time of unloading loading

R : Number of rehandles of a row in the dockyard

α : Average completion time of a single cycle

β : Average completion time of a double cycle

γ : Average time it takes to tackle a rehandle at the dockyard

μ : Large value

H_{mn} : Highest tier of the yard bay m and stack n

h_{mn} : Height of the yard-bay m and stack n

The decision variables are as follows:

X_{ij} : binary variable for the sequence of unloading jobs (1 if $j \in S$ is loaded after $i \in S$ and 0 otherwise)

Y_{ij} : binary variable for the sequence of loading jobs (1 if $j \in S$ is loaded after $i \in S$ and 0 otherwise)

x_{rmo} : Equals to 1 if the container (m, n, o) is loaded onto the ship-bay and 0 otherwise.

4.1.3. Model Establishment

The objective of the scheduling problem is to minimize the maximum completion time of all jobs while adhering to the subject constraints. Here, the completion time T depends on w and R . Hence, $T = \alpha w_s + \beta w_b + \gamma R$.

$$\text{minimize, } T_{max} \quad (1)$$

subject to,

$$TL_c - TU_c \geq L_c \quad \forall c \in S \quad (2)$$

$$TU_i - TU_j + \mu X_{ij} \geq U_i \quad \forall j, i \in S \quad (3)$$

$$TU_j - TU_k + \mu(1 - X_{ij}) \geq U_j \quad \forall j, i \in S \quad (4)$$

$$TL_i - TL_j + \mu Y_{ij} \geq L_i \quad \forall j, i \in S \quad (5)$$

$$TL_j - TL_i + \mu(1 - Y_{ij}) \geq L_j \quad \forall j, i \in S \quad (6)$$

$$TU_c \geq U_c \quad \forall c \in S \quad (7)$$

$$h_{mn} \leq H_{mn} \quad (8)$$

$$X_{ij} \in \{1, 0\} \quad \forall j, i \in S \quad (9)$$

$$Y_{ij} \in \{1, 0\} \quad \forall j, i \in S \quad (10)$$

$$x_{rmno} \in \{1, 0\} \quad (11)$$

These constraints define the model completely. Constraint (2) ensures that a stack can only be loaded after all the necessary stacks have been unloaded. Constraints (3), (4), (9) and (10) ensure that in an unloading permutation P' a stack is unloaded after the previous one has been unloaded. For every pair of stacks (i, j) , either stack i is unloaded before stack j (if $X_{ij} = 1$) or the opposite (if $X_{ij} = 0$), and they also ensure that the time elapsed between the two events is big enough to unload the second of the two stacks. Constraints (5), (6), (9) and (10) are equivalent to (3), (4), (9) and (10) but for the loading events. Constraint (7) ensures that a row's total unloading completion time allows for enough time to unload that stack at least. Constraint (8) ensures the restriction on stack height. Constraint (11) enforces the binary conditions upon the flow variables.

4.2. QCDC-DR-GA

This paper assumes the number of stacks to unload and load from a ship row is S . The unloading sequence of S stacks is diversiform, and the number of unloading sequences is $S!$. For each certain unloading sequence, we need to determine the maximum number of dual cycles, which increases the complexity of the problem. Moreover, $S!$ represents the approximate value of this problem's complexity. On the other hand, assuming the number of retrieval containers at the dockyard is N . The number of ways to arrange containers N on the dockyard is again $N!$. Here, the estimated complexity of the problem also becomes $N!$. This paper aims to determine an unloading sequence for which several dual cycles will be maximized and a dockyard container arrangement for which the number of rehandles will be minimized. Then, the complexity of our problem will be $(S! \times N!)$.

In computer science and operations research, the genetic algorithm (GA) is a metaheuristic approach, drawing inspiration from natural selection mechanisms, which fall into the broader category of evolutionary algorithms (EA). GA can generate high-quality solutions for optimization problems. We developed a mixed GA considering a parallel one-dimensional unloading sequence and two-dimensional dockyard plan while crossover and mutation. The more challenging part of QCDC-DR-GA is calculating fitness (calculating the cost of each generation) and integrating the unloading sequence and dockyard arrangement. The operating flow path of the QCDC-DR-GA is shown in Figure 4.

4.2.1. Set Initial Population

The initial population (P) comprises chromosomes representing unload sequences and dockyard plans. Notations include:

P = population of chromosomes

n = the number of chromosomes in P

c_i = the i^{th} chromosome in P , where $1 \leq i \leq n$

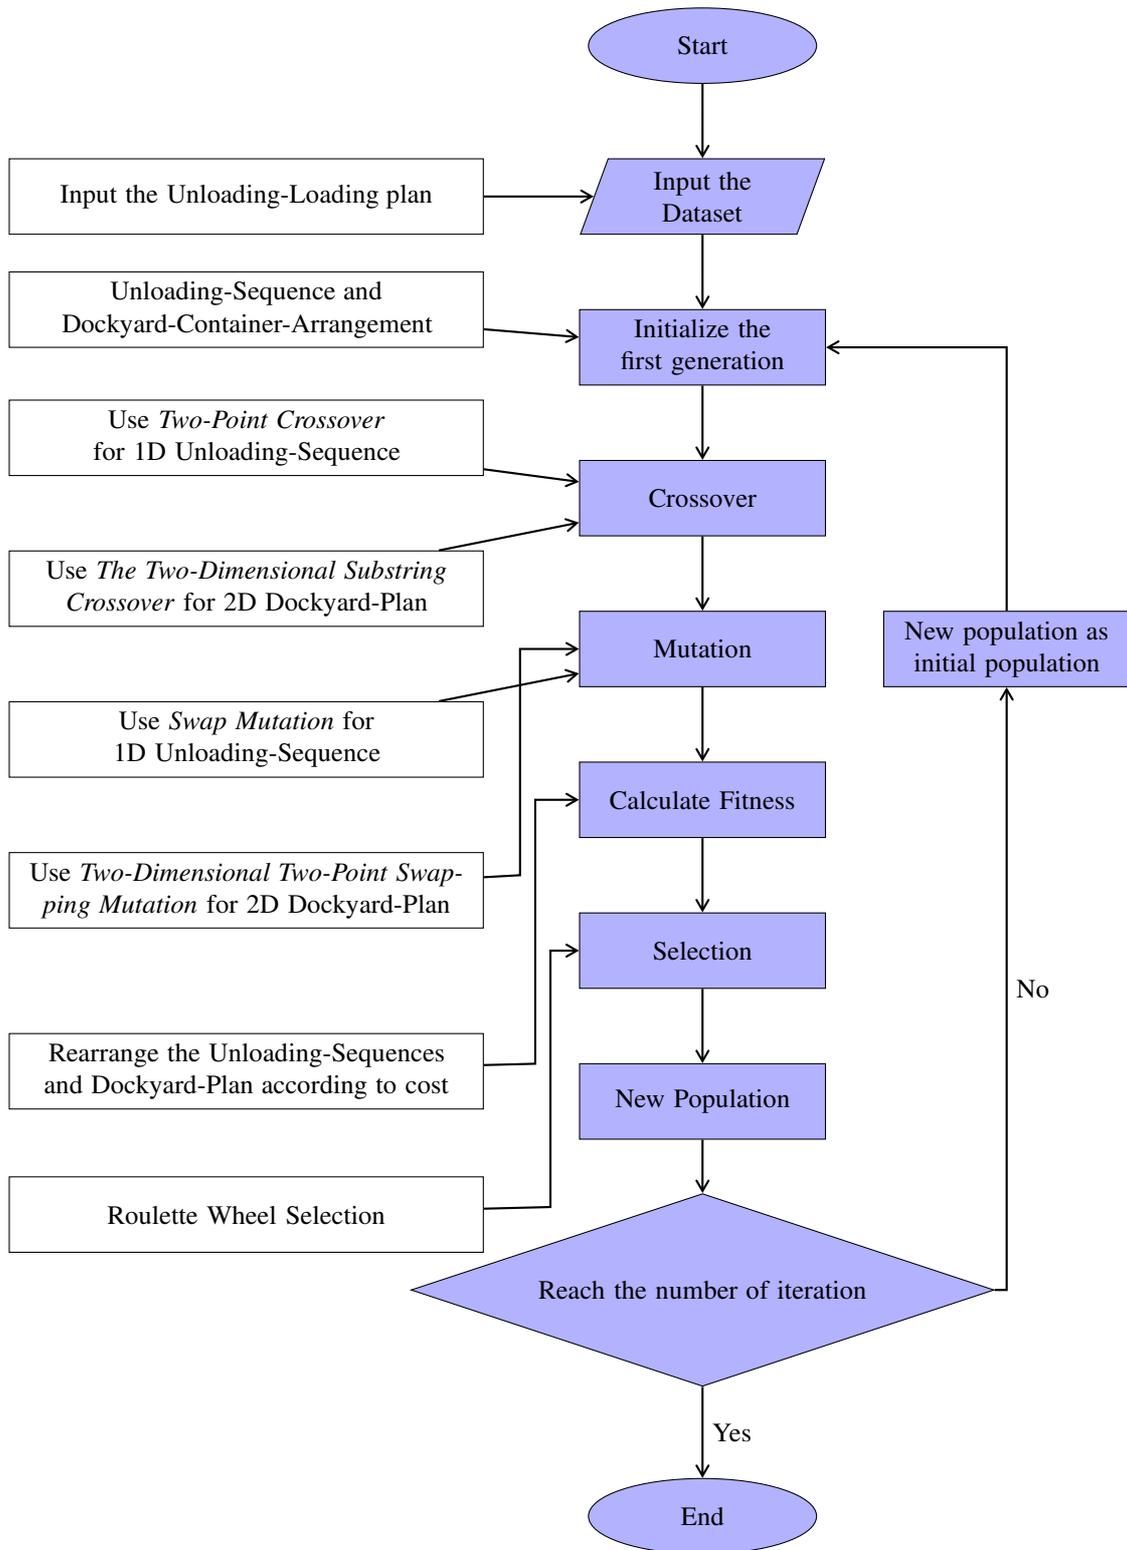


Figure 4: Methodological flowchart of the proposed QCDC-DR-GA.

$c_{i(us)}$ = part of chromosome representing unloading sequence

$c_{i(dp)}$ = part of chromosome representing dockyard plan

$$A_1 = \left[1 \ 2 \ 3 \ 4 \ 5 \ 6 \ 7 \ 8 \ 9 \ 10 \right];$$

$$A_2 = \begin{bmatrix} 3A & 3B & 1C & 1D \\ 1A & 2B & & \\ 2A & 1E & 1B & \\ 3C & 2C & 3E & 3D \\ 2D & 2E & 4A & 4D \\ 4B & 4C & 3C & \\ 4E & & & \end{bmatrix};$$

Here, each row in the vector A_2 denotes a dockyard stack, and each element of the matrix contains two pieces of information that denote the position of the ship (stack number and position in the stack) where it would be loaded. For example, '3A' means that the container would be on the third stack, the first position of the selected ship row. A_1 and A_2 are nothing more than parts of the chromosome $c_{i(us)}$ and $c_{i(dp)}$.

4.2.2. Crossover

We chose two parents from the previous generation and combined their genetic information to generate new offspring for the next generation. However, we needed to use two different methods for the two parts of the chromosome. For the 1D vector, we did 1D-crossover, and for the 2D vector, we did 2D-crossover operations.

One Dimensional Crossover: From the various crossover techniques, we chose the *Two-Point Crossover* method, a special case of *N-Point Crossover*. At first, we selected two random points on the individual chromosomes and exchanged the genetic materials along these points. The common genes were removed from the offspring, and the dropped genes (if any) were appended at the back of the chromosomes (see Figure ??).

Two Dimensional Crossover: For the 2D vector, we use the *2D Substring Crossover* method. This involves row swap and column swap operations, which is a modified version of the 2D crossover introduced in the aircraft scheduling problem (Tsai et al., 2015).

Row-wise operation: Two random points are selected, and the entire row of the parents between these points is swapped.

Column-wise operation: The column-wise operation is performed on the selected rows using the *Two-Point Crossover* method previously used for 1D vector crossover.

Repeated items are removed, and any dropped-out items are appended to the offspring (see Figure 6).

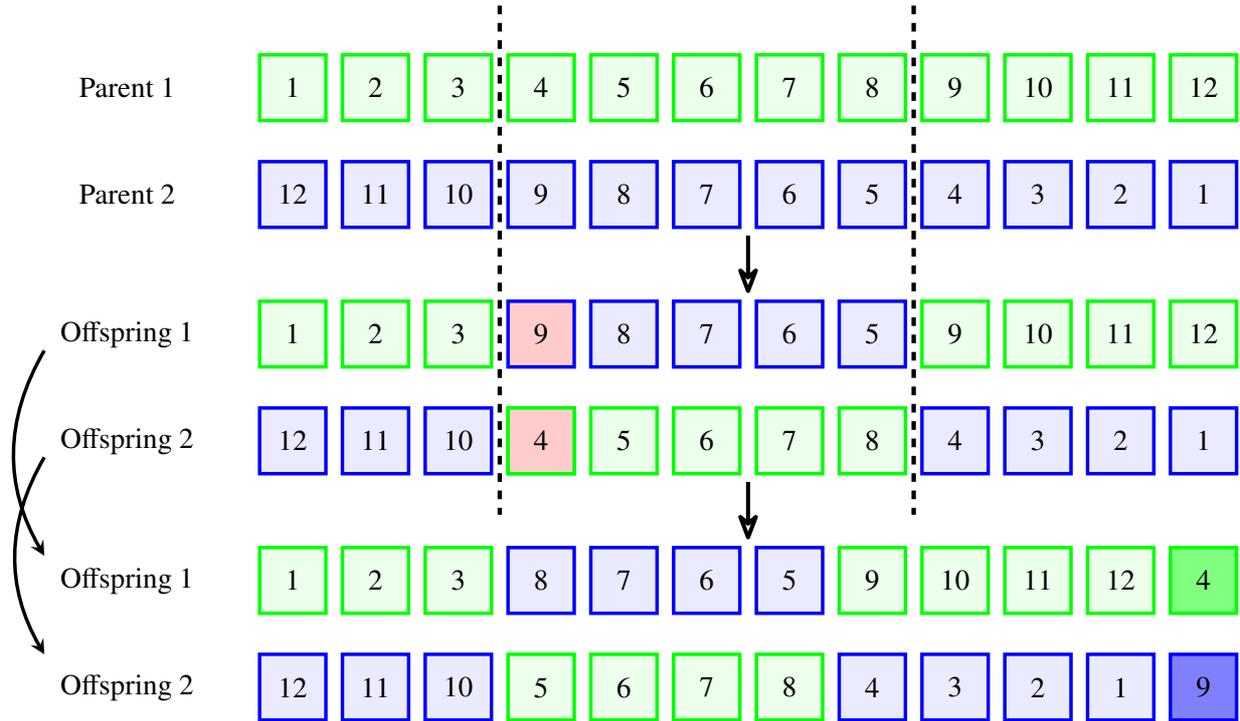


Figure 5: 1D Two-Point Crossover technique.

4.2.3. Mutation

The mutation is a genetic operation that maintains the genetic diversity of the chromosomes between generations. It is similar to biological mutation. Again, we use two different methods for two parts of the chromosome.

Notation:

P_m = the probability of mutation.

The mutation operation will not occur after every cross. The mutation method is described in algorithm 1.

Algorithm 1: Mutation Algorithm

Input: Two 1D vectors after newly crossed child

Output: Two 2D vectors as mutated child

- 1 Generate a random number R .
 - 2 **if** $R > P_m$ **then**
 - 3 Do not do the mutation operation.
 - 4 **else**
 - 5 Do mutation operation.
-

One Dimensional Mutation: We utilize the *Swap Mutation* method for the 1D chromosome part, interchanging two selected genes after crossover (see Figure 7).

Two Dimensional Mutation: Here, we chose the *2D Two-Point Swapping Mutation* method for the 2D part of our

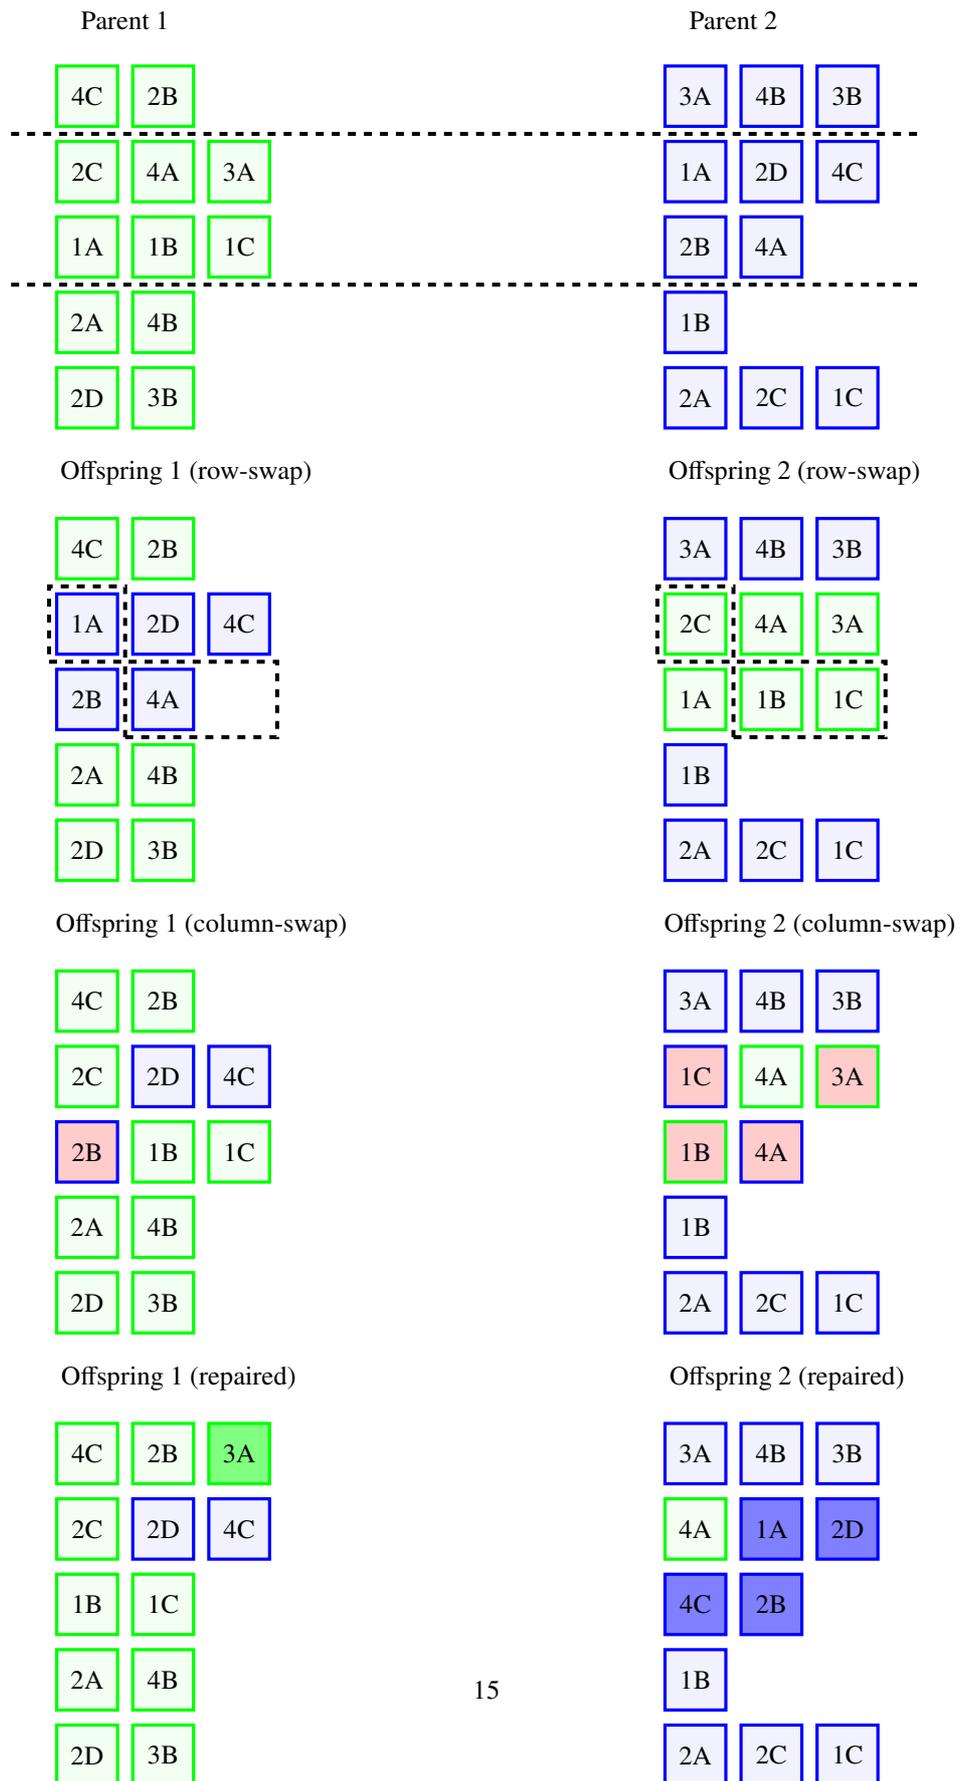


Figure 6: 2D Two-Point Substring Crossover technique.

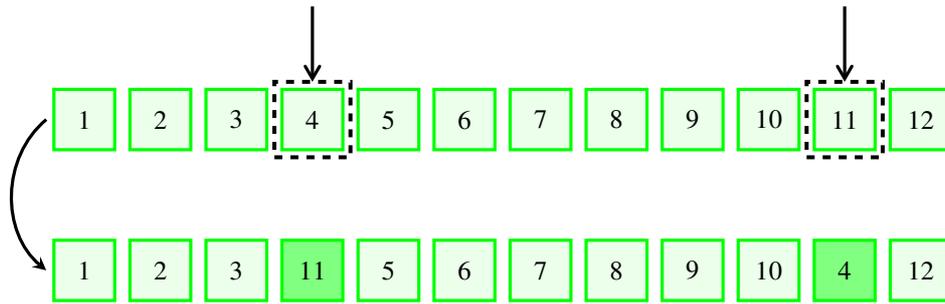


Figure 7: Swap mutation for 1D vector.

chromosome. This is also the modified version of the mutation method introduced by Tsai et al. (Tsai et al., 2015). The method is described in algorithm 2 (also see Figure 8).

Notations:

R : the number of rows in the 2D chromosome part.

C_{R_i} : the number of columns in the i^{th} row.

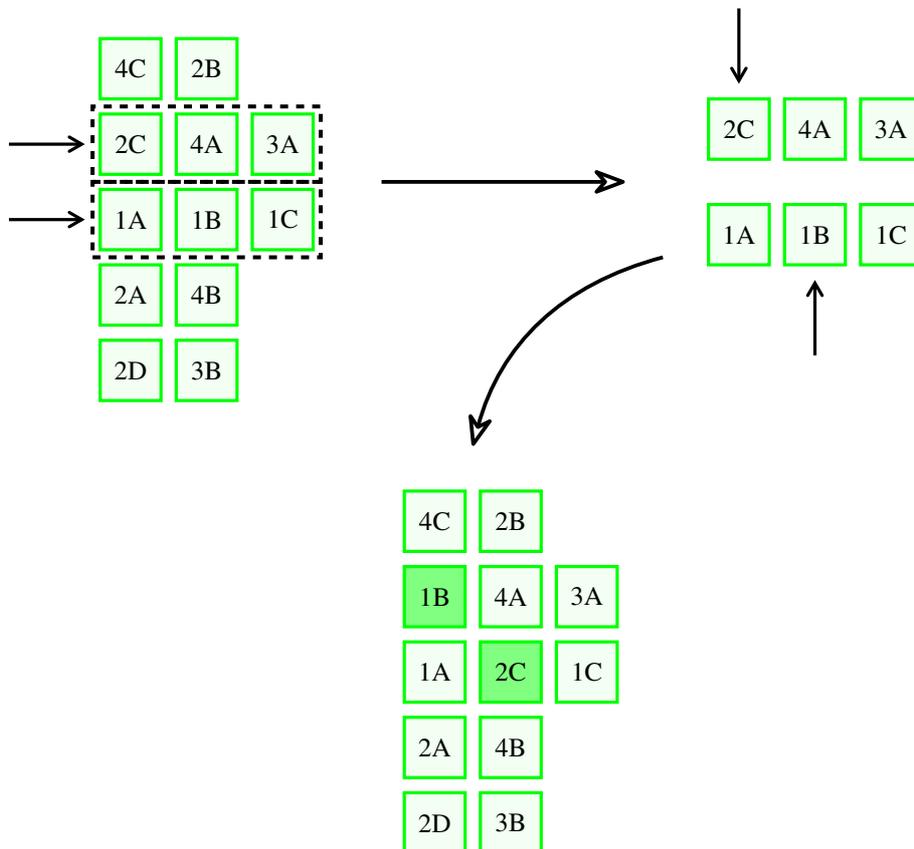


Figure 8: 2D two-point swapping mutation.

Algorithm 2: 2D Mutation Algorithm

Input: A 2D vector from newly crossed children

Output: A 2D vector as a mutated child

- 1 Randomly generate $r1$ and $r2$ to select two rows from the 2D vector, where $1 \leq r1, r2 \leq R$
 - 2 Generate random integers $c1$ and $c2$ to select two points from the selected rows, where $1 \leq c1 \leq Cr1$ and $1 \leq c2 \leq Cr2$
 - 3 Interchange the genes between the selected points of the 2D vector
-

4.2.4. Calculate Fitness

The fittest chromosomes are selected from every generation according to their cost. The cost here is the total completion time, which is nothing but our objective function. Every time a new generation is produced, the cost is calculated and stored against every chromosome. Then, the population is sorted in ascending order according to their cost. The population is now ready for the selection stage. The calculation method of the cost of each chromosome is explained in details in algorithm 3 and 4.

4.2.5. Selection

We adopted the *Roulette Wheel* selection method. Roulette selection is a probabilistic method for choosing individuals based on their fitness, with the probability of selection directly proportional to their fitness. The method is inspired by real-world roulette, but this has distinct differences from traditional roulette mechanisms. Instead of having all slots with the same probability of being selected, we implemented a weighted version of roulette (Figure 9). The likelihood of selection increases with an individual's higher fitness (or lower cost).

Notations:

P_E = the percentage of elite class chromosomes of a generation.

E_{rw} = End value of the roulette wheel. *Elite class* is a portion of a generation who are the fittest. The elite class will be automatically selected for the next generation every generation. The P_E of our model was 20%.

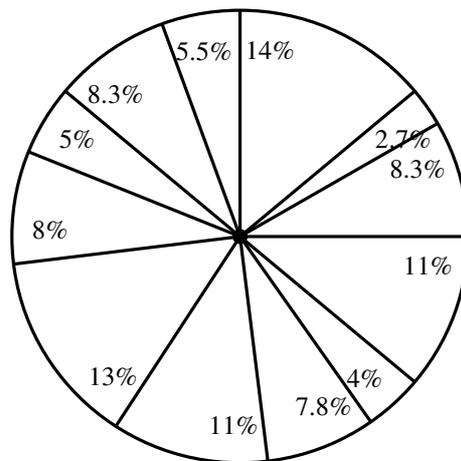


Figure 9: Weighted roulette wheel.

The roulette wheel selection steps are shown in algorithm 5.

4.2.6. Termination

The termination condition of the GA determines when the run ends. Initially, the GA progresses quickly, yielding better solutions every few iterations. However, this progress tends to slow down later, with minimal improvements. To guarantee that our solution approaches optimality, we establish a termination condition as follows: g_i denotes the i^{th} generation, G represents the maximum number of generations, and N_s stands for the number of successive generations

Algorithm 3: Cost function

Input: Loading plan, unloading plan, dockyard container arrangement, maximum dockyard container stack height

Output: No. of single cycles, no. of double cycles, no. of dockyard rehandles

```

1 Function unload_first_stack(unloading plan, unloading sequence):
2   for container ∈ the dockyard stack of unloadingSequence do
3     if the container will not stay on the vessel then
4       unload the container
5       no_of_single_cycles += 1
6 Function calculate_rehandles(target container):
7   Let, no_of_rehandles ← 0
8   Let, found_the_container ← false
9   for i ∈ stacks of dockyard do
10    for j ∈ containers of current stack do
11      if j = target container then
12        found_the_container ← true
13        while until containers are shifted from the top of the target container one by one do
14          no_of_rehandles + = 1
15          Shift the container nearest lowest stack
16        return no_of_rehandles
17  if found_the_container = false then
18    Warning! container not found
19  return 0
20 Function loading_operation(unloading plan, loading plan, unloading sequence):
21  if the current loading stack is empty then
22    if the current unloading stack is empty then
23      go to the next loading stack
24    else
25      return false, 0
26  Load the current container from dockyard
27  return true, calculate_rehandles(current container to be loaded at dockyard)
28 Let, no_of_single_cycles ← 0
29 Let, no_of_double_cycles ← 0
30 Let, no_of_rehandles ← 0
31 unload_first_stack(unloading plan, unloading sequence)

```

Algorithm 4: Cost function (continued)

```
32 while until all the stacks are unloaded from ship do
33   for container  $\in$  current stack do
34     if the container will not stay on the vessel then
35       unload the container
36       if there is any container to load and any stack of the ship is free for loading then
37         flag, rehandles  $\leftarrow$  loading_operation(unloadig plan, loading plan, unloading sequence)
38         no_of_rehandles += rehandles
39         no_of_dual_cycles += 1
40 while complete loading the remaining stacks do
41   flag, rehandles  $\leftarrow$  loading_operation(unloadig plan, loading plan, unloading sequence)
42   no_of_rehandles += rehandles
43   no_of_single_cycles += 1
```

Algorithm 5: Roulette Wheel Selection Algorithm

Input: Probability against the fitness value of each chromosome

Output: A selected chromosome

- 1 Define a 1D vector RW of size n for storing the fitness value of each chromosome. The fitness value is stored as a *cumulative sum* order where E_{rw} is the total sum of all fitness.
 - 2 **for** $i \leftarrow 1$ **to** n **do**
 - 3 Generate a random number r , where $0 \leq r \leq E_{rw}$.
 - 4 Select a chromosome as a parent for crossover.
-

where the fittest chromosome incurs the same cost. The genetic algorithm (GA) execution concludes according to the criteria specified in Algorithm 6.

Algorithm 6: GA termination algorithm

Input: Number of successive generations in which the cost of the fittest chromosome is the same and iteration number

Output: Boolean value to take termination decision

- 1 $N_s \leftarrow$ Number of successive generations in which the fittest chromosome costs the same.
 - 2 **if** $g_i = G$ **or** $N_s = 100$ **then**
 - 3 Terminate the GA run.
 - 4 **else**
 - 5 Continue
-

4.2.7. Parameters

The GA control parameters are shown in table 1. The parameters best fit our model, such as population size, crossover technique, elite percentage, mutation probability, selection method, etc. As the solution to our problem is a smooth landscape type and the complexity of our problem is medium, we selected these parameters to fit the situation.

Table 1: GA control parameters

Parameter	Value
Population size	200
1D crossover strategy	Two-Point Crossover
2D crossover strategy	2D Substring Crossover
Crossover rate	0.80
1D mutation strategy	Swap Mutation
2D mutation strategy	2D Two-Point Swapping Mutation
Mutation rate	0.30
Selection strategy	Roulette wheel
Elite class	0.20
Consecutive iterations	100

5. Results and Discussion

This section addresses the magnitude of *QCDC-DR-GA*. We offer tools to translate cycle-based benefits into time equivalents and validate those estimates against real-world double-cycling data. With an eye on the present and future, we analyze the financial impact of double cycling, estimating potential rewards for both existing vessels and those gracing the waves in the years ahead. The results of the experiments were obtained using a computer with 8 gigabytes of RAM, an Ubuntu 22.04 operating system, and an Intel Core i5 8th Gen. The algorithm was implemented using Python libraries- Pandas and NumPy.

5.1. Performance Comparisons of the Algorithms

To validate the effectiveness of our proposed *QCDC-DR-GA* algorithm, we conducted a comprehensive comparison with three established optimization methods:

- (a) *Dual-Cycling Greedy Upper Bound Approach*: It represents a greedy approach in which the unloading sequence is generated by sorting the stacks of containers of the ship row in descending order (Goodchild and Daganzo, 2006). This heuristic method focuses solely on implementing dual-cycle loading/unloading, neglecting dock-side rehandles. It's a baseline approach to gauge the potential improvement offered by more complex methods.
- (b) *Mixed-Integer Programming Model for QCDCS (bi-level GA)*: This approach represents an improvement over the greedy upper bound by incorporating QCDCS optimization within a bi-level genetic algorithm framework (Zeng et al., 2015). It came with a significant advancement over the greedy approach by incorporating QCDCS optimization.
- (c) *GA-ILSRS*: This method, explored in two scenarios, optimizes dockyard rehandles using a genetic algorithm combined with Iterated Local Search (Ji et al., 2015). However, it falls short by neglecting the loading/unloading process. We assumed two scenarios of selecting two methods of loading-unloading.

- (i) *Scenario 1*: Considers dual cycling for loading/unloading while neglecting dockyard rehandles.
- (ii) *Scenario 2*: Focuses solely on dockyard rehandling with single-cycle loading/unloading.

The greedy upper bound approach is a heuristic approach for implementing dual cycling only, but they did not consider any dockside rehandle. The QCDCS-bilevel GA overcame this heuristic approach but did not consider the time consumed by the dockyard rehandles. On the other hand, the GA-ILSRS only optimized the dockyard rehandles without considering the loading-unloading system. As for QCDC-DR-GA, we considered both loading-unloading with dual cycling and dockyard rehandles in one model and optimized the model using a sophisticated GA approach.

5.2. Datasets

Six scenarios were designed according to the number of stacks and the maximum stack height of containers in each row. Considering the characteristics of commonly used container ships, we assume that the number of stacks is 5 to 30 and the maximum stack height is 4 to 10. The program generated a row's loading and unloading plan and the dockyard container arrangements. Table 2 shows the configurations of six datasets of unloading and loading plans. Table 3 shows a sample unloading plan of a small ship, and Table 4 shows a sample loading plan of that ship.

Table 2: Loading-unloading plan configuration

Scenario	No. of stacks	Maximum stack height
1	30	10
2	25	10
3	20	10
4	15	8
5	10	5
6	5	4

Each cell tells the container location information in Table 3. For example, 1B means that the container is at the 1st stack, 2nd tier of the row, and *F* means the container would remain on the ship. The information in Table 4 is alike.

Table 3: Unloading plan of a ship's row

Stack No.	Tier No.	1	2	3	4	5
	1		1A	1B	1C	1D
2		2A	2B	2C		
3		F	3A	3B	3C	3D
4		4A	4B			
5		5A	5B	5C	5D	5E
6		F	6A	6B	6C	6D
7		F	7A	7B	7C	7D
8		F	8A	8B	8C	8D
9		F	9A	9B	9C	9D
10		F	10A	10B	10C	10D

Table 4: Loading plan of a ship's row

Stack No.	Tier No.	1	2	3	4	5
	1		1A	1B	1C	1D
2		2A	2B	2C	1D	2E
3		3A	3B			
4		4A	4B	4C	4D	4E
5		5A	5B	5C	5D	5E
6		6A	6B			
7		7A	7B	7C	7D	
8		8A				
9		9A	9B	9C	9D	
10		10A	10B	10C	10D	

The program also generated the dockyard plan according to the loading plan. Here, we assumed that the highest dockyard container stack height is 6. The sample of the dockyard plan is elaborated in 4.2.1 as A_2 .

Tables 3 and 4 provide container location information. For instance, 1B indicates a container located in the 1st stack, the 2nd tier of the row, with F indicating the container remaining on the ship. Assuming a maximum stack height of 6, the dockyard plan is discussed further in Section 4.2.1 as A_2 .

Table 5: Two-tailed paired t-test results of the proposed QCDC-DR-GA against the other strategies

Scenarios	No. of stacks	Maximum stack height	Strategies	Operation time (min)						$t_{19}(0.05) = 2.093$	Improvement of QCDC-DR-GA (%)	
				Min	Max	Mean	Standard deviation	Pearson correlation coefficient (r)	T-statistic	P-value		Significance
1	30	10	Proposed QCDC-DR-GA	615.25	704.92	667.62	25.29	-	-	-	-	-
			Greedy Upper Bound	718.58	825.92	780.33	35.04	-0.16317	10.58051	2.10E-09	Yes	14.44%
			QCDC-bi-level-GA	714.92	813.25	763.00	31.26	-0.24243	9.298231	1.68E-08	Yes	12.50%
			GA-ILSRS-Scenario-1	669.25	764.25	708.95	28.18	0.077286	4.952353	8.84E-05	Yes	5.83%
			GA-ILSRS-Scenario-2	820.75	851.25	835.09	9.59	-0.25862	24.9385	5.57E-16	Yes	20.05%
2	25	10	Proposed QCDC-DR-GA	522.42	604.75	559.02	27.24	-	-	-	-	-
			Greedy Upper Bound	645.33	710.75	674.20	20.93	-0.00945	14.5489	9.41E-12	Yes	17.08%
			QCDC-bi-level-GA	652.17	722.75	672.10	22.52	0.450328	18.67514	1.10E-13	Yes	16.82%
			GA-ILSRS-Scenario-1	535.42	631.08	579.37	28.28	0.075218	2.349253	0.029778	Yes	3.51%
			GA-ILSRS-Scenario-2	666.00	691.00	680.79	8.11	-0.26691	17.44741	3.75E-13	Yes	17.89%
3	20	10	Proposed QCDC-DR-GA	381.42	452.08	417.35	22.51	-	-	-	-	-
			Greedy Upper Bound	491.08	563.08	523.60	19.66	-0.37587	13.22962	4.90E-11	Yes	20.29%
			QCDC-bi-level-GA	484.08	563.08	519.85	25.76	-0.33001	11.33876	6.71E-10	Yes	19.72%
			GA-ILSRS-Scenario-1	397.42	465.75	425.77	19.96	0.259185	1.415272	0.173171	Yes	1.98%
			GA-ILSRS-Scenario-2	492.25	511.50	502.76	4.98	-0.13529	15.71027	2.43E-12	Yes	16.99%
4	15	8	Proposed QCDC-DR-GA	201.67	259.00	229.01	18.85	-	-	-	-	-
			Greedy Upper Bound	295.33	358.67	327.83	18.90	-0.29172	14.19992	1.44E-11	Yes	30.14%
			QCDC-bi-level-GA	295.50	349.33	323.00	17.54	0.013371	16.01655	1.73E-12	Yes	29.10%
			GA-ILSRS-Scenario-1	211.33	277.67	248.65	17.79	0.510959	4.719124	0.000149	Yes	7.90%
			GA-ILSRS-Scenario-2	279.00	295.00	286.56	5.52	-0.12894	12.34932	1.59E-10	Yes	20.08%
5	10	5	Proposed QCDC-DR-GA	89.50	138.67	119.40	16.39	-	-	-	-	-
			Greedy Upper Bound	138.50	186.67	164.44	14.66	-0.09791	8.523389	6.46E-08	Yes	27.39%
			QCDC-bi-level-GA	147.00	183.67	162.13	12.50	-0.51102	7.397294	5.26E-07	Yes	26.36%
			GA-ILSRS-Scenario-1	97.00	147.67	123.13	15.56	-0.06245	0.69881	0.493137	Yes	3.03%
			GA-ILSRS-Scenario-2	137.00	152.00	145.76	4.52	0.294877	7.337783	5.90E-07	Yes	18.09%
6	5	4	Proposed QCDC-DR-GA	37.67	70.42	55.43	10.75	-	-	-	-	-
			Greedy Upper Bound	48.67	81.42	63.82	12.87	0.061497	2.250737	0.036439	Yes	13.15%
			QCDC-bi-level-GA	47.67	80.42	65.60	10.75	0.064153	3.015466	0.007114	Yes	15.51%
			GA-ILSRS-Scenario-1	37.67	70.42	54.48	10.78	-0.25326	-0.24295	0.810645	No	-1.74%
			GA-ILSRS-Scenario-2	55.50	66.00	60.05	3.05	0.352321	1.998582	0.060167	Yes	7.70%

5.3. Numerical Tests

The six scenarios described in subsection 5.2, Table 2 are used for numerical tests. The processing time of QCs for single and dual cycling are taken from the trial run done by Goodchild (Goodchild and Daganzo, 2006), mentioned in subsection 2.1 are 90 seconds and 170 seconds. The rehandling time of a container for a gantry crane at the dockyard is generated from a uniform distribution of 60 seconds.

5.3.1. Test Results

We comprehensively evaluate the proposed QCDC-DR-GA algorithm, comparing its performance against four established methods for optimizing container handling at ports. The evaluation utilizes six datasets described in Table 2, representing different scenarios with varying container numbers and ship configurations. Table 5 presents the simulation results obtained by each method on these datasets. Additionally, Figure 10 visually compares the performance of QCDC-DR-GA with the other approaches.

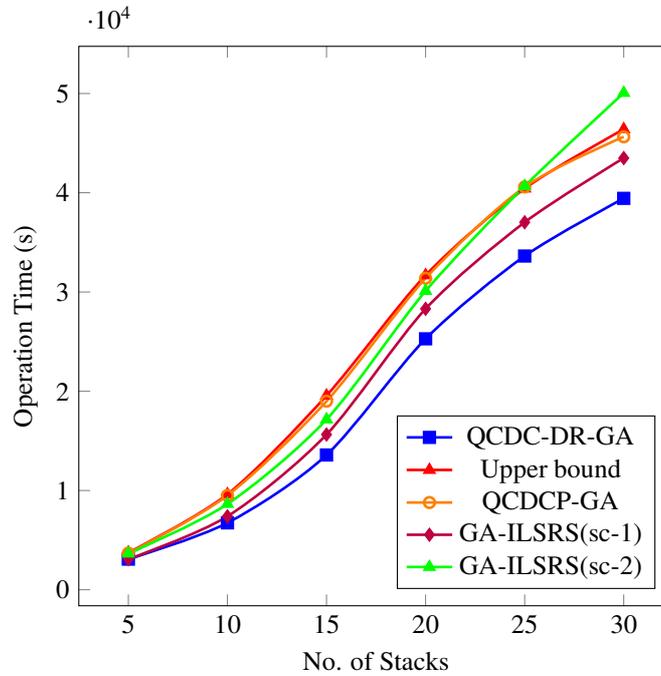


Figure 10: Comparative performance of QCDC-DR-GA against the state-of-the-art algorithms.

5.3.2. Key Findings

The key findings and remarks of the simulation are as follows:

- The proposed QCDC-DR-GA model consistently outperforms all other methods in terms of maximizing dual-cycles and minimizing the number of container handling. This demonstrates the effectiveness of our approach, which combines QCDC optimization with dockyard rehandle minimization and optimizes the total unloading-loading time of the entire process.

- The results support the hypothesis that separately optimizing QCDC and dockyard rehandles leads to suboptimal outcomes. Compared to QCDC-DR-GA, methods like QCDC Scheduling Optimized by bi-level GA and GA-ILSRS (Scenario 2) show limited improvement due to their fragmented approach.
- Similarly, neglecting the dual-cycling in QC operation optimization, as in GA-ILSRS (Scenario 1), leads to inferior performance compared to QCDC-DR-GA. This highlights the importance of considering both aspects simultaneously for optimal resource utilization.

By integrating QCDC optimization and dockyard rehandle minimization into a single model, QCDC-DR-GA demonstrates significant performance advantages over existing methods. This unified approach offers a powerful tool for port operators seeking to minimize container handling times and maximize operational efficiency.

5.4. Significance Test

This section presents the performance evaluation results of various port optimization strategies in a stacking environment. The experiments were carried out in different scenarios to cover the various vessel sizes. The operation time (in minutes) was measured for each strategy in each scenario. The statistical analysis was performed using the two-tailed paired t-test method to assess the significance of differences in operation time between the proposed QCDC-DR-GA strategy and other strategies.

The experiments were conducted across six scenarios, each representing a specific configuration of the stacking environment. The stacks ranged from 5 to 30, with varying maximum stack heights. For each scenario, operation time measurements were recorded 20 times for the proposed QCDC-DR-GA strategy and four other strategies, namely Greedy Upper Bound, QCDC-bi-level-GA, GA-ILSRS-Scenario-1, and GA-ILSRS-Scenario-2.

The paired t-test was used to analyze the differences in operation time between the proposed QCDC-DR-GA strategy and the other strategies under investigation. The paired t-test compares the means of two related groups to determine whether there is a statistically significant difference between them. The formulation of hypotheses for this test is as follows:

- *Null hypothesis (H_0):* There is no significant difference in operation time between the proposed QCDC-DR-GA strategy and the compared strategy.
- *Alternative hypothesis (H_1):* There is a significant difference in operation time between the proposed QCDC-DR-GA strategy and the compared strategy.

The paired t-test used a significance level (α) of 0.05. The t-statistic and p-value were calculated for each pair of strategies. The significance level (α) and the critical t value ($t_{19}(0.05) = 2.093$) were used to determine the significance of the observed differences.

The paired t-test results are presented in Table 5, which provides the minimum, maximum, mean, and standard deviation of the operation time for each strategy in different scenarios. The Pearson correlation coefficient (r), the t-statistic, the p-value, and the significance of the observed differences are reported.

6. Discussion

Port operations often face a trade-off between fast unloading/loading times and minimizing container rehandles within the dockyard. This research presents a groundbreaking model that tackles this dilemma head-on. Unlike past approaches that address each aspect separately, this model integrates them into a unified system. It leverages a mixed genetic algorithm, incorporating 1D and 2D approaches, to identify the optimal unloading sequence that minimizes the combined operation time for both unloading and loading and slashes unnecessary container movements within the yard. This holistic approach unlocks a cascade of benefits: operational costs plummet due to reduced fuel consumption and labor requirements, logistics efficiency soars with optimized container flow, and port capacity has the potential to expand as turnaround times shrink. While computationally demanding, this model holds immense potential to revolutionize port operations, ushering in an era of enhanced efficiency, productivity, and cost-effectiveness.

6.1. Practical Implications

Imagine a port buzzing with activity, containers arriving and departing in a seemingly chaotic dance. But beneath the surface, a revolution is brewing. We developed QCDC-DR-GA, transforming port operations from a juggling act to a well-rehearsed symphony. Simultaneously optimizing both unloading/loading speed and minimizing dockyard rehandles unlocks a treasure trove of practical benefits. Imagine ships unloading and loading at record speeds, thanks to the meticulously chosen sequence identified by QCDC-DR-GA. Picture yard workers gracefully navigate the containers, eliminating unnecessary relocations that waste time and fuel. The ripple effects are undeniable: operational costs plummet, logistics flow like a well-oiled machine, and the very capacity of the port expands as turnaround times dwindle. QCDC-DR-GA isn't just theoretical; it's a game-changer, poised to transform ports into beacons of efficiency and productivity. While its computational demands require careful consideration, the potential rewards are undeniable: a future where ports operate with newfound agility, cost-effectiveness, and a level of efficiency never before seen. This is more than just a model; it's a blueprint for a smarter, faster, and more sustainable future for port operations.

6.2. Managerial Implications

For port managers seeking to optimize operational efficiency, this research offers a groundbreaking model that simultaneously addresses the critical objectives of minimizing container unloading/loading times and dockyard rehandles. Unlike traditional approaches that consider these factors separately, our unified model integrates them into a single framework, yielding significant managerial implications.

The model translates to demonstrably reduced operational costs through optimized unloading/loading sequences and minimized relocations, resulting in lower fuel consumption, optimized labor requirements, and reduced equipment wear and tear. Furthermore, it facilitates smoother logistics by choreographing efficient container movement within the yard, eliminating unnecessary relocations and leading to improved predictability, faster turnaround times, and enhanced client satisfaction. Additionally, the model unlocks the potential for increased port capacity without requiring

costly infrastructure expansion, as every saved second in unloading/loading translates to the ability to serve more ships. Finally, by providing valuable data-driven insights into operations, the model empowers managers to make informed decisions regarding resource allocation, scheduling, and yard layout, fostering continuous improvement and adaptation to evolving demands.

Implementing this model necessitates careful consideration of its computational demands and integration challenges, and the potential benefits are undeniable. Imagine a future where your port operates with unprecedented efficiency, cost-effectiveness, and agility. This transformative model is more than just a tool; it represents a paradigm shift for port management, paving the way for a future symphony of success.

6.3. *Unique Theoretical Contributions*

This subsection delves into the three key theoretical contributions that underpin our proposed model:

- (i) *Introducing a Hybrid Approach:* We present a novel genetic algorithm (GA) that seamlessly blends the strengths of 1D and 2D GAs. This hybrid approach leverages the power of 1D GAs in exploring the solution space effectively while incorporating the 2D representation's ability to capture spatial relationships within the dockyard layout. This unique fusion empowers our model to achieve superior results compared to traditional GAs, paving the way for more efficient port operations.
- (ii) *Optimizing GA Parameters:* Recognizing the critical role of parameter selection in GA performance, we meticulously analyze various computational parameters. Through rigorous testing and evaluation, we identify the optimal combination of parameters and methods specifically tailored to our model. This meticulous optimization ensures that our GA operates at peak efficiency, maximizing its ability to find the optimal unloading sequence.
- (iii) *Justifying Strategic Choices:* We understand the value of transparency and provide detailed reasoning and justifications for selecting various strategies and methods implemented throughout our GA. This includes explaining the rationale behind crossover and mutation operators, selection mechanisms, and population sizes.

These three theoretical contributions - the hybrid GA, optimized parameters, and transparent justifications - form the bedrock of our model's effectiveness. They represent a significant advancement in GA strategies, offering a powerful tool for solving heuristic problems to achieve greater efficiency.

7. **Conclusions**

In this work, the model QCDC-DR-GA is developed to optimize the total ship unloading and loading process, improving the QC efficiency and reducing the dockyard rehandles. A heuristic method, a mixed GA (mixed with two-dimensional and one-dimensional GA), is designed to solve the model. A specially designed program prepares six dataset scenarios. Numerical experiments indicate that combining the two scenarios, unloading-loading and dockyard rehandle optimization, can reduce the ship's turnaround time. They also prove that the model is suitable for vessels of

any size. The model gives a constant better result for numerous datasets, small and big. Moreover, large ships perform remarkably well. In addition, our model has been compared with four of the latest methods on QCDC and dockyard rehandle minimization. QCDC-DR-GA showed superior improvements than the other models with a 95% confidence level, shown using the two-tailed paired t-test.

While this study provides valuable insights into optimizing container handling at ports, certain limitations deserve acknowledgment. Firstly, the model assumes immediate loading container availability at the dockside, potentially overlooking pre-staging requirements. Secondly, the model focuses on rehandling between the ship and the apron, neglecting potential relocations within ship stacks. Finally, interruptions due to inbound vehicles or cranes are not considered, potentially underestimating operational variability. Future research could address these limitations by incorporating pre-staging requirements, investigating intra-ship rehandle optimization, and incorporating dynamic disruptions, which could further refine the model's practical applicability. By acknowledging and addressing these limitations, future studies can build upon the present work and contribute to even more efficient and realistic port operations.

Data Availability

The datasets used in this research consist of the configuration of container ships' loading and unloading plans generated under six distinct scenarios. These scenarios are based on varying numbers of stacks and maximum stack heights of containers in each row, reflecting typical container ship characteristics. The scenarios encompass stack numbers ranging from 5 to 30 and maximum stack heights from 4 to 10. The dataset includes loading and unloading plans for dockyard containers, with sample plans provided for small ships. Each dataset comprises 20 instances representing different container loading and unloading scenarios. Each instance is characterized by a specific strategy detailing the number of single cycles, dual cycles, rehandles, and operation time required. Researchers interested in exploring the efficiency and performance of various strategies in handling container logistics within a dockyard setting can access the detailed generated data at <https://dx.doi.org/10.21227/cj08-qn62>.

Conflicts of Interest

The authors whose names are listed immediately below certify that they have no affiliations with or involvement in any organization or entity with any financial or non-financial interest in the subject matter or materials discussed in this manuscript.

CRedit Author Statement

Md Mahfuzur Rahman: Writing – Original draft preparation, Conceptualization, Methodology, Software, Formal analysis, and Visualization. **Md Abrar Jahin:** Writing – Original draft preparation, Conceptualization, Method-

ology, Software, Formal analysis, and Visualization. **Md. Saiful Islam:** Supervision, Writing – Review & Editing.
M. F. Mridha: Supervision, Writing – Review & Editing.

References

- Ahmed, E., El-Abbasy, M. S., Zayed, T., Alfalah, G., and Alkass, S. (2021). Synchronized scheduling model for container terminals using simulated double-cycling strategy. *Computers & Industrial Engineering*, 154:107118.
- Bish, E. K. (2003). A multiple-crane-constrained scheduling problem in a container terminal. *European Journal of Operational Research*, 144(1):83–107.
- Caserta, M., Voß, S., and Sniedovich, M. (2011). Applying the corridor method to a blocks relocation problem. *OR spectrum*, 33:915–929.
- Chen, L., Bostel, N., Dejax, P., Cai, J., and Xi, L. (2007). A tabu search algorithm for the integrated scheduling problem of container handling systems in a maritime terminal. *European Journal of Operational Research*, 181(1):40–58.
- Chu, C.-Y. and Huang, W.-C. (2002). Aggregates cranes handling capacity of container terminals: the port of kaohsiung. *Maritime Policy & Management*, 29(4):341–350.
- Diabat, A. and Theodorou, E. (2014). An integrated quay crane assignment and scheduling problem. *Computers & Industrial Engineering*, 73:115–123.
- Fu, Y.-M., Diabat, A., and Tsai, I.-T. (2014). A multi-vessel quay crane assignment and scheduling problem: Formulation and heuristic solution approach. *Expert Systems with Applications*, 41(15):6959–6965.
- Goodchild, A. V. and Daganzo, C. (2007). Crane double cycling in container ports: Planning methods and evaluation. *Transportation Research Part B: Methodological*, 41(8):875–891.
- Goodchild, A. V. and Daganzo, C. F. (2006). Double-cycling strategies for container ships and their effect on ship loading and unloading operations. *Transportation science*, 40(4):473–483.
- He, J., Yu, H., Tan, C., Yan, W., and Jiang, C. (2020). Quay crane scheduling for multiple hatches vessel considering double-cycling strategy. *Industrial Management & Data Systems*, 120(2):253–264.
- Homayouni, S. M., Tang, S. H., and Motlagh, O. (2014). A genetic algorithm for optimization of integrated scheduling of cranes, vehicles, and storage platforms at automated container terminals. *Journal of Computational and Applied Mathematics*, 270:545–556.

- Imai, A., Sasaki, K., Nishimura, E., and Papadimitriou, S. (2006). Multi-objective simultaneous stowage and load planning for a container ship with container rehandle in yard stacks. *European Journal of Operational Research*, 171(2):373–389.
- Ji, M., Guo, W., Zhu, H., and Yang, Y. (2015). Optimization of loading sequence and rehandling strategy for multi-quay crane operations in container terminals. *Transportation Research Part E: Logistics and Transportation Review*, 80:1–19.
- Kim, K. H. (1997). Evaluation of the number of rehandles in container yards. *Computers & Industrial Engineering*, 32(4):701–711.
- Kim, K. H. and Bae, J. W. (1999). A dispatching method for automated guided vehicles to minimize delays of containership operations. *Management Science and Financial Engineering*, 5(1):1–25.
- Kim, K. H. and Kim, H. B. (2002). The optimal sizing of the storage space and handling facilities for import containers. *Transportation Research Part B: Methodological*, 36(9):821–835.
- Kim, K. H. and Park, Y.-M. (2004). A crane scheduling method for port container terminals. *European Journal of operational research*, 156(3):752–768.
- Ku, D. and Arthanari, T. S. (2016). On double cycling for container port productivity improvement. *Annals of Operations Research*, 243:55–70.
- Lee, C.-Y., Liu, M., and Chu, C. (2015). Optimal algorithm for the general quay crane double-cycling problem. *Transportation science*, 49(4):957–967.
- Lee, D.-H., Cao, J. X., Shi, Q., and Chen, J. H. (2009). A heuristic algorithm for yard truck scheduling and storage allocation problems. *Transportation Research Part E: Logistics and Transportation Review*, 45(5):810–820.
- Park, Y.-M. and Kim, K. H. (2003). A scheduling method for berth and quay cranes. *OR spectrum*, 25(1):1–23.
- Sauri, S. and Martin, E. (2011). Space allocating strategies for improving import yard performance at marine terminals. *Transportation Research Part E: Logistics and Transportation Review*, 47(6):1038–1057.
- Schonfeld, P. and Sharafeldien, O. (1985). Optimal berth and crane combinations in containerports. *Journal of waterway, port, coastal, and ocean engineering*, 111(6):1060–1072.
- Song, J. (2007). A study for optimization of double cycling in container ports. *Port Technology International*, 36:50–52.
- Taleb-Ibrahimi, M., de Castilho, B., and Daganzo, C. F. (1993). Storage space vs handling work in container terminals. *Transportation Research Part B: Methodological*, 27(1):13–32.

- Tavakkoli-Moghaddam, R., Makui, A., Salahi, S., Bazzazi, M., and Taheri, F. (2009). An efficient algorithm for solving a new mathematical model for a quay crane scheduling problem in container ports. *Computers & Industrial Engineering*, 56(1):241–248.
- Tsai, M.-W., Hong, T.-P., Lin, W.-T., et al. (2015). A two-dimensional genetic algorithm and its application to aircraft scheduling problem. *mathematical Problems in Engineering*, 2015.
- Vis, I. F., De Koster, R., Roodbergen, K. J., and Peeters, L. W. (2001). Determination of the number of automated guided vehicles required at a semi-automated container terminal. *Journal of the Operational research Society*, 52(4):409–417.
- Zeng, Q., Diabat, A., and Zhang, Q. (2015). A simulation optimization approach for solving the dual-cycling problem in container terminals. *Maritime Policy & Management*, 42(8):806–826.
- Zeng, Q., Yang, Z., and Hu, X. (2011). Disruption recovery model for berth and quay crane scheduling in container terminals. *Engineering Optimization*, 43(9):967–983.
- Zhang, C., Wan, Y.-w., Liu, J., and Linn, R. J. (2002). Dynamic crane deployment in container storage yards. *Transportation Research Part B: Methodological*, 36(6):537–555.
- Zhang, H. and Kim, K. H. (2009). Maximizing the number of dual-cycle operations of quay cranes in container terminals. *Computers & Industrial Engineering*, 56(3):979–992.
- Zhang, X., Zeng, Q., and Sheu, J.-B. (2019). Modeling the productivity and stability of a terminal operation system with quay crane double cycling. *Transportation Research Part E: Logistics and Transportation Review*, 122:181–197.
- Zheng, F., Pang, Y., Liu, M., and Xu, Y. (2020). Dynamic programming algorithms for the general quay crane double-cycling problem with internal-reshuffles. *Journal of Combinatorial Optimization*, 39:708–724.

This figure "Dual_cycle.drawio.png" is available in "png" format from:

<http://arxiv.org/ps/2406.08534v1>

This figure "Single_cycle.drawio.png" is available in "png" format from:

<http://arxiv.org/ps/2406.08534v1>

This figure "Single_cycle_loading.drawio.png" is available in "png" format from:

<http://arxiv.org/ps/2406.08534v1>

This figure "large_ship.jpg" is available in "jpg" format from:

<http://arxiv.org/ps/2406.08534v1>