

LuSNAR: A Lunar Segmentation, Navigation and Reconstruction Dataset based on Multi-sensor for Autonomous Exploration

Jiayi Liu^{1,2,3}, Qianyu Zhang^{1,2,3}, Xue Wan^{*2,3}, Shengyang Zhang^{1,2,3}, Yaolin Tian^{1,2,3}, Haodong Han^{1,2,3}, Yutao Zhao^{1,2,3}, Baichuan Liu^{1,2,3}, Zeyuan Zhao^{1,2,3}, Xubo Luo^{1,2,3}

¹University of Chinese Academy of Sciences

²Technology and Engineering Center for Space Utilization, Chinese Academy of Sciences

³Key Laboratory of Space Utilization, Chinese Academy of Sciences

Abstract: With the complexity of lunar exploration missions, the moon needs to have a higher level of autonomy. Environmental perception and navigation algorithms are the foundation for lunar rovers to achieve autonomous exploration. The development and verification of algorithms require highly reliable data support. Most of the existing lunar datasets are targeted at a single task, lacking diverse scenes and high-precision ground truth labels. To address this issue, we propose a multi-task, multi-scene, and multi-label lunar benchmark dataset LuSNAR. This dataset can be used for comprehensive evaluation of autonomous perception and navigation systems, including high-resolution stereo image pairs, panoramic semantic labels, dense depth maps, LiDAR point clouds, and the position of rover. In order to provide richer scene data, we built 9 lunar simulation scenes based on Unreal Engine. Each scene is divided according to topographic relief and the density of objects. To verify the usability of the dataset, we evaluated and analyzed the algorithms of semantic segmentation, 3D reconstruction, and autonomous navigation. The experiment results prove that the dataset proposed in this paper can be used for ground verification of tasks such as autonomous environment perception and navigation, and provides a lunar benchmark dataset for testing the accessibility of algorithm metrics. We make LuSNAR publicly available at: <https://github.com/autumn999999/LuSNAR-dataset>.

Keywords: Autonomous exploration; Semantic segmentation; Navigation and localization; 3D Reconstruction

1. Introduction

The rovers, as planetary robots, play a crucial role in facilitating human exploration of extraterrestrial celestial bodies and enhancing our understanding of the universe. As the nearest celestial body to the earth, lunar exploration tasks attracts scientists for its geological evolution and internal structure. After the peak of lunar exploration led by the United States and former Soviet Union in 1976, space-faring nations such as China and India have successively sent satellites and rovers to the Moon for scientific exploration (Gao et al., 2017). China successfully launched the Yutu and Yutu-2 rovers in Chang'E-3 (CE-3) and s Chang'e-4 (CE-4) mission, enabling exploration and investigation on the moon. (Long et al., 2015, Li et al., 2021) In August of 2023, India's Chandrayaan-3 achieved a successful soft landing on the moon, thus becoming the fourth nation for lunar exploration.

With the increasing complexity of deep space exploration missions, the long communication chain between Earth and the moon greatly restricts the human-in-loop operation and control of rovers.(McGuire et al., 2016) The safety and real-time performance of future exploration tasks require increasing autonomous ability of the rovers. Autonomous environmental perception and navigation are the foundation to ensure the safety and efficiency of lunar exploration tasks. The development and validation of perception and navigation algorithms demand a substantial amount of data with various scenes includes different topography and object distributions. In particular, deep learning algorithms rely on datasets with ground truth labels for model training and testing.(Minar et al., 2016) High-quality ground truth labels and diverse scene data can enhance the accuracy and generalizability of the model. Thus, a lunar benchmark dataset supporting the tasks of environmental perception and navigation will serve as a testbed for the comparison and evaluation of various algorithms.

Driven by the new wave of lunar exploration, some datasets have been proposed focused on the navigation and recognition on lunar surface. Furgale proposed Devon Island dataset (Furgale et al., 2012) for lunar terrain navigation. The sensors include stereo images, 3D laser ranging scans, and location data collected on terrain

on Earth where topographic features are similar to the moon. Vayugundla proposed LRNT dataset (Vayugundla et al., 2018) based on data collected by the Lightweight Rover Unit (LRU), and can be used to evaluate rover navigation. The S3LI dataset (Giubilato et al., 2022) and the LRNT dataset were collected at the same location and are also employed to validate and evaluate visual-inertial SLAM. Roman proposed a lunar landscape simulation dataset (Roman et al., 2019) containing semantic labels for sky, smaller rocks and larger rocks, which can be used for training and testing semantic segmentation algorithms for lunar scene. These datasets show potential application value for future lunar semantic perception, positioning and navigation missions. However, the lack of scene diversity makes it difficult to evaluate the real performance of the algorithms, and moreover, the generalization of trained model can hardly be fulfilled. Therefore, the existing dataset is difficult to support the diverse needs of future lunar exploration.

The autonomous exploration of rovers involves the collaborative execution of multiple tasks, including semantic perception, obstacle recognition, path planning, navigation and positioning, and terrain reconstruction. These tasks are connected and influenced each other. The dataset merely focused on single task cannot provide a comprehensive performance evaluation of the autonomous exploration system. For example, the failure detection of one stone in the semantic segmentation will lead to errors in obstacle map generation, and thus the path planning may be inaccurate; Incorrect navigation poses used for multi-site point cloud stitching can significantly impact the accuracy and reliability of path planning, potentially leading to unsafe driving for rovers. Datasets for a single task can only be used to validate and optimize algorithms for specific tasks, but cannot be used to comprehensively evaluate perception and navigation systems. The dataset must be combined with multi-task modules to achieve efficient and robust autonomous exploration.

Autonomous exploration missions require lunar rovers to adapt to diverse and unknown lunar environments, which may include vast plains, rocky terrain with dense distribution, and rugged crater bottoms which may have different distribution training data on

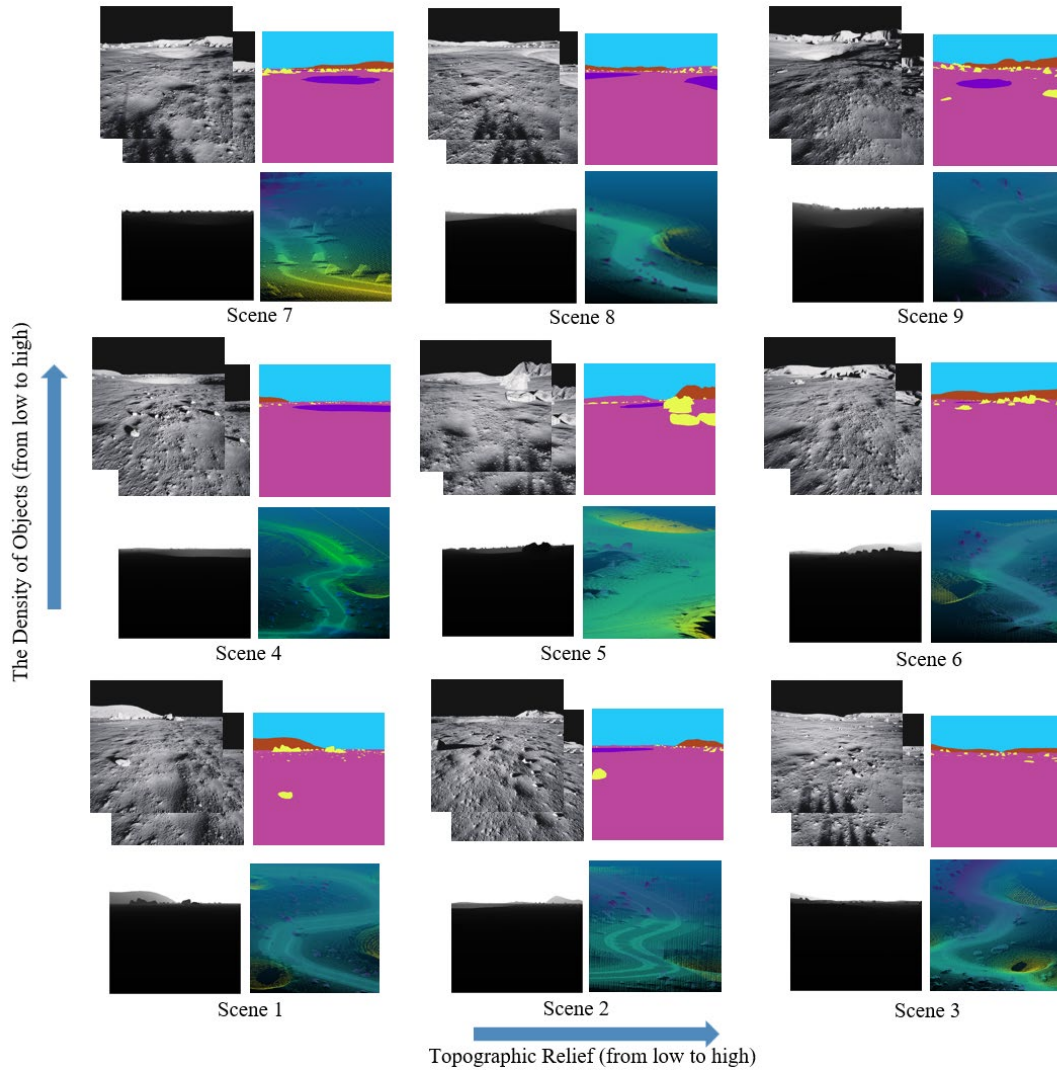


Fig. 1. Overview of 9 lunar surface scenes with different topographic relief and density of objects.

Earth. The generalization of the environment perception algorithms is important. However, this is hard to achieve because the data collection scenario for real lunar exploration missions is limited, and relying solely on real exploration data for training and testing cannot improve the generalization of algorithms. Another potential solution is to establish lunar surface similar scenarios on Earth. However, it is difficult to build large number of lunar simulation scenarios with different topography features. A single-scene dataset may make the algorithm only applicable to lunar surface scenes under specific conditions, resulting in poor performance in large range explorations. Especially for deep learning algorithms that rely on a large amount of training data, using only samples collected in the same scenario may lead to overfitting of the model. Therefore, in order to improve the generalization ability of the algorithm, the dataset is

necessary to cover different terrains and landforms from the data level.

Another challenge is the collection of a large amount of ground truth labels with high-quality and less labor-intensive. The ground truth data captured by actual sensors, such as RGB-D cameras, have poor reliability in outdoor environment. Therefore, the existing dataset uses estimated values or manual annotations as labels, lacking reliable high-precision ground truth (depth information, semantic maps, pose). The cost of manual annotation is high, and its reliability is poor. Low-quality ground truth labels contain noise and error information, which can be mistaken by the model as true features, leading to the learning of incorrect rules. High-precision ground truth labels assist algorithms in learning and predicting more effectively, and accurately evaluate the performance of models.

To address the above needs and challenges, this

paper proposed a benchmark dataset named LuSNAR including nine simulated lunar surface scenes based on Unreal Engine 4, and it is different from many existing benchmark datasets which only focus on a single task, such as navigation or recognition. LuSNAR is the first lunar scene benchmark dataset that provides high-resolution stereo image pairs, panoramic semantic labels, depth maps, point clouds, poses, and timestamps. This dataset will encourage researchers to investigate potential perception, navigation and reconstruction for lunar exploration based on multiple sensors and high-quality ground truth. Tasks supported by LuSNAR include 2D and 3D semantic segmentation, visual SLAM, LiDAR SLAM, stereo matching, and 3D reconstruction. Due to the controllable and editable features of lunar scenes in simulation engine, we divided the lunar surface simulation scene into 9 different levels based on the topographic relief level and surface object richness in order to cover different types of lunar surface. LuSNAR collected data under different terrains and landforms, which can be used as training samples to improve the generalization of the model. In the simulation scenes, the sensors carried by the simulated rover include a stereo camera, a LiDAR, and an IMU. **Fig. 1** shows nine scenes and visualized output data. Based on the simulation engine, reliable and high-precision ground truth are provided including depth, 2D semantic masks, 3D semantic labels, trajectory, and 3D point cloud of the scene, which are difficult to obtain using real sensors. To summarize, LuSNAR is a multi-task, multi-scene, and multi-sensor lunar surface dataset, which can effectively validate the feasibility of long-term autonomous environmental perception and navigation indicators.

The dataset have the following features:

- LuSNAR offered multiple tasks that consider the connections between segmentation, navigation and reconstruction, which is crucial for autonomous and safely driving for lunar rover. To validate the feasibility of the dataset, state-of-the-art 2D and 3D semantic segmentation, visual and LiDAR SLAM, and 3D reconstruction methods have been tested using the proposed dataset.
- LuSNAR dataset collected data in nine representative scenes to increase the diversity of dataset and explore the impact of topography steepness and object density on autonomous

exploration tasks. Nine lunar simulation environments were designed based on different topographic relief and objects density, and sorted in order according to the complexity of the terrain.

- The LuSNAR dataset contains multimodality ground truth labels synchronously generated for each trajectory, including depth, 2D semantic maps, 3D semantic labels, positions, and poses. The ground truth labels obtained through simulation engine have high reliability, providing strong support for ground verification and algorithm selection.

The structure of the paper is as follows. Section 2 presents a review of the current benchmark datasets for lunar and planetary scenes. Section 3 describes the characteristics and establishment process of LuSNAR dataset. The experimental results evaluating LuSNAR are discussed in Section 4. Finally, remarks and prospects for future research are discussed in Section 5.

2. Related works

In this section, public datasets, including extraterrestrial bodies, Mars and the Moon, for the tasks of segmentation and navigation of rovers, have been reviewed.

2.1 Planetary Semantic segmentation datasets

Roman et al. (Roman et al., 2019) presented an artificial lunar landscape dataset that simulates images of the moon using Terragen from Planetside Software. The Space Robotics Group at Keio University in Japan created this dataset, which is available on Kaggle and provides photorealistic images of the lunar surface along with semantic labels for training scene segmentation algorithms. It currently contains 9,766 realistic rendered images of the rocky lunar landscape and their corresponding semantic labels, including sky, smaller rocks, and larger rocks. It also includes bounding boxes of all larger rocks that can be used to train object detection algorithms.

Swan et al. (Swan et al., 2021) proposed the AI4Mars dataset, which consists of nearly 326K semantic segmentation full image labels on 35K images from the Curiosity, Opportunity, and Spirit rovers. The label data was collected through crowdsourcing, with an additional approximately 1,500 annotations from NASA mission's rover planners and scientists. The dataset includes four label types, namely soil, bedrock, sand, and large rock. It was built for training and validating terrain classification models for Mars. The current planetary semantic

Table 1
Comparison of the state-of-the-art datasets with the proposed LuSNAR dataset.

Dataset	Scene	Real/Synthetic	Scenes Number	Sensors				Ground Truth				
				Mono	Stereo	LiDAR	IMU	Depth	position	pose	Semantic Label	
											2D	3D
Lunar Landscape	Moon	Synthetic	1	✓	✗	✗	✗	✗	✗	✗	✓	✗
AI4MARS	Mars	Real	3	✓	✓	✗	✗	✗	✗	✗	✓	✗
Canadian 3D Mapping	Mars	Real	2	✗	✗	✓	✓	✗	✓	✓	✗	✗
Canadian Energy Aware	Mars	Real	1	✓	✓	✗	✓	✗	✓	✗	✗	✗
Erfoud	Mars	Real	3	✓	✓	✓	✓	✗	✓	✓	✗	✗
MADMAX	Mars	Real	8	✓	✓	✗	✓	✗	✓	✓	✗	✗
Katwijk Beach	Mars	Real	1	✓	✓	✓	✓	✗	✓	✗	✗	✗
Devon Island	Mars/Moon	Real	4	✓	✓	✓	✗	✗	✓	✗	✗	✗
LRNT	Mars/Moon	Real	1	✓	✓	✗	✓	✗	✓	✗	✗	✗
S3LI	Mars/Moon	Real	7	✓	✓	✓	✓	✗	✓	✗	✗	✗
Ours	Moon	Synthetic	9	✓	✓	✓	✓	✓	✓	✓	✓	✓

segmentation datasets primarily focus on the labels of 2D images which include fewer categories, lacking annotations for 3D data and failing to capture precise geometric information of scene objects. Consequently, they cannot contribute to the advancement of 3D semantic segmentation algorithms and overlook potential future research opportunities in exploring the fusion of 2D and 3D semantic information.

2.2 Navigation datasets

Due to the difficulties of acquiring real data from Mars and the Moon, most datasets are generated via field or software simulation. Given the geological and climatic similarities between Mars and Earth, it is feasible to find a location on Earth that is similar to the Martian environment. Tong et al. (Tong et al., 2013) presented a dataset collected at two distinct planetary analog rover test facilities in Canada, namely the University of Toronto Institute for Aerospace Studies (UTIAS) indoor rover test facility and the Canadian Space Agency's (CSA) Mars Emulation Terrain (MET). This dataset specifically focuses on 3D laser scans, with a total of 272 scans collected. Potential applications include terrain reconstruction, path planning, and LiDAR SLAM. Similarly, another dataset (Lamarre et al., 2020) was also collected by MET at CSA, but with different sensors. The sensor suite includes a color stereo camera, a monocular camera, an IMU, a pyranometer, drive power consumption monitors, wheel encoders, and a GPS receiver. The dataset contains 142,710 images from a stereo camera and 16,203 images from a monocular camera. It is divided into six separate runs, covering a total distance of over 1.2 km, and can be used for

environment reconstruction, short-to-medium-distance path planning, omnidirectional visual-inertial odometry, and energy-aware planetary navigation.

The Erfoud dataset (Lacroix et al., 2020) was acquired by two mobile robots, Mana and Minnie, at three different Mars-like locations in the Tafilalet region of Morocco. Collected along nine different trajectories totaling 13 km, the dataset contains approximately 110,000 georeferenced stereo image pairs and 40,000 LiDAR scans. It also includes wheel odometry data, FoG gyroscope measurements, IMU data, and pose ground truth obtained through RTK GPS. This dataset can be utilized for various applications including stereo vision, visual odometry, visual SLAM, terrain modeling, as well as more advanced tasks such as visual/LiDAR fusion, LiDAR SLAM, multi-robot SLAM, and absolute localization based on orbital data. The MADMAX dataset (Meyer et al., 2021) was collected in the same region as the Erfoud dataset. This dataset contains time-stamped recordings from a monochrome stereo camera, an omnidirectional stereo camera, a color camera, and an IMU. Additionally, it provides the 5 degrees of freedom (DoF) D-GNSS ground truth. There are 36 tracks in total, the longest track span is 1.5 km, and the total track length reaches 9.2 km. The dataset can be used as a benchmark for the accuracy and robustness of state-of-the-art navigation algorithms.

The Katwijk Beach Planetary Rover dataset (Hewitt et al., 2018) was collected along a 1 km section of beach near Katwijk, the Netherlands. The beach was populated with a variety of artificial rocks in different sizes to emulate the conditions of Mars landing sites. The dataset can be divided into two parts. One part contains stereo

images, pan and tilt orientations from a pan-tilt unit, scanning LiDAR and ToF measurements, IMU data, and RTK GPS positions. The other part contains the georeferenced images of UAV and DEMs. The dataset is well-suited for global and relative localization, SLAM, or related subtopics in environments where GNSS signals are unavailable.

Although the number of datasets about the Moon is smaller due to environmental differences, there are still some field-simulated lunar datasets. The Devon Island Rover Navigation Dataset (Furgale et al., 2012) was collected at a Mars/Moon analog site on Devon Island, Nunavut. Mainly includes stereo images, 3D laser ranging scans, positions from the DGPS, sun vectors, inclinometer data, etc. It can be used for studying localization problems in GPS-denied environments. Mount Etna in Sicily, Italy, is also an excellent environment similar to the Moon and Mars. Both the LRNT dataset (Vayugundla et al., 2018) and the S3LI dataset (Giubilato et al., 2022) capture data at this site. The former was captured by the Lightweight Rover Unit (LRU), which traversed a distance of approximately 1 km. It provides grayscale images, dense depth images, IMU data, wheel odometry estimates, and ground truth from DGPS. This dataset complements the MADMAX dataset by recording simulated data of the Moon, using the same sensor settings. It evaluated the existing pose estimation system running on the rover and proved its importance to fuse visual and inertial navigation systems in GPS-denied and unstructured planetary environments. The latter captured 7 sequences ranging from 8 to 30 minutes, covering a distance of up to 1.3 km, collected by a handheld sensor suite that includes a monochrome stereo camera, a solid-state LiDAR, an IMU, and a GPS receiver. The dataset is used for the evaluation of diverse visual-inertial SLAM algorithms, emphasizing their advantages and limitations, while also presenting examples of potential use cases.

The existing navigation datasets are limited in terms of data types and lack support for simultaneous multitasking, which hinders the system-level integration of multiple modules in a loosely coupled manner to enhance overall performance. Most of these datasets focus on Mars, with only a small number of terrain scenes available. This lack of environmental diversity restrains the improvement of rovers' navigation capabilities in dynamic and unknown environments. Furthermore, they fail to provide true depth information of the scene and some datasets lack complete pose ground truth, making effective evaluation of 3D reconstruction and localization

tasks difficult.

Table 1 shows a comparison between the state-of-the-art datasets and the LuSNAR dataset proposed in this paper. It can be seen that none of the previous works can simultaneously support segmentation, navigation and reconstruction tasks in one dataset, while the LuSNAR dataset can do this. The LuSNAR dataset comprises various data types from stereo camera, LiDAR, and IMU, offering high-precision 2D/3D semantic labels, pose ground truth, and depth maps generated by the simulation engine. This facilitates multi-task testing and evaluation of algorithms for 2D/3D semantic segmentation, localization, and 3D reconstruction. Moreover, this dataset collects data from 9 lunar surface scenes featuring unique terrains, which not only exceeds other datasets in the number of scenes and solves the scarcity issue of lunar surface datasets, but also helps rovers to enhance the generalization ability in unknown lunar surface scenes through the diversity of environments.

3. Dataset features

The LuSNAR dataset is based on simulation engine to generate a multi-task, multi-scene, and multi-label lunar surface dataset, which can be used for ground verification, algorithm selection of autonomous environmental perception, and navigation of lunar rovers. To achieve this, diverse and realistic lunar scenes are designed for data collection, aiming to equip rovers with the ability to generalize when encountering unknown environments. In this section, a detailed overview of the principles behind the simulation scene design, as well as the content and features of the LuSNAR dataset is provided.

3.1 Multi-task supported

- Semantic perception

The semantic information has important practical significance in lunar surface exploration missions. It can not only provide obstacle information to help rovers assess terrain traversability, but also provide prior knowledge for lunar geological research, allowing scientists to select landforms of interest for in-depth investigation. (Garcia-Garcia et al., 2017) Both the image sequence and point cloud sequence in the LuSNAR dataset contain semantic labels, enabling the evaluation of 2D and 3D semantic segmentation algorithms for lunar scenes. The data taken from cameras and LiDAR have

their merits and problems. The camera can provide rich information of appearance, texture, and color of lunar surface; however, it is susceptible to illumination variations and unable to detect obstacles in shadows, thereby features extracted from images may fail to be tracked during travel. On the other hand, LiDAR can offer precise three-dimensional coordinates of objects with geometric information and remains insensitive to illumination changes. Nevertheless, the point cloud obtained from scanning is usually relatively sparse and lacks comparable levels of detail as images. Therefore, combining camera and LiDAR data can use the privilege of both sensor and provide more reliable result for semantic segmentation. The LuSNAR dataset can verify the applicability and complementarity of 2D and 3D semantic perception algorithms in lunar surface scenarios, which contributes to the high-level visual understanding research on lunar surface.

- SLAM

Autonomous navigation tasks are a crucial technology for lunar rovers in autonomous lunar exploration, including key steps such as mapping, localization, and path planning. SLAM (Simultaneous Localization and Mapping) technology can calculate the localization, velocity, and orientation of the rover based on sensors carried by the rover itself, without relying on ground support, supporting the lunar rover's autonomous exploration mission. The LuSNAR dataset supports multiple sensor SLAM solutions, including monocular SLAM, stereo SLAM, LiDAR SLAM, and IMU (Inertial Measurement Unit) fusion-based SLAM. Visual SLAM has the advantages of low cost and rich information of cameras. However, visual sensors are highly sensitive to changes in lighting conditions, which can affect localization accuracy. LiDAR SLAM can directly acquire three-dimensional information about the environment, achieving higher precision pose estimation and mapping by registering point cloud data from adjacent frames. However, LiDAR SLAM may degrade or fail in scenes without obvious geometric features. Multi-sensor SLAM solutions that incorporate IMU data can address challenges related to global localization in similar geometric environments and environmental changes.(Xu et al., 2022) This helps to correct errors in cases where

visual and LiDAR information is temporarily missing, thus improving the robustness of autonomous navigation systems. The LuSNAR dataset provides multimodal data for lunar rover navigation and mapping on the lunar surface, including camera images, LiDAR scan sequences, IMU data, and ground truth pose information. This facilitates the validation of SLAM algorithms based on different sensors for localization accuracy and real-time performance, further promoting the application of SLAM technology in lunar rover autonomous exploration missions.

- 3D Reconstruction

The lunar surface is an uneven, irregular, and unstructured environment with various obstacles. To ensure the safe navigation of lunar rovers during their missions, it is essential to perform dense terrain reconstruction of the surroundings for path planning, target area identification and obstacle avoidance. A stereo-matching algorithm based on binocular vision is an effective method for dense terrain reconstruction.(Laga et al., 2020) This algorithm calculates a disparity map from the stereo images and recovers a 3D point cloud of the scene using camera parameters. The LuSNAR dataset provides dense depth ground truth and camera parameters for the lunar rover's surrounding environment, allowing for the evaluation of the accuracy and real-time performance of stereo-matching algorithms in terrain reconstruction. In practical applications, relying only on point clouds obtained from individual camera stations provides limited information about the lunar rover's surroundings. It is necessary to merge and fuse terrain reconstruction results from multiple camera stations by combining their poses. The LuSNAR dataset also synchronously provides ground truth poses of the lunar rover, enabling the fusion and stitching of multi-station point cloud data to generate point cloud of large area on lunar surface. Dense terrain reconstruction data accurately reflect changes in the surrounding terrain, serving as fundamental information for lunar rover localization, path planning, scientific exploration, and the overall goal of achieving a comprehensive perception of the rover's environment.

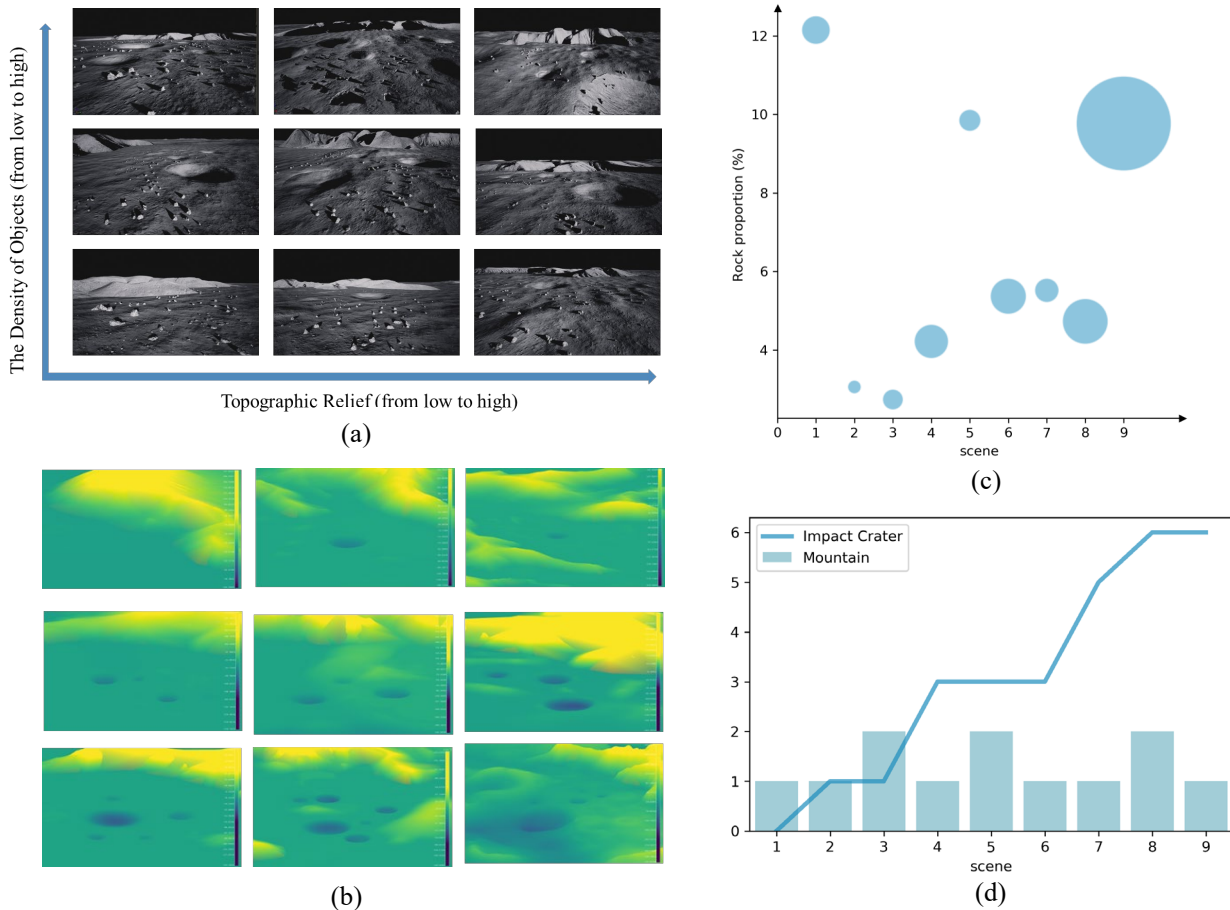


Fig. 2. The topographic relief and density of objects in 9 lunar scenes.

3.2 Diversity in lunar topographic relief and objects density

Lunar simulation scenes are designed and rendered based on Unreal Engine 4, utilizing the AirSim plugin developed by Microsoft for data collection. (Shah et al., 2017) UE4 is a game development engine created by Epic Games, and we leveraged lunar-related terrain, features, and material textures available in the Unreal Marketplace as our assets. During the simulation scene design, we referenced Apollo lunar exploration data and images captured by China's Yutu-2 lunar rover to ensure the accuracy and scientific fidelity of the scenes. We categorized features in the scenes into four major types: lunar regolith, rocks, impact craters, and mountains, aligning with the actual lunar surface's geological characteristics. To create a highly realistic and immersive lunar simulation environment, we considered various factors inherent to lunar settings, such as topographic relief, feature distributions, and light intensity on the lunar surface.

The topographic relief and objects density of the

lunar exploration areas can be largely different due to scientific purpose, leading to distinct planning and requirements for autonomous exploration tasks. To ensure the diversity lunar terrain topography and features of the dataset, this paper innovatively used topographic relief and the density of objects as two aspects and designed nine representative lunar surface scenes. As shown in **Fig. 2(a)**, the horizontal axis represents topographic relief from gentle to steep, while the vertical axis represents feature richness from sparse to abundant. This approach not only enriches scene diversity but also facilitates the exploration of how diverse terrains and topographies influence environmental perception and autonomous navigation algorithms. **Fig. 2(b)** illustrates the topographic relief trends of the nine scenes and renders them with different colors based on elevation information. Scenes 1, 4, and 6 exhibit relatively flat terrain, while scenes 2, 5, and 7 feature minor undulations, and scenes 3, 6, and 9 display significant terrain variations. Additionally, this paper proposed a quantitative analysis of the types of features in these nine

Table 2

Parameters of stereo cameras, LiDAR and IMU in the simulation engine.

Sensor	Details
2×Camera	RGB, 10Hz capture frequency, 1024×1024 resolution, 610.17784 focal length, 80°×80°FOV, 310mm baseline.
1×LiDAR	Spinning, 128 beams, 10Hz capture frequency, 360° horizontal FOV, -25° to 27° vertical FOV, ≤30m range, up to 20M points per second.
1×IMU	100Hz capture frequency, 3-Axis, $0.002353596(m/s^3\sqrt{Hz})$ accelerometer random walk, $8.7266462e-5(rad/s\sqrt{Hz})$ gyroscope random walk, $1.2481827e-5(m/s^2\sqrt{Hz})$ accelerometer bias instability, $9.9735023e-7(rad/s\sqrt{Hz})$ gyroscope bias instability.


scenes. The quantity of rocks and impact craters served as the primary criteria for assessing feature richness in the scenes. **Fig. 2(c)** presents the abundance of rocks in the lunar rover's travel area within the nine scenes, with the vertical axis indicating the proportion of rocks in the lunar rover's path and the circular area representing the total quantity of rocks in the scene. **Fig. 2(d)** provides statistics on the number of mountain ranges and impact craters in the nine scenes, indicating an overall increasing trend in the number of impact craters. Due to the larger volume of mountains and their limited occurrence within the field of view, the number of mountains in each scene is limited to 1-2. Considering the distribution of rocks and the number of impact craters, scenes 7, 8, and 9 emerge as the three scenes with the richest features. In summary, the terrain complexity gradually increases from scenes 1 to 9, providing lunar surface scene data with various combinations of terrain and topography.

3.3 multi-label

This article uses the "AirSimGameMode" mode for simulation in Unreal Engine 4. The simulation involves manually controlling a simulated rover to navigate within the scene. Attention has been given to ensuring diversity in both the scene and motion modes to ensure its functionality in various terrains and environments. The rover collects trajectories from each of the nine scenes, and its sensors move along with the trajectory to gather multimodal data. The rover's motion modes include straight-line movement, turning, climbing, descending, obstacle avoidance, and circumnavigation, all of which are representative of scenarios encountered in real-world tasks. The rover's travel distance ranges from 200m to

600m, and its speed during operation does not exceed 5m/s. Data collection occurs in two steps: real-time collection during rover operation and offline rendering. IMU data and rover pose ground truth are collected in real-time during operation, while the stereo image pairs from the cameras and LiDAR point clouds are generated offline using ground truth poses. The final dataset includes scene images, depth images, point clouds, and semantic segmentation labels. The simulation engine parameters and output data, following the reference of Yutu-2's relevant payload parameters, are shown in the **Table 2**. The LuSNAR dataset comprises a collection of 13,006 sequences, gathered from nine scenes, each with a consistent set of internal and external parameters. Each sequence includes stereo image pairs, single-frame point clouds, semantic labels, IMU data, and rover pose ground truth. All data is named according to timestamps, with images and semantic labels stored in PNG format, depth maps in PFM format, and IMU, ground truth pose, and 3D LiDAR point cloud data stored in TXT format.

The lunar rover's native frame and sensor frame defined in the simulation engine are shown in **Fig. 3**. The forward direction of the lunar rover is the positive X-axis, the horizontal direction to the right is the positive Y-axis,

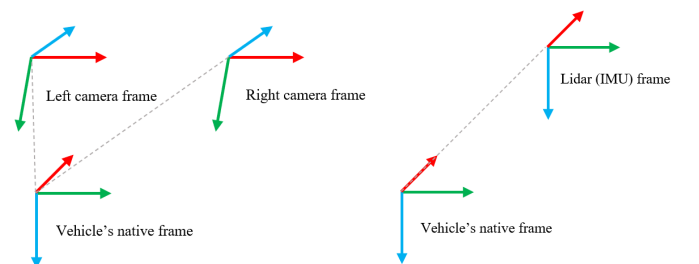**Fig. 3.** Extrinsic settings for rover and sensors.

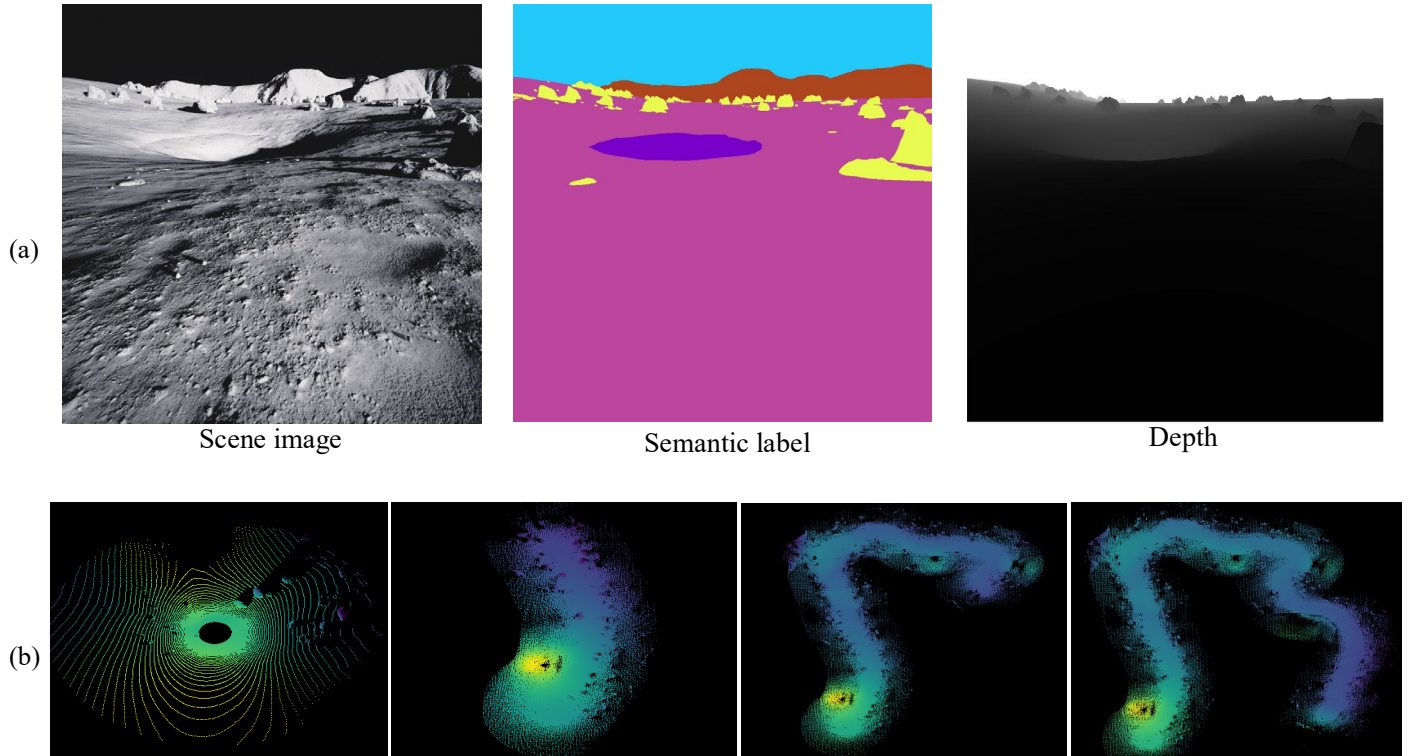


Fig. 4. An example of 2D labels and 3D trajectories. (a) 2D semantic image and depth map. (b) Ground truth point cloud map construction process.

and the vertical downward direction is the positive Z -axis. Taking the center of the rover as frame origin, both LiDAR and IMU are positioned at $(1, 0, -1.5)$, aligning their frame orientations with that of the lunar rover. Regarding navigation camera, the forward direction is the positive Z -axis, the horizontal right direction is the positive X -axis, and the vertical downward direction is the positive Y -axis. The left navigation camera is positioned at $(1, -0.155, -1.5)$ with the center of the lunar rover as the frame origin, while the right navigation camera is positioned at $(1, 0.155, -1.5)$.

An example of labels generated in the proposed dataset are shown in **Fig. 4(a)**, which demonstrate the collected stereo image pairs, depth maps, and semantic labels. The LiDAR point cloud frame is sequentially loaded to obtain trajectories in different time periods, as shown in **Fig. 4(b)**. In the 2D image semantic segmentation mask, object labels include lunar regolith, lunar rocks, impact craters, mountains, and the sky. In the 3D point cloud semantic segmentation mask, object labels include lunar regolith, rocks, and impact craters. The LuSNAR dataset has a total size of 108GB and

provides more than 42GB of stereo image pairs, 50GB of depth maps, 356MB of semantic segmentation labels, and 14GB of single-frame point cloud data with semantic information.

4. Experiment

4.1 Semantic Segmentation

The dataset was utilized to conduct experiments on 2D and 3D semantic segmentation. A total of 13,006 images and 13,006 point cloud frames were collected from 8 short sequences and 1 long sequence for training and testing. The data of scenes 1, 2, 4, 6, 8, 9 were used for model training, and the data of scenes 3, 5, 7 were used for testing. The metrics IoU, mIoU, and mAcc were adopted to evaluate the performance of different semantic segmentation algorithms on this dataset.

In the 2D semantic segmentation experiment, five state-of-the-art algorithms are tested: Deeplabv3+(Chen et al., 2018), Mobilenetv3(Howard et al., 2019), Unet(Ronneberger et al., 2015), PointRend(Kirillov et al., 2020), and Segformer(Xie et al., 2021). The classification categories are lunar regolith, rock, impact crater,

Table 3

The quantitative comparison results of five 2D semantic segmentation algorithms.

Method	Lunar regolith	Rock	Impact crater	Mountain	Sky	mAcc(%)	mIoU(%)
Deeplabv3+	98.01	75.64	79.62	83.11	99.68	92.90	87.39
Mobilenetv3	98.72	75.16	76.96	82.98	99.57	91.99	86.68
Unet	98.70	73.50	73.09	79.46	99.34	91.01	84.82
PointRend	99.07	76.17	82.45	84.00	99.70	93.29	88.28
Segformer	99.05	81.69	80.37	89.16	99.54	94.22	89.96

Table 4

The quantitative comparison results of five 3D semantic segmentation algorithms.

Method	Lunar regolith	Rock	Impact crater	mAcc(%)	mIoU(%)
PointNet	96.53	76.57	11.73	66.92	61.61
PointNet++	96.69	80.80	15.03	66.80	64.17
KPCConv	96.09	89.95	32.04	90.94	72.69
RandLA-Net	99.56	97.65	88.51	98.73	95.24
Point Transformer	99.61	98.16	88.67	98.09	95.48

mountain, and sky. **Table 3** illustrates the quantitative comparison results of five 2D semantic segmentation algorithms. The results presented in **Table 3** demonstrate that the PointRend has superior performance in the lunar regolith and impact crater categories, achieving IoU of 99.07% and 82.45%. The Segformer outperforms other algorithms in the rock and mountain categories, with an improvement of at least 5% IoU particularly for the rock and mountain categories. Overall, Segformer has the best segmentation effect on this dataset, as evidenced by its top-ranking mAcc and mIoU of 94.22% and 89.96%. **Fig. 5** shows the segmentation visualization of the same image under different algorithms compared with its ground truth. The prediction results of Segformer are basically correct. Mobilenetv3, PointRend and Segformer perform well in identifying impact craters and rock. Both Deeplabv3+ and Unet have errors in the category of impact craters, which may be due to the presence of shadow areas within the craters.

In the 3D semantic segmentation experiment, five state-of-the-art algorithms are tested: PointNet(Qi et al., 2017), PointNet++(Qi et al., 2017), KPCConv(Thomas et al., 2019), RandLA-Net(Hu et al., 2019), and Point

Transformer(Engel et al., 2021). The classification categories are lunar regolith, rock, and impact crater. **Table 4** illustrates the quantitative comparison results of five 3D semantic segmentation algorithms. **Fig. 6** shows the segmentation visualization of the same point cloud frame under different algorithms compared with its ground truth.

It can be seen from **Table 4** that Point Transformer consistently achieves optimal performance across all categories, ranking first in mIoU with a tiny advantage of 0.24%. However, it slightly lags behind RandLA-Net in terms of mAcc by 0.64%.

By combining **Table 3** and **Table 4**, it is evident that the 2D semantic segmentation algorithms exhibit excellent segmentation effects on lunar regolith and sky, with IoU consistently exceeding 98%, while the 3D semantic segmentation algorithms show better results on the categories of close-range rocks and impact crater. Specifically, compared with the best result of the 2D semantic segmentation algorithm, Point Transformer has a higher IoU of 16.47% for the rock category and a higher IoU of 6.22% for the impact crater category. It reflects the differences and complementarity of image sequences and

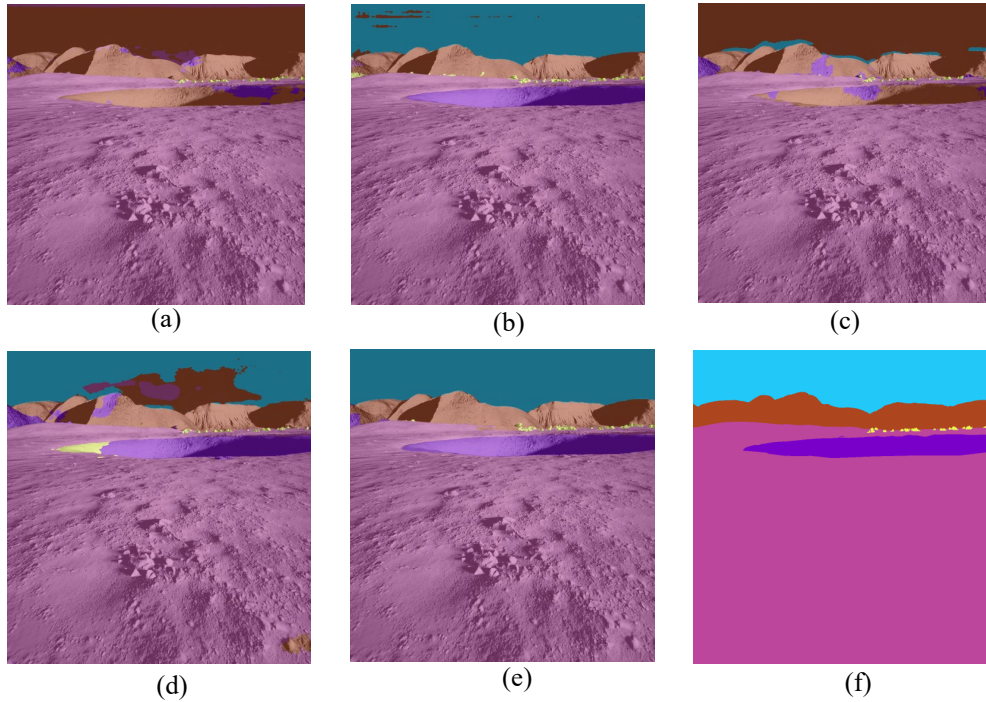


Fig. 5. The segmentation visualization of the same image under different algorithms compared with its ground truth. (a) Deeplabv3+ (b) Mobilenetv3 (c) Unet (d) PointRend (e) Segformer (f) Ground truth

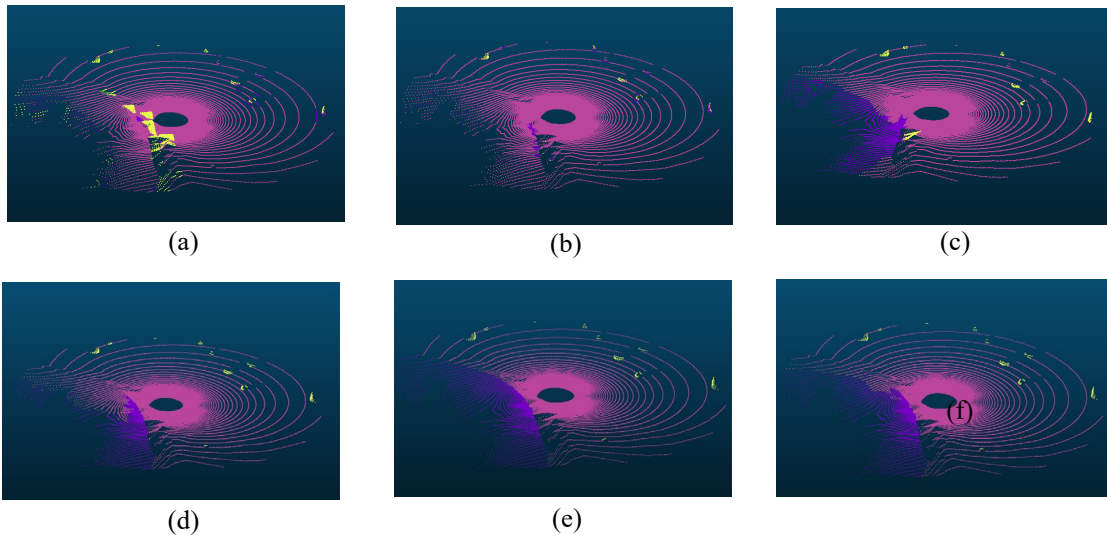


Fig. 6. The segmentation visualization of the same point cloud frame under different algorithms compared with its ground truth. (a) PointNet (b) PointNet++ (c) KPConv (d) RandLA-Net (e) Point Transformer (f) Ground truth

segmentation tasks. The integration of camera and LiDAR data facilitates more precise segmentation of diverse lunar landforms by rovers, thereby providing richer prior knowledge for path planning and obstacle avoidance.

To test the generalization property of segmentation algorithms, scene 1-3 are selected as training set, and scene 4-9 are used as testing set. The training set and testing set have different data distribution owing to scene design. This experiment will test whether the

appearance of obstacle which have not seen in the training set.

Table 5 and **Table 6** illustrate the quantitative comparison results of Segformer and Point Transformer tested in different scenes. Fig. 8 is a line chart of mIoU of the two algorithms in 6 scenes.

Table 5

The quantitative comparison results of Segformer in 6 scenes.

Scene	Soil	Rock	Impact crater	Mountain	Sky	mAcc(%)	mIoU(%)
4	98.75	87.07	66.81	96.93	99.61	92.19	89.83
5	98.22	70.68	60.48	74.95	99.53	89.19	80.77
6	98.75	85.18	68.05	93.72	99.28	92.90	89.00
7	98.43	86.73	66.36	93.75	99.25	92.59	88.90
8	98.60	83.06	73.86	86.18	98.52	92.36	88.05
9	96.20	76.20	19.19	76.23	96.43	78.47	72.85

Table 6

The quantitative comparison results of Point Transformer in 6 scenes.

Scene	Luanr regolith	Rock	Impact crater	mAcc(%)	mIoU(%)
4	99.83	98.87	97.74	99.31	98.81
5	99.49	97.91	84.04	98.12	93.81
6	99.31	98.41	73.27	91.76	90.33
7	99.63	99.05	90.41	96.94	96.36
8	99.54	98.38	83.83	95.07	93.92
9	98.24	95.94	65.06	93.98	86.41

As can be seen that Segformer achieves an average mIoU of 84.90% across six scenes, while Point Transformer attains an average mIoU of 93.27%. Despite being trained solely on simple scene data, both algorithms achieve a certain level of generalization in complex environments. The 3D semantic segmentation algorithm outperforms its 2D counterpart in terms of generalization ability, showcasing an average mIoU improvement of 8.37%.

Fig. 7 demonstrates the variations of mIoU for 2D and 3D segmentation algorithms in the six scenes. The segmentation effect is the best in Scene 4, but it is the worst in Scene 9. In terms of topographic relief, scenes 4, 5, and 6 roughly show a decreasing trend in mIoU as the slope steepness rises, as do scenes 7, 8, and 9. In scenes 5 and 6, compared to scene 4, the mIoU of the Segformer decreases with increasing topographic relief, with scene 5 having the lowest accuracy. This may be due to the presence of extensive shadow areas in scene 5. In scenes 7, 8, and 9, as topographic relief increases, the mIoU of the segformer also declines. The mIoU of the Point Transformer shows a decreasing trend in scenes 4, 5, 6, and 7, 8, and 9, respectively. Regarding the density of

objects, Segformer's average mIoU is 85.30% in scenes 4-6 and drops to 80.87% in scenes 7-9; Point Transformer's average mIoU is 94.32% in scenes 4-6 and drops to 92.23% in scenes 7-9. It is interesting to see that with the increase of lunar surface objects richness, the segmentation performance decreases. The findings suggest that although the segmentation algorithms do show a certain level of generalization, their performance in semantic segmentation of the lunar surface is limited due to significantly influenced by topographic relief and the density of objects. Therefore, further research can be carried on to enhance the generalization property of segmentation for lunar related applications.

4.2 SLAM

Visual SLAM and LiDAR SLAM experiments were conducted using this dataset. Since the dataset provides the ground truth of the sensor's pose in the world frame, and the SLAM estimates the pose relative to the first frame in the local odometry frame based on the sensor. In order to accurately evaluate the performance of SLAM algorithm, it is necessary to use the extrinsic of the sensor

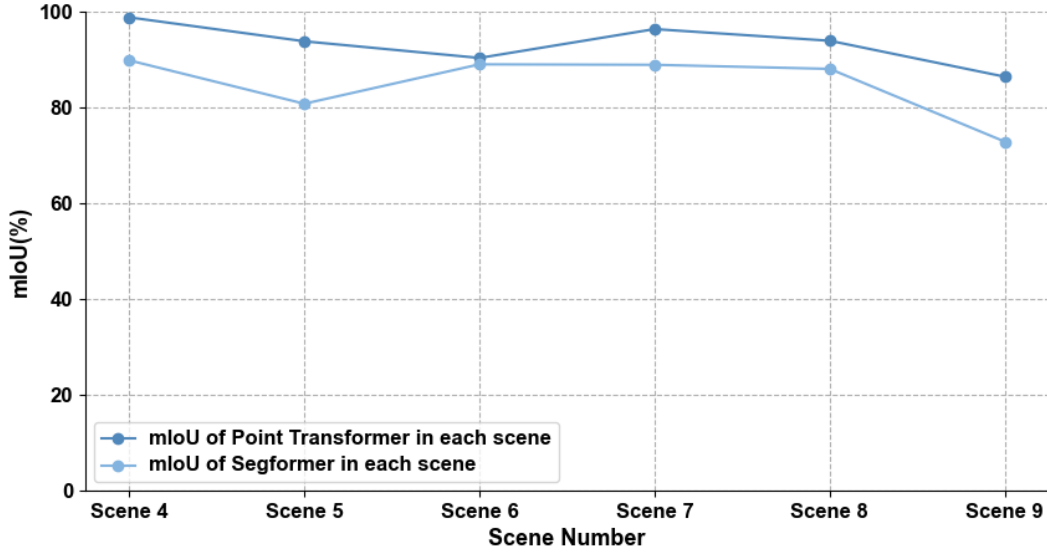


Fig. 7. The Line chart of mIoU of the two 2D/3D algorithms in 6 scenes.

relative to the rover and the real-time ground truth pose of the rover in the world frame provided by the dataset to convert the estimated relative pose to the world frame. The conversion relationship is as follows:

$$T_{b_0}^{b_i} = T_b^o T_{o_0}^{o_i} T_o^b \quad (1)$$

In the Eq.(1.1), $T_{o_0}^{o_i}$ indicates the pose of odometry at the timestamp i relative to the starting point of the motion at the timestamp 0 , which is the value estimated by the SLAM. T_b^o is the transformation matrix from the odometry frame to the rover's native frame obtained based on the extrinsic of the sensor. T_o^b is the inverse matrix of T_b^o , which denotes the transformation matrix from the rover's native frame to the odometry frame. According to Eq.(1.1), $T_{o_0}^{o_i}$ can be converted to the pose $T_{b_0}^{b_i}$ of the rover's native frame at the timestamp i relative to the rover's native frame at the timestamp 0 . For the convenience of representation, the following definitions are made:

$$P_i := T_{b_0}^{b_i} \quad (2)$$

$$Q_i := T_w^{b_i} \quad (3)$$

The estimated trajectory of SLAM is $P_1, P_2, \dots, P_n \in SE(3)$ and the ground truth trajectory is $Q_1, Q_2, \dots, Q_n \in SE(3)$. There are two main metrics for evaluation: relative pose error (RPE) and absolute trajectory error (ATE) (Sturm, J. et al., 2012). The RPE at timestamp i is defined as follows:

$$E_i := (Q_i^{-1} Q_{i+\Delta})^{-1} (P_i^{-1} P_{i+\Delta}) \quad (4)$$

The odometry of matching between consecutive frames is suitable for calculating the root mean square error (RMSE) (Sturm, J. et al., 2012) in the case of $\Delta = 1$. That is:

$$RMSE(E_{1:n}, 1) := \left(\frac{1}{n-1} \sum_{i=1}^{n-1} \|trans(E_i)\|^2 \right)^{\frac{1}{2}} \quad (5)$$

where $trans(E_i)$ indicates the translational components of the relative pose error E_i .

The ATE at timestamp i is defined as follows:

$$F_i := Q_i^{-1} S P_i \quad (6)$$

where S refers to the transformation between the estimated trajectory and the ground truth trajectory for alignment. In the past, the method of Horn (Sturm et al., 2012, Horn et al., 1987) or Umeyama (Umeyama et al., 1991) was usually used, but it is not able to evaluate the accumulative error. Therefore, the calculated transformation S is used to convert P_i into the same frame as Q_i , in order to more accurately evaluate the performance of SLAM. The formula for the conversion is as follows:

$$S = T_w^{b_i} = T_w^{b_0} T_{b_0}^{b_i} \quad (7)$$

Apparently, S is the rover's pose under the world frame at timestamp i . Similarly, RMSE is used as metric, that is:

$$RMSE(F_{1:n}) := \left(\frac{1}{n} \sum_{i=1}^n \|trans(F_i)\|^2 \right)^{\frac{1}{2}} \quad (8)$$

9 scenes. For the visual SLAM experiment, combining the results of 9 scenes, the average $RMSE_{RPE}$ of ORB-SLAM3 in stereo mode and stereo inertial mode are

Table 7
The accuracy of visual SLAM and LiDAR SLAM algorithms in 9 scenes.

scene	Vision SLAM						LiDAR SLAM							
	ORB-SLAM3(s)		ORB-SLAM3(si)		VINS-Mono		VINS-Fusion		A-LOAM		LeGO-LOAM		FAST-LIO	
	$RMSE_{RPE}$	$RMSE_{ATE}$	$RMSE_{RPE}$	$RMSE_{ATE}$	$RMSE_{RPE}$	$RMSE_{ATE}$	$RMSE_{RPE}$	$RMSE_{ATE}$	$RMSE_{RPE}$	$RMSE_{ATE}$	$RMSE_{RPE}$	$RMSE_{ATE}$	$RMSE_{RPE}$	$RMSE_{ATE}$
1	0.0046	0.1933	0.0038	0.1411	0.0527	3.8933	1.3211	2.7246	0.3215	1.2503	4.3903	6.8975	0.0720	4.3340
2	0.0019	0.0891	0.0044	0.0755	0.0307	1.2133	0.6186	0.9744	0.5900	1.5498	7.2205	4.2094	0.0439	0.1898
3	0.0020	0.1456	0.0040	0.0619	0.0211	2.1130	0.4216	0.6574	0.2924	0.4387	7.1883	7.8525	0.0487	1.7975
4	0.0024	0.0554	0.0055	0.0409	0.0269	1.8580	0.4262	1.1383	0.7307	2.1245	2.3536	28.7922	0.0432	0.4615
5	0.0020	0.0444	0.0070	0.0773	0.0278	1.7708	0.1306	0.8625	0.3340	1.7731	2.8573	13.1838	0.0575	1.5479
6	0.0043	0.4182	0.0240	0.4632	0.0161	1.3064	0.1726	0.5807	0.2914	1.3599	8.8268	9.8600	0.0531	0.5209
7	0.0017	0.0745	0.0052	0.0466	0.0363	2.4146	0.4961	0.6831	0.3513	1.3278	4.1259	6.1484	0.0388	0.3577
8	0.0018	0.0483	0.0070	0.0416	0.0335	2.5308	0.6506	1.6375	0.7202	11.6698	7.0844	16.9650	0.0468	0.6867
9	0.0019	0.1132	0.0061	0.0968	0.0510	0.7134	0.2398	0.8163	0.2681	2.1814	0.7021	3.8255	0.0449	2.3525

Considering the influence of trajectory length on the RMSE of ATE, where shorter trajectories exhibit less translational and rotational drift (Giubilat et al., 2022). In order to fairly compare all scenes, the percentage of the RMSE of RPE and ATE relative to the trajectory length is calculated as the evaluation metrics, as follows:

$$RMSE_{RPE} = RMSE(E_{1:n}, 1) m \quad (9)$$

$$RMSE_{ATE} = \frac{100 \times RMSE(F_{1:n})}{length_{gt}} \% \quad (10)$$

ORB-SLAM3 (Campos et al., 2021) (stereo module and stereo inertial module), VINS-Mono (Qin et al., 2018), and VINS-Fusion (Qin et al., 2019a, Qin et al., 2019b) are selected for visual SLAM, while A-LOAM (Zhang et al., 2014), LeGO-LOAM (Shan et al., 2018) and FAST-LIO (Xu et al., 2022) are selected for LiDAR SLAM, where FAST-LIO is a multi-source sensor algorithm of the tightly coupled IMU.

Table 7 summaries the accuracy of the above algorithms in 9 scenes and **Fig. 8** shows the trajectories visualization of visual odometry and LiDAR odometry in

0.0025 and 0.0074, and the average $RMSE_{ATE}$ are 0.1313% and 0.1161%, respectively. The average $RMSE_{RPE}$ of VINS-Mono and VINS-Fusion are 0.0329 and 0.4975, and the average $RMSE_{ATE}$ are 1.9793% and 1.1194%, respectively. It can be seen that the benefits of ORB feature points for scene feature extraction are obvious, as evidenced by the ORB-SLAM3 has a higher accuracy than VINS-Mono and VINS-Fusion based on optical flow features. And the addition of IMU measurements makes ORB-SLAM3 in stereo inertial mode has a lower $RMSE_{ATE}$ compared to ORB-SLAM3 in stereo mode. For the LiDAR SLAM experiment, it can be seen that FAST-LIO has the best overall performance in 9 scenes due to the combination of IMU. In terms of $RMSE_{ATE}$, LeGO-LOAM with the highest dependence on ground objects performs poorly, with an average $RMSE_{ATE}$ of 10.8594% in 9 scenes. A-LOAM demonstrates moderate performance, with an average $RMSE_{ATE}$ of 2.6306%, and FAST-LIO performs better, with $RMSE_{ATE}$ reduced by 9.4985%

and 1.2697% compared to LeGO-LOAM and ALOAM.

it can be observed that the visual inertial odometry

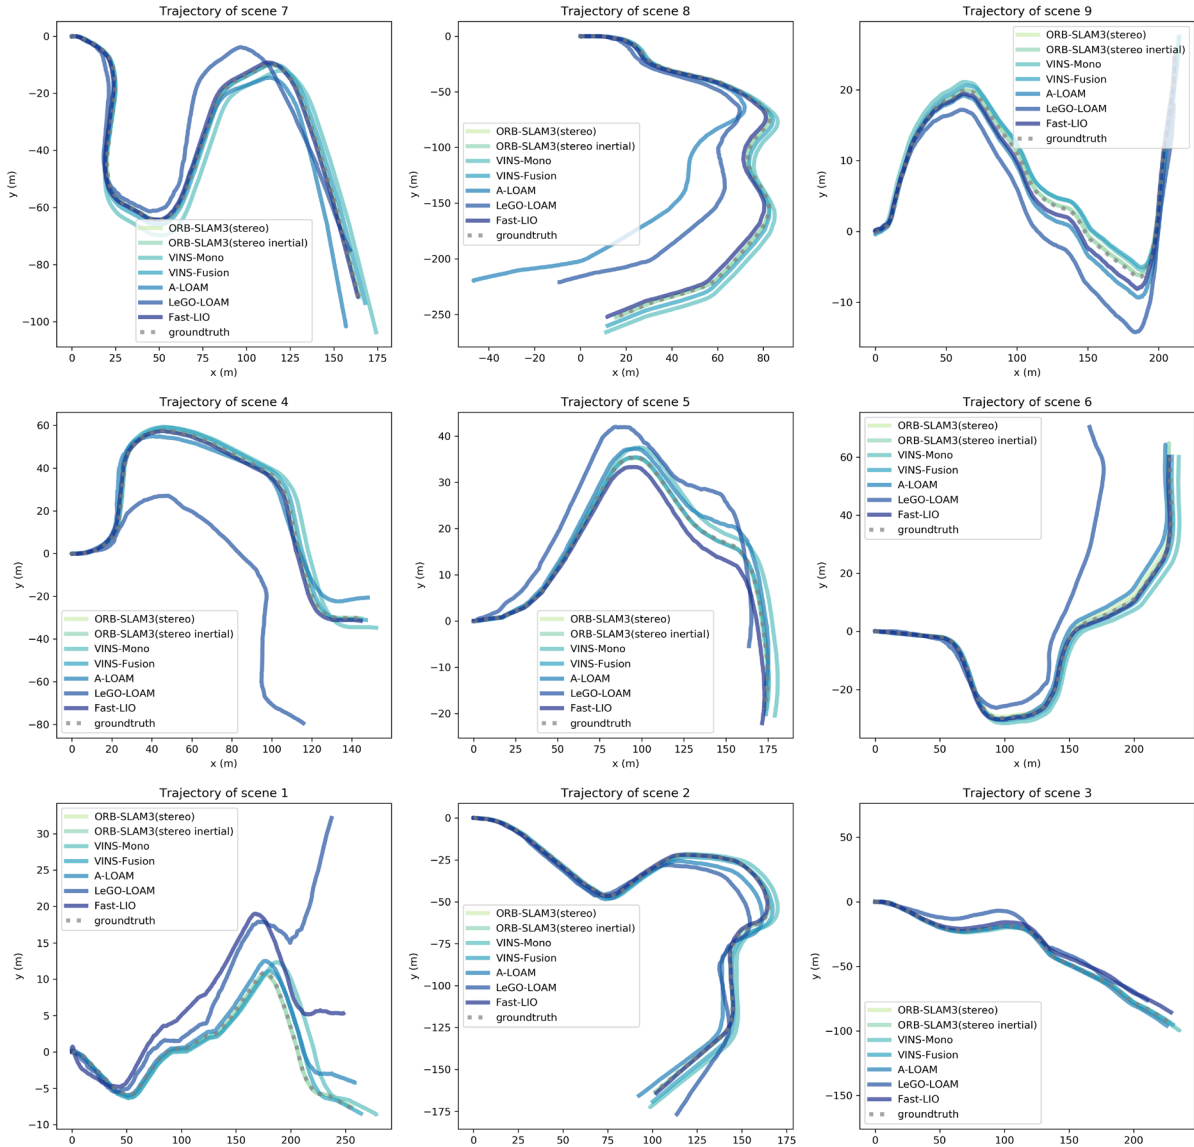


Fig. 8. Trajectories visualization of visual odometry and LiDAR odometry in 9 scenes.

In order to more intuitively analyze the impact of topographic relief and the density of objects on different types of SLAM algorithms, the $RMSE_{ATE}$ of ORB-SLAM3 (stereo) in visual odometry, ORB-SLAM3 (stereo inertial) in visual inertial odometry, LiDAR odometry A-LOAM, and LiDAR inertial odometry FAST-LIO are selected and plotted in a heatmap as shown in Fig. 9, with darker colors denoting larger errors.

From Fig. 9(a), it can be observed that the visual odometry $RMSE_{ATE}$ generally decreases as the density of objects increases, reaching the minimum value of 0.0444% in scene 5, and the value of scene 8 is only slightly higher than scene 5 by 0.0041%; from Fig. 9(b),

$RMSE_{ATE}$ also decreases with increasing objects density, reaching the minimum value of 0.0416% in scene 8. The findings suggest that visual SLAM requires higher density of objects and proper topographic relief, as an increased object density facilitates improved extraction of image features, while proper topographic relief enriches image features by reducing occlusion.

From Fig. 9(c), it can be seen that the performance of LiDAR odometry in scene 8 is very poor, reaching $RMSE_{ATE}$ of 11.6698%, and the average $RMSE_{ATE}$ of the 3 scenes with different objects density decreases as the level increases; from Fig. 9(d), it can be seen that the LiDAR inertial odometry has the worst effect in the

simplest scene 1, with $RMSE_{ATE}$ of 4.3340%. Meanwhile, it also does not perform well in the most complex scene 9, with $RMSE_{ATE}$ of 2.3525%. The findings suggest that LiDAR SLAM heavily relies on appropriate combination of lunar topographic relief and objects density, otherwise the results will be poor.

Overall, the highest $RMSE_{ATE}$ of visual SLAM is 0.4632%, while the average $RMSE_{ATE}$ of LiDAR SLAM is 11.9958%, thereby the LiDAR SLAM is worse than visual SLAM in this dataset. Consequently, the visual SLAM is more suitable for navigation tasks in lunar scenes.

The results of $RMSE_{ATE}$ after adding the IMU measurements to the odometry demonstrate that the accuracy has improved except for scenes 5 and 6 in visual SLAM, with an average $RMSE_{ATE}$ of 0.0307% reduced;

in the LiDAR SLAM, except for scenes 1, 3, and 9, the accuracy of the scenes has improved, with an average $RMSE_{ATE}$ of 2.67% reduced. It shows that IMU has certain ability to improve navigation accuracy in lunar scenes.

4.2 3D Reconstruction

The stereo matching and 3D reconstruction algorithms based on the LuSNAR dataset were tested. In the stereo matching experiment, 10 pairs of stereo images that can reflect the representativeness of the scene were selected from 9 sequences, BM and SGBM(Ueshiba et al., 2006), PSMNet(Chang et al., 2018), RAFTStereo(Lipson et al., 2021) and CREStereo(Li et al., 2022) were used for disparity estimation. Among them, BM and SGBM were configured with a maximum disparity of 256 and a

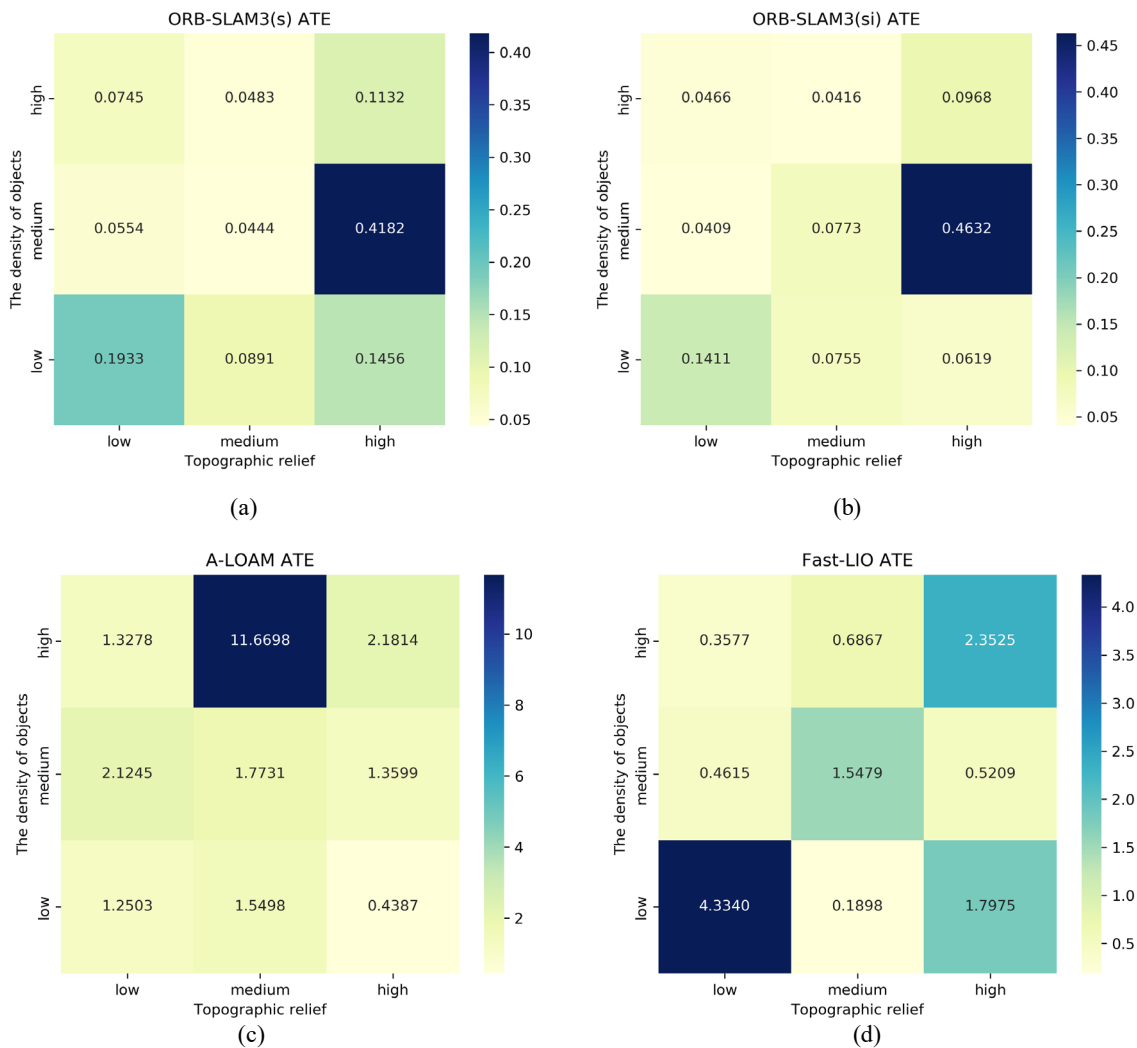


Fig. 9. The heatmap of visual odometry and LiDAR odometry. (a) orbslam3_stereo (b)orbslam3_stereo_inertial (c) aloam (d) fast-lio

Table 8
lpx error(%) of five stereo matching algorithms in 9 scenes.

Scene/ Method	BM	SGBM	PSMNet	RAFTStereo	CREStereo
1	38.3	76.78	62.93	23.63	20.04
2	33.5	71.2	62.86	23.66	18.09
3	31.98	70.75	59.67	26.57	16.92
4	33.67	69.9	64.59	28.95	17.44
5	35.91	71.41	64.28	23.84	5.82
6	74.07	74.07	63.16	21.77	20.95
7	30.02	71.02	62.72	26.16	27.01
8	32.73	71.15	62.88	22.79	12.2
9	64.62	71.975	98.16	83.12	69.83
AvgErr	41.644	72.028	66.805	31.165	23.144

Table 9
Completion results in different ranges in terms of per-point L1 Chamfer Distance(m) ,lower is better.

Scene/Range	5m	10m	20m	50m
3	0.0081	0.0116	0.0180	0.0368
5	0.0098	0.0153	0.0283	0.0514
8	0.0109	0.0144	0.0203	0.0371

window size of 7, while PSMNet, RAFT-Stereo and CREStereo were tested with pre-trained models. The evaluation metric for stereo matching accuracy is the pixel error. When the error between the predicted disparity and the ground truth disparity exceeds 1 pixel, it is considered a matching failure. Lower pixel error indicates better stereo matching performance. **Table 8** illustrates the quantitative comparison results of five stereo matching algorithms. The results presented in it demonstrate that CREStereo has superior overall performance, with an average error rate of 23.14% across 9 scenes. RAFTStereo slightly outperforms CREStereo by 0.85% in terms of error rate in scene 7, while BM works best in scene 9 characterized by the most complex terrain, exhibiting an error rate that is 5% lower than that of CREStereo. The analysis of CREStereo results in terms of topographic relief and the density of objects

reveals that the scenes with medium topographic relief (scenes 2, 5, 8) have an average mismatch rate 28.38% lower than scenes with low topographic relief (scenes 1, 4, 7), and are 71.59% lower than scenes with high topographic relief (scenes 3, 6, 9). Similarly, the average mismatch rate of medium objects density scenes (scenes 4, 5, 6) is also lower than that of low density scenes (scenes 1, 2, 3) and high density scenes (scenes 7, 8, 9), respectively 10.84% and 64.83%. **Fig. 10** shows the visualization of disparity generated by the five algorithms in scenes 8 and 9.

In **Fig. 10**, the disparity maps predicted by BM and SGBM based on traditional methods are sparse and noisy, whereas the disparity results obtained from PSMNet, RAFT-Stereo, and CREStereo are smoother. Specifically, RAFT-Stereo and CREStereo are able to preserve more details of the scene, such as impact crater rims and distant

rocks.

It can be seen that high topographic relief and objects density have a significant impact on the accuracy of stereo matching. It is possible that mountains or large rocks block the light, resulting in shaded areas. These areas lack texture features, thereby hindering the accurate estimation of disparity by stereo matching algorithms. The shadow area in scene 9, for instance, has the difficulties in estimating disparity based on visual texture due to its potential confusion with the black sky.

Consequently, the mismatch rate of scene 9 surpasses that of other scenes. In general, medium topographic relief and objects density can provide appropriate texture information for stereo matching, minimizing the presence of excessive shadows and facilitating the acquisition of more accurate disparity.

In the 3D reconstruction experiments, we chose the best model CREStereo in the stereo matching experiment to generate parallax images and obtain dense point cloud of the single station based on the camera's internal and

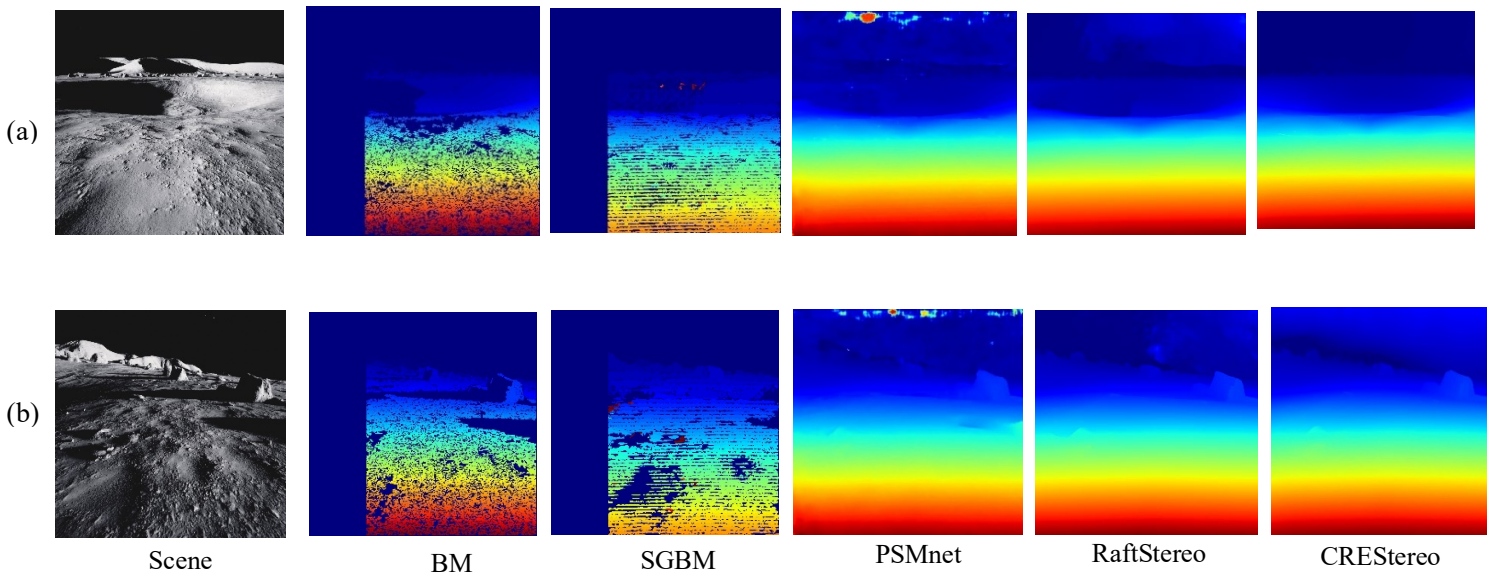


Fig. 10. Visualization of disparity generated by stereo matching algorithm.

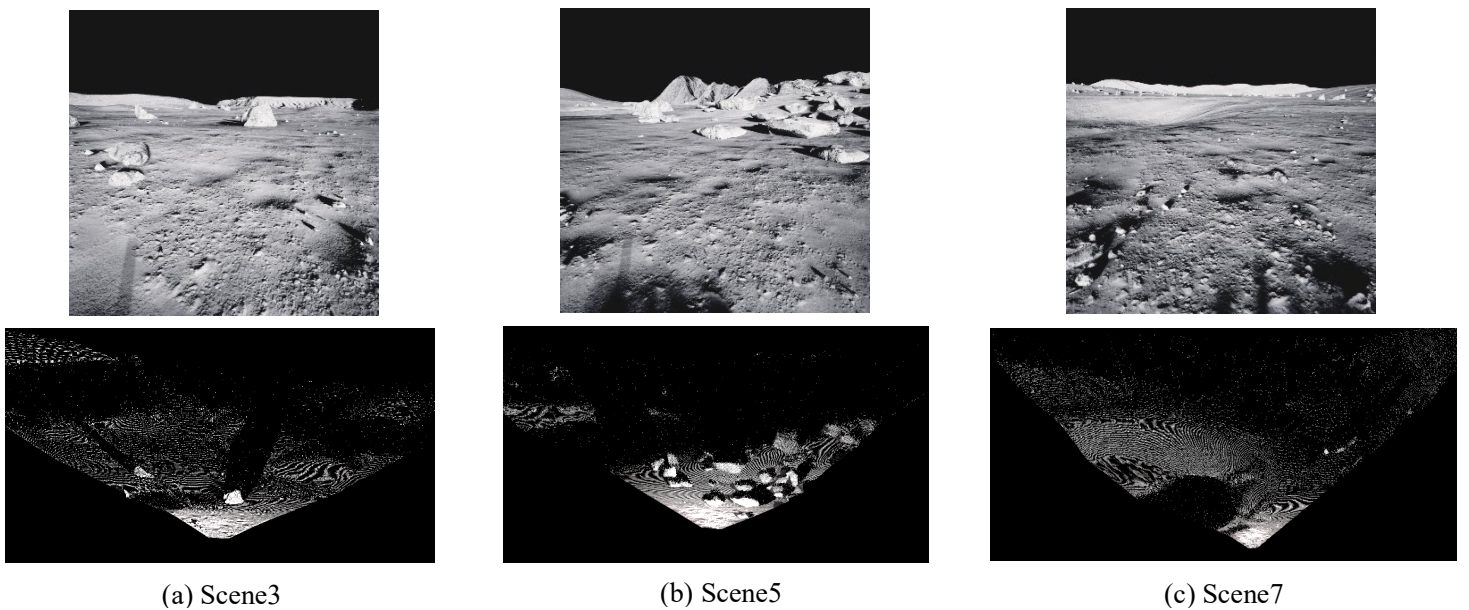


Fig. 11. Visualization of points generated by stereo matching algorithm.

external parameters. This paper uses chamfer distance as the quantitative criteria to compare the reconstructed point cloud with the point cloud restored by depth truth. CREStereo performs best in scenes 3, 5, and 8, where we extracted one frame of stereo image pair for terrain reconstruction. **Table 9** shows the accuracy evaluation results within the range of 5, 10, 20, and 50m. The experimental results indicate that the loss of 3D reconstruction is in a linear increase.

As shown in **Fig. 11**, the single station terrain reconstruction results for scenarios 3, 5, and 8 are presented. **Fig.11** (a) shows an example of scene 3 with a small amount of rocks, and **Fig.11**(b) shows an example of scene 5 with a slope and densely distributed rocks. The reconstructed rock structures in both scenarios are relatively complete, but due to the presence of perspective occlusion, some point clouds are missing. **Fig.11** (c) shows an example of the impact crater scene in Scenario 8. The reconstruction results of the impact crater are basically complete, and the geometric structure of the edges is clear. According to the experimental results, it can be concluded that the environmental information around the lunar rover can be basically restored through visual terrain scene data.

6. Conclusion

This paper proposes a benchmark dataset LuSNAR for autonomous environmental perception and navigation on the lunar surface. This dataset collects diverse scene data based on a simulation engine and contains high-precision ground truth labels. We validate and evaluate this dataset using 2D/3D semantic segmentation, SLAM, and 3D reconstruction algorithms. The evaluation results show that the dataset provides high-quality label and ground truth information and can be used in the ground verification stage to validate and develop autonomous perception and navigation algorithms. We hope that LuSNAR will help promote the autonomy of lunar rover exploration and realize the universalization of intelligent technology in planetary scenes. In future work, we will expand the size of the LuSNAR dataset to cover more diverse lunar surface scenes. In addition, we will validate and establish baseline results on other tasks, such as 3D semantic reconstruction, absolute positioning relative to

orbital data, and SLAM fusion of multi-source sensors. Through these works, we expect th LuSNAR dataset to provide more comprehensive data support for autonomous lunar rover exploration.

Acknowledgements

The authors would like to thank the support from National Natural Science Foundation of China (No.42171445).

References

- Gao, Yang , and S. Chien . "Review on space robotics: Toward top-level science through space exploration." *Science Robotics* 2.
- Long,Xiao,Peimin,et al.A young multilayered terrane of the northern Mare Imbrium revealed by Chang'E-3 mission.[J].*Science* (New York, N.Y.), 2015.DOI:10.1126/science.1259866.
- Li C, Zuo W, Wen W, et al. Overview of the Chang'e-4 mission: Opening the frontier of scientific exploration of the lunar far side[J]. *Space Science Reviews*, 2021, 217: 1-32.
- McGuire,Kerry,Moses,et al.Developing Decision Aids to Enable Human Spaceflight Autonomy[J].*AI magazine: Artificial intelligence*, 2016, 37(4):46-54.
- Minar M R , Naher J .Recent Advances in Deep Learning: An Overview.2018 [2023-10-01].DOI:10.13140/RG.2.2.24831.10403.
- Furgale P , Carle P , Enright J ,et al.The Devon Island rover navigation dataset[J].*The International Journal of Robotics Research*, 2012.DOI:10.1177/0278364911433135.
- Vayugundla M , Steidle F , Smisek M ,et al.Datasets of Long Range Navigation Experiments in a Moon Analogue Environment on Mount Etna[C]//*ISR 2018; 50th International Symposium on Robotics*.2018.
- Giubilato R, Stürzl W, Wedler A, et al. Challenges of slam in extremely unstructured environments: The dlr planetary stereo, solid-state lidar, inertial dataset[J]. *IEEE Robotics and Automation Letters*, 2022, 7(4): 8721-8728.
- Romain Pessia and Genya Ishigami of the Space Robotics Group, Keio University, Japan. 2019.

- <https://www.kaggle.com/datasets/romainpessia/artificial-lunar-rocky-landscape-dataset>
- Swan R M , Atha D , Leopold H A , et al. AI4MARS: A Dataset for Terrain-Aware Autonomous Driving on Mars[C]//Computer Vision and Pattern Recognition. IEEE, 2021. DOI:10.1109/CVPRW53098.2021.00226.
- Tong C H, Gingras D, Larose K, et al. The Canadian planetary emulation terrain 3D mapping dataset[J]. The International Journal of Robotics Research, 2013, 32(4): 389-395.
- Lamarre O , Limoyo O , Mari F , et al. The Canadian Planetary Emulation Terrain Energy-Aware Rover Navigation Dataset:[J]. The International Journal of Robotics Research, 2020(6). DOI:10.1177/0278364920908922.
- Lacroix S, De Maio A, Labourey Q, et al. The Erfoud dataset: a comprehensive multi-camera and Lidar data collection for planetary exploration[C]//15th Symposium on Advanced Space Technologies in Robotics and Automation. 2020.
- L. Meyer et al., "The MADMAX data set for visual-inertial rover navigation on Mars," J. Field Robot., vol. 38, no. 6, pp. 833–853, 2021.
- Hewitt R A, Boukas E, Azkarate M, et al. The Katwijk beach planetary rover dataset[J]. The International Journal of Robotics Research, 2018, 37(1): 3-12.
- Garcia-Garcia A , Orts-Escolano S , Oprea S , et al. A Review on Deep Learning Techniques Applied to Semantic Segmentation[J]. 2017. DOI:10.48550/arXiv.1704.06857.
- Xu X, Zhang L, Yang J, et al. A review of multi-sensor fusion slam systems based on 3D LIDAR[J]. Remote Sensing, 2022, 14(12): 2835.
- Laga H, Jospin L V, Boussaid F, et al. A survey on deep learning techniques for stereo-based depth estimation[J]. IEEE Transactions on Pattern Analysis and Machine Intelligence, 2020, 44(4): 1738-1764.
- S. Shah, D. Dey, C. Lovett, and A. Kapoor, "Airsim: High-fidelity visual and physical simulation for autonomous vehicles," in Field and Service Robotics, 2017.
- Chen L C, Zhu Y, Papandreou G, et al. Encoder-decoder with atrous separable convolution for semantic image segmentation[C]//Proceedings of the European conference on computer vision (ECCV). 2018: 801-818.
- Howard A , Sandler M , Chu G , et al. Searching for MobileNetV3[J]. 2019. DOI:10.48550/arXiv.1905.02244.
- Ronneberger O, Fischer P, Brox T. U-net: Convolutional networks for biomedical image segmentation[C]//Medical Image Computing and Computer-Assisted Intervention–MICCAI 2015: 18th International Conference, Munich, Germany, October 5-9, 2015, Proceedings, Part III 18. Springer International Publishing, 2015: 234-241.
- Kirillov A, Wu Y, He K, et al. Pointnet: Image segmentation as rendering[C]//Proceedings of the IEEE/CVF conference on computer vision and pattern recognition. 2020: 9799-9808.
- Xie E , Wang W , Yu Z , et al. SegFormer: Simple and Efficient Design for Semantic Segmentation with Transformers[J]. 2021. DOI:10.48550/arXiv.2105.15203.
- Qi C R , Su H , Mo K , et al. PointNet: Deep Learning on Point Sets for 3D Classification and Segmentation[J]. IEEE, 2017. DOI:10.1109/CVPR.2017.16.
- Qi C R , Yi L , Su H , et al. PointNet++: Deep Hierarchical Feature Learning on Point Sets in a Metric Space[J]. 2017. DOI:10.48550/arXiv.1706.02413.
- Thomas H, Qi C R, Deschaud J E, et al. Kpconv: Flexible and deformable convolution for point clouds[C]//Proceedings of the IEEE/CVF international conference on computer vision. 2019: 6411-6420.
- Hu Q , Yang B , Xie L , et al. RandLA-Net: Efficient Semantic Segmentation of Large-Scale Point Clouds[J]. 2019. DOI:10.48550/arXiv.1911.11236.
- Engel N , Belagiannis V , Dietmayer K . Point Transformer[J]. 2021. DOI:10.1109/ACCESS.2021.3116304.
- Sturm, J., Engelhard, N., Endres, F., Burgard, W., & Cremers, D. (2012, October). A benchmark for the evaluation of RGB-D SLAM systems. In 2012 IEEE/RSJ international conference on intelligent robots and systems (pp. 573-580). IEEE.

- Horn, B. K. (1987). Closed-form solution of absolute orientation using unit quaternions. *Josa a*, 4(4), 629-642.
- Umeyama, S. (1991). Least-squares estimation of transformation parameters between two point patterns. *IEEE Transactions on Pattern Analysis & Machine Intelligence*, 13(04), 376-380.
- Giubilato, R., Stürzl, W., Wedler, A., & Triebel, R. (2022). Challenges of slam in extremely unstructured environments: The dlr planetary stereo, solid-state lidar, inertial dataset. *IEEE Robotics and Automation Letters*, 7(4), 8721-8728.
- Campos, C., Elvira, R., Rodríguez, J. J. G., Montiel, J. M., & Tardós, J. D. (2021). Orb-slam3: An accurate open-source library for visual, visual-inertial, and multimap slam. *IEEE Transactions on Robotics*, 37(6), 1874-1890.
- Qin, T., Li, P., & Shen, S. (2018). Vins-mono: A robust and versatile monocular visual-inertial state estimator. *IEEE Transactions on Robotics*, 34(4), 1004-1020.
- Qin, T., Pan, J., Cao, S., & Shen, S. (2019a). A general optimization-based framework for local odometry estimation with multiple sensors. *arXiv preprint arXiv:1901.03638*.
- Qin, T., Cao, S., Pan, J., & Shen, S. (2019b). A general optimization-based framework for global pose estimation with multiple sensors. *arXiv preprint arXiv:1901.03642*.
- Zhang, Ji & Singh, Sanjiv. (2014). LOAM : Lidar Odometry and Mapping inreal-time. *Robotics: Science and Systems Conference (RSS)*. 109-111.
- T.Shan and B. Englot, "LeGO-LOAM: Lightweight and Ground-OptimizedLidar Odometry and Mapping on Variable Terrain," 2018 IEEE/RSJInternational Conference on Intelligent Robots and Systems (IROS),Madrid, Spain, 2018, pp. 4758-4765, doi: 10.1109/IROS.2018.8594299.
- W.Xu, Y. Cai, D. He, J. Lin and F. Zhang, "FAST-LIO2: Fast DirectLiDAR-Inertial Odometry," in *IEEE Transactions on Robotics*, vol.38, no. 4, pp. 2053-2073, Aug. 2022, doi: 10.1109/TRO.2022.3141876.
- Ueshiba, T. 2006. "An Efficient Implementation Technique of Bidirectional Matching for Real-time Trinocular Stereo Vision." 18th International Conference on Pattern Recognition (ICPR'06), Vol. 1, 1076–1079. Hong Kong, China: IEEE.
- Chang J R, Chen Y S. Pyramid stereo matching network[C]//Proceedings of the IEEE conference on computer vision and pattern recognition. 2018: 5410-5418.
- Lipson L, Teed Z, Deng J. Raft-stereo: Multilevel recurrent field transforms for stereo matching[C]//2021 International Conference on 3D Vision (3DV). IEEE, 2021: 218-227.
- Li J , Wang P , Xiong P ,et al.Practical Stereo Matching via Cascaded Recurrent Network with Adaptive Correlation[J].2022.DOI:10.48550/arXiv.2203.11483.