

Exploring the 6G Potentials: Immersive, Hyper Reliable, and Low-Latency Communication

Afsoon Alidadi Shamsabadi, *Member, IEEE*, Animesh Yadav, *Senior Member, IEEE*, Yasser Gadallah, *Senior Member, IEEE*, and Halim Yanikomeroglu, *Fellow, IEEE*,

Abstract—The transition towards the sixth-generation (6G) wireless telecommunications networks introduces significant challenges for researchers and industry stakeholders. The 6G technology aims to enhance existing usage scenarios, particularly supporting innovative applications requiring stringent performance metrics. Among the key performance indicators (KPIs) for 6G, immersive throughput, hyper-reliability, and hyper-low latency must be achieved simultaneously in some critical applications to achieve the application requirements. However, this is challenging due to the conflicting nature of these KPIs. This article proposes a new service class of 6G as immersive, hyper reliable, and low-latency communication (IHRLLC), and introduces a potential network architecture to achieve the associated KPIs. Specifically, technologies such as ultra-massive multiple-input multiple-output (umMIMO)-aided terahertz (THz) communications, and reconfigurable intelligent surfaces (RIS) are viewed as the key enablers for achieving immersive data rate and hyper reliability. Given the computational complexity involved in employing these technologies, and the challenges encountered in designing real-time algorithms for efficient resource allocation and management strategies as well as dynamic beamforming and tracking techniques, we also propose the involvement of other potential enabling technologies such as non-terrestrial networks (NTN), learn-to-optimize (L2O) and generative-AI (GenAI) technologies, quantum computing, and network digital twin (NDT) for limiting the latency.

I. INTRODUCTION

Recently, the fifth-generation (5G) networks have become operational in many countries worldwide, while researchers are working on studies related to the sixth-generation (6G) wireless networks. These studies are inspired by potential use cases, requirements, and challenges that are yet to be addressed. The previous generations of wireless networks have already provided significant enhancements that enabled a vast range of novel applications compared to those supported by legacy wireless networks. Nevertheless, according to the International Telecommunication Union’s (ITU) vision for international mobile telecommunications 2030 (IMT-2030), 6G usage scenarios are envisioned as advanced versions of existing 5G scenarios, alongside entirely new use cases that support the deployment of innovative applications [1]. Besides, 6G wireless networks are expected to cater to future use cases and applications that require high mobility, immersive data rates, hyper-reliability, and low-latency simultaneously. This necessitates the introduction of significantly more advanced network architectures and enabling technologies. We refer to this type of service class as immersive, hyper reliable, and low-latency communication (IHRLLC), which is also the focus of this article.

The current 5G wireless network already includes ultra-reliable and low latency communications (URLLC) as one of its service classes. The URLLC class targets mission-critical applications and a wide range of other applications, including industry automation, intelligent transportation, health care, and intelligent societies. Several enabling schemes and technologies have been developed to meet the stringent requirements of URLLC in terms of reliability and latency. These include grant-free access, redundant packet transmission, short packet transmission, edge computing, software-defined network (SDN), and network function virtualization (NFV) while utilizing both licensed and unlicensed bands, as well as coordinated multipoint (CoMP) techniques [2]. However, the critical use cases and applications that are envisioned for the 6G wireless networks demand unprecedented data rates combined with hyper-low latency and reliability simultaneously. In this context, URLLC alone might not be sufficient to achieve the requirements set for IHRLLC. Furthermore, it is essential to note that the IHRLLC requirements conflict with each other, making them challenging to achieve. Therefore, novel network architecture designs, along with innovative schemes and technologies, must be explored and investigated.

Recently, a few works have started investigating the role of URLLC in addressing use cases and applications that require high connectivity, mobility, and high data rates in 6G wireless networks [3]–[5]. In [3], the potential of terahertz (THz) frequency band is explored for offering high-rate and highly-reliable low-latency communications in wireless virtual reality (VR) applications. It is observed that the probability of line-of-sight (LoS) links in THz play a crucial role in characterizing the end-to-end (E2E) delay. In [4], three high data rate connectivity scenarios, including ubiquitous, deep, and holographic connectivity, are proposed, leveraging URLLC. Machine-learning-based solutions are proposed to achieve the stringent requirements of the high data rate and URLLC. In [5], a high mobility communication scenario is considered and the impact of the Doppler spread on URLLC for vehicular communication is explored. To this end, orthogonal time frequency space (OTFS) modulation and sensing-aided predictive beamforming schemes are exploited for reliable and low-latency communications, respectively.

The aforementioned previous works explore individual use cases that require high data rates while adhering to the URLLC constraints. In this article, we present several important use cases for 6G wireless networks under the proposed IHRLLC service class. We then discuss potential enabling technologies and propose a unified approach to integrate these technologies

to support the IHRLLC services. The main contributions of this paper can be summarized as follows

- We propose a new type of service class for 6G, namely the IHRLLC class, which concurrently supports an immersive data rate, hyper reliability, and low-latency communication. Several important use cases for this type of service are discussed, along with their specific requirements.
- We discuss a set of enabling technologies to support the IHRLLC class. Additionally, a network architecture is proposed that combines these technologies to achieve the goal of IHRLLC. Challenges and open issues pertaining to the proposed architecture are also discussed.
- We present a numerical simulation-based experiment to validate the high data rate via ultra-massive multiple-input multiple-output (umMIMO)-aided THz communication.

II. REQUIREMENTS, USE CASES, AND CHALLENGES

As 6G wireless networks are expected to encompass a broad spectrum of novel use cases, applications, and services, more than one KPI must be met simultaneously to achieve acceptable levels of quality of experience (QoE). In this paper, we focus on some specific use cases that require the simultaneous satisfaction of three KPIs, namely, immersive data rates, hyper reliability, and low latency. The exact values of these KPIs vary depending on service expectations of the use cases. Certain use cases prioritize specific KPIs or demand stricter thresholds on a particular KPI to guarantee the desired performance. In the following section, we discuss a novel service class for 6G which we term the IHRLLC class, and discuss some key use cases and associated challenges.

A. Immersive Communication

Immersive communication (IC) will be one of the key service classes of the 6G wireless networks. It will introduce interactive services such as extended reality (XR), holographic communication, cloud gaming, high-definition video (4K and 8K) streaming, and immersive event experiences over cellular networks. These services demand a large volume of data and require immersive throughput values. For instance, a live VR concert, streaming to thousands of participants simultaneously, requires a wireless network capable of handling substantial data rates without compromising the user's QoE. According to the ITU IMT-2030 vision, the envisioned throughput for IC peaks at 1 Tbps, with the user-experienced data rate of at least 300 Mbps [1], which far exceeds the capabilities of IMT-2020.

B. Hyper reliable and low-latency communication (HRLLC)

The HRLLC class, an extension of URLLC in 5G, will be another core service class in 6G alongside other classes. Latency in wireless networks is influenced by various components of the architecture. Key factors include network management strategies in the core network, signal processing schemes such as modulation and coding in the E2E parts of the network, and the propagation delay of the signal

within the network. Achieving hyper low-latency values of 0.1 to 1 ms, as specified by IMT-2030, without ensuring a hyper-reliable network, renders 6G use cases infeasible. Specifically, for applications such as autonomous vehicles and industrial automation, the network must simultaneously meet the reliability standard of $10^{-5} \sim 10^{-7}$ while achieving hyper low-latency, thus enabling the HRLLC usage scenario.

C. Immersive, hyper reliable, low-latency communication (IHRLLC)

The two aforementioned service classes have been studied separately, each with associated KPIs. Nevertheless, a wide range of use cases require simultaneous fulfillment of a combined set of three KPIs (i.e., immersive data rate, hyper reliability and low latency) for an acceptable level of QoE. Hence, we propose IHRLLC as a new service class for 6G wireless networks. Below are some of the key applications under this service class.

1) *Mobile tele-surgery*: Mobile tele-surgery in an ambulance racing through the city with a patient needing an urgent surgical operation is a representative use case for IHRLLC. The surgeon, located in a hospital far away from the ambulance, is required to perform the critical procedure remotely to save the patient's life as they are being rushed to the hospital. This situation requires not only IC to transmit substantial data volumes but also necessitates absolute reliability and hyper low-latency to ensure the safety and efficacy of the medical procedure.

2) *Multisensory XR*: XR refers to various types of reality, including augmented reality (AR), mixed reality (MR), and virtual reality (VR), encompassing all real-and-virtual combined environments and human-machine interactions with the assistance of handheld and wearable end-user devices. Multisensory XR applications have unique requirements, including bounded low latency and high uplink and downlink bandwidth. These are challenging requirements due to scale and mobility at various speeds (e.g., walking, driving, fast trains) as well as coverage and handovers. The 3rd Generation Partnership Project (3GPP) Release 18 promises to significantly improve support for higher data rates and capacity while also introducing power and latency reduction techniques to enable more immersive AR experiences.

3) *High-frequency trading*: In particular, high-frequency trading (HFT) is a trading method that utilizes powerful computer programs to execute a large number of orders in a very short period. This approach aims to avoid the high risks associated with fast-changing trading prices [6]. HFT requires networks that are capable of meeting the required set of KPIs with a high degree of certainty.

4) *Cloud gaming*: In the gaming industry, cloud gaming refers to use cases where most computations related to single-player or multiplayer gaming are offloaded from users' hardware devices to edge or remote servers. Essentially, games are hosted on remote servers, with users' devices serving primarily as peripherals for interacting with the game. In cloud gaming, the user's QoE depends on the network's capability to deliver IHRLLC service class performance.

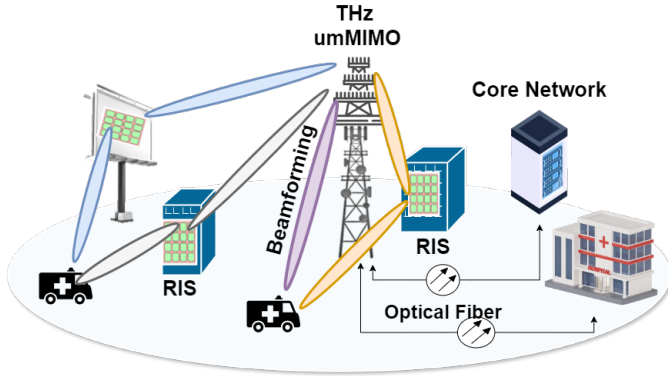


Fig. 1: umMIMO and RIS-aided THz communication for 6G mobile tele-surgery application.

5) *Advance air mobility*: Advance air mobility (AAM) is a concept that enables customers to access on-demand air transportation through multimodal transport networks. One of the key use cases of AAM is urban air mobility (UAM), which allows vehicles to either be autonomously controlled or remotely piloted while operating beyond the visual LoS from the ground. UAM vehicles typically have multiple sensors, such as light detection and ranging (lidar), radar, and cameras. These sensors can be utilized for advanced driver assistance systems and can also transmit real-time immersive data with hyper reliability and low-latency to a ground pilot for remote operation.

Pursuing a combined set of conflicting KPIs leads to inherent difficulties, as most existing wireless networks normally focus on achieving a specific KPI at the expense of others. Balancing these KPIs in 6G wireless networks to meet the diverse requirements of various applications of IHRLLC remains a significant challenge, and addressing them necessitates innovative solutions. In the following section, we overview a set of potential enabling technologies that we can depend upon and describe how properly aggregating these technologies overcomes the challenges that arise in simultaneously achieving conflicting KPIs.

III. ENVISIONED ENABLING TECHNOLOGIES FOR IHRLLC

Several solutions and technologies are proposed to improve the throughput, latency, and reliability of wireless networks. These technologies span different parts of the wireless networks to ensure that the overall requirements are met. However, techniques used to achieve one specific KPI may interfere with achieving other KPIs. For example, utilizing higher frequency bands significantly improves data rates but limits the coverage area due to severe shadowing, deep fading, and molecular absorption, that result in decreased reliability. In this section, we provide an overview of our envisioned IHRLLC enabling technologies and their corresponding advantages and challenges. We also discuss how the combination of various technologies, across the different network layers, supports the concurrent fulfilment of multiple KPIs.

A. umMIMO and RIS-aided THz communication

Migrating to higher frequency bands has been the solution to access wider bandwidth and, hence, higher data rates for users. The millimeter wave (mmWave) spectrum, which includes frequencies above 24 GHz, was utilized in the 5G wireless networks to provide access to a considerable bandwidth compared to the previous mobile network generations. However, the huge capacity demand of 6G applications necessitates the provisioning of extremely high bandwidths, which can only be achieved through THz communications. The THz spectrum, in particular, spans the frequencies in the 0.1 to 3 THz range. Extremely high available bandwidth at this frequency range makes it a promising technology to achieve immersive communication in 6G. Nevertheless, operating in the THz frequency band exposes new challenges to the wireless networks [7]. The most significant of these challenges include higher free space path loss (FSPL) and molecular absorption, channel modeling, and the design of hardware which includes radio frequency (RF) devices, modulators, and antennas. Therefore, devising innovative solutions to address the aforementioned challenges is crucial for leveraging the potential of THz frequencies in 6G wireless networks. To overcome the short distance communication range and severe blockage of the THz frequency band, antenna array architectures, e.g., umMIMO and RIS, can be integrated into the radio access networks to improve the beam gain toward users and maintain LoS connection with the base station, respectively, see Fig. 1.

1) *umMIMO beamforming*: Higher Frequency bands, such as mmWave and THz, enable the use of antenna designs that can accommodate a significantly greater number of antenna elements. Therefore, implementing the umMIMO technology and enhanced beamforming techniques creates high-gain narrow beams tailored to individual users. These beams help reduce the substantial FSPL in THz communications [8]. Fig. 2 depicts the cumulative distribution function (CDF) of the data rate and the packet error rate (PER) performance for varying values of signal-to-noise ratio (SNR) in a wireless system consisting of one base station, with a cell radius of 1000 m, equipped with an umMIMO antenna serving one user. The system works at the center frequency of 850 GHz, and the user is allocated a bandwidth of 200 MHz. It can be observed that the data rate and PER values of the user are within the desired range to facilitate a reliable and immersive connection. Nevertheless, achieving such high data rate and low PER values necessitates designing efficient advanced beamforming algorithms.

Beamforming via umMIMO architecture in the THz frequency band presents several challenges. Very narrow pencil beams require accurate knowledge of the channel state information (CSI), accurate angle of departure of the transmitters, and the angle of arrival of receivers. Furthermore, since beamforming is vulnerable to mobility, the difficulty lies in continuous beam realignment in a short time. Furthermore, a large number of RF power amplifier chains are needed to perform effective beamforming, thus increasing cost and power consumption. Alternatively, an energy-efficient holographic MIMO system appears to be a potential solution.

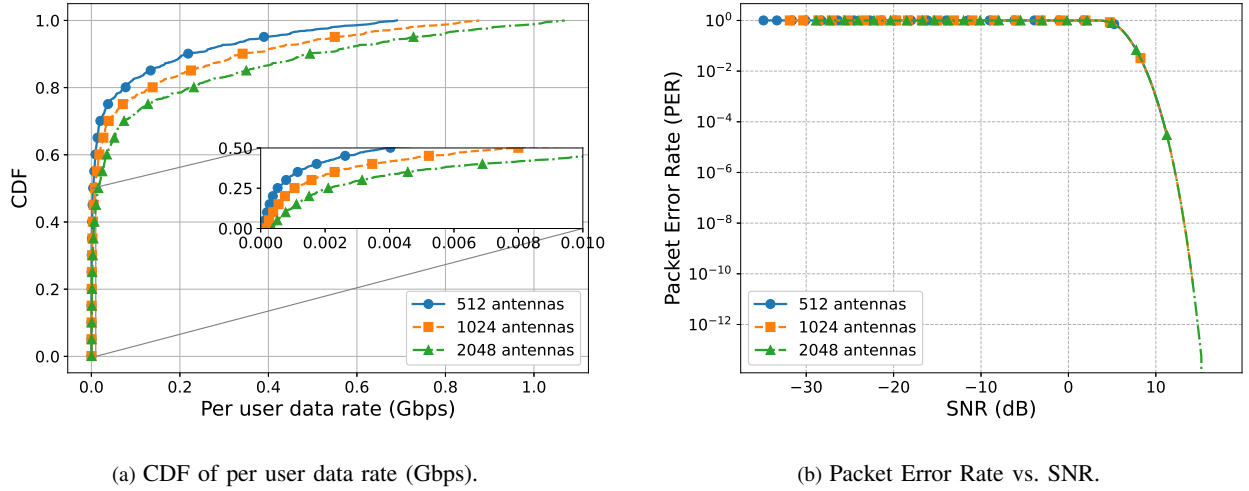


Fig. 2: User data rate and PER in an umMIMO system working at 850 GHz carrier frequency with 200 MHz bandwidth.

2) *RIS for LoS connectivity and diversity*: The RIS technology presents a groundbreaking advancement in wireless communication, offering an evolutionary approach to signal propagation and control. RISs are artificial surfaces with numerous small, electronically controlled passive elements capable of altering the phase and amplitude of the incoming signal, thus enabling the redirection or reshaping of the signal path [9]. Therefore, an RIS enables a favorable and adaptable wireless environment for signal propagation, which can enhance the performance of wireless networks from several perspectives. First, considering the ever-increasing demand for ubiquitous seamless connectivity, wireless networks require deploying more base stations to ensure reliable connectivity for users. However, this will bring a higher energy consumption, higher deployment and maintenance costs, and a higher level of interference to deal with. RIS passive elements and their light weight make them capable of being deployed in many strategic spots in the city at a relatively low cost, which enables them to overcome the communication distance limitations of the THz frequency band by offering LoS links, thus paving the way for IHRLLC.

Second, RISs can be strategically positioned to create a scattering channel, which is desirable for enhancing the performance of umMIMO systems in THz communications. As a result, RIS systems can add a degree of freedom to umMIMO systems and improve the reliability of wireless networks.

B. Non-terrestrial networks

Non-terrestrial networks (NTN), which include space satellites and aerial platforms such as high altitude platform stations (HAPS) and unmanned aerial vehicles (UAVs), present a promising architecture for 6G wireless networks. Traditionally, NTN have been considered a potential technology for enhancing wireless networks coverage in rural and remote areas. However, given the ever-increasing capacity demands of future wireless networks and the need for a resilient and reliable network architecture, the new paradigm of employing the NTN

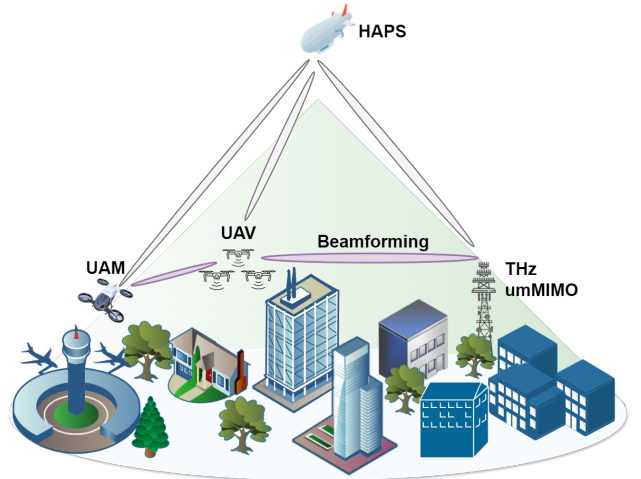


Fig. 3: Role of HAPS and UAVs in enabling UAM use case in 6G.

is to integrate them into urban terrestrial wireless networks to guarantee an immersive and hyper reliable connection for the users [12]. HAPS, located at an altitude of about 20 Km above the ground, can provide a one-way propagation delay of the order of microseconds, which is much less than that of the satellite networks. In addition, as depicted in Fig. 3, HAPS can play the role of backhauling for the UAVs via enabling airborne integrated access and backhauling (IAB). In applications such as UAM, multi-connectivity through aerial platforms, such as UAVs and HAPS, will be a potential solution in case of losing connection with either the main base station or the RIS (Fig. 3).

In the previous sections, various enabling technologies were discussed to facilitate IHRLLC. The implementation of such sophisticated technologies, as well as the proper design of the corresponding parameters, is a critical challenge. Considering the umMIMO antennas and RISs, with a large number of elements along with the challenges of THz communication, designing the optimum parameters through traditional ap-

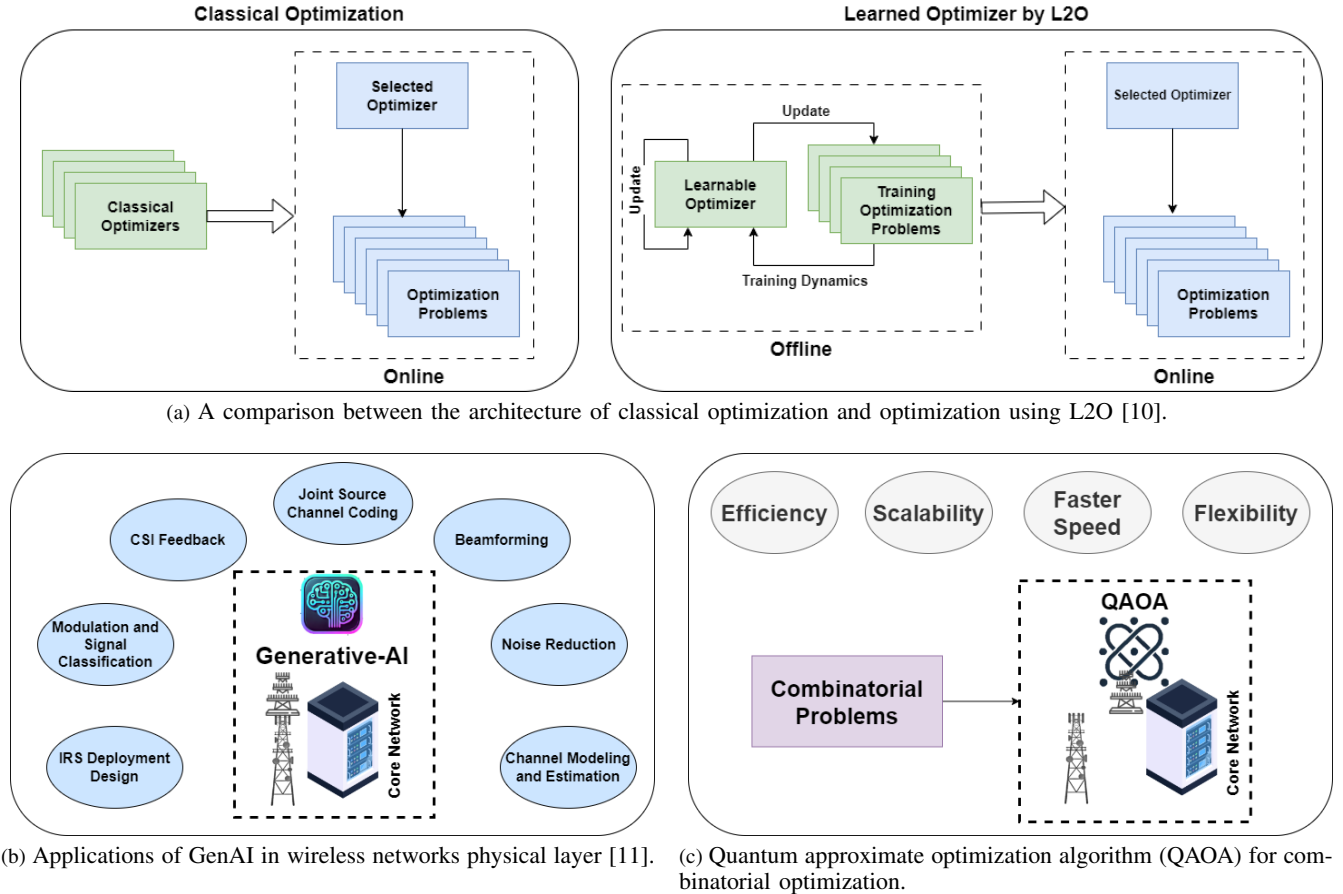


Fig. 4: L2O, GenAI, and Quantum Computing. The logos in the middle of (b) and (c) are generated using ChatGPT-4o.

proaches incurs a high computational cost. To this end, AI algorithms can potentially produce revolutionary changes in future wireless networks and overcome computational challenges. In the following discussion, we investigate promising novel computational-related approaches, including learn-to-optimize (L2O), generative AI (GenAI), and quantum computing technologies as methods to solve the aforementioned computational challenges in 6G wireless networks.

C. AI technologies: L2O and GenAI

L2O leverages machine learning (ML) to improve the current optimization algorithms or develop new optimization approaches [10]. Conventional optimization techniques often rely on fundamental methods such as gradient descent, conjugate gradient, and Newton steps, which are theoretically robust and straightforward. These methods are chosen based on the type of problem and are expected to provide solutions that meet their theoretical guarantees. However, L2O presents a different approach in which optimization methods are developed through training based on their performance with sample problems (Fig. 4a). These methods may not have a solid theoretical foundation, but are designed to enhance performance through training, which usually occurs online. At the same time, this training aims to make the actual application of the methods more efficient. In situations involving complex problems such as nonconvex optimization or inverse problems,

a well-trained L2O method might deliver better results than traditional methods.

Although conventional AI/ML algorithms have already been utilized in developing algorithms for wireless networks, GenAI has recently been considered a potential tool for future wireless networks. GenAI can be employed in wireless networks to overcome the challenges of the conventional AI algorithms [11]. Specifically, GenAI models can be utilized in various physical layer aspects of the networks, such as IRS deployment design, joint source-channel coding, beamforming, etc., as illustrated in Fig. 4b. In addition, the GenAI models can generate data for training purposes and can be implemented near the training locations.

D. Quantum Computing

Future wireless networks will experience massive communications among users in various usage scenarios. This makes it increasingly difficult to decide the order in which resource allocation should be made. These challenges can be defined as combinatorial problems which involve determining the service order for different users and the routes for traffic transfer to ensure everyone receives the promised QoE. Additionally, networks are becoming software-oriented through the use of the SDN and NFV technologies. Next-generation networks will employ AI and cognitive technologies for self-healing, self-management, and decision making, which require

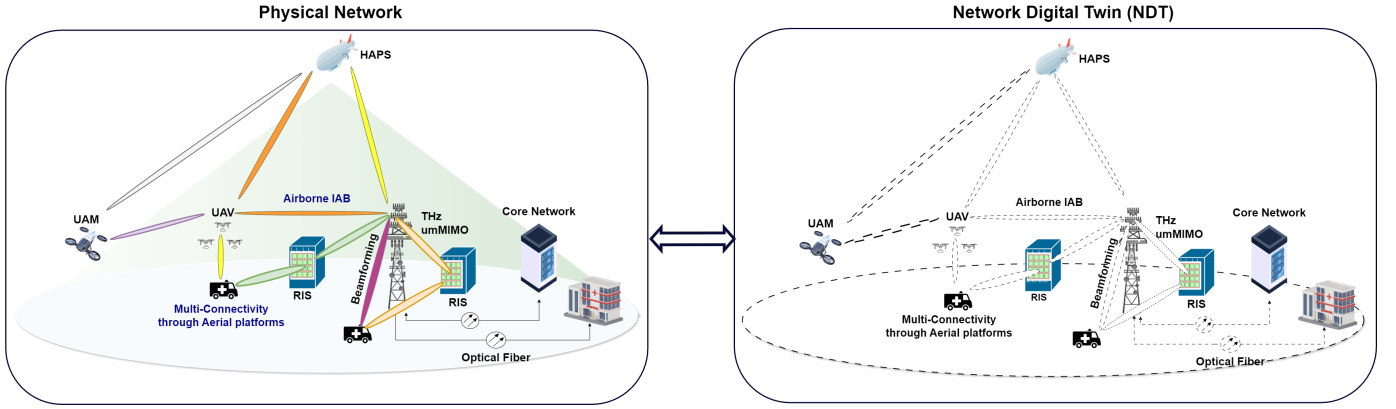


Fig. 5: NDT-empowered network for IHRLLC in mobile tele-surgery and UAM use cases.

massive computing capabilities, leading to high latency [13]. Traditionally, combinatorial problems have so far been largely solved using heuristic methods that simplify the problem. However, these methods typically yield approximate answers that, in certain situations, may lead to inferior performance. Optimization methods based on statistics and data, on the other hand, consume a significant amount of energy and may not be suitable for dynamic situations that require quick reactions. To address these issues, hybrid algorithms combining quantum and classical computing, such as the quantum approximate optimization algorithm (QAOA), are used. These algorithms can be deployed at the core network, in various scales according to the hardware capabilities, offering considerable performance improvements in many combinatorial optimization problems [14]. Hybrid algorithms optimize the strengths of both computing approaches, ultimately increasing the network capacity. This ensures that demanding applications receive the necessary service quality, even in a busy network, while also saving energy.

E. Network Digital Twin (NDT)

Digital twin (DT) is an emerging technology that virtually represents a physical system. It accurately models complex systems by replicating real physical entities and functionalities of a physical system into the digital world in real-time. Combining the DT technology with AI/ML tools, real-time data can be used to improve the operation and performance of the physical system in terms of precise decision-making and efficient resource utilization. The network DT (NDT) has recently been proposed as a key enabler for efficient control and management of modern communication networks [15]. Through the NDT dynamic state of the network, the status of the edge and cloud servers can be captured in real-time. Furthermore, combining 3D map services with NDT can determine the location and health of network infrastructure elements such as base stations and RISs. The NDT does therefore improve network performance. However, it also suffers from problems of data asynchronization and deviation between the NDT and the real network. Such issues can be addressed by appropriately applying the tools from the AI/ML framework.

IV. PROPOSED NETWORK ARCHITECTURE FOR IHRLLC

We now propose a network architecture that integrates the aforementioned technologies to support and achieve the requirement for the IHRLLC service class. We use NDT as the underlying technology that helps the IHRLLC use cases to make more informed and swift decisions. In particular, NDT is used to gain information about the infrastructure locations and the status of edge and cloud computing servers in the entire network. As an example, the proposed NDT-empowered network for IHRLLC in mobile tele-surgery and UAM use cases is shown in Fig. 5. Essentially, the network relies on the THz band to support immersive communication. To reliably transmit data at high data rates, the communication relies on numerous RISs deployed at different locations throughout the city. After obtaining the relative location information via NDT, and with the help of the umMIMO, the ambulance continuously forms pencil beams toward multiple RISs in LoS with an ambulance. The use of multiple RISs not only facilitates LoS communications but also enhances diversity reception. Both the LoS link and diversity reception significantly improve reliability. Each RIS is tuned such that all reflected signals are directed to the nearest base station and subsequently to the core network and then eventually to the hospital. Furthermore, multi-connectivity transmission is available. If the ambulance can not find an RIS in the range, it then starts communication via a dedicated UAV that is associated with this ambulance. For the UAM use case, UAVs and HAPS will be part of the IHRLLC network, which ensures seamless connectivity for the user.

AI enablers (L2O and GenAI) and quantum computing play a crucial role in the proposed network by reducing computational delays for algorithms related to efficient resource allocation, beamforming design, beam-tracking, AI/ML-based operations, and various functions for implementing SDN and NFV. The L2O and GenAI models can be utilized at the base stations and the core network, in different scales, to support designing efficient algorithms. Accordingly, quantum computing resources are distributed across the core network components. In this way, tasks requiring heavy computation are delegated to the core network due to the higher processing capabilities. On the other hand, tasks requiring real-time

decision making will be handled at the base stations using L2O and GenAI models. Task allocation is based on the status of all the servers, monitored via NDT. Additionally, HAPS serves as a computing platform for specific use cases such as UAM.

V. CHALLENGES AND OPEN ISSUES

In the previous sections, we discussed the 6G use cases that require IHRLLC to achieve an acceptable QoE, and we proposed a combination of technologies to achieve IHRLLC. However, designing an E2E wireless network, equipped with the proposed technologies, and is capable of dealing with a large volume of data in a hyper reliable manner within a hyper low-latency, is a significant challenge. Considering the THz frequency band, combined with umMIMO and RIS technologies, the development of hardware devices such as antenna elements and electronic or photonic devices that can generate high frequency electromagnetic waves is an open area of research among wireless researchers. The THz-specific air interface techniques and multiple access protocols need further exploration to ensure network reliability. Furthermore, the human health and safety issues associated with the THz technology should be thoroughly analyzed and evaluated.

Although AI has been introduced as a game changer for future wireless networks, specific characteristics of these networks make the implementation of the AI algorithms challenging. One of the key challenges is the randomness of the wireless network environments inherited from the random channel models. This is considerably important in urban areas where wireless channels experience significant small-scale fading. Consequently, developing AI-driven algorithms to support the E2E network functionality in a robust, resilient, dynamic, and efficient manner is a significant challenge and, hence, an important research area. This is in addition to the privacy and standardization concerns related to the implementation of AI algorithms. Finally, integrating a combination of all potential technologies into wireless networks necessitates interdisciplinary research among experts in wireless networks, AI, and quantum computing to ensure the efficiency and scalability of the developed algorithms.

VI. CONCLUSION

In this paper, we discussed the 6G use cases that require achieving immersive, hyper reliable, low-latency communication (IHRLLC) simultaneously. Accordingly, we proposed a new class, termed the IHRLLC class, to be considered as one of the main 6G service classes. We also proposed potential network solutions to meet the KPI requirements and overcome the challenges of achieving multiple KPIs. To this end, THz communication, combined with umMIMO and RIS, plays an important role in making IHRLLC feasible. An NDT-empowered network architecture was proposed to facilitate the IHRLLC applications. Moreover, novel computation and communication techniques, including L2O, GenAI, quantum computing, and NDT, were proposed to design the parameters of various parts of the architecture.

REFERENCES

- [1] International Telecommunications Union Radiocommunication Sector (ITU-R), "Framework and overall objectives of the future development of IMT for 2030 and beyond, Recommendation ITU-R M.2160-0," Geneva, Switzerland, 2023.
- [2] N. H. Mahmood, I. Atzeni, E. A. Jorswieck, and O. L. A. López, "Ultra-reliable low-latency communications: Foundations, enablers, system design, and evolution towards 6G," *Found. Trends Commun. Inf. Theory*, vol. 20, no. 5-6, pp. 512–747, 2023.
- [3] C. Chaccour, M. N. Soorki, W. Saad, M. Bennis, and P. Popovski, "Can terahertz provide high-rate reliable low-latency communications for wireless VR?" *IEEE Internet Things J.*, vol. 9, no. 12, pp. 9712–9729, Jun. 2022.
- [4] Y. Liu, Y. Deng, A. Nallanathan, and J. Yuan, "Machine learning for 6G enhanced ultra-reliable and low-latency services," *IEEE Wireless Commun. Mag.*, vol. 30, no. 2, pp. 48–54, Apr. 2023.
- [5] W. Yuan, J. Zou, Y. Cui, X. Li, J. Mu, and K. Han, "Orthogonal time frequency space and predictive beamforming-enabled URLLC in vehicular networks," *IEEE Wireless Commun. Mag.*, vol. 30, no. 2, pp. 56–62, Apr. 2023.
- [6] T. Yin, C. Liu, F. Ding, Z. Feng, B. Yuan, and N. Zhang, "Graph-based stock correlation and prediction for high-frequency trading systems," *Pattern Recognit.*, vol. 122, Feb. 2022.
- [7] Z. Chen, X. Ma, B. Zhang, Y. Zhang, Z. Niu, N. Kuang, W. Chen, L. Li, and S. Li, "A survey on terahertz communications," *China Commun.*, vol. 16, no. 2, pp. 1–35, Feb. 2019.
- [8] A. Faisal, H. Sameddeen, H. Dahrouj, T. Y. Al-Naffouri, and M.-S. Alouini, "Ultramassive MIMO systems at terahertz bands: Prospects and challenges," *IEEE Veh. Technol. Mag.*, vol. 15, no. 4, pp. 33–42, Dec. 2020.
- [9] Q. Wu, S. Zhang, B. Zheng, C. You, and R. Zhang, "Intelligent reflecting surface-aided wireless communications: A tutorial," *IEEE Trans. Commun.*, vol. 69, no. 5, pp. 3313–3351, May 2021.
- [10] T. Chen, X. Chen, W. Chen, Z. Wang, H. Heaton, J. Liu, and W. Yin, "Learning to optimize: A primer and a benchmark," *J. Mach. Learn. Res.*, vol. 23, no. 1, Jan. 2022.
- [11] N. Van Huynh, J. Wang, H. Du, D. T. Hoang, D. Niyato, D. N. Nguyen, D. I. Kim, and K. B. Letaief, "Generative AI for physical layer communications: A survey," *IEEE Trans. Cogn. Commun. Netw.*, vol. 10, no. 3, pp. 706–728, Jun. 2024.
- [12] A. A. Shamsabadi, A. Yadav, and H. Yanikomeroglu, "Enhancing next-generation urban connectivity: Is the integrated HAPS-terrestrial network a solution?" *IEEE Commun. Lett.*, vol. 28, no. 5, pp. 1112–1116, May 2024.
- [13] R. Ferrara, R. Bassoli, C. Deppe, F. H. Fitzek, and H. Boche, "The computational and latency advantage of quantum communication networks," *IEEE Commun. Mag.*, vol. 59, no. 6, pp. 132–137, Jun. 2021.
- [14] J. Choi and J. Kim, "A tutorial on quantum approximate optimization algorithm (QAOA): Fundamentals and applications," in *Proc. 10th Int. Conf. Inf. Commun. Technol. Convergence (ICTC)*, Jeju, Korea (South), 16–18 Oct. 2019, pp. 138–142.
- [15] P. Almasan, M. Ferriol-Galmés, J. Paillisse, J. Suárez-Varela, D. Perino, D. López, A. A. P. Perales, P. Harvey, L. Ciavaglia, L. Wong, V. Ram, S. Xiao, X. Shi, X. Cheng, A. Cabellos-Aparicio, and P. Barlet-Ros, "Network digital twin: Context, enabling technologies, and opportunities," *IEEE Commun. Mag.*, vol. 60, no. 11, pp. 22–27, Nov. 2022.

BIOGRAPHY

Afsoon Alidadi Shamsabadi [M] (afsoonalidadi@carleton.ca) is a PhD Candidate in the Non-Terrestrial Networks (NTN) Lab in the Department of SCE at Carleton University, Canada.

Animesh Yadav [SM] (yadava@ohio.edu) is an assistant professor in the School of EECS at Ohio University, Athens, OH, USA.

Yasser Gadallah [SM] (ygadallah@aucegypt.edu) is a Professor at the Department of ECE at The American University in Cairo (AUC), Egypt. His research interests include IoT, wireless communication and smart systems. He has extensive telecommunications industrial experience, having worked at several high-profile industry-leading companies in this area.

Halim Yanikomeroglu [F] (halim@sce.carleton.ca) is a Chancellor's Professor of Systems and Computer Engineering in the Non-Terrestrial Networks Lab., at Carleton University, Canada. He is a Fellow of EIC (Engineering Institute of Canada), CAE (Canadian Academy of Engineering), and AAIA (Asia-Pacific Artificial Intelligence Association); and a Distinguished Speaker for IEEE Communications Society and IEEE Vehicular Technology Society.