

A Look Into Training Large Language Models on Next Generation Datacenters

Alexandru M. Gherghescu
University Politehnica of
Bucharest
Bucharest, Romania

Vlad-Andrei Bădoiu
University Politehnica of
Bucharest
Bucharest, Romania

Alexandru Agache
University Politehnica of
Bucharest
Bucharest, Romania

Mihai-Valentin Dumitru
University Politehnica of
Bucharest
Bucharest, Romania

Iuliu Vasilescu
University Politehnica of
Bucharest
Bucharest, Romania

Radu Mantu
University Politehnica of
Bucharest
Bucharest, Romania

Costin Raiciu
University Politehnica of
Bucharest / *Broadcom Inc.*
Bucharest, Romania

ABSTRACT

Is it still worth doing computer networking research? What are relevant problems in this space given the supremacy of hyperscalers in deployed large networks? We take an unconventional approach to finding relevant research directions, by starting from Microsoft’s plans to build a \$100 billion datacenter for ML [22]. Our goal is to understand what models could be trained in such a datacenter, as well as the high-level challenges one may encounter in doing so.

We first examine the constraints imposed by cooling and power requirements for our target datacenter and find that it is infeasible to build in a single location. We use LM scaling laws [9] to determine that we could train models of 50T or 100T parameters. Finally, we examine how distributed training might work for these models and what the networking requirements are. We conclude that building the datacenter and training such models is technically possible, but this requires a novel NIC-based multipath transport along with a redesign of the entire training stack, outlining a research agenda for our community in the near future.

1 INTRODUCTION

The past few years have witnessed a revolution in the field of natural language processing, with Large Language Models (LLMs) emerging as extraordinary tools for a wide range of tasks. As public models reach hundreds of billions of parameters, and closed models like ChatGPT presumably surpass the trillion-parameter threshold, scaling laws [9, 13] predict no immediate end to this growth. We are now in the midst of a race to develop ever-larger models, with the datacenter at the heart of this competition.

Graphics Processing Units (GPUs) now dominate both compute and network traffic generation in AI-focused datacenters. Clusters comprising tens of thousands of GPUs are being used specifically for training transformer-based [27] models. Distributed training frameworks [17, 21, 29] have been developed to facilitate the training, due to the complexity of its nature and the high amount of communication needed. As such, networking now directly influences the training times, as GPU utilization is around 50% [12, 26].

What are the challenges in building such a behemoth of a datacenter? Foremost among these is securing sufficient electrical power, as we anticipate consumption on the order of gigawatts—a scale not readily available in a single location within the United States. Cooling presents another significant hurdle; as companies move away from water-based solutions, the datacenter’s surface area must increase proportionally with power consumption to effectively dissipate heat. Once these fundamental infrastructure challenges are addressed, we encounter the primary technical impediment: training scalability. As we approach systems with millions of GPUs, several critical questions arise: How will training methods adapt to such massive scale? What will be the upper limits of model size? How will networking requirements evolve to support this unprecedented level of computation and data movement?

This study provides insights into the future of large-scale AI infrastructure and the technical hurdles that must be overcome to realize the next generation of massive language models (with the primary focus on training). More specifically, we perform a systematic study of key challenges and features of building such a datacenter, starting from the \$100

billion and publicly available information. Using state-of-the-art model scaling laws, we explore the models that may be trained in such a datacenter, discussing the shortcomings of the current software and hardware stack, with a focus on networking. Lastly, we provide a set of insights into upcoming medium-term models as well as how the challenges we expose can be tackled.

2 INFRASTRUCTURE, POWER AND COOLING

The leading GPU for a next generation datacenter is the recently announced Blackwell B200 series from Nvidia, with novel NVL72 (72GPUs / rack) packaging, at a price tag of 3M\$. Each rack draws close to 1MW in full load, has a FP4 performance of 1440 PFlops, and 13.5TB of HBM3e memory. In-rack connectivity is via NVlink, with 14.4Tbps per GPU. Each GPU has a 800Gbps NIC connected to the scale-out network. Following current trends of spending up to 70% of our budget on compute, we get a total of 23K racks containing **1.67M GPUs** with a maximum power consumption of **2.9GW** and **33408000 PFlops** of FP4 performance (with sparsity) and an aggregate memory of **313PB (petabytes) of HBM3e**. That is, the whole datacenter would be able to output **33.4e21** floating point operations per second in FP4, with sparsity.

Considering up to 40% [24] more consumption due to non-compute, the overall power consumption of the datacenter will end up in the range of 4-5 GW. Looking at the US grid operators, we identify the maximum disposable power for all grids by computing the difference between the max registered power generation and max registered power demand in the last two years, with the most promising shown in Table 1.

Balancing Authority	Max Available (MW)
PJM	9915.0
SRP	2634.0
NEVP	2209.0
BPAT	2143.0

Table 1: Maximum available energy for the top energy producer grids in the US.

While PJM is a possible candidate for our 5 GW datacenter, it covers an area over several states. To find a single geographic point, we grouped power sources within a radius into power nodes. The vertices between nodes are high voltage transmission lines. We further constrained the solution to have at least an interconnect of 50% of the power demand. Following this approach, we couldn't find a single spot, but we can reduce the area to the vicinity of northern Baltimore around three nuclear power plants: Calvert Cliffs Plant, Peach Bottom, and Salem.

A single datacenter in this area would require the building of new 550 kV power lines, as the current infrastructure will not be able to handle the interconnect. Thus, the natural approach is to split the datacenter into multiple units. This also makes sense from a cooling perspective. As datacenters aim for net zero water usage in the future, and a datacenter can dissipate at least $2.076 \text{ kW}/\text{m}^2$ which would require a 5GW datacenter to have a surface of 2.41B m^2 . Adding to this, geographically separating the datacenter units would make it possible to tap several different renewable sources as opposed to a single one from a specific region. Lastly, fault tolerance to disaster, as well as the way the US grid is split between east and west add to this. Lower inference times due to proximity to users in both areas also support this approach"

Considering the west coast, we could fit the datacenter near California in the SRP grid. A second option is to split a datacenter unit of 2.5 GW into 2 or more locations; however we're not considering this approach in our paper. The most promising locations are in the area of southern Washington State and California, near the cross-state 765 kV power line.

3 MODEL SCALING

What model can we train using the above infrastructure? We choose the classical quadratic Transformer model, since it is the most studied and understood architecture, in order to draw an upper bound on training time. We do note that recent initial research on architectural variations, such as Mixture-of-Experts [11, 23], linear and sub-quadratic Transformers (RetNet [25], Mamba [6], RWKV [18]), and other such alternative models suggest that training times are similar to regular Transformers. However, they might be deployed in practice to help with inference times, at the cost of some model performance. As these models are less studied and less widely adopted, we do not consider them in our study.

3.1 Scaling laws

Based on our estimated number of GPUs and the number of FLOPS available in the datacenter, we proceed to determine the size of the model and the training dataset. The scaling laws offered by Hoffmann et al. [9] give us a rough idea as to what model we can train given this compute budget.

While we speculate that new and innovative software solutions will have to be deployed on such massive infrastructure, we demonstrate existing software solutions in our calculations. In all of the following calculations, we're considering a regular, classical quadratic Transformer, as noted above. We're considering all operations in FP4 precision, unless otherwise noted. This allows us to closely follow the scaling laws while trying to utilize GPU tensor cores and memory fully. We do not discuss performance at such a low precision,

but note that there have been different approaches and lines of research trying to train models in this range of precision, with mixed results.

In Figure 1a, we apply the scaling laws to estimate model size up to 24 months of training on the datacenter. This gives us a rough idea of what’s possible under constraints imposed on training time and compute budget.

Training time. For a moment, let’s consider there are no restrictions on interconnect bandwidth, memory consumed by the model, activations, optimizer etc., and that the GPUs would be able to run at 100% capacity. If we let the system run for 6 months, we would be able to get a total compute budget of $519e27$ FLOPS on the infrastructure.

Based on the total compute budget, we can infer the number of parameters and dataset size for *loss-optimal training*, given the scaling laws discussed above. From Figure 1a, the scaling laws predict that 6 months of training would give us a model of $52.5T$ parameters, and 24 months a model of size $103.5T$ parameters. The first model would optimally require a dataset of size $1650T$ tokens, while the second model would require $3226T$ tokens (around 15 Petabytes).

Constraints on networking, precision for certain operations, ideal operating conditions, memory utilization, and other such factors affect the GPU utilization rate. It is the case that hardware utilization today typically ranges from 40% to 60%. We do not consider this in our theoretical calculations above for simplicity, but later discuss the potential delays introduced by network communication.

Following the scaling laws, the datacenter could theoretically train a loss-optimal **52.5T model in 6 months** or a **103.5T model in 24 months**.

3.2 The architecture of the model

Now that we have identified possible model sizes that could be trained on such a datacenter, we will work on inferring the architecture. For the sake of comparing numbers, we’ll pick the two models identified above, namely the 50T model optimally trainable in 6 months, and the 100T model for 24 months. As we are in uncharted territory we make several assumptions:

The vocabulary size of the models is 256000 tokens. This sets the vocabulary size to a value that will cover most of the Unicode characters, similar to today’s models.

The **100T model** has **224 layers, 280 attention heads and a hidden dimension of 192000**, totaling **99.2 trillion parameters**, for a classical Transformer architecture, while the **50T model** has **252 layers, 280 attention heads and a hidden dimension of 132000**. While this doesn’t respect the usual width-to-depth ratio, Hoffmann et al [9] mentions that scaling one dimension more than the other should not significantly affect the performance of the model.

These numbers are more or less arbitrarily picked, for the sake of comparison, we’ve minimally experimented with a number of different model ratios and settled on these. We note that there is the possibility that better architectures could facilitate improved network communication, memory usage, GPU utilization, fault tolerance etc.

Sequence length of 32k. Although this may seem low at first, we note that there are a number of techniques [3, 5, 19, 28] which can be used to extend the context length after pre-training. From our experiments, increasing the pre-training context length would not be feasible here due to the quadratic memory requirements of classical Transformers.

4 NETWORK COMMUNICATION

Up until this point, we built a theoretical model in a vacuum, with no limits on memory, interconnect bottlenecks etc. Let us materialize the model. In this chapter we focus on the networking and communication stacks and discuss their particular set of challenges.

3D parallelism [17] will be used for distributed model training, as it should scale much better for larger Transformer models compared to techniques such as ZeRO-DP [21] or FSDP [29]. We’ll distribute the layers of the model to GPUs in such a way as to keep tensor parallelism computation local (inside the NVLink domain), while trying to minimize or overlap the communication times of pipeline parallelism and data parallelism, which happen over the scale-out 800 Gb/s links.

The total aggregate memory needed to train the model, not considering tensor parallelism, is composed of the memory for the model itself (considering an FP8 master model, calculations done using FP4 model), gradients, optimizer states, and activations. In Table 2, we have the total memory size of the models using the formulas given by Hoffmann et al. [9]

Model	Params	Gradients	Optimizer	Activations	Total
100T	148.7TB	49.5TB	198.3TB	188TB	585TB
50T	79.1TB	26.3TB	105.5TB	203.9TB	415 TB

Table 2: Memory usage of our target models.

Next, in Table 3, we have the number of layers per NVL72 rack and the number of model replicas over the available racks. Since 1 layer cannot fit in the memory of a single GPU, the layer is split across multiple GPUs using tensor parallelism. Following the work on reducing the activation size [14], we can deduce the final activations size by dividing by the number of tensor parallel units, picked empirically by choosing combinations of tensor-parallel units and layers per rack and seeing what fits in the available HBM memory. We end up with a value of memory per layer of about $1.86TB$ for the 100T model and $1.00TB$ for the 50T model. We importantly

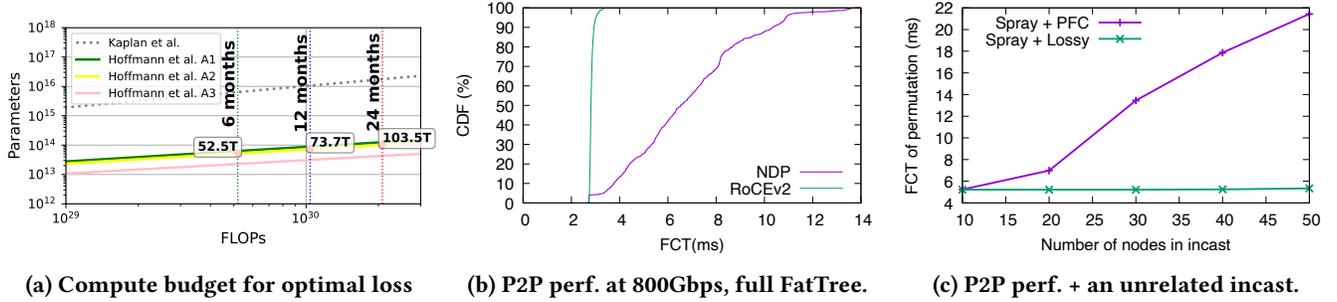


Figure 1

note that the layers held inside a rack are all the same layer of different model replicas, as opposed to consecutive layers of the same model replica. This will massively reduce all-reduce communication on the scale-out and cross-datacenter networks in the backward pass, when computing gradients, as we show in Section 4.1.

Model Size	# Layers	Mem per Layer	Layers Per Rack	Replicas
100T	224	1.86TB	7	721
50T	252	1.00TB	13	1196

Table 3: Number of layers per rack and the number of model replicas in the datacenter.

Using Table 3, we end up with 10 GPUs per layer (10-way TP) for the 100T model and 5 GPUs per layer (5-way TP) for the 50T model. While we do not fully utilize the racks (a number of GPUs are essentially not doing any computation), the extra GPUs can be used for fault tolerance. Otherwise a fault could massively degrade training time, as whole iterations would have to be re-computed.

Computation. We first calculate the theoretical ideal computation time per layer. This will give us a general idea of how much time is spent on pure computation, and how much time can be allocated to communication overhead.

Model	FLOPS per Model	FLOPS per Layer	Time per layer (Fwd)
100T	6.52e18	29e15	145.5 ms
50T	3.5e18	13.9e15	139.2 ms

Table 4: Model Comparison: Flops and Layer Time

Starting from the formulas from Hoffmann et al. [9], we can calculate the floating point operations needed for a pass through the models. We make the same assumption that the backward pass takes twice as much time as the forward pass. This theoretical computation time is shown in Table 4.

4.1 Communication

We also calculate communication time, given by the above constraints. With 7 layers per rack and 13 layers per rack for the two models, we end up with 10-way tensor parallel, 224-way pipeline parallel and 721-way data parallel for the 100T model, and 5-way tensor parallel, 252-way pipeline parallel, and 1196-way data parallel for the 50T model.

We especially note that, to keep communication times low, we employ a hierarchical data parallel approach. We all-reduce the gradients inside a single NVL72 rack in a first step (this is why we keep the same layer of different model replicas locally), and then we do a scale-out all-reduce globally, between racks, in a second step. This reduces the global all-reduce to 103 peers for the 100T model, and 92 peers for the 50T model. While theoretically this does not improve the optimal all-reduce time, since the message size is still the same (the gradients for a layer, of 223 GB for the 100T model and 104 GB for the 50T model), we believe congestion, as well as practical all-reduce times, will be much lower. In a third step, the gradients have to be exchanged back through an all-gather among the local layers of a rack, since each separate copy of the layer only exchanged parts of its data. The first and third steps happen over NVLink, so this approach should be much faster in practice.

Figure 2 shows a visual representation of the 3D parallelism strategy we use.

Tensor Parallel. Inside a layer, tensor parallelism needs to run two all-reduce operations per forward pass, as there are 2 synchronization points (the output of the attention layer and the output of the feed-forward layer), and 2 extra all-reduce operations per backward pass. The resulting communication overhead is 0.61 GB (100T) and 0.8 GB (50T).

With an interconnect of 1.8 TB/s between GPUs inside an NVL72 rack, the ideal tensor parallelism communication time for one all-reduce is 0.61ms for the 100T and 0.71ms for 50T (Equation 1). Since we have two all-reduce operations per forward pass, we get 1.22ms and 1.42ms in total. This

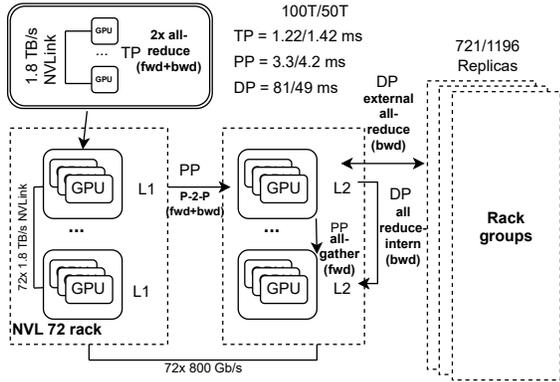


Figure 2: Overview of the communication involved for a 100T model using 3D Parallelism.

communication cannot be overlapped with computation, as tensor parallelism introduces output-input dependencies.

$$\text{All Reduce TP} = \frac{2(\text{MLP} + \text{ATTN}) \cdot \text{NUM_PEERS} - 1}{\text{P2P_Speed} \cdot \text{NUM_PEERS}} \quad (1)$$

Pipeline Parallel. Between racks, the communication for pipeline parallelism reduces to a point-to-point (P2P) exchange between GPUs. To reduce communication time over InfiniBand, the GPUs exchange only part of the input (every layer is replicated 7-way or 13-way on each rack). An additional all-gather over the speedy NVLink in the next rack allows every GPU to start the next layer computation with the full inputs. The total communication size for pipeline parallel is half that of tensor parallelism, as only the last output of the feed-forward layer needs to be exchanged. In total, this would mean $0.3\text{GB}/(100\text{GB/s}) = 3\text{ms}$ per P2P communication and $0.3\text{GB}/1.8\text{TB/s} * 5/6 = 0.3\text{ms}$ for a total of 3.3ms for the 100T model. Similarly, for the 50T model we get 4ms and 0.2ms .

Data Parallel. After exchanging the data as described above, we need to run all-reduce operations in the backward pass to synchronize gradients between model replicas. As mentioned above, we perform a hierarchical all-reduce. First, we do an internal all-reduce within an NVL72 rack, and then a scale-out, external all-reduce between different racks, involving similar layer replicas with fewer peers per collective operation. After the global all-reduce, we require an additional all-gather within the NVL72 rack, to synchronize the gradients between all local layer replicas.

The communication times for these all-reduce operations result from Equation 2. For the external all-reduce we multiplying the $P2P_Speed$ and no longer dividing $grads_per_layer$

by NUM_GPUS . The ideal internal DP time for 100T/50T computes to $21/21\text{ms}$ whereas external time is $60/28\text{ms}$.

$$\text{All Reduce DP} = 2 \cdot \frac{\text{grads_per_layer}}{\text{GPUS_PER_LAYER}} \cdot \frac{\text{REPS} - 1}{\text{P2P_Spd} \cdot \text{REPS}} \quad (2)$$

For the final all-gather within the rack there’s an additional 10ms .

For hierarchical communication that uses both the scale-up and scale-out domains, we can reduce the total completion time by chunking the data and processing each chunk independently, i.e., via data pipelining.

4.2 Wide-area training

In Section 2, we’ve found that power constraints require splitting the datacenter, and the best split would be between the east and west coasts with an RTT of around 40ms . Can we train the model across this distance? Splitting the datacenter would not affect our training architecture. Instead of a big datacenter running 721-way data parallel replicas for the 100T model (or 1196, in the case of the 50T model), we could split this into 2, where each datacenter runs 360-way data parallel and 598-way data parallel, respectively, and synchronize the gradients in the backward pass between datacenters normally. As the backward pass takes 290ms , this serves as an upper bound for the all-reduce communication.

To achieve this, we modify our hierarchical data parallel approach as follows: a global all-reduce inside a datacenter is followed by an all-reduce between the two datacenters involving all nodes, followed by propagation of the gradients to all racks using 2 all-gathers (one all-gather per rack, as before, and one point-to-point transfer, followed by another all-gather per rack). For efficiency, each rack in the first datacenter communicates with its peer in the other datacenter, essentially running an all-reduce between two nodes. The message size represents only a small part of the actual gradients, equal to the total gradient size divided by the number of racks per datacenter.

4.3 Exposed networking

Our predictions show that, for each batch of training data, the GPUs will take approximately 145ms to perform the calculations for the forward pass, and 290ms for the backward pass. It is important to note that much of the networking is overlapped with computation and thus hidden. For instance, during back-propagation, when a layer finishes computing its gradients, it can already start synchronizing them with other layer replicas. The only point where this communication is completely exposed is at the last layer.

The amount of exposed communication is, in principle, not large at 800Gbps scale-out (5ms per step), but this assumes

a perfect network. Also, most of the all-reduce operation is masked by backpropagation, except for the last layer (out of 200+ layers). If the network behaves as a non-blocking switch, as our previous calculations assume, the impact on performance is minimal. The scale-up network (NVLink / NVSwitch) should behave close to the theoretical optimum. We explore to what extent the scale-out network approximates this ideal in the next section.

5 NETWORK TOPOLOGY AND TRANSPORT PROTOCOLS

How do we connect 800K GPUs with 800Gbps NICs in each of our two datacenters? The largest switches on the market today have 51.2Tbps bisection bandwidth, and can be configured with 64 800Gbps ports. To build a fully provisioned Fat Tree, we need 4 tiers with a total of 75K switches and 2.4 million switch-to-switch links. For the large majority of these, the length is tens of meters, which makes cheap, passive DAC cables infeasible; optical transceivers cost 1K USD per link even at 400Gbps, so the estimated price tag for the wires alone is enormous (\$5 billion). We can reduce this cost by using fewer tiers (higher radix switches) and by designing the topology to reduce core load, thus allowing oversubscription without loss in performance.

Multi-rail topologies [4] are a way to achieve higher effective switch radix with the same switching chips. The same 51.2T chip can be configured as a 256 200Gbps ports switch (instead of 64 ports with 800Gbps). It’s important to note that an 800Gbps link is in fact built using 8 parallel 100Gbps serdes blocks transmitting over the same wire. We can thus have the same wire carry 4 or 8 lower-speed links for the same total capacity of 800Gbps.

With multi-rail, we can build switches that contain four 51.2T ASICs and have 256 front panel ports. Inside the switch, each front panel port is divided into four 200Gbps links each of which is connected to a separate switching ASIC via backplane copper traces. The total NIC bandwidth is still 800Gbps, but it is obtained by connecting to 4 separate networks (rails) which use the same wires and switches but are otherwise independent. Switch-to-switch links follow the same pattern, where 4 200Gbps links share a wire.

With 256-port switches, three tiers are (more than) sufficient to connect all the GPUs. If we used only two tiers, 32K GPUs could be connected at full bisection, and 51K with 4:1 oversubscription. If next-generation switches had higher port counts (e.g., 1024 100Gbps ports), two tiers would be sufficient to connect the entire datacenter.

Multi-rail reduces the number of switches and switch-to-switch links by a third for full bisection, and even more for oversubscribed networks. Another significant benefit is that

it enables better traffic locality, as we now have four times more GPUs connecting to the same TOR switch.

How should we interconnect the GPUs to the scale-out network? The conventional approach is to connect all GPUs in the same rack to the same switch (i.e., TOR). However, with an ML network, these GPUs are already connected to the higher speed scale-up network, so the scale-out TOR would carry little local traffic. A better approach has first-tier switches connecting GPUs from different racks to ensure maximum cross-rack bandwidth.

If we provision the second tier as full bisection, we would connect 128 GPUs from different racks to a single switch. We would like to have the data-parallel all-reduce traffic stay local, so we can schedule the replicas of the same layer (using an orchestrator such as Slurm) onto these nodes. For our 100T model, we have around 100 replicas, so they fit nicely, which means that, barring failures, all reduce traffic will stay switch-local.

We still have inter-datacenter all-reduce traffic and point-to-point traffic to carry through. The latter is a synchronized permutation across all training nodes, to fully load the core. We estimate this would take 3ms per step, hidden behind forward/backward compute (145ms/290ms). Even with 4:1 oversubscription, the optimal completion time is just 12ms, much smaller than our budget.

This means we can use a four to one (or larger) oversubscription ratio, having 200 downlinks and 50 uplinks per first-tier switch. In our second tier, if we use another two to one oversubscription, we will have 168 downlinks and 88 uplinks. With this, we would need 4300 switches (17200 switching chips, a fifth compared to a full Fat Tree) and crucially, only 240K switch-to-switch links, ten times less than the Fat Tree [1].

To connect across datacenters, we need 14 Tbps all-reduce to finish in 100ms, and double that to accommodate other sync traffic. We can either connect the 300 top-tier switches directly in the two datacenters or create a new pod with routers connecting to long distance links (easier and more flexible).

Which transport protocol shall we use? A multi-rail, oversubscribed topology scale-out is sufficient on paper, but what transports shall we use for it? The only real choice today is to use hardware transports based on RDMA, either IP (RoCEv2) or InfiniBand. Both are lossless and single-path, with similar performance for AIML traffic (the latter has slightly lower latency). This, coupled with the vendor lock-in associated with InfiniBand, suggests that the target network will be implemented using IP.

How far are existing transports from the optimal transfer times ? Point-to-point traffic pattern is particularly tough,

as it goes across multiple switch tiers. We simulated synchronized P2P transfers required for our 100T model using RoCEv2 in a three-tier FatTree topology with 1024 hosts and 800Gbps links. The optimal Flow completion Time (FCT) is just under 3ms, yet RoCEv2 takes 15ms to finish, as shown in Figure 1b. This is due to collisions because of ECMP [2, 8, 20].

Because of the synchronized, lock-step nature of distributed training, the tail FCT in the point-to-point phase will end up delaying the entire distributed training by the same amount (5 seconds per iteration, or 3%). In contrast, transports such as NDP[8] or Homa[16] that spread traffic across all paths we get within 5% of the optimal FCT, as shown in Figure 1b.

A stronger argument for using multipath transport is our multi-rail network design. Without such a transport, applications (typically the collective library) would have to manually break up the data across the rails, resulting in sub-optimal load balancing. Furthermore, within a rail, we would have similar FCT inflation due to collisions as in our experiment above.

For all-reduce implementations, ring all-reduce works fine with large amounts of data and few nodes (100 in our case), and each node has one incoming and one outgoing connection. As most all-reduce traffic will stay in the first tier, this should be workable, but it has the downside of needing 200RTTs to finish; with a 5us RTT, this adds 1 ms to the completion time (of 60ms). The dual-binary tree scales better (logarithmic number of RTTs) but requires two outgoing and two incoming connections per node. Coupled with slightly desynchronized starts, this can result in small incasts which may trigger priority flow control, tree saturation and affect innocent traffic. Small scale incasts also appear in all-to-all(v) traffic used in MoE inference.

Lossless networks are notoriously difficult to manage [7]; buffers are getting smaller in BDPs as switches are getting faster, meaning that PFC will trigger more often. Furthermore, congestion control for RDMA such as DCQCN [30] or HPCC [15] starts at line rate and only reacts to congestion after the 1st RTT, meaning it can still cause PFC. Figure 1c shows the effect of PFC on an unrelated permutation traffic pattern (128 nodes) in a network of 2048 nodes.

Wide area transport. The scale-out transport must be multipath and capable of running at 800Gbps; what about the inter-DC transport? The all-reduce involves all training nodes, each transferring 300MB per iteration in around 100ms. This requires at least 25Gbps per flow. We can use TCP, but the CWND adaptation creates unnecessary loss; coupled with a fairly large RTT, retransmissions create unnecessarily long tail FCT. If we adopt a controller similar to B4 [10], we can perform both traffic engineering and admission control on

the wide area links to ensure congestion control is not needed and all traffic is admissible.

We can still have loss due to bit errors, which require re-transmissions. These could be avoided by adding redundancy to the outgoing traffic (e.g., parity packets or similar).

Finally, the wide-area traffic must be prioritized within data center networks, which means that multipath traffic must be able to cope with non-equal capacity links.

6 RESEARCH QUESTIONS

Significant breakthroughs are required to keep up with the ever-growing demands of next-generation LLMs. We are predicting that a transition towards multipath communication is necessary to avoid the crushing impact of current protocols on the tail end of completion times. Scheduling and placement also need to evolve, and things are further complicated by failure domains for tensor parallelism being rigidly confined to the rack level. Adding wide area transport into the mix comes with its own set of unique challenges. It's of utmost importance to leave headroom for redundancy and failure recovery while keeping utilization high; for example, by mixing long running training workloads with transient inference jobs. It's also important to note that advances in network monitoring are required to keep up with the blazingly fast data speeds, as current sampling approaches appear to no longer capture the relevant bigger picture.

REFERENCES

- [1] Mohammad Al-Fares, Alexander Loukissas, and Amin Vahdat. 2008. A Scalable, Commodity Data Center Network Architecture. In *Special Interest Group on Data Communication (SIGCOMM)*. ACM.
- [2] Mohammad Al-Fares, Sivasankar Radhakrishnan, Barath Raghavan, Nelson Huang, and Amin Vahdat. 2010. Hedera: Dynamic Flow Scheduling for Data Center Networks. In *Networked Systems Design and Implementation (NSDI)*. USENIX Association.
- [3] Yukang Chen, Shengju Qian, Haotian Tang, Xin Lai, Zhijian Liu, Song Han, and Jiaya Jia. 2023. Longlora: Efficient fine-tuning of long-context large language models. *arXiv preprint arXiv:2309.12307* (2023).
- [4] Salvador Coll, Eitan Frachtenberg, Fabrizio Petrini, Adolfo Hoisie, and Leonid Gurvits. 2002. Using Multirail Networks in High-Performance Clusters. (08 2002).
- [5] Yiran Ding, Li Lyna Zhang, Chengruidong Zhang, Yuanyuan Xu, Ning Shang, Jiahang Xu, Fan Yang, and Mao Yang. 2024. Longrope: Extending llm context window beyond 2 million tokens. *arXiv preprint arXiv:2402.13753* (2024).
- [6] Albert Gu and Tri Dao. 2023. Mamba: Linear-time sequence modeling with selective state spaces. *arXiv preprint arXiv:2312.00752* (2023).
- [7] Chuanxiong Guo, Haitao Wu, Zhong Deng, Gaurav Soni, Jianxi Ye, Jitu Padhye, and Marina Lipshteyn. 2016. RDMA over Commodity Ethernet at Scale. In *Special Interest Group on Data Communication (SIGCOMM)*. ACM.
- [8] Mark Handley, Costin Raiciu, Alexandru Agache, Andrei Voinescu, Andrew W. Moore, Gianni Antichi, and Marcin Wójcik. 2017. Architecting Datacenter Networks and Stacks for Low Latency and High Performance. In *Special Interest Group on Data Communication (SIGCOMM)*. ACM.

- [9] Jordan Hoffmann, Sebastian Borgeaud, Arthur Mensch, E Buchatskaya, T Cai, E Rutherford, DdL Casas, LA Hendricks, J Welbl, A Clark, et al. 2022. Training compute-optimal large language models. *arXiv 2022. arXiv preprint arXiv:2203.15556* 10 (2022).
- [10] Sushant Jain, Alok Kumar, Subhasree Mandal, Joon Ong, Leon Poutievski, Arjun Singh, Subbaiah Venkata, Jim Wanderer, Junlan Zhou, Min Zhu, et al. 2013. B4: Experience with a globally-deployed software defined WAN. *ACM SIGCOMM Computer Communication Review* 43, 4 (2013), 3–14.
- [11] Albert Q Jiang, Alexandre Sablayrolles, Antoine Roux, Arthur Mensch, Blanche Savary, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Emma Bou Hanna, Florian Bressand, et al. 2024. Mixtral of experts. *arXiv preprint arXiv:2401.04088* (2024).
- [12] Ziheng Jiang, Haibin Lin, Yinmin Zhong, Qi Huang, Yangrui Chen, Zhi Zhang, Yanghua Peng, Xiang Li, Cong Xie, Shibiao Nong, et al. 2024. {MegaScale}: Scaling large language model training to more than 10,000 {GPUs}. In *21st USENIX Symposium on Networked Systems Design and Implementation (NSDI 24)*. 745–760.
- [13] Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. 2020. Scaling laws for neural language models. *arXiv preprint arXiv:2001.08361* (2020).
- [14] Vijay Anand Korthikanti, Jared Casper, Sangkug Lym, Lawrence McAfee, Michael Andersch, Mohammad Shoeybi, and Bryan Catanzaro. 2023. Reducing activation recomputation in large transformer models. *Proceedings of Machine Learning and Systems* 5 (2023), 341–353.
- [15] Yuliang Li, Rui Miao, Hongqiang Harry Liu, Yan Zhuang, Fei Feng, Lingbo Tang, Zheng Cao, Ming Zhang, Frank Kelly, Mohammad Alizadeh, et al. 2019. HPCC: High precision congestion control. In *Proceedings of the ACM special interest group on data communication*. 44–58.
- [16] Behnam Montazeri, Yilong Li, Mohammad Alizadeh, and John Ousterhout. 2018. Homa: A Receiver-driven Low-latency Transport Protocol Using Network Priorities. In *Special Interest Group on Data Communication (SIGCOMM)*. ACM.
- [17] Deepak Narayanan, Mohammad Shoeybi, Jared Casper, Patrick LeGresley, Mostofa Patwary, Vijay Korthikanti, Dmitri Vainbrand, Prithvi Kashinkunti, Julie Bernauer, Bryan Catanzaro, et al. 2021. Efficient large-scale language model training on gpu clusters using megatron-lm. In *Proceedings of the International Conference for High Performance Computing, Networking, Storage and Analysis*. 1–15.
- [18] Bo Peng, Eric Alcaide, Quentin Anthony, Alon Albalak, Samuel Arcadinho, Stella Biderman, Huanqi Cao, Xin Cheng, Michael Chung, Matteo Grella, et al. 2023. Rwkv: Reinventing rns for the transformer era. *arXiv preprint arXiv:2305.13048* (2023).
- [19] Bowen Peng, Jeffrey Quesnelle, Honglu Fan, and Enrico Shippole. 2023. Yarn: Efficient context window extension of large language models. *arXiv preprint arXiv:2309.00071* (2023).
- [20] Costin Raiciu, Sebastien Barre, Christopher Pluntke, Adam Greenhalgh, Damon Wischik, and Mark Handley. 2010. Improving Data-center Performance and Robustness with Multipath TCP. In *Special Interest Group on Data Communication (SIGCOMM)*. ACM.
- [21] Samyam Rajbhandari, Jeff Rasley, Olatunji Ruwase, and Yuxiong He. 2020. Zero: Memory optimizations toward training trillion parameter models. In *SC20: International Conference for High Performance Computing, Networking, Storage and Analysis*. IEEE, 1–16.
- [22] Reuters. 2024. Microsoft, OpenAI planning \$100 billion data center project - The Information. <https://www.reuters.com/technology/microsoft-openai-planning-100-billion-data-center-project-information-reports-2024-03-29> 28 July 2024.
- [23] Noam Shazeer, Azalia Mirhoseini, Krzysztof Maziarz, Andy Davis, Quoc Le, Geoffrey Hinton, and Jeff Dean. 2017. Outrageously large neural networks: The sparsely-gated mixture-of-experts layer. *arXiv preprint arXiv:1701.06538* (2017).
- [24] Arman Shehabi, Sarah Smith, Dale Sartor, Richard Brown, Magnus Hermlin, Jonathan Koomey, Eric Masanet, Nathaniel Horner, Inês Azevedo, and William Lintner. 2016. United states data center energy usage report. (2016).
- [25] Yutao Sun, Li Dong, Shaohan Huang, Shuming Ma, Yuqing Xia, Jilong Xue, Jianyong Wang, and Furu Wei. 2023. Retentive network: A successor to transformer for large language models. *arXiv preprint arXiv:2307.08621* (2023).
- [26] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. 2023. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971* (2023).
- [27] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Lukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. *Advances in neural information processing systems* 30 (2017).
- [28] Peitian Zhang, Zheng Liu, Shitao Xiao, Ninglu Shao, Qiwei Ye, and Zhicheng Dou. 2024. Soaring from 4K to 400K: Extending LLM’s Context with Activation Beacon. *arXiv preprint arXiv:2401.03462* (2024).
- [29] Yanli Zhao, Andrew Gu, Rohan Varma, Liang Luo, Chien-Chin Huang, Min Xu, Less Wright, Hamid Shojanazeri, Myle Ott, Sam Shleifer, et al. 2023. Pytorch fsdp: experiences on scaling fully sharded data parallel. *arXiv preprint arXiv:2304.11277* (2023).
- [30] Yibo Zhu, Haggai Eran, Daniel Firestone, Chuanxiong Guo, Marina Lipshteyn, Yehonatan Liron, Jitendra Padhye, Shachar Raindel, Mohammad Haj Yahia, and Ming Zhang. 2015. Congestion Control for Large-Scale RDMA Deployments. In *Proceedings of the 2015 ACM Conference on Special Interest Group on Data Communication (London, United Kingdom) (SIGCOMM ’15)*. Association for Computing Machinery, New York, NY, USA, 523–536. <https://doi.org/10.1145/2785956.2787484>