

## **Notice**

This manuscript is a preliminary version of a conference paper presented at the 32nd Annual European Symposium on Algorithms (ESA 2024). The final version of this paper can be found at the following link: <https://doi.org/10.4230/LIPIcs.ESA.2024.94>. We encourage readers to refer to the final paper for the most accurate and updated findings.

---

# SOLVING THE GRAPH BURNING PROBLEM FOR LARGE GRAPHS\*

---

A PREPRINT

✉ **Felipe de C. Pereira**<sup>†</sup>  
Institute of Computing  
University of Campinas  
Campinas, Brazil  
pereira\_felipe@ic.unicamp.br

✉ **Pedro J. de Rezende**  
Institute of Computing  
University of Campinas  
Campinas, Brazil  
pjr@unicamp.br

✉ **Tallys Yunes**  
Miami Herbert Business School  
University of Miami  
Coral Gables, USA  
tallys@miami.edu

✉ **Luiz F. B. Morato**  
Institute of Computing  
University of Campinas  
Campinas, Brazil  
fernandomorato93@gmail.com

April 25, 2024

## ABSTRACT

We propose an exact algorithm for the Graph Burning Problem (GBP), an NP-hard optimization problem that models the spread of influence on social networks. Given a graph  $G$  with vertex set  $V$ , the objective is to find a sequence of  $k$  vertices in  $V$ , namely,  $v_1, v_2, \dots, v_k$ , such that  $k$  is minimum and  $\bigcup_{i=1}^k \{u \in V : d(u, v_i) \leq k - i\} = V$ , where  $d(u, v)$  denotes the distance between  $u$  and  $v$ . We formulate the problem as a set covering integer programming model and design a row generation algorithm for the GBP. Our method exploits the fact that a very small number of covering constraints is often sufficient for solving the integer model, allowing the corresponding rows to be generated on demand. To date, the most efficient exact algorithm for the GBP, denoted here by GDCA, is able to obtain optimal solutions for graphs with up to 14,000 vertices within two hours of execution. In comparison, our algorithm finds provably optimal solutions approximately 236 times faster, on average, than GDCA. For larger graphs, memory space becomes a limiting factor for GDCA. Our algorithm, however, solves real-world instances with almost 200,000 vertices in less than 35 seconds, increasing the size of graphs for which optimal solutions are known by a factor of 14.

**Keywords** Graph burning · Burning number · Burning sequence · Set covering · Integer programming · Row generation

## 1 Introduction

The Graph Burning Problem (GBP) is a combinatorial optimization problem that models a form of contagion diffusion on social networks in which one seeks to propagate influence over the entire network as quickly as possible [5]. By representing networks as graphs, a contagion can be thought of as a fire that spreads throughout the vertices of a graph following its adjacency relations.

In this problem, we are given an undirected graph  $G = (V, E)$  that represents a social network, where each vertex in  $V$  corresponds to an individual and each edge  $\{u, v\} \in E$  indicates a reciprocal influence relationship between the individuals represented by  $u$  and  $v$ .

---

\*This work was supported in part by grants from: *Santander Bank*, Brazil; *Brazilian National Council for Scientific and Technological Development* (CNPq), Brazil, #314293/2023-0, #313329/2020-6; *São Paulo Research Foundation* (FAPESP), Brazil, #2023/04318-7; #2023/14427-8.

<sup>†</sup>Corresponding author.

A *burning process* in  $G$  unfolds in a series of *rounds*. In every round  $i \geq 1$ , each vertex is either assigned the *burned* or *unburned* state. Initially, all vertices are unburned. In each round  $i \geq 1$ , exactly one vertex (a *fire source*) is chosen to be set on fire and becomes burned. Moreover, starting in round  $i = 2$ , each unburned vertex that has at least one burned neighbor in round  $i - 1$  becomes burned and remains in that state until the last round.

A sequence  $(v_1, v_2, \dots, v_k) \in V^k$ , where  $v_i$  is the  $i$ -th fire source, constitutes a *burning sequence* for  $G$ , if the entire graph is burned by the  $k$ -th round.

For each  $u \in V$ , we denote by  $N_j[u] = \{v \in V : d(u, v) \leq j\}$  the  $j$ -th *closed neighborhood* of  $u$ , where  $d(u, v)$  denotes the *distance* between  $u$  and  $v$ , *i.e.*, the number of edges in a shortest path in  $G$  that connects these vertices.

Formally,  $(v_1, v_2, \dots, v_k)$  is a burning sequence for  $G$  if

$$\bigcup_{i=1}^k N_{k-i}[v_i] = V \quad (1)$$

It follows from the burning process that  $v_i$  ascertains that each vertex in  $N_{k-i}[v_i]$  (including  $v_i$ ) gets burned by round  $k$ .

**Problem 1** (Graph Burning Problem). *Given an undirected graph  $G$ , find a burning sequence for  $G$  of minimum length.*

The length of a shortest burning sequence for  $G$  is called its *burning number*, denoted  $b(G)$ , and was introduced in the literature as a graph parameter that measures the speed at which a propagation can spread throughout a network: the smaller the burning number of  $G$  is, the more susceptible  $G$  is to fast contagions. Although this parameter is of special interest for social networks, the problem has also been investigated for various other classes of graphs [2, 3, 4, 7, 8, 14, 16, 17, 18, 26, 27].

The GBP is NP-hard [2, 5] and, so far, four exact approaches have been proposed to solve the problem for arbitrary graphs [10, 12]. The currently best known exact algorithm [10], referred to, here, as GDCA, is able to find provably optimal solutions for real-world networks with up to 14,000 vertices in less than two hours. For larger graphs, memory space becomes a limiting factor.

## 1.1 Our Contributions

In this paper, we propose an exact algorithm for the GBP based on an integer programming (IP) formulation together with a row generation procedure. Through a series of computational experiments, we are able to demonstrate that the proposed method significantly outperforms GDCA. More specifically, our algorithm:

- Finds provably optimal solutions 236 times faster, on average, than GDCA for networks with up to 14,000 vertices;
- Solves real-world networks with almost 200,000 vertices in less than 35 seconds, hence increasing the size of the vertex set of graphs for which optimal solutions are known by a factor of 14.

This paper is organized as follows. In Section 2, we review the literature on the GBP and, in Section 3, we describe our exact algorithm. Section 4 contains a report on computational experiments and an analysis of the results. Lastly, in Section 5, we present concluding remarks and address future work.

## 2 Previous Work

The GBP was proposed in [5] and has been extensively studied both from theoretical and practical points of view. In this section, we present a brief background review of the problem for arbitrary graphs, focusing on upper bounds, heuristics, approximation algorithms, and mathematical models. For a probe regarding the GBP on specific families of graphs, we refer the reader to the survey [3].

Let  $G = (V, E)$  be an arbitrary undirected graph with  $p \geq 1$  connected components and let  $n_1, n_2, \dots, n_p$  be the numbers of vertices of these components. Denote by  $b(G)$  the burning number of  $G$ .

Theorem 1 provides the best known upper bound for  $b(G)$  [1, 12].

**Theorem 1.**  $b(G) \leq p + \sum_{i=1}^p \lceil (4n_i/3)^{1/2} \rceil$ .

Conjecture 1 suggests a tighter upper bound for  $b(G)$ , but that result remains open since the problem was introduced [5, 12].

**Conjecture 1.**  $b(G) \leq \sum_{i=1}^p \lceil n_i^{1/2} \rceil$ .

Among the plethora of heuristics proposed for the GBP [9, 10, 13, 19, 28, 29], a centrality-based genetic algorithm [19] and the greedy algorithm from [10] are the latest in the literature.

Two 3-approximation algorithms for the GBP were proposed in [2, 7], and more recently, a  $(3 - 2/b(G))$ -approximation, referred to, here, as BFF, was introduced in [11]. Algorithm 1 describes BFF, which progressively builds a burning sequence  $S$  by iteratively selecting the  $i$ -th fire source as the vertex that is farthest from any of the previous selected fire sources. In [11], it is shown that  $|S| \leq 3 \cdot b(G) - 2$  and that BFF has worst-case time complexity  $\mathcal{O}(|V|^2)$ , provided that the distances between all pairs of vertices are computed a priori.

---

**Algorithm 1:** BFF (as used in [10])

---

**Input :** Graph  $G = (V, E)$ ; distances between all pairs of vertices of  $G$

**Output:** A burning sequence  $S$

```

1 Select  $v_1$  arbitrarily;  $S \leftarrow (v_1)$ ;  $i \leftarrow 2$ ;
2 while  $S$  is not feasible do
3    $v_i = \arg \max_{u \in V} (\min\{d(u, v_1), d(u, v_2), \dots, d(u, v_{i-1})\})$ ;
4    $S \leftarrow (v_1, v_2, \dots, v_i)$ ;  $i \leftarrow i + 1$ ;
5 return  $S$ 

```

---

## 2.1 Existing Mathematical Models

Regarding exact formulations for the GBP, three IP models, namely, ILP, CSP1 and CSP2, were proposed in [12]. While ILP consists of an optimization model, the last two are decision models that, for a given integer  $B$ , determine whether a burning sequence of length  $B$  exists.

In both ILP and CSP1, the main variables are indexed by each pair  $(v, i) \in V \times \{1, 2, \dots, U\}$ , where  $U$  is a known upper bound for  $b(G)$ , and each of them indicates whether  $v$  is burned in round  $i$ . This idea has also been applied for the design of mathematical models for related problems, such as the well studied Target Set Selection Problem and some of its variants [20, 21, 22, 25].

In CSP2, the main variables are indexed by each pair  $(u, v) \in V \times V$  and each of them specifies whether  $u$  is responsible for  $v$  getting burned, if  $u$  is a fire source. The assemblage of CSP2 requires that the distances between every pair of vertices be known.

## 2.2 The Current Best Known Exact Algorithm

We now describe GDCA, an exact algorithm that leads to better performance results when compared to simply solving the models cataloged in the previous section, as was empirically demonstrated by experiments reported in [10].

GDCA relies on the fact that the GBP can be seen as a set covering problem. This was first observed in [6] and later formalized in [10] by means of a reduction of the GBP to the Clustered Maximum Coverage Problem (CMCP) [10] that we now describe.

**Problem 2** (Clustered Maximum Coverage Problem). *Given a set  $P$  and  $k \geq 1$  sets (clusters)  $C_1, C_2, \dots, C_k$ , each one containing subsets of  $P$ , find  $k$  sets  $S_1, S_2, \dots, S_k$  such that  $S_i \in C_i$ , for  $i = 1, 2, \dots, k$ , and  $|\bigcup_{i=1}^k S_i|$  is maximum.*

Given an undirected graph  $G = (V, E)$ , let  $P = V$ ,  $k = B$  and, for each  $i = 1, 2, \dots, B$ , take  $C_i = \{S_{i,v} : v \in V\}$ , where  $S_{i,v} = N_{B-i}[v]$ . The value of an optimal solution for CMCP corresponds to the maximum number of vertices that can be burned in  $G$  using a sequence of  $B$  vertices [10]. If such number equals  $|V|$ , then an optimal solution for CMCP, say,  $S_{1,v_1}, S_{2,v_2}, \dots, S_{k,v_k}$ , corresponds to a burning sequence  $(v_1, v_2, \dots, v_k)$  for  $G$ . Otherwise, one can conclude that  $b(G) > B$ .

In [10], the following IP model, originally designed for the CMCP, and referred to, here, as CMCP-IP, is used to decide whether a burning sequence of length  $B$  for  $G$  exists. Let  $X = \{x_{v,i} : v \in V, i \in \{1, 2, \dots, B\}\}$  and  $Y = \{y_v : v \in V\}$  be sets of binary variables such that  $x_{v,i} = 1$  iff  $v$  is the  $i$ -th fire source and  $y_v = 1$  iff  $v$  gets burned during the burning process.

$$\begin{array}{l}
\text{CMCP-IP} \left\{ \begin{array}{l}
\max \sum_{v \in V} y_v \quad (2) \\
\text{s.t.} \quad \sum_{v \in V} x_{v,i} = 1 \quad \forall i \in \{1, 2, \dots, B\} \quad (3) \\
\sum_{i=1}^B \sum_{u \in V: v \in N_{B-i}[u]} x_{u,i} \geq y_v \quad \forall v \in V \quad (4)
\end{array} \right.
\end{array}$$

The objective function (2) maximizes the number of burned vertices. Constraints (3) establish that exactly one vertex is assigned to each position in the burning sequence. Lastly, Constraints (4) ensure that if  $v$  is in the burned state, then there is at least one fire source  $u$  (possibly  $v$  itself) such that  $d(u, v) \leq B - i$ , where  $i$  is the position of  $u$  in the burning sequence. CMCP-IP has a total of  $\mathcal{O}(|V| \cdot B)$  binary variables and  $\mathcal{O}(|V|)$  constraints. Loading this model requires that the distances between every pair of vertices be known.

GDCA performs a binary search in a certain interval of candidate values for  $b(G)$  and uses CMCP-IP to solve each of the decision problems encountered during the search. Algorithm 2 describes the procedure.

---

**Algorithm 2:** GDCA

**Input :** Graph  $G = (V, E)$

**Output:** Optimal burning sequence  $S$

- 1  $D \leftarrow$  distance matrix of  $G$ ;  $S \leftarrow$  BFF( $G, D$ );
  - 2  $U \leftarrow |S|$ ;  $L \leftarrow \lceil (|S| + 2)/3 \rceil$ ;
  - 3 **while**  $L \leq U$  **do**
  - 4      $B \leftarrow \lfloor (L + U)/2 \rfloor$ ;  $(obj, S') \leftarrow$  SolveCMCP-IP( $G, D, B$ );
  - 5     **if**  $obj = |V|$  **then**  $S \leftarrow S'$ ;  $U \leftarrow B - 1$ ; **else**  $L \leftarrow B + 1$ ;
  - 6 **return**  $S$
- 

First, the algorithm computes the distances between all pairs of vertices (e.g., by  $|V|$  breadth-first searches, totaling  $\mathcal{O}(|V|^2 + |V| \cdot |E|)$  time). Then, BFF is applied to obtain a burning sequence  $S$  for  $G$ . Next, GDCA computes upper and lower bounds for  $b(G)$ , namely,  $U = |S|$  and  $L = \lceil (|S| + 2)/3 \rceil$ . The lower bound follows from the fact that, since BFF is a  $(3 - 2/b(G))$ -approximation,  $|S| \leq (3 - 2/b(G)) \cdot b(G)$  and, therefore  $\lceil (|S| + 2)/3 \rceil \leq b(G)$ . Then, a binary search is employed to solve  $\mathcal{O}(\log(U - L + 1))$  GBP decision problems.

In [10], it is shown that GDCA is able to find optimal solutions for networks with up to 12,000 vertices. In the next section, we show how to improve GDCA to design a more effective and efficient exact algorithm for the GBP.

### 3 A Row Generation Algorithm

In this section, we introduce an exact algorithm for the GBP, denoted by PRYM, preceded by the presentation of some useful results and an IP formulation for which a row generation method is employed in PRYM.

Let  $G = (V, E)$  be an undirected graph. Since any sequence containing all vertices of  $V$  constitutes a trivial feasible solution for  $G$ , we have that  $b(G) \leq |V|$ . Moreover, there exists a burning sequence of length  $k$  for  $G$  for each integer  $k$ , with  $b(G) \leq k \leq |V|$  since we may append (dummy) fire sources to any given burning sequence.

Furthermore, although the definition of GBP does not forbid burning sequences that contain reoccurring vertices, it is easy to prove that for each  $k \in \mathbb{Z}$ , where  $b(G) \leq k \leq |V|$ , there exists a burning sequence of length  $k$  for  $G$  that does not contain repeated vertices.

We now propose an integer program for the decision version of the GBP, denoted by GBP-IP. This model determines whether there exists a burning sequence of length  $B \leq |V|$  for  $G$ . Let  $X = \{x_{v,i} : v \in V, i \in \{1, 2, \dots, B\}\}$  be a set of binary variables such that  $x_{v,i} = 1$  iff  $v$  is the  $i$ -th fire source in a burning sequence for  $G$ .

$$\begin{array}{l}
\text{GBP-IP} \left\{ \begin{array}{l}
\text{Find } X \tag{5} \\
\text{s.t.} \quad \sum_{i=1}^B x_{v,i} \leq 1 \quad \forall v \in V \tag{6} \\
\quad \quad \sum_{v \in V} x_{v,i} = 1 \quad \forall i \in \{1, 2, \dots, B\} \tag{7} \\
\sum_{i=1}^B \sum_{u \in V: v \in N_{B-i}[u]} x_{u,i} \geq 1 \quad \forall v \in V \tag{8}
\end{array} \right.
\end{array}$$

Constraints (6) ensure that each  $v \in V$  appears at most once in the burning sequence. Constraints (7) establish that exactly one vertex is assigned to each position in the burning sequence. Lastly, Constraints (8) ensure that each vertex is burned by the end of round  $B$ , *i.e.*, that Equation (1) is satisfied. From now on, we also refer to (8) as *covering constraints*. Whenever (8) is satisfied for a vertex  $v$ , we say that  $v$  is *covered*, otherwise,  $v$  is *uncovered*.

We remark that although Constraints (6) are not necessary for the correctness of the model, they cut off integer solutions with repeated vertices, which reduces the search space.

GBP-IP has a total of  $\mathcal{O}(B \cdot |V|)$  binary variables and  $\mathcal{O}(|V|)$  constraints. Observe that GBP-IP can be obtained from CMCP-IP by: removing the objective function (2), adding Constraints (6), and setting  $y_v = 1$  for each  $v \in V$ .

**Proposition 1.** *If  $X = \{x_{v,i} : v \in V, i \in \{1, 2, \dots, B\}\}$  is a feasible solution for GBP-IP, then there exists a burning sequence  $S$  of length  $B$  for  $G$  such that for each  $v \in V$ , if  $x_{v,i} = 1$ , then  $v$  is the  $i$ -th fire source of  $S$ .*

*Proof.* Let  $X$  be a feasible solution for GBP-IP. By (7), for each  $i \in \{1, 2, \dots, B\}$ , there exists exactly one vertex  $v$  such that  $x_{v,i} = 1$ . Take a sequence  $S = (v_1, v_2, \dots, v_B)$  such that  $x_{v_i,i} = 1$ . Since  $X$  satisfies (8),  $S$  satisfies Equation (1) and, therefore,  $S$  is a burning sequence for  $G$ .  $\square$

**Proposition 2.** *If there is a burning sequence of length  $B$  for  $G$ , then GBP-IP is feasible.*

*Proof.* Let  $S = (v_1, v_2, \dots, v_B)$  be a burning sequence for  $G$  with no repeated vertices. Take  $X = \{x_{v,i} : v \in V, i \in \{1, 2, \dots, B\}\}$  such that  $x_{v,i} = 1$  iff  $v$  is the  $i$ -th fire source of  $S$ . By construction,  $X$  satisfies Constraints (6) and (7). Also, since  $S$  satisfies Equation (1),  $X$  satisfies Constraints (8). Therefore,  $X$  is a feasible solution for GBP-IP.  $\square$

Now, let  $L$  and  $U$  be lower and upper bounds for  $b(G)$ . Since there is no burning sequence for  $G$  of length less than  $b(G)$ , it follows from Proposition 1 that for every  $B \in [L, b(G) - 1]$ , GBP-IP is infeasible. Similarly, since there is a burning sequence for  $G$  of length  $b(G) + q$  for every  $q \in \mathbb{Z}_{\geq 0}$ , it follows from Proposition 2 that for every  $B \in [b(G), U]$ , GBP-IP admits a feasible solution from which a burning sequence of length  $B$  can be built. Therefore, one can perform a binary search to determine the smallest value  $B$  in the interval  $[L, U]$  for which a feasible solution of GBP-IP exists, leading to an optimal solution of length  $B$  for  $G$ . This idea is similar to the one employed in GDCA (see Algorithm 2) and is the core of PRYM, which is described in Algorithm 3.

---

### Algorithm 3: PRYM

---

**Input :** Graph  $G = (V, E)$

**Output:** Optimal burning sequence  $S$

- 1  $S \leftarrow \text{BFF-d}(G)$ ;  $U \leftarrow |S|$ ;  $L \leftarrow \lceil (|S| + 2)/3 \rceil$ ;
  - 2 **while**  $L < U$  **do**
  - 3      $B \leftarrow \lfloor (L + U)/2 \rfloor$ ;  $(\text{answer}, S') \leftarrow \text{SolveGBP-IP}(G, B)$ ;
  - 4     **if**  $\text{answer} = \text{feasible}$  **then**  $S \leftarrow S'$ ;  $U \leftarrow B$ ; **else**  $L \leftarrow B + 1$ ;
  - 5 **return**  $S$
- 

First, PRYM obtains a feasible solution  $S$  by running a modified version of BFF (BFF-d) which, instead of being provided with all pairwise distances between vertices, as in GDCA, computes only the required distances on demand. In other words, during the  $i$ -th iteration of BFF-d, right before vertex  $v_i$  is selected as the  $i$ -th fire source of  $S$  (see step 3 of Algorithm 1), BFF-d computes the distance between  $v_{i-1}$  and each vertex in  $V$  by means of a single breadth-first search. These distances are stored in memory until PRYM halts. The motivation for this change is that in that iteration only the distances from each vertex in  $V$  to the  $i - 1$  previous fire sources are needed. Since the lengths

of burning sequences are often much smaller than  $|V|$ , this modification speeds up BFF-d to a total complexity of  $\mathcal{O}(|S|(|V| + |E|))$ , leading to a significant improvement in practice.

Next, PRYM computes lower and upper bounds for searching for  $b(G)$ , namely,  $L = \lceil (|S| + 2)/3 \rceil$  and  $U = |S|$ . Lastly, PRYM performs a binary search on the interval of values between  $L$  and  $U$ , solving  $\mathcal{O}(\log(U - L))$  GBP decision problems by means of solving the GBP-IP model on each query.

We remark that to solve the GBP-IP model, PRYM does not need to load the whole set of covering constraints from the start. Instead, these constraints are loaded on demand following the traditional *lazy constraint* strategy: whenever the IP solver finds an integer solution, we separate a violated covering constraint, if it exists, and add it to the model as a lazy constraint. This approach comes from the observation that, very often, a small subset of the covering constraints may be sufficient to prove that GBP-IP is either infeasible or feasible.

As an illustration, consider these real-world networks obtained from [24]: *ia-enron-only* ( $|V| = 143$ ,  $|E| = 623$ ,  $b(G) = 4$ ); *DD244* ( $|V| = 291$ ,  $|E| = 822$ ,  $b(G) = 7$ ); and *ca-netscience* ( $|V| = 379$ ,  $|E| = 914$ ,  $b(G) = 6$ ) and depicted in Figure 1. For each of them, the infeasibility of the GBP-IP model for  $B = b(G) - 1$  can be established by loading only the covering constraints associated with the colored vertices. Moreover, in Section 4, we show that, for instances containing hundreds of thousands of vertices, just dozens covering constraints are sufficient to prove that there is no burning sequence of length  $B = b(G) - 1$ .

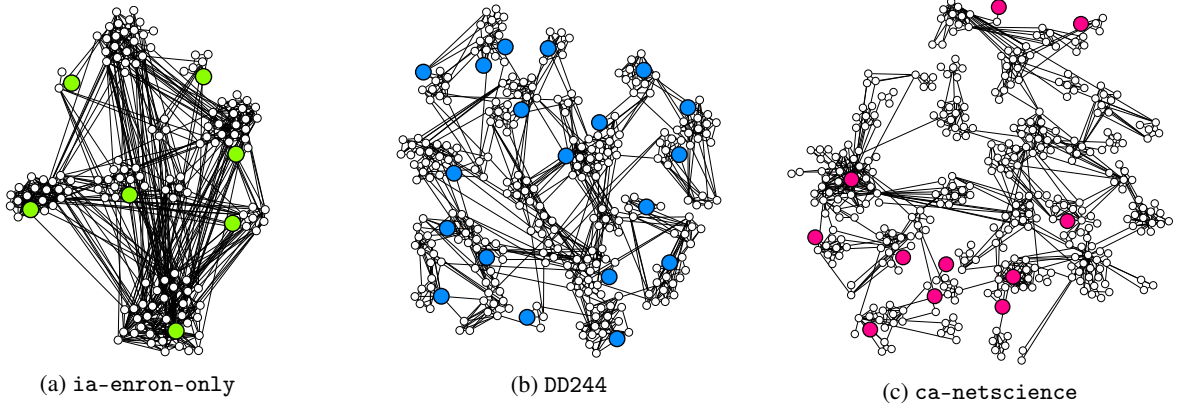


Figure 1: Illustration of the vertices (colored and enlarged) whose covering constraints suffice to prove the infeasibility of GBP-IP for  $B = b(G) - 1$ .

In light of that, whenever PRYM invokes an IP solver to solve GBP-IP, only the covering constraints associated to the vertices in the burning sequence obtained by BFF-d are initially loaded into the model. The rest of the covering constraints used by the solver are added according to the following separation procedure.

Given an integer solution found by the solver, we first extract the sequence  $S = (v_1, v_2, \dots, v_B)$  such that  $x_{v_i, i} = 1$  in  $\mathcal{O}(|V| \cdot B)$  time. Then, for each  $i \in \{1, 2, \dots, B\}$ , we determine the distances between  $v_i$  and all vertices of  $G$  by breadth-first search, in  $\mathcal{O}(|V| + |E|)$  time, whenever they had not been previously computed by PRYM. Next, for each  $u \in V$ , we calculate the distance between  $u$  and its closest vertex among those burned by round  $B$  in the burning process. This value, denoted by  $d_S(u)$ , can be calculated in  $\mathcal{O}(B)$  time as

$$d_S(u) = \max(0, \min\{d(u, v_1) - (B - 1), d(u, v_2) - (B - 2), \dots, d(u, v_B)\}).$$

If  $d_S(u) = 0$ , then  $u$  is covered, otherwise,  $d_S(u) \geq 1$  and  $u$  is uncovered. If  $d_S(v) = 0$  for every  $v \in V$ , then no constraint is violated and  $S$  is a burning sequence for  $G$ . Otherwise, we select  $w = \arg \max_{u \in V} d_S(u)$ , i.e., the uncovered vertex that is farthest from any burned vertex. Then, we calculate the distances between  $w$  and all vertices of  $G$  by a breadth-first search, in  $\mathcal{O}(|V| + |E|)$  time, if they were not calculated previously. Lastly, we compute the covering constraint for  $w$  and load it onto the solver as a lazy constraint.

As a branching rule for solving the GBP-IP, PRYM determines that for each vertex  $v$ , the variable  $x_{v, i}$  has a higher priority for branching than  $x_{v, j}$  for every  $j > i$ . The purpose of this approach is to decide the first positions of the burning sequence earlier in the search.

We now highlight the advantages of PRYM over GDCA. First, observe that PRYM addresses the GBP decision problem directly via the GBP-IP model, while GDCA attempts to solve, via the CMCP-IP model, an instance of an optimization problem all the way through, even when  $B < b(G)$  and an upper bound less than  $|V|$  for the objective function (2)

is determined. This shows that PRYM can be particularly more expedient than GDCA in these cases by saving valuable computing time.

Another major time-saving strategy is that PRYM computes, on demand, only distances between pairs of vertices of  $G$  known to be necessary instead of GDCA’s  $|V|^2$  such computations. As we show in Section 4, memory space becomes a limiting factor for GDCA for graphs with upwards of 14,000 vertices, while PRYM is able to handle instances with hundreds of thousands of vertices.

Lastly, a crucial advantage stems from the row generation approach whose separation algorithm is able to discover a small number of decisive covering constraints that are often sufficient for the solver to find a feasible solution or to prove the infeasibility of GBP-IP for a given value of the parameter  $B$ . Moreover, since covering constraints tend to involve a substantial number of variables for large graphs, loading a small subset of these constraints ultimately speeds up the resolution of the linear relaxation.

In the next section, we report a series of experiments comparing the efficiency and efficacy of PRYM and GDCA on a large benchmark of instances.

## 4 Computational Experiments

We now describe the experiments we carried out to empirically evaluate PRYM. For this purpose, we used a machine equipped with an Intel® Xeon® E5-2630 v4 processor, 64 GB of RAM, and the Ubuntu 22.04.1 LTS operating system. For IP solver, we used Gurobi v10.0.3 running on a single thread of execution. The benchmark of instances employed here extends the one used in the experiments reported in [10] to a total of 66 real-world networks obtained from the Network Repository [24] and the Stanford Large Network Dataset Collection [15].

The instances were divided into two sets according to the number of vertices:  $\Delta_{10K}$  is the set of instances with at most 10K vertices and  $\Delta_{200K}$  comprises the instances with more than 10K vertices and at most 200K vertices. We refer the reader to our publicly available repository [23] where the source code, instances, and solutions obtained are accessible.

The results for  $\Delta_{10K}$  and  $\Delta_{200K}$  are presented in Tables 1, 2, respectively. The first three columns describe the instances while the two subsequent ones display the lower and upper bounds for  $b(G)$ ,  $L$  and  $U$ , obtained via BFF-d. The “Opt” column shows the optimal value,  $b(G)$ , while the following two columns display the running times (rounded up to the nearest second) spent by GDCA and PRYM to find provably optimal solutions. The last two columns show the number of covering constraints (of type (8)) loaded by PRYM while solving GBP-IP for  $B = b(G) - 1$  and for  $B = b(G)$ .

Recall that when  $B = b(G) - 1$ , GBP-IP is infeasible and  $B$  is a lower bound for  $b(G)$ . On the other hand, when  $B = b(G)$ , GBP-IP admits a feasible solution and  $B$  is an upper bound for  $b(G)$ . We highlight that according to Tables 1 and 2, the number of covering constraints used by PRYM for these cases falls significantly short of the number of vertices in each graph. In fact, when  $B = b(G) - 1$  and  $B = b(G)$ , PRYM had to load, on average, only 5.54% and 7.14% of the whole set of possible covering constraints, respectively.

Also, the burning numbers that appear in bold in Tables 2 are newly proven optimal results. In the running time columns, the entries containing ‘-’ indicate that the execution was halted due to memory overflow. Also, in the last column, whenever the initial upper bound  $U$  was equal to the burning number, ‘-’ is used to reflect that there was no need for PRYM to solve GBP-IP for  $B = U = b(G)$ .

Considering the 50 instances, 48 from  $\Delta_{10K}$  and 2 from  $\Delta_{200K}$ , for which both PRYM and GDCA obtained provably optimal solutions, for 27 instances PRYM was on average 236.7 times faster than GDCA; they attained the same running times for 21 instances, considering the granularity of the time measurements presented (sec); and PRYM only performed slower than GDCA by a few seconds on two instances: DD349 and bal-bin-tree-9. Among these 50 instances, the most remarkable result occurred for the *athletes* instance, which was solved by PRYM in 2 seconds, in contrast to the 5263 seconds spent by GDCA.

The remaining 16 instances from  $\Delta_{200K}$  were only solved by PRYM, which spent a maximum of 34 seconds per instance. Remarkably, despite the large sizes of these graphs, which have up to 200,000 vertices, PRYM required just a few dozen covering constraints to solve GBP-IP.



Table 1: Quantifying the empirical results obtained for  $\Delta_{10K}$ .

Instance Name	Instance		Bounds		Opt	Time (sec)		#Cov. Constr. for:	
	$ V $	$ E $	$L$	$U$	$b(G)$	GDCA	PRYM	$b(G) - 1$	$b(G)$
karate	34	78	2	4	3	1	1	4	7
chesapeake	39	170	2	3	3	1	1	7	–
dolphins	62	159	3	6	4	1	1	7	12
rt-retweet	96	117	3	5	5	1	1	9	–
polbooks	105	441	3	5	4	1	1	10	9
adjnoun	112	425	2	4	4	1	1	6	–
ia-infect-hyper	113	2196	2	3	3	1	1	9	–
C125-9	125	6963	2	3	3	1	1	42	–
ia-enron-only	143	623	3	5	4	1	1	7	12
c-fat200-1	200	1534	3	7	7	1	1	37	–
c-fat200-2	200	3235	3	5	5	1	1	16	–
c-fat200-5	200	8473	2	3	3	1	1	5	–
sphere	258	1026	4	9	7	2	1	44	33
DD244	291	822	4	10	7	1	1	19	41
ca-netscience	379	914	4	8	6	1	1	11	25
infect-dublin	410	2765	3	6	5	1	1	12	8
c-fat500-1	500	4459	5	11	9	1	1	33	72
c-fat500-2	500	9139	4	8	7	1	1	36	13
c-fat500-5	500	23191	3	5	5	1	1	32	–
bio-diseasome	516	1188	4	10	7	1	1	13	15
web-polblogs	643	2280	3	7	5	2	1	7	15
DD687	725	2600	4	9	7	21	2	17	85
rt-twitter-copen	761	1029	4	8	7	2	1	9	13
DD68	775	2093	5	12	9	7	2	28	85
ia-crime-moreno	829	1475	3	7	7	21	1	58	–
DD199	841	1902	7	18	12	9	6	96	87
soc-wiki-Vote	889	2914	3	6	6	4	1	15	–
DD349	897	2087	6	16	12	7	13	113	110
DD497	903	2453	6	15	10	14	14	30	146
socfb-Reed98	962	18812	2	4	4	4	1	7	–
lattice3D	1000	2700	5	12	10	1767	1091	295	103
bal-bin-tree-9	1023	1022	5	11	10	1	7	513	16
delaunay-n10	1024	3056	5	11	9	42	9	58	140
stufe	1036	1868	6	15	12	424	147	204	163
lattice2D	1089	2112	7	19	13	1424	95	107	264
bal-ter-tree-6	1093	1092	4	8	7	1	1	44	21
email-univ	1133	5451	3	6	5	7	1	9	18
econ-mahindas	1258	7513	3	6	5	32	1	10	15
ia-fb-messages	1266	6451	3	5	5	9	1	9	–
bio-yeast	1458	1948	5	11	9	23	1	14	27
tech-routers-rf	2113	6632	3	7	6	30	1	9	21
chameleon	2277	36101	3	6	6	36	1	12	–
tvshow	3892	17262	4	10	9	302	2	14	18
facebook	4039	88234	3	5	4	26	1	5	5
DD6	4152	10320	9	24	16	716	189	135	221
squirrel	5201	198493	3	6	6	405	1	9	–
politician	5908	41729	4	8	7	452	2	11	14
government	7057	89455	3	6	6	749	1	10	–

Table 2: Quantifying the empirical results obtained for  $\Delta_{200K}$ . Newly established burning numbers appear in bold.

Name	Instance		Bounds		Opt	Time (sec)		#Cov. Constr. for:	
	$ V $	$ E $	$L$	$U$	$b(G)$	GDCA	PRYM	$b(G) - 1$	$b(G)$
crocodile	11631	170918	3	6	6	1982	1	10	–
athletes	13866	86858	3	7	7	5263	2	19	–
company	14113	52310	4	9	9	–	6	21	–
musae-facebook	22470	171002	4	9	8	–	7	13	22
new-sites	27917	206259	4	8	8	–	4	15	–
deezer-europe	28281	92752	5	12	10	–	24	16	18
RO-gemsec-deezer	41773	125826	4	10	10	–	10	16	–
HU-gemsec-deezer	47538	222887	4	9	8	–	30	14	39
artist	50515	819306	3	7	6	–	10	8	11
HR-gemsec-deezer	54573	498202	3	7	7	–	8	12	–
soc-brightkite	56739	212945	4	9	9	–	17	15	–
socfb-OR	63392	816886	4	8	8	–	11	13	–
soc-slashdot	70068	358647	3	7	7	–	8	9	–
soc-BlogCatalog	88784	2093195	3	5	5	–	4	9	–
soc-buzznet	101163	2763066	2	4	4	–	21	40	–
soc-LiveMocha	104103	2193083	3	5	5	–	23	29	–
soc-douban	154908	327162	3	6	6	–	34	30	–
soc-gowalla	196591	950327	4	8	8	–	31	10	–

## 5 Concluding Remarks and Future Work

In this paper, we propose an exact algorithm for the GBP, namely PRYM. For a given arbitrary graph, PRYM finds an optimal burning sequence by means of solving multiple decision problems formulated as set covering IP models, while it generates essential covering constraints on demand. The algorithm takes advantage of the fact that a very small number of covering constraints is often sufficient for solving those decision problems, as was confirmed in practice. Via computational experiments, we demonstrate that PRYM far outperforms the previously best known exact algorithm for GBP, and it is able to solve real-world instances with up to 200,000 vertices in less than 35 seconds. Results for even larger instances are forthcoming.

As for future research, we intend to investigate whether a column generation approach can also be successfully applied to the proposed IP formulation, extending PRYM to a branch-and-price algorithm and potentially increasing the suitability of the algorithm for solving the GBP for larger graphs.

## References

- [1] Paul Bastide, Marthe Bonamy, Anthony Bonato, Pierre Charbit, Shahin Kamali, Théo Pierron, and Mikaël Rabie. Improved pyrotechnics: Closer to the burning number conjecture. *The Electronic Journal of Combinatorics*, 30(4), 2023. doi:10.37236/11113.
- [2] Stéphane Bessy, Anthony Bonato, Jeannette Janssen, Dieter Rautenbach, and Elham Roshanbin. Burning a graph is hard. *Discrete Applied Mathematics*, 232:73–87, 2017. doi:10.1016/j.dam.2017.07.016.
- [3] Anthony Bonato. A survey of graph burning. *Contributions to Discrete Mathematics*, 16(1):185 – 197, 2021. doi:10.11575/cdm.v16i1.71194.
- [4] Anthony Bonato, Sean English, Bill Kay, and Daniel Moghbel. Improved bounds for burning fence graphs. *Graphs and Combinatorics*, 37(6):2761–2773, 2021. doi:10.1007/s00373-021-02390-x.
- [5] Anthony Bonato, Jeannette Janssen, and Elham Roshanbin. Burning a graph as a model of social contagion. In *Algorithms and Models for the Web Graph*, pages 13–22, 2014. doi:10.1007/978-3-319-13123-8\_2.
- [6] Anthony Bonato, Jeannette Janssen, and Elham Roshanbin. How to burn a graph. *Internet Mathematics*, 12(1-2):85–100, 2016. doi:10.1080/15427951.2015.1103339.
- [7] Anthony Bonato and Shahin Kamali. Approximation algorithms for graph burning. In *Theory and Applications of Models of Computation*, pages 74–92, 2019. doi:10.1007/978-3-030-14812-6\_6.
- [8] Anthony Bonato and Thomas Lidbetter. Bounds on the burning numbers of spiders and path-forests. *Theoretical Computer Science*, 794:12–19, 2019. doi:https://doi.org/10.1016/j.tcs.2018.05.035.

- [9] Zahra Rezaei Farokh, Maryam Tahmasbi, Zahra Haj Rajab Ali Tehrani, and Yousof Buali. New heuristics for burning graphs, 2020. doi:10.48550/arXiv.2003.09314.
- [10] Jesús García-Díaz and José Alejandro Cornejo-Acosta. A greedy heuristic for graph burning, 2024. doi:10.48550/arXiv.2401.07577.
- [11] Jesús García-Díaz, Julio César Pérez-Sansalvador, Lil María Xibai Rodríguez-Henríquez, and José Alejandro Cornejo-Acosta. Burning graphs through farthest-first traversal. *IEEE Access*, 10:30395–30404, 2022. doi:10.1109/ACCESS.2022.3159695.
- [12] Jesús García-Díaz, Lil María Xibai Rodríguez-Henríquez, Julio César Pérez-Sansalvador, and Saúl Eduardo Pomares-Hernández. Graph burning: Mathematical formulations and optimal solutions. *Mathematics*, 10(15), 2022. doi:10.3390/math10152777.
- [13] Rahul Kumar Gautam, Anjeneya Swami Kare, and Durga Bhavani S. Faster heuristics for graph burning. *Applied Intelligence*, 52(2):1351–1361, 2022. doi:10.1007/s10489-021-02411-5.
- [14] Arya Tanmay Gupta, Swapnil A. Lokhande, and Kaushik Mondal. Burning grids and intervals. In *Algorithms and Discrete Applied Mathematics*, pages 66–79, 2021. doi:10.1007/978-3-030-67899-9\_6.
- [15] Jure Leskovec and Andrej Krevl. SNAP Datasets: Stanford large network dataset collection. <http://snap.stanford.edu/data>, June 2014.
- [16] Huiqing Liu, Xuejiao Hu, and Xiaolan Hu. Burning number of caterpillars. *Discrete Applied Mathematics*, 284:332–340, 2020. doi:https://doi.org/10.1016/j.dam.2020.03.062.
- [17] Huiqing Liu, Ruiting Zhang, and Xiaolan Hu. Burning number of theta graphs. *Applied Mathematics and Computation*, 361:246–257, 2019. doi:https://doi.org/10.1016/j.amc.2019.05.031.
- [18] Dieter Mitsche, Paweł Prałat, and Elham Roshanbin. Burning number of graph products. *Theoretical Computer Science*, 746:124–135, 2018. doi:https://doi.org/10.1016/j.tcs.2018.06.036.
- [19] Mahdi Nazeri, Ali Mollahosseini, and Iman Izadi. A centrality based genetic algorithm for the graph burning problem. *Applied Soft Computing*, 144:110493, 2023. doi:10.1016/j.asoc.2023.110493.
- [20] F. C. Pereira. A computational study of the Perfect Awareness Problem. Master’s thesis, University of Campinas, Brazil, 2021. URL: <https://hdl.handle.net/20.500.12733/1641217>.
- [21] F. C. Pereira and P. J. de Rezende. The Least Cost Directed Perfect Awareness Problem: complexity, algorithms and computations. *Online Social Networks and Media*, 37–38, 2023. doi:10.1016/j.osnem.2023.100255.
- [22] F. C. Pereira, P. J. de Rezende, and C. C. de Souza. Effective heuristics for the perfect awareness problem. *Procedia Computer Science*, 195:489–498, 2021. doi:10.1016/j.procs.2021.11.059.
- [23] F. C. Pereira, P. J. de Rezende, and Tallys Yunes. A Row Generation Algorithm for Finding Optimal Burning Sequences of Large Graphs - Complementary Data. Mendeley Data, V1, 2024. doi:10.17632/c95hp3m4mz.
- [24] Ryan A. Rossi and Nesreen K. Ahmed. The network data repository with interactive graph analytics and visualization. In *AAAI*, 2015. URL: <https://networkrepository.com>.
- [25] Paulo Shakarian, Sean Eyre, and Damon Paulo. A scalable heuristic for viral marketing under the tipping model. *Social Network Analysis and Mining*, 3(4):1225–1248, 2013. doi:10.1007/s13278-013-0135-7.
- [26] Kai An Sim, Ta Sheng Tan, and Kok Bin Wong. On the burning number of generalized Petersen graphs. *Bulletin of the Malaysian Mathematical Sciences Society*, 41(3):1657–1670, 2018. doi:10.1007/s40840-017-0585-6.
- [27] Ta Sheng Tan and Wen Chean Teh. Burnability of double spiders and path forests. *Applied Mathematics and Computation*, 438:127574, 2023. doi:https://doi.org/10.1016/j.amc.2022.127574.
- [28] Marek Šimon, Ladislav Huraj, Iveta Dirgova Luptakova, and Jiri Pospichal. How to burn a network or spread alarm. *MENDEL*, 25(2):11–18, 2019. doi:10.13164/mendel.2019.2.011.
- [29] Marek Šimon, Ladislav Huraj, Iveta Dirgová Luptáková, and Jiří Pospíchal. Heuristics for spreading alarm throughout a network. *Applied Sciences*, 9(16), 2019. doi:10.3390/app9163269.