
Scaling up Mean Field Games with Online Mirror Descent

Julien Perolat*¹ Sarah Perrin*² Romuald Elie*¹ Mathieu Laurière³ Georgios Piliouras⁴ Matthieu Geist⁵
Karl Tuyls¹ Olivier Pietquin⁵

Abstract

We address scaling up equilibrium computation in Mean Field Games (MFGs) using Online Mirror Descent (OMD). We show that continuous-time OMD provably converges to a Nash equilibrium under a natural and well-motivated set of monotonicity assumptions. This theoretical result nicely extends to multi-population games and to settings involving common noise. A thorough experimental investigation on various single and multi-population MFGs shows that OMD outperforms traditional algorithms such as Fictitious Play (FP). We empirically show that OMD scales up and converges significantly faster than FP by solving, for the first time to our knowledge, examples of MFGs with hundreds of billions states. This study establishes the state-of-the-art for learning in large-scale multi-agent and multi-population games.

1. Introduction

Solving decision making problems involving multiple agents has been the topic of intensive research in Artificial Intelligence for decades. It finds applications in a wide variety of domains such as economy (Conitzer & Sandholm, 2011; Othman et al., 2013; Achdou et al., 2014), resource management (Couillet et al., 2012; Freedman et al., 2020), crowd motion modeling (Achdou & Lasry, 2019) or even animal behaviour analysis (Phelps et al., 2018; Bardi & Cardaliaguet, 2020) among others. Despite the vast literature on Game Theory and numerous fundamental results, application to real-world problems remains a challenge. Recent successes of combining Game Theory and Machine Learning (especially Deep Learning (Goodfellow et al., 2016) and Reinforcement Learning (Sutton & Barto, 2018)) led to solutions for large scale games such as

chess (Campbell et al., 2002), Go (Silver et al., 2016; 2017; 2018), Poker (Brown & Sandholm, 2017; 2019; Moravčík et al., 2017) and even complex video games like StarCraft II (Vinyals et al., 2019). Although this allowed for tackling problems involving large states spaces, the number of agents remains still limited and scaling up to large populations of players remains intractable, which prevents a broader real-world impact.

To address this challenge, the Mean Field Game (MFG) theory was introduced in (Lasry & Lions, 2007; Huang et al., 2006b) to study a category of games that involves an infinite population of agents. By considering the limit case of a continuous distribution of identical agents (*i.e.*, anonymous and with symmetric interests), the MFG framework allows the learning problem to be reduced to the characterization of the optimal behavior of a single representative agent in its interactions with the full population. Given this asymptotic formulation, traditional solutions to MFGs entail a coupled system of differential equations: one capturing the forward dynamics of the population and a second being the dynamic programming optimality equation of the representative player. Despite important progress in the area, such approaches are based on numerical approximation schemes for partial differential equations (Achdou & Capuzzo-Dolcetta, 2010; Achdou et al., 2012; Carlini & Silva, 2014; 2015; Briceño Arias et al., 2018; Briceño Arias et al., 2019; Achdou & Laurière, 2020) or for stochastic differential equations (Chassagneux et al., 2019; Angiuli et al., 2019), which are not easily scaled to large state spaces. Also, given the sensitivity to limit conditions, only simple configurations of the state space can be considered. So, until recently, we were left with solutions that either scale in terms of the state space dimension (deep RL) or in terms of large populations of agents (MFGs). Moreover, generalizations of the MFG framework to models with multiple populations have been introduced in (Huang et al., 2006a) and have attracted a growing interest (Bensoussan et al., 2013; Carmona & Delarue, 2018a; Bensoussan et al., 2018). Applications include urban settlements (Achdou et al., 2017) and crowd motion (Lachapelle & Wolfram, 2011; Aurell & Djehiche, 2018).

By introducing solutions inspired by game theory (*i.e.*, Fictitious Play (Robinson, 1951; Shapiro, 1958)) into

*Equal contribution ¹DeepMind Paris ²Univ. Lille, CNRS, Inria, UMR 9189 CRISTAL ³Princeton University, ORFE ⁴Singapore University of Technology and Design ⁵Google Research, Brain Team. Correspondence to: Romuald Elie <relie@google.com>.

MFGs (Cardaliaguet & Hadikhanloo, 2017; Elie et al., 2020; Perrin et al., 2020), recent research leverages the generalization capacity of Machine Learning to compute a Nash equilibrium (NE) in large state spaces. Fictitious Play (FP) is a generic algorithm that alternates two steps starting from an arbitrary strategy for the representative player: i) computing the best response of this agent against the rest of the population, ii) compute the mixture of that best response with its previous strategy. Perrin et al. (2020) propose to make use of most recent Reinforcement Learning (RL) methods to learn the best response and solve problems with millions of states with a non-trivial topology. Unfortunately, FP seems hard to scale further for several reasons. First, the computation of the best response remains a hard problem even if RL is promising. Second, its computational efficiency seems very low in practice. Finally, FP requires storing multiple quantities (*e.g.* averaged policies and induced distributions, etc.) which contributes to cap scalability.

In this context, our first contribution is a new algorithm to compute a NE *in lieu* of FP, namely Online Mirror Descent (OMD) (Shalev-Shwartz et al., 2011). Inspired by convex optimization and the Mirror Descent algorithm (Nemirovsky & Yudin, 1979), our method doesn't require the computation of a best response. It rather alternates a step of evaluation of the current strategy with a step of improvement of that strategy. The evaluation is done through the computation of the expected accumulated pay-offs of the strategy over time in the shape of a so-called Q -function. The improvement step reduces to computing the soft-max of the quantity obtained by integrating the Q -functions over iterations (like the MD algorithm suggests). Quantities that need to be stored by OMD (the strategy and the integrated Q -function) are thus limited compared to FP. As a second contribution, we provide a proof of convergence for continuous time OMD to a NE for MFGs under reasonable assumptions (common in the field). These theoretical results extend naturally to multi-population MFGs as well as settings where a noise is commonly shared by all agents. Our third contribution is an extensive empirical evaluation of OMD on different tasks involving single or multiple populations, in the presence of a common noise or not, with non trivial topologies. The scale of the considered problems reaches 10^{11} states and trillions of state-action pairs, surpassing by 4 or 5 orders of magnitudes existing results. These experiments demonstrate that OMD's computational efficiency is much stronger than FP which results in faster convergence.

2. Preliminaries on Mean Field Games

In a Multi-Population Mean Field Game (MP-MFG), an infinite number of players from N_p different populations interact with each other in a temporally and spatially extended game (the case $N_p = 1$ corresponds to a standard MFG).

Let \mathcal{X} be the finite discrete state space and \mathcal{A} be the finite discrete action space of the MP-MFG. We denote by $\Delta\mathcal{X}$ and $\Delta\mathcal{A}$ respectively the spaces of probability distributions over states and actions. In this sequential decision problem, a representative player of population $i \in \{1, \dots, N_p\}$ starts at a state $x_0^i \in \mathcal{X}$ according to a distribution $\mu_0^i \in \Delta\mathcal{X}$. We consider a finite time horizon $N > 0$. At each time step $n \in \{0, \dots, N\}$, the representative player of population i is in state x_n^i and takes an action according to $\pi_n^i(\cdot|x_n^i)$, where $\pi_n^i \in (\Delta\mathcal{A})^{\mathcal{X}}$ is a policy. Given this action a_n^i , the representative player moves to a next state x_{n+1}^i with probability $p(\cdot|x_n^i, a_n^i)$ and receives a reward $r^i(x_n^i, a_n^i, \mu_n^1, \dots, \mu_n^{N_p})$, where μ_n^j is the distribution of the population j at time n . Here $p \in (\Delta\mathcal{X})^{\mathcal{X} \times \mathcal{A}}$ and $r^i : \mathcal{X} \times \mathcal{A} \times (\Delta\mathcal{X})^{N_p} \rightarrow \mathbb{R}$. Observe that the transition kernel does not depend on the Multi-population distribution as in many classical MFG examples (Lasry & Lions, 2007). For the reader's convenience, we denote $\pi^i = \{\pi_n^i\}_{n \in \{0, \dots, N\}}$, $\mu^i = \{\mu_n^i\}_{n \in \{0, \dots, N\}}$, $\pi = \{\pi_n^i\}_{i \in \{1, \dots, N_p\}}$, $\mu = \{\mu_n^i\}_{i \in \{1, \dots, N_p\}}$, $\pi_n = \{\pi_n^i\}_{i \in \{1, \dots, N_p\}}$ and $\mu_n = \{\mu_n^i\}_{i \in \{1, \dots, N_p\}}$.

During the game and for given a fixed multi-population distributions sequence μ , a representative player of population i accumulates the following sum of rewards:

$$J^i(\pi^i, \mu) = \mathbb{E} \left[\sum_{n=0}^N r^i(x_n^i, a_n^i, \mu_n) \mid x_0^i \sim \mu_0^i, a_n^i \sim \pi_n^i(\cdot|x_n^i), x_{n+1}^i \sim p(\cdot|x_n^i, a_n^i) \right].$$

Backward Equation: Given a population i , a time n , a state x^i , an action a^i , a policy π^i and a multi-population distribution sequence μ , we define the Q -function:

$$Q_n^{i, \pi^i, \mu}(x^i, a^i) = \mathbb{E} \left[\sum_{k=n}^N r^i(x_k^i, a_k^i, \mu_k) \mid x_n^i = x^i, a_n^i = a^i, a_k^i \sim \pi_k^i(\cdot|x_k^i), x_{k+1}^i \sim p(\cdot|x_k^i, a_k^i) \right]$$

and the **value function**:

$$V_n^{i, \pi^i, \mu}(x^i) = \mathbb{E} \left[\sum_{k=n}^N r^i(x_k^i, a_k^i, \mu_k) \mid x_n^i = x^i, a_k^i \sim \pi_k^i(\cdot|x_k^i), x_{k+1}^i \sim p(\cdot|x_k^i, a_k^i) \right].$$

These two quantities can be computed recursively with the following backward equations:

$$\begin{aligned} Q_N^{i, \pi^i, \mu}(x^i, a^i) &= r^i(x^i, a^i, \mu_N) \\ Q_{n-1}^{i, \pi^i, \mu}(x^i, a^i) &= r^i(x^i, a^i, \mu_{n-1}) \\ &\quad + \sum_{x'^i \in \mathcal{X}} p(x'^i|x^i, a^i) \mathbb{E}_{b^i \sim \pi_n^i(\cdot|x'^i)} \left[Q_n^{i, \pi^i, \mu}(x^i, b^i) \right], \\ V_n^{i, \pi^i, \mu}(x^i) &= \mathbb{E}_{a^i \sim \pi_n^i(\cdot|x^i)} \left[Q_n^{i, \pi^i, \mu}(x^i, a^i) \right]. \end{aligned}$$

Finally, the sum of rewards is $J^i(\pi^i, \mu) = \mathbb{E}_{x^i \sim \mu_0^i} [V_n^{i, \pi^i, \mu}(x^i)]$.

Forward Equation: If all the agents of a population i follow the policy π^i , the distribution of the full population is defined recursively via the following forward equation: for all $x^i \in \mathcal{X}$, $\mu_0^{i, \pi^i}(x) = \mu_0^i(x)$ and for all $x'^i \in \mathcal{X}$,

$$\mu_{n+1}^{i, \pi^i}(x'^i) = \sum_{(x^i, a^i) \in \mathcal{X} \times \mathcal{A}} \pi_n^i(a^i | x^i) p(x'^i | x^i, a^i) \mu_n^{i, \pi^i}(x^i) \quad (1)$$

for $n \leq N - 1$. We denote $\mu^\pi = (\mu^{i, \pi^i})_{i \in \{1, \dots, N_p\}}$.

This leads to the following property for the cumulative sum of rewards $J^i(\pi^i, \mu) = \sum_{n=0}^N \sum_{(x^i, a^i) \in \mathcal{X} \times \mathcal{A}} \mu_n^{i, \pi^i}(x^i) \pi_n^i(a^i | x^i) r^i(x^i, a^i, \mu_n)$.

Best Response and Exploitability: A best response policy $\pi^{i, br, \mu}$ to a multi-population distribution sequence μ verifies the following property $\max_{\pi^i} J^i(\pi^i, \mu) = J^i(\pi^{i, br, \mu}, \mu)$. It can be computed recursively by finding the best responding Q -function $Q^{i, br, \mu}$:

$$\begin{aligned} Q_N^{i, br, \mu}(x^i, a^i) &= r^i(x^i, a^i, \mu_N) \\ Q_{n-1}^{i, br, \mu}(x^i, a^i) &= r^i(x^i, a^i, \mu_{n-1}) \\ &+ \sum_{x'^i \in \mathcal{X}} p(x'^i | x^i, a^i) \max_{b^i} [Q_n^{i, br, \mu}(x^i, b^i)]. \end{aligned}$$

Finally $\pi_n^{i, br, \mu}(\cdot | x^i) \in \arg \max_{\pi^i} Q_n^{i, br, \mu}(x^i, \cdot)$.

The **exploitability** measures the distance to an equilibrium and is defined as $\phi(\pi) = \sum_{i=1}^{N_p} \phi^i(\pi)$ where, for each i ,

$$\phi^i(\pi) = \max_{\pi'^i} J^i(\pi'^i, \mu^\pi) - J^i(\pi^i, \mu^\pi).$$

Monotonicity: A multi-population game is said to be **weakly monotone** if for any $\rho_n^i, \rho'_n^i \in \Delta(\mathcal{X} \times \mathcal{A})$ and $\mu_n^i, \mu'_n^i \in \Delta \mathcal{X}$ such that for all i, n, x^i $\mu_n^i(x^i) = \sum_{a^i \in \mathcal{A}} \rho_n^i(x^i, a^i)$ and $\mu'_n^i(x^i) = \sum_{a^i \in \mathcal{A}} \rho'_n^i(x^i, a^i)$, we have: $\sum_i \sum_{(x^i, a^i) \in \mathcal{X} \times \mathcal{A}} (\rho_n^i(x^i, a^i) - \rho'_n^i(x^i, a^i)) (r^i(x^i, a^i, \mu_n) - r^i(x^i, a^i, \mu'_n)) \leq 0$. It is **strictly weakly monotone** if the inequality is strict whenever $\rho_n \neq \rho'_n$. This condition means that the players are discouraged from taking similar state-action pairs as the rest of the population. Intuitively, it can be interpreted as an aversion to crowded areas.

We have the following consequence, which is enough to derive many properties.

Lemma 1. *The weak monotonicity property implies that for*

any π, π' with $\pi \neq \pi'$,

$$\begin{aligned} \tilde{\mathcal{M}}(\pi, \pi') &:= \sum_{i=1}^{N_p} [J^i(\pi^i, \mu^\pi) + J^i(\pi'^i, \mu^{\pi'}) \\ &- J^i(\pi^i, \mu^{\pi'}) - J^i(\pi'^i, \mu^\pi)] \leq 0. \quad (2) \end{aligned}$$

Strictly weak monotonicity implies a strict inequality above.

This result is proved in Appendix E.

Moreover, the weak monotonicity condition is met for example in the following classical framework.

Lemma 2. *Assume the reward is separable, i.e. $r^i(x^i, a^i, \mu) = \bar{r}^i(x^i, a^i) + \hat{r}^i(x^i, \mu)$ and the following monotonicity condition holds: for all $\mu \neq \mu'$, $\sum_i \sum_{x \in \mathcal{X}} (\mu^i(x^i) - \mu'^i(x^i)) (\hat{r}^i(x^i, \mu) - \hat{r}^i(x^i, \mu')) \leq 0$ (resp. < 0). Then the game is weakly monotone (resp. strictly weakly monotone).*

This result is proven in Appendix A.

An example of such a separable and monotone reward can be found in multi-population predator prey models where the reward can be expressed as a network zero-sum game:

$$\begin{aligned} r^i(x^i, a^i, \mu) &= \bar{r}^i(x^i, a^i) + \hat{r}^i(x^i, \mu) + \underbrace{\sum_{j \neq i} \mu^j(x^j) \hat{r}^{i,j}(x^i)}_{=\bar{r}^i(x^i, \mu)} \quad (3) \end{aligned}$$

if $\forall x \in \mathcal{X}, \hat{r}^{i,j}(x) = -\hat{r}^{j,i}(x)$ and if $\forall \mu \neq \mu', \forall i, \sum_{x \in \mathcal{X}} (\mu^i(x^i) - \mu'^i(x^i)) (\hat{r}^i(x^i, \mu) - \hat{r}^i(x^i, \mu')) \leq 0$ (or with a strict inequality).

Nash Equilibrium (NE): A NE is a vector of policies for all populations that has a 0 exploitability. The existence of a NE in MFGs has been studied in many settings (Cardaliaguet, 2012; Bensoussan et al., 2013; Carmona & Delarue, 2018b). In our framework, it is a consequence of the convergence of the Fictitious play dynamics in monotone games which will be introduced later and proved in Appendix C.

Proposition 1 (Existence and uniqueness of Nash). *Any weakly monotone MP-MFG admits a NE. Besides, if the weak monotonicity is strict, the NE is unique.*

Proof. The existence result follows from Theorem (1), while the uniqueness property is proven in Appendix F. \square

3. Background on Fictitious Play

One can extend the Fictitious Play work of Perrin et al. to a multi-population setting. In the Multi-Population case, the Fictitious play process is defined as follows. Let first picking

1 as an arbitrary but classical reference time. For $t < 1$, we consider a fixed uniform policy for all representative player i at all time-step n denoted $\pi_{n,t < 1}^{i,br}$ and inducing a distribution $\mu_{n,t}^{i,br}$. We define $\forall t \geq 1$ the distribution $\mu_{n,t}^i$ as:

$$\forall i, n, \mu_{n,t}^i(x^i) = \frac{1}{t} \int_{s=0}^t \mu_{n,s}^{i,br}(x^i) ds,$$

where, for all $t \geq 1$, $\mu_{n,t}^{i,br}$ is the distribution of a best response policy $\pi_{n,t}^{i,br}$ to $\mu_{n,t}^i(x^i)$. The policy $\pi_{n,t}^i$ of the distribution $\mu_{n,t}^i$ verifies the following equation (see Perrin et al.): for all i, n, x^i, a^i ,

$$\pi_{n,t}^i(a^i | x^i) \int_{s=0}^t \mu_{n,s}^{i,br}(x^i) ds = \int_{s=0}^t \pi_{n,s}^{i,br}(a^i | x^i) \mu_{n,s}^{i,br}(x^i) ds$$

Theorem 1. *If a MP-MFG satisfies the weak monotony assumption, the exploitability is a strong Lyapunov function of the Fictitious Play dynamical system, $\forall t \geq 1$: $\frac{d}{dt} \phi(\pi^t) \leq -\frac{1}{t} \phi(\pi^t)$. Hence $\phi(\pi^t) = O(\frac{1}{t})$.*

Proof. This is an extension to multi-population of Theorem 1 of (Perrin et al., 2020). The full proof is left in Appendix C. \square

4. Online Mirror Descent: algorithm and convergence result

We now turn to the Online Mirror Descent Algorithm and introduce a regularizer $h : \Delta\mathcal{A} \rightarrow \mathbb{R}$, that is assumed to be ρ -strongly convex for some constant $\rho > 0$. Furthermore, we will assume from this point forward that the regularizer h is *steep*, i.e., $\|\nabla h(\pi)\| \rightarrow \infty$ whenever π approaches the of $\Delta\mathcal{A}$; The classic negentropy regularizer, which results to replicator dynamics is the prototypical example of this class. Denote by $h^* : \mathbb{R}^{|\mathcal{A}|} \rightarrow \mathbb{R}$ its convex conjugate defined by $h^*(y) = \max_{p \in \Delta\mathcal{A}} [\langle y, p \rangle - h(\pi)]$. Since h is differentiable almost everywhere, we have, for almost every y ,

$$\Gamma(y) := \nabla h^*(y) = \arg \max_{p \in \Delta\mathcal{A}} [\langle y, p \rangle - h(\pi)]. \quad (4)$$

Discrete Time Online Mirror Descent: The OMD algorithm is implemented as described in Algorithm 1. At each iteration, the first step consists in computing, for each population, the evolution of the population's distribution by using the current policy, see (1). In the second step, each population's policy is updated. This update is done by first updating the corresponding y variable and then obtaining the policy thanks to the function Γ . We have for all

Algorithm 1 Online Mirror Descent (OMD)

Input: $\alpha, y_{n,0}^i = 0$ for all $i, n; t_{max}$.

repeat

Forward Update: Compute for all $i, \mu^{i,\pi^{(t)}}$

Backward Update: Compute for all $i, Q^{i,\pi^i}, \mu^{\pi^i}$

Update for all i, n, x, a ,

$$y_{n,t+1}^i(x, a) = y_{n,t}^i(x, a) + \alpha Q_n^{i,\pi^i, \mu^{\pi^i}}(x, a)$$

$$\pi_{n,t+1}^i(\cdot | x) = \Gamma(y_{n,t+1}^i(x, \cdot))$$

until $t = t_{max}$

$t > 0, i \in \{1, \dots, N_p\}, n \in \{0, \dots, N\}$,

$$y_{n,t+1}^i(x^i, a^i) = \sum_{s=0}^t \alpha Q_n^{i,\pi^i, \mu^{\pi^i}}(x^i, a^i),$$

$$\pi_{n,t+1}^i(\cdot | x^i) = \Gamma(y_{n,t+1}^i(x^i, \cdot)).$$

Continuous Time Online Mirror Descent: We study the theoretical convergence of the continuous time version of Algorithm 1. Namely, the Continuous Time Online Mirror Descent (CTOMD) algorithm (Mertikopoulos et al., 2018) is defined as: for all $i \in \{1, \dots, N_p\}, n \in \{0, \dots, N\}$, $y_{n,0}^i = 0$, and for all $t \in \mathbb{R}_+$,

$$y_{n,t}^i(x^i, a^i) = \int_0^t Q_n^{i,\pi^i, \mu^{\pi^i}}(x^i, a^i) ds, \quad (5)$$

$$\pi_{n,t}^i(\cdot | x^i) = \Gamma(y_{n,t}^i(x^i, \cdot)). \quad (6)$$

From here on, unless otherwise specified, we assume that the weak monotonicity condition holds and denote by π^* a NE, whose existence follows from Proposition 1. We let $y^{i,*} : (x^i, a^i) \mapsto y^{i,*}(x^i, a^i)$ be the corresponding dual variable such that $\pi^{i,*}(\cdot | x^i) = \Gamma(y^{i,*}(x^i, \cdot))$ for every i .

Measure of similarity with the NE π^* : Based on the regularizer h , we define in the dual space the following measure of similarity $H : \mathbb{R}^{|\mathcal{A}|} \rightarrow \mathbb{R}$ with the NE π^* :

$$H(y) := \sum_{i=1}^{N_p} \sum_{n=0}^N \sum_{x^i \in \mathcal{X}} \mu_n^{i,\pi^*}(x^i) \left[h^*(y_{n,t}^i(x^i, \cdot)) - h^*(y^{i,*}(x^i, \cdot)) - \langle \pi_{n,t}^{i,*}, y_{n,t}^i(x^i, \cdot) - y_{n,t}^{i,*}(x^i, \cdot) \rangle \right].$$

As detailed below, this quantity will be decreasing through the iterations of CTOMD. Observe that since the regularizer is steep and thus always maps in the interior of the simplex, it can also be expressed in terms of Bregman divergence as:

$$H(y) = \sum_{i=1}^{N_p} \sum_{n=0}^N \sum_{x^i \in \mathcal{X}} \mu_n^{i,\pi^*}(x^i) [D_h(\pi_n^{i,*}(x^i, \cdot), \pi_n^i(x^i, \cdot))].$$

which is always non-negative. Here D_F denotes the Bregman divergence associated with a map F and defined as $D_F(p, q) := F(p) - F(q) - \langle \nabla F(q), p - q \rangle$. In this derivation we have used known relations between Fenchel couplings and Bregman divergences (e.g., Mertikopoulos & Sandholm (2016)) and denoted $\pi_n^i := \Gamma(y_n^i)$. Thus, the similarity measure H can also be expressed in terms of proximity between policies.

We are now in position to characterize the dynamics of the similarity to the Nash mapping via the following lemma, whose proof is provided in Appendix D.

Lemma 3 (Similarity to Nash dynamics). *In CTOMD, the measure of similarity H to the Nash π^* satisfies*

$$\frac{d}{dt}H(y_t) = \Delta J(\pi_t, \pi^*) + \tilde{\mathcal{M}}(\pi_t, \pi^*) \quad (7)$$

where $\Delta J(\pi_t, \pi^*) := \sum_{i=1}^{N_p} J^i(\pi_t^i, \mu^{\pi^*}) - J^i(\pi^{i,*}, \mu^{\pi^*})$ is always non-positive, and where the weak monotonicity metric $\tilde{\mathcal{M}}$ is defined in (2).

Convergence to the Nash for MP-MFGs: We now turn to the main theoretical contribution of the paper, by deriving the convergence of CTOMD to the set of NE for MP-MFGs.

Theorem 2 (Convergence of CTOMD). *If a MP-MFG satisfies $\tilde{\mathcal{M}}(\pi, \pi') < 0$ if $\mu^\pi \neq \mu^{\pi'}$ and 0 otherwise, then $(\pi_t)_{t \geq 0}$ generated by CTOMD given in (6) converges to the set of Nash equilibria of the game as $t \rightarrow +\infty$.*

Proof. The proof is left in appendix G. \square

Thanks to Lemma 1 together with Proposition 1, we easily deduce the convergence to the unique NE in some more stringent classes of MP-MFGs.

Corollary 1 (Convergence of CTOMD for weakly monotone MFG). *For any strictly weakly monotone MP-MFG, $(\pi_t)_{t \geq 0}$ generated by CTOMD given in (6) converges to the unique NE of the game, as $t \rightarrow +\infty$.*

Corollary 2 (Convergence of CTOMD for multi-population network zero sum MFG). *For any strictly monotone and essentially zero-sum MP-MFG, $(\pi_t)_{t \geq 0}$ generated by CTOMD given in (6) converges to the unique NE of the game, as $t \rightarrow +\infty$.*

It is worth noticing that the argumentation followed in our proof differs from the usual approaches on regret minimization arguments as e.g. in (Zinkevich et al., 2008).

Restriction to a single population MFG: Finally, considering the number of populations N_p equals 1, we deduce a convergence result of CTOMD to the NE of single population for strictly weakly monotone MFG.

Corollary 3 (Convergence of CTOMD for Single Population MFG). *For any single population MFG satisfying the*

strictly weak monotonicity assumption, $(\pi^{(t)})_{t \geq 0}$ generated by CTOMD given in (6) converges to the unique NE of the game, as $t \rightarrow +\infty$.

5. Numerical experiments

We illustrate the theoretical convergence of CTOMD with an extensive empirical evaluation of OMD described in Algorithm 1 within various settings involving single or multiple populations as well as non trivial topologies (videos available here). These settings are typically hardly tractable using classical numerical approximation schemes for partial differential equations. Besides, the scale of the numerical experiments grows up to 10^{12} states, establishing a new scalability benchmark in the MFG literature. We emphasize the diversity of tractable environments by considering (randomized MDP) Garnet settings, a twenty-storey high building evacuation, a crowd movement example in the presence of common noise and finally an essentially zero sum multi-population chasing game.

Experimental setup: We compare OMD and FP with different learning rates α . In discrete-time OMD, α appears in the backward update of y : $y_{n,t+1}^i(x, a) = y_{n,t}^i(x, a) + \alpha Q_{n,t}^{i,\pi_t^i, \mu^{\pi_t}}(x, a)$, whereas in discrete-time FP, it corresponds to how much we update the average policy with the new best response $\pi_{n,t+1}^i(x^i, a^i)$ given by

$$\frac{(1 - \alpha_t)\mu_{n,t}^{i,\pi_t}(x^i)\pi_{n,t+1}^i(x^i, a^i) + \alpha_t\mu_{n,t}^{i,br}(x^i)\pi_{n,t}^{i,br}(x^i, a^i)}{(1 - \alpha_t)\mu_{n,t}^{i,\pi_t}(x^i) + \alpha_t\mu_{n,t}^{i,br}(x^i)}$$

FP is experimented with decreasing $\alpha_t = \alpha/(2 + t)$ or constant $\alpha_t = \alpha$ learning rate. This latter is referred to hereafter as *FP damped*, while $\alpha = 1$ corresponds to the fixed point iteration algorithm, i.e. the population applies the last best response policy. The theoretical proof of convergence relies on restrictive conditions which only hold for a small class of games. We provide a thorough evaluation in Table 1 of the complexity of the environments along with the memory required to compute our results. For OMD, we only need to store y of size $|\mathcal{X}| \times |\mathcal{A}|$ and the distributions, of size $|\mathcal{X}|$. For FP, we need to store the last best response, the average policy, the last distribution and the average distribution, requiring a total of $2 \times (|\mathcal{X}| \times |\mathcal{A}|) + 2 \times |\mathcal{X}|$. In all the experiments, h is the entropy: $h = -\sum_{a \in \mathcal{A}} \pi(a) \log(\pi(a))$. This implies that $h^*(y) = \log(\sum_a \exp(y(a)))$, and we find that Γ is a softmax if we take the gradient of h^* .

5.1. Garnet

We first evaluate Alg. 1 on a set of randomly generated problems (repeatability of our results for varying sizes).

Environment: A garnet is an abstract and randomly generated MDP (Archibald et al., 1995). We adapt this con-

Environment	$ \mathcal{X} $	$ \mathcal{X} \times \mathcal{A} $	OMD	FP
Garnet	$2 \times 10^3 - 2 \times 10^4$	$2 \times 10^4 - 4 \times 10^5$	84Ko - 229Ko	168Ko - 458Ko
Building	8×10^9	5.6×10^{10}	0.21To	0.42To
Common noise	2.73×10^{11}	1.092×10^{12}	5.0To	10To
Multi-Population medium	5×10^7	2×10^8	0.93Go	1.9Go
Multi-Population large	8×10^8	3.2×10^9	73Go	146Go

Table 1. Number of states, action-states pairs & RAM memory required for the experiments. $|\mathcal{X}|$ = positions \times timesteps \times common noise \times number of populations).

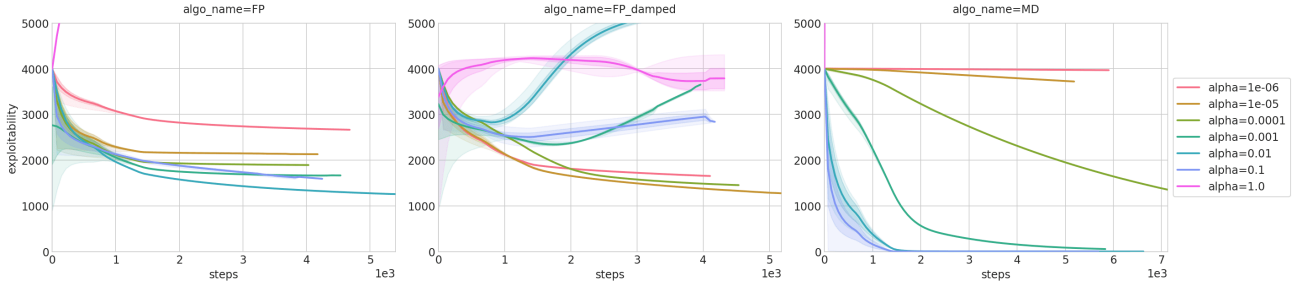


Figure 1. 5 Garnet sampled with param $n_x = 20000$, $n_a = 10$, $t = 2000$, $s_f = 10$

cept to single-population MFGs by modifying the reward. In our case, a Garnet is built from the set of parameters $(n_x, n_a, n_b, s_f, \eta)$, with n_x and n_a respectively the numbers of states and actions. The term n_b is a branching factor, and the transition kernel (independent of μ) is built as follows: n_b transiting states are drawn randomly without replacement, and the associated transition probabilities are obtained by partitioning the unit interval with $n_x - 1$ uniformly sampled random points. The reward term $\tilde{r}(x, u)$ is set to 0 for s_f states sampled randomly without replacement, for each of the remaining states it is set for all actions to a random value sampled uniformly in the unit interval. We set $\tilde{r}(s, \mu) = -\eta \log(\mu(x))$. This reward encourages the agents to spread out across the MDP states and can model social distancing. This process generates a monotone MFG.

Numerical results: Fig. 1 (main text) and 6 (Appx. H.1) shows various Garnet experiments. We fix $s_f = 10$, $t = 2000$, $\eta = 1$ and $n_b = 1$ (deterministic dynamics) and vary $n_x \in \{2 \cdot 10^3; 2 \cdot 10^4\}$ and $n_a \in \{10, 20\}$. In each case, results are averaged over 5 randomly generated Garnets. We compare OMD to FP, damped or not. We observe that OMD consistently converges faster for the right choice of α . $\alpha = 1$ might lead to unstable results while $\alpha = 0.1$ consistently provides fast convergence to the Nash. In all cases, the number of states influences the convergence rate, but much less for OMD.

5.2. Building evacuation

Environment: We now turn to a single-population crowd modeling problem, namely a building evacuation. This

kind of problem has been the topic of several works on MFG (see e.g. (Achdou & Laurière, 2015; Achdou & Lasry, 2019) for a single room and (Djehiche et al., 2017) for a multilevel building). The building consists of 20 floors, each of dimension 200×200 . At each floor, two staircases are located at two opposite corners, such as the crowd has to cross the whole floor to take the next staircase. Each agent can remain in place, move in the 4 directions (up, down, right, left) as well as go up or down when on a staircase location. The initial distribution is uniform over all the floors. Each agent of the crowd wants to go downstairs as quickly as possible - as it gets a reward of 10 at the bottom floor - while favoring social distancing:

$$r(x, a, \mu) = -\eta \log(\mu(x)) + 10 \times \mathbb{1}_{\text{floor}=0}$$

Numerical results: We compute this problem with a horizon of 10000, so $|\mathcal{X}| = 8^{10}$. We take $\eta = 1$. To ensure that the reward stays bounded, we clip the first part $-\eta \log(\mu(x))$ to -40 . As expected, we observe in Fig. 2 that the agents go downstairs and do not concentrate on the shortest path but rather spread mildly. OMD converges faster than both FP and FP damped.




Figure 3. Building environment.

5.3. Crowd motion with randomly shifted point of interest

Environment: We consider a second crowd modeling

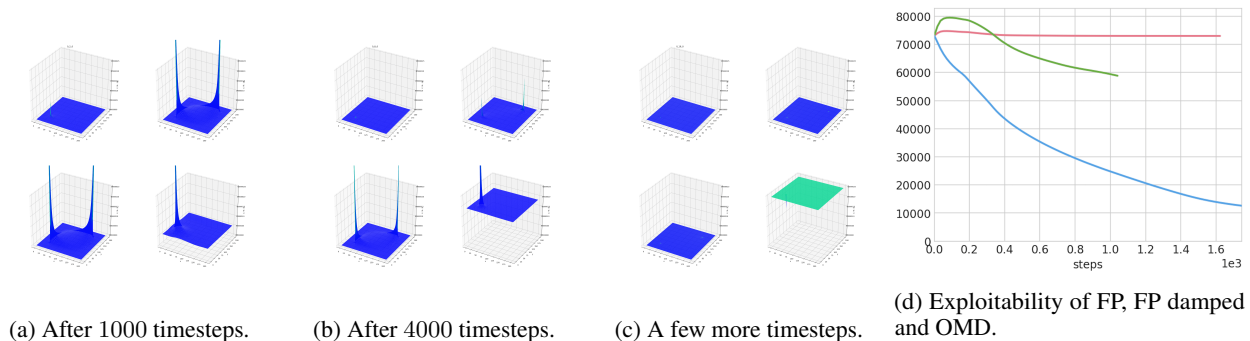


Figure 2. Population distribution at consecutive dates. Each plot of a subfigure is a different floor, the bottom floor is the bottom-right plot, the top floor is the top-left plot. Fig. 2d: FP (red, $\alpha = 10^{-5}$), FP damped (green, $\alpha = 10^{-3}$) and OMD (blue, $\alpha = 10^{-4}$).

MFG, extending the Beach Bar problem of (Perrin et al., 2020) in two dimensions. The environment is a 2D torus of dimensions 1000×1000 , with a point of interest initially located at the center of the square. After 200 timesteps, the point of interest changes location, moving randomly in the direction of one of the corner. This process repeats itself 5 times. This random location change adds common noise to the environment and increases exponentially the number of states. Considering MFG with common noise can be encompassed in our previous study by simply increasing the state space with the common noise and adding time to the reward and the transition kernel. For every random movement, four possible directions are possible, making the total number of states $|\mathcal{X}| = 2 \times 10^8 \times \sum_{k=0}^4 4^k = 2.73 \times 10^{11}$ states. The reward is: $r(x, a, \mu) = C \times (1 - \frac{\|bar-(i,j)\|_1}{2 \times N_{side}}) - \log(\mu(x))$.

Numerical results: We set $C = 10$. We observe in Fig. 4 that the population is organizing itself with respect to the point of interest and follows it closely as it randomly moves within the dedicated square region. With common noise we get more than a trillion states, making it hard for FP to scale. More plots with a smaller state space are available in Appx. H for a comparison of OMD and FP.

5.4. Multi-population chasing

Environment: We finally look at MP-MFGs, where the populations are chasing each other in a cyclic manner. For the sake of clarity, we explain the reward structure with 3 populations, but more populations are considered in the experiments. With three populations, the game closely relates to the well known Hens-Foxes-Snakes outdoor game for kids. Hens are trying to catch snakes, while snakes are chasing foxes, who are willing to eat hens. It can also be interpreted as a control version of the spatially extended Rock-Paper-Scissors, where patterns of travelling waves appear under certain conditions (Postlethwaite & Rucklidge, 2017). The interplay between nontransitive interactions and biodiversity has been the subject of extensive, mostly exper-

imental, research showing that the setting details critically affect the emergent behavior (Szolnoki et al., 2020).

To ensure $\bar{r}^{i,j} = -\bar{r}^{j,i}$ we implement MP-MFGs with the reward structure defined in Table 2 (ex. with 3 populations).

	R	P	S
R	0	-1	1
P	1	0	-1
S	-1	1	0

Table 2. $\bar{r}^{i,j}$ for three-population.

The reward of population i is monotone (cf. Appx. H.4.1) and follows the definition (3): $r^i(x, a, \mu^1, \dots, \mu^N) = -\log(\mu^i(x)) + \sum_{j \neq i} \mu^j(x) \bar{r}^{i,j}(x)$. The distributions are initialized either randomly or in different corners. The number of agents of each population is fixed, but the reward encourages the agent to chase the population that it dominates. For example, if an agent is Rock, the second term of the reward is proportional to the amount of Scissors agents μ^S where the Rock agent is located, and inversely proportional to μ^P , the proportion of Paper agents, making the Rock agent to flee from places populated by Paper agents.

Numerical results: We present a four-population example, each is initially located at a corner of the environment. We observe that the populations are chasing each other in a cyclic fashion. Fig. 5 highlights that OMD algorithm outperforms FP in terms of exploitability minimization (full comparison with different values of α in Appx. H.4). It demonstrates the robustness of the OMD algorithm within the different topologies considered. Topologies of the environment are a torus, a basic square or the ‘donut’ topology (an environment where the agent gets a negative reward if it goes inside a large zone at the center of the square).

6. Related work

OMD dynamics have been studied extensively within the field of multi-agent games (Cesa-Bianchi & Lugosi, 2006; Nisan et al., 2007). Leveraging the well known advanta-

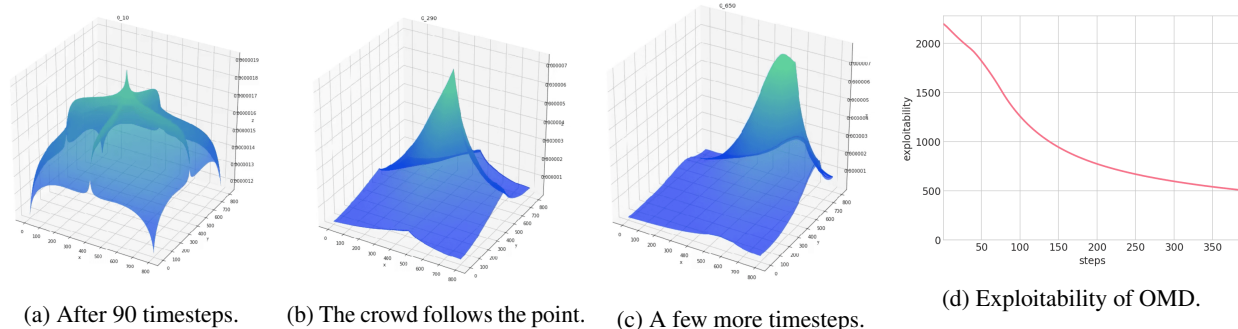


Figure 4. Crowd position at different consecutive dates when the point of interest is randomly shifted to the right by a common noise.

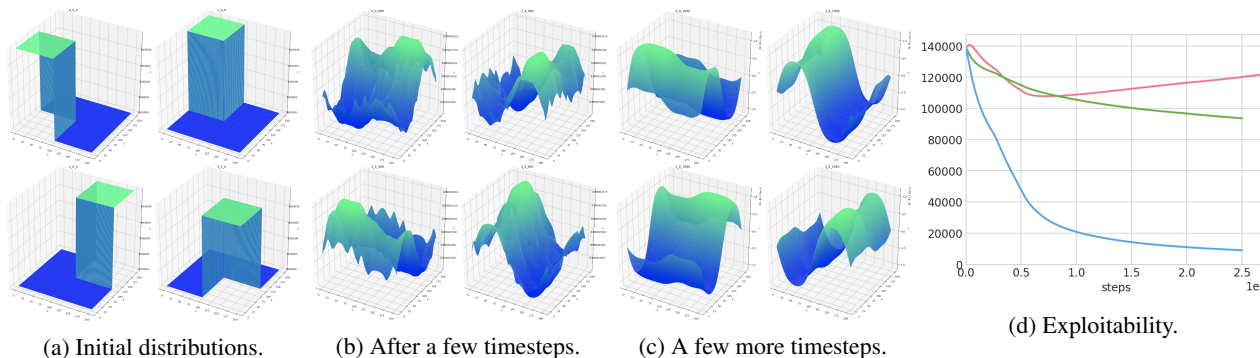


Figure 5. 4-population chasing. Fig 5d: FP (red, $\alpha = 10^{-3}$), FP damped (green, $\alpha = 10^{-5}$) and OMD (blue, $\alpha = 10^{-5}$).

geous regret properties of such dynamics (Srebro et al., 2011), one can prove strong time-average convergence results both in zero-sum games (and network variants thereof) (Freund & Schapire, 1999; Cai et al., 2016) as well as in smooth-games (Roughgarden, 2009). Recently, there has been explicit focus on understanding their day-to-day behavior which has been shown to be non-equilibrating even in standard bilinear zero-sum games (Piliouras & Shamma, 2014; Mertikopoulos et al., 2018). Moreover, even in simple games the behavior of such dynamics can become formally chaotic (Sato et al., 2002; Palaiopoulos et al., 2017; Chotibut et al., 2019). Nevertheless, sufficient conditions have been established under which converge to NE is guaranteed even in the sense of the day-to-day behavior (Zhou et al., 2017; Bravo et al., 2018). We find sufficient conditions for convergence in the more demanding setting of MP-MFG.

MP-MFGs have been introduced in (Huang et al., 2006a) and studied from a PDE viewpoint in (Feleqi, 2013; Cirant, 2015; Cirant & Verzini, 2017; Bardi & Cirant, 2018). To the best of our knowledge, our work is the first one to provide a monotonicity condition for MP-MFG and to provide a provably converging algorithm.

Related to the question of learning in MFGs, (Yin et al., 2010) studied a MF oscillator game, while (Cardaliaguet & Hadikhanloo, 2017) initiated the study of Fictitious Play

in MFGs, which has been further studied in (Hadikhanloo & Silva, 2019). Recently, these ideas have been combined with Reinforcement Learning by Elie et al. (2020); Perrin et al. (2020). These methods allow solving MFGs under a monotonicity assumption, which is at the same time easier to check and less restrictive than the ones used to ensure convergence for fixed point iterations (Guo et al., 2019; Anahtarci et al., 2020) or single-loop fictitious play iterations (Angiuli et al., 2020; Xie et al., 2020). In our work, we also prove convergence under such a weak monotonicity condition, which enables us to cover a large class of MFGs. Furthermore, we consider time-dependent problems (as e.g. in (Mishra et al., 2020)) instead of stationary equilibria. Mirror Descent for MFGs has been introduced in (Hadikhanloo, 2017) for first-order, single-population MFG. Our results cover second order, MP-MFG. Traditional numerical methods for solving MFGs typically rely on a finite difference scheme introduced in (Achdou & Capuzzo-Dolcetta, 2010). This approach can be extended to solve MP-MFG, see (Achdou et al., 2017). However, to the best of our knowledge, there is no general convergence guarantees, nor has it been tested on examples with as many states as we consider. More recently, several numerical methods to solve MFGs based on machine learning tools have been proposed using either an analytical viewpoint (Al-Arabi et al., 2018; Carmona & Laurière, 2019a; Ruthotto et al., 2020; Cao et al.,

2020; Lin et al., 2020) or a stochastic viewpoint (Fouque & Zhang, 2020; Carmona & Laurière, 2019b; Germain et al., 2019). To the best of our knowledge, these algorithms have not been proved to converge and seem applicable only under rather stringent conditions (on the structure or the regularity of the problem) and do not seem to be directly applicable to complex geometries due to boundary conditions. Last, the question of learning with multiple infinite populations of agents has also been studied recently in (Subramanian et al., 2018). The authors consider several groups where the agents cooperate among each group, which differs from our setting where all the agents compete.

7. Conclusion

We proposed Online Mirror Descent for MP-MFGs. We have proved that under appropriate monotonicity assumptions, OMD converges to a NE. Moreover, we considered multiple experimental benchmarks, some with hundreds of billions states, and compared extensively OMD to FP. OMD scales up remarkably well and consistently converges significantly faster than FP. An interesting direction of future work would be to study the rate of convergence of OMD. We have shown $O(1/t)$ rate for FP in MP-MFG but our technique does not extend to OMD. Empirically, we envision to extend this approach to a model-free setting with function approximation and address even larger problems.

Acknowledgments

Georgios Piliouras gratefully acknowledges grant PIE-SGP-AI-2018-01, NRF2019-NRF-ANR095 ALIAS grant and NRF 2018 Fellowship NRF-NRFF2018-07. Mathieu Laurière gratefully acknowledges the support of NSF grant DMS-1716673 and ARO grant W911NF-17-1-0578. We would like to thank Mark Rowland for his review of the manuscript and helpful suggestions.

References

- Achdou, Y. and Capuzzo-Dolcetta, I. Mean field games: numerical methods. *SIAM Journal on Numerical Analysis*, 48(3), 2010. ISSN 0036-1429. doi: 10.1137/090758477. URL <https://doi.org/10.1137/090758477>.
- Achdou, Y. and Lasry, J.-M. Mean field games for modeling crowd motion. In *Contributions to partial differential equations and applications*. Springer, 2019.
- Achdou, Y. and Laurière, M. On the system of partial differential equations arising in mean field type control. *Discrete Contin. Dyn. Syst.*, 35(9), 2015. ISSN 1078-0947. doi: 10.3934/dcds.2015.35.3879. URL <https://doi.org/10.3934/dcds.2015.35.3879>.
- Achdou, Y. and Laurière, M. Mean field games and applications: Numerical aspects. In *Mean Field Games*, volume 2281 of *C.I.M.E. Foundation Subseries*. Springer International Publishing, 2020.
- Achdou, Y., Camilli, F., and Capuzzo-Dolcetta, I. Mean field games: numerical methods for the planning problem. *SIAM Journal on Control and Optimization*, 50(1), 2012.
- Achdou, Y., Buera, F., Lasry, J.-M., Lions, P.-L., and Moll, B. PDE models in macroeconomics. *Proceedings of the Royal Society of London. Series A, Mathematical and Physical Sciences*, 2014.
- Achdou, Y., Bardi, M., and Cirant, M. Mean field games models of segregation. *Math. Models Methods Appl. Sci.*, 27(1):75–113, 2017. ISSN 0218-2025. doi: 10.1142/S0218202517400036. URL <http://dx.doi.org/10.1142/S0218202517400036>.
- Al-Arabi, A., Correia, A., Naiff, D., Jardim, G., and Saporito, Y. Solving nonlinear and high-dimensional partial differential equations via deep learning. *arXiv preprint arXiv:1811.08782*, 2018.
- Anahtarci, B., Kariksiz, C. D., and Saldi, N. Q-learning in regularized mean-field games. *arXiv preprint arXiv:2003.12151*, 2020.
- Angiuli, A., Graves, C. V., Li, H., Chassagneux, J.-F., Delarue, F., and Carmona, R. Cemracs 2017: numerical probabilistic approach to MFG. *ESAIM: Proceedings and Surveys*, 65, 2019.
- Angiuli, A., Fouque, J.-P., and Laurière, M. Unified reinforcement q-learning for mean field game and control problems. *arXiv preprint arXiv:2006.13912*, 2020.
- Archibald, T., McKinnon, K., and Thomas, L. On the generation of markov decision processes. *Journal of the Operational Research Society*, 46(3):354–361, 1995.
- Aurell, A. and Djehiche, B. Mean-field type modeling of nonlocal crowd aversion in pedestrian crowd dynamics. *SIAM J. Control Optim.*, 56(1):434–455, 2018. ISSN 0363-0129. doi: 10.1137/17M1119196. URL <https://doi.org/10.1137/17M1119196>.
- Bardi, M. and Cardaliaguet, P. Convergence of some mean field games systems to aggregation and flocking models. *arXiv:2004.04403*, 2020.
- Bardi, M. and Cirant, M. Uniqueness of solutions in mean field games with several populations and Neumann conditions. In *PDE models for multi-agent phenomena*, volume 28 of *Springer INdAM Ser.*, pp. 1–20. Springer, Cham, 2018.
- Bensoussan, A., Frehse, J., and Yam, S. C. P. *Mean Field Games and Mean Field Type Control Theory*. Springer Briefs in Mathematics. Springer, New York, 2013. ISBN 978-1-4614-8507-0; 978-1-4614-8508-7.
- Bensoussan, A., Huang, T., and Laurière, M. Mean field control and mean field game models with several populations. *Minimax Theory Appl.*, 3(2):173–209, 2018. ISSN 2199-1413.
- Bravo, M., Leslie, D. S., and Mertikopoulos, P. Bandit learning in concave n -person games. *arXiv preprint arXiv:1810.01925*, 2018.
- Briceño Arias, L. M., Kalise, D., and Silva, F. J. Proximal methods for stationary mean field games with local couplings. *SIAM Journal on Control and Optimization*, 56(2), 2018. ISSN 0363-0129. doi: 10.1137/16M1095615. URL <https://doi.org/10.1137/16M1095615>.
- Briceño Arias, L. M., Kalise, D., Kobeissi, Z., Laurière, M., Mateos González, A., and Silva, F. J. On the implementation of a primal-dual algorithm for second order time-dependent mean field games with local couplings. *ESAIM: Proceedings*, 65, 2019. doi: 10.1051/proc/201965330. URL <https://doi.org/10.1051/proc/201965330>.
- Brown, N. and Sandholm, T. Superhuman AI for heads-up no-limit poker: Libratus beats top professionals. *Science*, 360(6385), December 2017.

- Brown, N. and Sandholm, T. Superhuman AI for multiplayer poker. *Science*, 365(6456), 2019. ISSN 0036-8075. doi: 10.1126/science.aay2400. URL <https://science.sciencemag.org/content/365/6456/885>.
- Cai, Y., Candogan, O., Daskalakis, C., and Papadimitriou, C. Zero-sum polymatrix games: A generalization of minmax. *Mathematics of Operations Research*, 41(2): 648–655, 2016.
- Campbell, M., Hoane Jr, A. J., and Hsu, F.-h. Deep Blue. *Artificial intelligence*, 134(1-2), 2002.
- Cao, H., Guo, X., and Laurière, M. Connecting GANs, MFGs, and OT. *arXiv preprint arXiv:2002.04112*, 2020.
- Cardaliaguet, P. Notes on mean field games. *P.-L. Lions' Lectures at Collège de France*, 2012.
- Cardaliaguet, P. and Hadikhanloo, S. Learning in mean field games: the fictitious play. *ESAIM: Control, Optimisation and Calculus of Variations*, 23(2), 2017.
- Carlini, E. and Silva, F. J. A fully discrete semi-Lagrangian scheme for a first order mean field game problem. *SIAM Journal on Numerical Analysis*, 52(1), 2014. ISSN 0036-1429. doi: 10.1137/120902987. URL <https://doi.org/10.1137/120902987>.
- Carlini, E. and Silva, F. J. A semi-Lagrangian scheme for a degenerate second order mean field game system. *Discrete and Continuous Dynamical Systems*, 35(9), 2015. ISSN 1078-0947. doi: 10.3934/dcds.2015.35.4269. URL <https://doi.org/10.3934/dcds.2015.35.4269>.
- Carmona, R. and Delarue, F. *Probabilistic theory of mean field games with applications. I*, volume 83 of *Probability Theory and Stochastic Modelling*. Springer, Cham, 2018a. ISBN 978-3-319-56437-1; 978-3-319-58920-6. Mean field FBSDEs, control, and games.
- Carmona, R. and Delarue, F. *Probabilistic Theory of Mean Field Games with Applications I-II*. Springer, 2018b.
- Carmona, R. and Laurière, M. Convergence Analysis of Machine Learning Algorithms for the Numerical Solution of Mean Field Control and Games: I—The Ergodic Case. *arXiv preprint arXiv:1907.05980*, 2019a.
- Carmona, R. and Laurière, M. Convergence Analysis of Machine Learning Algorithms for the Numerical Solution of Mean Field Control and Games: II—The Finite Horizon Case. *arXiv preprint arXiv:1908.01613*, 2019b.
- Cesa-Bianchi, N. and Lugosi, G. *Prediction, Learning, and Games*. Cambridge University Press, 2006.
- Chassagneux, J.-F., Crisan, D., Delarue, F., et al. Numerical method for fbsdes of mckean–vlasov type. *The Annals of Applied Probability*, 29(3), 2019.
- Chotibut, T., Falniowski, F., Misiurewicz, M., and Piliouras, G. The route to chaos in routing games: When is price of anarchy too optimistic? *arXiv preprint arXiv:1906.02486*, 2019.
- Cirant, M. Multi-population mean field games systems with Neumann boundary conditions. *J. Math. Pures Appl.* (9), 103(5):1294–1315, 2015. ISSN 0021-7824. doi: 10.1016/j.matpur.2014.10.013. URL <http://dx.doi.org/10.1016/j.matpur.2014.10.013>.
- Cirant, M. and Verzini, G. Bifurcation and segregation in quadratic two-populations mean field games systems. *ESAIM Control Optim. Calc. Var.*, 23(3):1145–1177, 2017. ISSN 1292-8119. doi: 10.1051/cocv/2016028. URL <http://dx.doi.org/10.1051/cocv/2016028>.
- Conitzer, V. and Sandholm, T. Expressive markets for donating to charities. *Artif. Intell.*, 175(7-8):1251–1271, 2011.
- Couillet, R., Perlaza, S. M., Tembine, H., and Debbah, M. Electrical vehicles in the smart grid: A mean field game analysis. *IEEE Journal on Selected Areas in Communications*, 30(6), 2012.
- Djehiche, B., Tcheukam, A., and Tembine, H. A mean-field game of evacuation in multilevel building. *IEEE Transactions on Automatic Control*, 62(10), 2017.
- Elie, R., Pérolat, J., Laurière, M., Geist, M., and Pietquin, O. On the convergence of model free learning in mean field games. *Proceedings of the AAAI Conference on Artificial Intelligence*, 34(05):7143–7150, 2020.
- Feleqi, E. The derivation of ergodic mean field game equations for several populations of players. *Dyn. Games Appl.*, 3(4):523–536, 2013. ISSN 2153-0785. doi: 10.1007/s13235-013-0088-5. URL <http://dx.doi.org/10.1007/s13235-013-0088-5>.
- Fouque, J.-P. and Zhang, Z. Deep learning methods for mean field control problems with delay. *Frontiers in Applied Mathematics and Statistics*, 6, 2020. ISSN 2297-4687. doi: 10.3389/fams.2020.00011. URL <https://www.frontiersin.org/article/10.3389/fams.2020.00011>.
- Freedman, R., Borg, J. S., Sinnott-Armstrong, W., Dickerson, J. P., and Conitzer, V. Adapting a kidney exchange algorithm to align with human values. *Artif. Intell.*, 283: 103261, 2020.

- Freund, Y. and Schapire, R. E. Adaptive game playing using multiplicative weights. *Games and Economic Behavior*, 29(1-2):79–103, 1999.
- Germain, M., Mikael, J., and Warin, X. Numerical resolution of mckean-vlasov fbsdes using neural networks. *arXiv preprint arXiv:1909.12678*, 2019.
- Goodfellow, I., Bengio, Y., and Courville, A. *Deep Learning*. MIT Press, 2016. <http://www.deeplearningbook.org>.
- Guo, X., Hu, A., Xu, R., and Zhang, J. Learning mean-field games. In *Proceedings of NeurIPS*, 2019.
- Hadikhanloo, S. Learning in anonymous nonatomic games with applications to first-order mean field games. *arXiv preprint arXiv:1704.00378*, 2017.
- Hadikhanloo, S. and Silva, F. J. Finite mean field games: fictitious play and convergence to a first order continuous mean field game. *Journal de Mathématiques Pures et Appliquées (9)*, 132, 2019. ISSN 0021-7824. doi: 10.1016/j.matpur.2019.02.006. URL <https://doi.org/10.1016/j.matpur.2019.02.006>.
- Huang, M., Malhamé, R. P., and Caines, P. E. Large population stochastic dynamic games: closed-loop McKean-Vlasov systems and the Nash certainty equivalence principle. *Communications in Information and Systems*, 6(3), 2006a. ISSN 1526-7555. URL <http://projecteuclid.org/euclid.cis/1183728987>.
- Huang, M., Malhamé, R. P., and Caines, P. E. Large population stochastic dynamic games: closed-loop McKean-Vlasov systems and the Nash certainty equivalence principle. *Communications in Information and Systems*, 6(3), 2006b. ISSN 1526-7555. URL <http://projecteuclid.org/euclid.cis/1183728987>.
- Lachapelle, A. and Wolfram, M.-T. On a mean field game approach modeling congestion and aversion in pedestrian crowds. *Transportation research part B: methodological*, 45(10):1572–1589, 2011.
- Lasry, J.-M. and Lions, P.-L. Mean field games. *Japanese Journal of Mathematics*, 2(1), 2007. ISSN 0289-2316. doi: 10.1007/s11537-007-0657-8. URL <http://dx.doi.org/10.1007/s11537-007-0657-8>.
- Lin, A. T., Fung, S. W., Li, W., Nurbekyan, L., and Osher, S. J. apac-net: Alternating the population and agent control via two neural networks to solve high-dimensional stochastic mean field games. *arXiv preprint arXiv:2002.10113*, 2020.
- Mertikopoulos, P. and Sandholm, W. H. Learning in games via reinforcement and regularization. *Mathematics of Operations Research*, 41(4):1297–1324, 2016.
- Mertikopoulos, P., Papadimitriou, C., and Piliouras, G. Cycles in adversarial regularized learning. In *Proceedings of the Twenty-Ninth Annual ACM-SIAM Symposium on Discrete Algorithms*, pp. 2703–2717. SIAM, 2018.
- Mishra, R. K., Vasal, D., and Vishwanath, S. Model-free reinforcement learning for non-stationary mean field games. In *2020 59th IEEE Conference on Decision and Control (CDC)*, pp. 1032–1037. IEEE, 2020.
- Moravčík, M., Schmid, M., Burch, N., Lisý, V., Morrill, D., Bard, N., Davis, T., Vaughn, K., Johanson, M., and Bowling, M. Deepstack: Expert-level artificial intelligence in heads-up no-limit poker. *Science*, 356(6337), 2017.
- Nemirovsky, A. and Yudin, D. Problem complexity and optimization method efficiency. *M.: Nauka*, 1979.
- Nisan, N., Roughgarden, T., Tardos, E., and Vazirani, V. V. *Algorithmic Game Theory*. Cambridge University Press, USA, 2007. ISBN 0521872820.
- Othman, A., Pennock, D. M., Reeves, D. M., and Sandholm, T. A practical liquidity-sensitive automated market maker. *ACM Trans. Economics and Comput.*, 1(3):14:1–14:25, 2013.
- Palaiopanos, G., Panageas, I., and Piliouras, G. Multiplicative weights update with constant step-size in congestion games: Convergence, limit cycles and chaos. In *Advances in Neural Information Processing Systems*, pp. 5872–5882, 2017.
- Perrin, S., Pérolat, J., Laurière, M., Geist, M., Elie, R., and Pietquin, O. Fictitious play for mean field games: Continuous time analysis and applications. *Proc. of NeurIPS*, 2020.
- Phelps, S., Ng, W. L., Musolesi, M., and Russell, Y. I. Precise time-matching in chimpanzee allogrooming does not occur after a short delay. *PLOS One*, 13(9), 2018.
- Piliouras, G. and Shamma, J. S. Optimization despite chaos: Convex relaxations to complex limit sets via poincaré recurrence. In *Proceedings of the twenty-fifth annual ACM-SIAM symposium on Discrete algorithms*, pp. 861–873. SIAM, 2014.
- Postlethwaite, C. M. and Rucklidge, A. M. Spirals and heteroclinic cycles in a spatially extended rock-paper-scissors model of cyclic dominance. *EPL (Europhysics Letters)*, 117(4):48006, Feb 2017. ISSN 1286-4854. doi: 10.1209/0295-5075/117/48006. URL <http://dx.doi.org/10.1209/0295-5075/117/48006>.

- Robinson, J. An iterative method of solving a game. *Annals of mathematics*, 1951.
- Roughgarden, T. Intrinsic robustness of the price of anarchy. In *Proc. of STOC*, pp. 513–522, 2009.
- Ruthotto, L., Osher, S. J., Li, W., Nurbekyan, L., and Fung, S. W. A machine learning framework for solving high-dimensional mean field game and mean field control problems. *Proceedings of the National Academy of Sciences*, 117(17), 2020.
- Sato, Y., Akiyama, E., and Farmer, J. D. Chaos in learning a simple two-person game. *Proceedings of the National Academy of Sciences*, 99(7):4748–4751, 2002. doi: 10.1073/pnas.032086299. URL <http://www.pnas.org/content/99/7/4748.abstract>.
- Shalev-Shwartz, S. et al. Online learning and online convex optimization. *Foundations and trends in Machine Learning*, 4(2):107–194, 2011.
- Shapiro, H. N. Note on a computation method in the theory of games. In *Communications on Pure and Applied Mathematics*, 1958.
- Silver, D., Huang, A., Maddison, C. J., Guez, A., Sifre, L., Van Den Driessche, G., Schrittwieser, J., Antonoglou, I., Panneershelvam, V., Lanctot, M., et al. Mastering the game of Go with deep neural networks and tree search. *Nature*, 529(7587), 2016.
- Silver, D., Schrittwieser, J., Simonyan, K., Antonoglou, I., Huang, A., Guez, A., Hubert, T., Baker, L., Lai, M., Bolton, A., et al. Mastering the game of Go without human knowledge. *Nature*, 550(7676), 2017.
- Silver, D., Hubert, T., Schrittwieser, J., Antonoglou, I., Lai, M., Guez, A., Lanctot, M., Sifre, L., Kumaran, D., Graepel, T., Lillicrap, T., Simonyan, K., and Hassabis, D. A general reinforcement learning algorithm that masters chess, shogi, and Go through self-play. *Science*, 632(6419), 2018.
- Srebro, N., Sridharan, K., and Tewari, A. On the universality of online mirror descent. *arXiv preprint arXiv:1107.4080*, 2011.
- Subramanian, J., Seraj, R., and Mahajan, A. Reinforcement learning for mean-field teams. In *Workshop on Adaptive and Learning Agents at International Conference on Autonomous Agents and Multi-Agent Systems.*, 2018.
- Sutton, R. S. and Barto, A. G. *Reinforcement Learning: An Introduction*. The MIT Press, second edition, 2018.
- Szolnoki, A., de Oliveira, B., and Bazeia, D. Pattern formations driven by cyclic interactions: A brief review of recent developments. *EPL (Europhysics Letters)*, 131(6): 68001, 2020.
- Vinyals, O., Babuschkin, I., Czarnecki, W. M., Mathieu, M., Dudzik, A., Chung, J., Choi, D. H., Powell, R., Ewalds, T., Georgiev, P., et al. Grandmaster level in StarCraft II using multi-agent reinforcement learning. *Nature*, 575(7782), 2019.
- Xie, Q., Yang, Z., Wang, Z., and Minca, A. Provable fictitious play for general mean-field games. *arXiv preprint arXiv:2010.04211*, 2020.
- Yin, H., Mehta, P. G., Meyn, S. P., and Shanbhag, U. V. Learning in mean-field oscillator games. In *49th IEEE Conference on Decision and Control (CDC)*. IEEE, 2010.
- Zhou, Z., Mertikopoulos, P., Moustakas, A. L., Bambos, N., and Glynn, P. Mirror descent learning in continuous games. In *2017 IEEE 56th Annual Conference on Decision and Control (CDC)*, pp. 5776–5783. IEEE, 2017.
- Zinkevich, M., Johanson, M., Bowling, M., and Piccione, C. Regret minimization in games with incomplete information. In *Proceedings of NeurIPS*, 2008.

A. Separability + Monotonicity Imply Weak Monotonicity

Proof of Lemma 2. Let us assume that the reward is separable $r^i(x^i, a^i, \mu) = \bar{r}^i(x^i, a^i) + \tilde{r}^i(x^i, \mu)$ and that it follows the monotonicity condition: $\forall \mu \neq \mu', \sum_i \sum_{x \in \mathcal{X}} (\mu^i(x^i) - \mu'^i(x^i))(\tilde{r}^i(x^i, \mu) - \tilde{r}^i(x^i, \mu')) \leq 0$. Then, we have:

$$\begin{aligned}
 & \sum_{i=1}^{N_p} [J^i(\pi, \mu^\pi) - J^i(\pi', \mu^\pi) - J^i(\pi, \mu^{\pi'}) + J^i(\pi', \mu^{\pi'})] \\
 &= \sum_{i=1}^{N_p} \sum_{n=0}^N \sum_{(x^i, a^i) \in \mathcal{X} \times \mathcal{A}} [\mu_n^{i, \pi^i}(x^i) \pi_n^i(a^i | x^i) r^i(x^i, a^i, \mu_n^\pi) - \mu_n^{i, \pi'^i}(x^i) \pi_n^i(a^i | x^i) r^i(x^i, a^i, \mu_n^\pi) \\
 &\quad - \mu_n^{i, \pi^i}(x^i) \pi_n^i(a^i | x^i) r^i(x^i, a^i, \mu_n^{\pi'}) + \mu_n^{i, \pi'^i}(x^i) \pi_n^i(a^i | x^i) r^i(x^i, a^i, \mu_n^{\pi'})] \\
 &= \sum_{i=1}^{N_p} \sum_{n=0}^N \sum_{(x^i, a^i) \in \mathcal{X} \times \mathcal{A}} (\mu_n^{i, \pi^i}(x^i) \pi_n^i(a^i | x^i) - \mu_n^{i, \pi'^i}(x^i) \pi_n^i(a^i | x^i)) (r^i(x^i, a^i, \mu_n^\pi) - r^i(x^i, a^i, \mu_n^{\pi'})) \\
 &= \sum_{i=1}^{N_p} \sum_{n=0}^N \sum_{(x^i, a^i) \in \mathcal{X} \times \mathcal{A}} (\mu_n^{i, \pi^i}(x^i) \pi_n^i(a^i | x^i) - \mu_n^{i, \pi'^i}(x^i) \pi_n^i(a^i | x^i)) (\tilde{r}^i(x^i, \mu_n^\pi) - \tilde{r}^i(x^i, \mu_n^{\pi'})) \\
 &= \sum_{i=1}^{N_p} \sum_{n=0}^N \sum_{x^i \in \mathcal{X}} (\mu_n^{i, \pi^i}(x^i) - \mu_n^{i, \pi'^i}(x^i)) (\tilde{r}^i(x^i, \mu_n^\pi) - \tilde{r}^i(x^i, \mu_n^{\pi'})) \leq 0.
 \end{aligned}$$

With a similar proof, we obtain the corresponding property with strict inequality. \square

B. Multi-Population Reward

Let us suppose:

$$r^i(x^i, a^i, \mu) = \bar{r}^i(x^i, a^i) + \hat{r}^i(x^i, \mu^i) + \underbrace{\sum_{j \neq i} \mu^j(x^j) \hat{r}^{i,j}(x^i)}_{=\tilde{r}^i(x^i, \mu)}$$

With $\forall x \in \mathcal{X}, \hat{r}^{i,j}(x) = -\hat{r}^{j,i}(x)$ and if $\forall \mu \neq \mu', \forall i, \sum_{x \in \mathcal{X}} (\mu^i(x^i) - \mu'^i(x^i)) (\hat{r}^i(x^i, \mu^i) - \hat{r}^i(x^i, \mu'^i)) \leq 0$.

$$\begin{aligned}
 & \sum_i \sum_{x \in \mathcal{X}} (\mu^i(x^i) - \mu'^i(x^i)) (\tilde{r}^i(x^i, \mu) - \tilde{r}^i(x^i, \mu')) \\
 &= \sum_i \sum_{x \in \mathcal{X}} (\mu^i(x^i) - \mu'^i(x^i)) (\hat{r}^i(x^i, \mu^i) + \sum_{j \neq i} \mu^j(x^j) \hat{r}^{i,j}(x^i) - \hat{r}^i(x^i, \mu'^i) - \sum_{j \neq i} \mu'^j(x^j) \hat{r}^{i,j}(x^i)) \\
 &= \sum_i \sum_{x \in \mathcal{X}} (\mu^i(x^i) - \mu'^i(x^i)) (\hat{r}^i(x^i, \mu^i) - \hat{r}^i(x^i, \mu'^i)) + \underbrace{\sum_i \sum_{j \neq i} \sum_{x \in \mathcal{X}} (\mu^i(x^i) - \mu'^i(x^i)) (\mu^j(x^j) - \mu'^j(x^j)) \hat{r}^{i,j}(x^i)}_{=0 \text{ since } \hat{r}^{i,j}(x) = -\hat{r}^{j,i}(x)} \\
 &\leq 0
 \end{aligned}$$

C. Fictitious Play

In this section, we prove that under the weak monotonicity condition, the Fictitious Play process converges to a NE.

First, we prove the following property, which stems from the weak monotonicity.

Property 1. *Let f be a smooth enough function and let assume that the ODE $\dot{\rho} = f(\rho)$ (with $\dot{\rho} = \frac{d}{dt}\rho$) has a solution $(\rho^t)_{t \geq 0} = (\rho_n^t(x))_{t \geq 0, x \in \mathcal{X}}$. If the game is weakly monotone, then:*

$$\sum_{i=1}^{N_p} \sum_{x^i, a^i \in \mathcal{X} \times \mathcal{A}} \langle \nabla_{\rho} r^i(x^i, a^i, \rho), \dot{\rho} \rangle \rho^i(x^i, a^i) \leq 0.$$

Proof. The monotonicity condition implies that, for all $\tau \geq 0$, we have:

$$\sum_{i=1}^{N_p} \sum_{x^i, a^i \in \mathcal{X} \times \mathcal{A}} (\rho_t^i(x^i, a^i) - \rho_{t+\tau}^i(x^i, a^i))(r^i(x^i, a^i, \rho_t) - r^i(x^i, a^i, \rho_{t+\tau})) \leq 0.$$

Thus:

$$\sum_{i=1}^{N_p} \sum_{x^i, a^i \in \mathcal{X} \times \mathcal{A}} \frac{\rho_t^i(x^i, a^i) - \rho_{t+\tau}^i(x^i, a^i)}{\tau} \frac{r^i(x^i, a^i, \rho_t) - r^i(x^i, a^i, \rho_{t+\tau})}{\tau} \leq 0.$$

The result follows when $\tau \rightarrow 0$. □

In the space of distributions over state actions, the Fictitious Play process can be expressed as follows. First, we start with a distribution $\rho_{n,t}^i$ following the balance equation on the state action distributions:

$$\sum_{a'^i \in \mathcal{A}} \rho_{n-1,t}^i(x'^i, a'^i) = \sum_{x^i, a^i \in \mathcal{X} \times \mathcal{A}} p(x'^i | x^i, a^i) \rho_{n,t}^i(x^i, a^i).$$

And for $t < 1$, the policy $\pi_{n,t}^i(a^i | x^i) = \frac{\rho_{n,t}^i(x^i, a^i)}{\sum_{a^i \in \mathcal{A}} \rho_{n,t}^i(x^i, a^i)}$ is the uniform policy whenever $\sum_{a^i \in \mathcal{A}} \rho_{n,t}^i(x^i, a^i) > 0$.

A best response state action distribution to ρ is written $\rho_{n,t}^{i,br}(x^i, a^i)$ (which will be assumed to be equal to ρ_t for $t < 1$) and finally the FP process on the state action distribution is written as for all $t \geq 1$:

$$\rho_{n,t}^i(x^i, a^i) = \frac{1}{t} \int_0^t \rho_{n,s}^{i,br}(x^i, a^i) ds.$$

The exploitability can then be written as:

$$\phi(t) = \max_{\rho} \left[\sum_{i=1}^{N_p} \sum_{n=0}^N \sum_{x^i, a^i \in \mathcal{X} \times \mathcal{A}} \rho_n^i(x^i, a^i) r^i(x^i, a^i, \rho_{n,t}) \right] - \left[\sum_{i=1}^{N_p} \sum_{n=0}^N \sum_{x^i, a^i \in \mathcal{X} \times \mathcal{A}} \rho_{n,t}^i(x^i, a^i) r^i(x^i, a^i, \rho_{n,t}) \right]$$

Property 2. *We have that $\frac{d}{dt} \rho_{n,t}^i(x^i, a^i) = \frac{1}{t} \left[\rho_{n,t}^{i,br}(x^i, a^i) - \rho_{n,t}^i(x^i, a^i) \right]$ by taking the derivative of $\rho_{n,t}^i(x^i, a^i) = \frac{1}{t} \int_0^t \rho_{n,s}^{i,br}(x^i, a^i) ds$ on both sides.*

Finally, we take the derivative of the exploitability and get:

$$\begin{aligned}
 \frac{d}{dt}\phi(t) &= \frac{d}{dt} \max_{\rho} \left[\sum_{i=1}^{N_p} \sum_{n=0}^N \sum_{x^i, a^i \in \mathcal{X} \times \mathcal{A}} \rho_n^i(x^i, a^i) r^i(x^i, a^i, \rho_{n,t}) \right] - \frac{d}{dt} \left[\sum_{i=1}^{N_p} \sum_{n=0}^N \sum_{x^i, a^i \in \mathcal{X} \times \mathcal{A}} \rho_{n,t}^i(x^i, a^i) r^i(x^i, a^i, \rho_{n,t}) \right] \\
 &= \left[\sum_{i=1}^{N_p} \sum_{n=0}^N \sum_{x^i, a^i \in \mathcal{X} \times \mathcal{A}} \rho_{n,t}^{i,br}(x^i, a^i) \frac{d}{dt} \left(r^i(x^i, a^i, \rho_{n,t}) \right) \right] \\
 &\quad - \left[\sum_{i=1}^{N_p} \sum_{n=0}^N \sum_{x^i, a^i \in \mathcal{X} \times \mathcal{A}} \left(\rho_{n,t}^i(x^i, a^i) \frac{d}{dt} \left(r^i(x^i, a^i, \rho_{n,t}) \right) + r^i(x^i, a^i, \rho_{n,t}) \frac{d}{dt} \left(\rho_{n,t}^i(x^i, a^i) \right) \right) \right] \\
 &= \left[\sum_{i=1}^{N_p} \sum_{n=0}^N \sum_{x^i, a^i \in \mathcal{X} \times \mathcal{A}} \underbrace{\left[\rho_{n,t}^{i,br}(x^i, a^i) - \rho_{n,t}^i(x^i, a^i) \right]}_{=t \frac{d}{dt} \left(\rho_{n,t}^i(x^i, a^i) \right)} \underbrace{\frac{d}{dt} \left(r^i(x^i, a^i, \rho_{n,t}) \right)}_{=\langle \nabla_{\rho} r^i(x^i, a^i, \rho_{n,t}), \dot{\rho}_{n,t} \rangle} \right] \\
 &\quad - \left[\sum_{i=1}^{N_p} \sum_{n=0}^N \sum_{x^i, a^i \in \mathcal{X} \times \mathcal{A}} r^i(x^i, a^i, \rho_{n,t}) \underbrace{\frac{d}{dt} \left(\rho_{n,t}^i(x^i, a^i) \right)}_{=\frac{1}{t} \left[\rho_{n,t}^{i,br}(x^i, a^i) - \rho_{n,t}^i(x^i, a^i) \right]} \right] \\
 &= t \sum_{i=1}^{N_p} \sum_{n=0}^N \sum_{x^i, a^i \in \mathcal{X} \times \mathcal{A}} \underbrace{\left[\frac{d}{dt} \left(\rho_{n,t}^i(x^i, a^i) \right) \langle \nabla_{\rho} r^i(x^i, a^i, \rho_{n,t}), \dot{\rho}_{n,t} \rangle \right]}_{\leq 0} \\
 &\quad - \frac{1}{t} \underbrace{\left[\sum_{i=1}^{N_p} \sum_{n=0}^N \sum_{x^i, a^i \in \mathcal{X} \times \mathcal{A}} \left[\rho_{n,t}^{i,br}(x^i, a^i) - \rho_{n,t}^i(x^i, a^i) \right] r^i(x^i, a^i, \rho_{n,t}) \right]}_{=\phi(t)} \\
 &\leq -\frac{1}{t} \phi(t).
 \end{aligned}$$

D. Online Mirror Descent Dynamics

Proof of Lemma 3. The Continuous Time Online Mirror Descent (CTOMD) algorithm is defined as: for all $t > 0, i \in \{1, \dots, N_p\}, n \in \{0, \dots, N\}$,

$$y_{n,t}^i(x^i, a^i) = \int_0^t Q_n^{i, \pi_s^i, \mu^{\pi_s}}(x^i, a^i) ds,$$

$$\pi_{n,t}^i(\cdot | x^i) = \Gamma(y_{n,t}^i(x^i, \cdot)).$$

$$\begin{aligned} \frac{d}{dt} H(y_t) &= \frac{d}{dt} \sum_{i=1}^{N_p} \sum_{n=0}^N \sum_{x^i \in \mathcal{X}} \mu_n^{i, \pi^*}(x^i) \left[h^*(y_{n,t}^i(x^i, \cdot)) - h^*(y^{i,*}(x^i, \cdot)) - \langle \pi_{n,t}^{i,*}, y_{n,t}^i(x^i, \cdot) - y_{n,t}^{i,*}(x^i, \cdot) \rangle \right] \\ &= \sum_{i=1}^{N_p} \sum_{n=0}^N \sum_{x^i \in \mathcal{X}} \mu_n^{i, \pi^*}(x^i) \frac{d}{dt} \left[h^*(y_{n,t}^i(x^i, \cdot)) - h^*(y^{i,*}(x^i, \cdot)) - \langle \pi_{n,t}^{i,*}, y_{n,t}^i(x^i, \cdot) - y_{n,t}^{i,*}(x^i, \cdot) \rangle \right] \\ &= \sum_{i=1}^{N_p} \sum_{n=0}^N \sum_{x^i \in \mathcal{X}} \mu_n^{i, \pi^*}(x^i) \left[\frac{d}{dt} h^*(y_{n,t}^i(x^i, \cdot)) - \langle \pi_{n,t}^{i,*}, \frac{d}{dt} y_{n,t}^i(x^i, \cdot) \rangle \right] \\ &= \sum_{i=1}^{N_p} \sum_{n=0}^N \sum_{x^i \in \mathcal{X}} \mu_n^{i, \pi^*}(x^i) \left[\langle \pi_{n,t}^i(\cdot | x^i) - \pi_{n,t}^{i,*}(\cdot | x^i), Q_n^{i, \pi_t^i, \mu^{\pi_t}}(x^i, \cdot) \rangle \right] \\ &= \sum_{i=1}^{N_p} \sum_{n=0}^N \sum_{x^i \in \mathcal{X}} \mu_n^{i, \pi^*}(x^i) \left[V_n^{i, \pi_t^i, \mu^{\pi_t}}(x^i) - \langle \pi_{n,t}^{i,*}(\cdot | x^i), Q_n^{i, \pi_t^i, \mu^{\pi_t}}(x^i, \cdot) \rangle \right] \\ &= \sum_{i=1}^{N_p} \sum_{n=0}^N \sum_{x^i \in \mathcal{X}} \mu_n^{i, \pi^*}(x^i) \left[V_n^{i, \pi_t^i, \mu^{\pi_t}}(x^i) - \langle \pi_{n,t}^{i,*}(\cdot | x^i), r^i(x^i, \cdot, \mu^{\pi_t}) \rangle + \sum_{x'^i \in \mathcal{X}} p(x'^i | x^i, a^i) V_{n+1}^{i, \pi_t^i, \mu^{\pi_t}}(x'^i, \cdot) \right] \\ &= \sum_{i=1}^{N_p} \sum_{n=0}^N \left[\sum_{x^i \in \mathcal{X}} \mu_n^{i, \pi^*}(x^i) V_n^{i, \pi_t^i, \mu^{\pi_t}}(x^i) \right] - \underbrace{\left[\sum_{x^i \in \mathcal{X}} \mu_n^{i, \pi^*}(x^i) \langle \pi_{n,t}^{i,*}(\cdot | x^i), r^i(x^i, \cdot, \mu^{\pi_t}) \rangle \right]}_{= \mu_{n+1}^{i, \pi^*}(x'^i)} \\ &\quad - \underbrace{\left[\sum_{x'^i \in \mathcal{X}} V_{n+1}^{i, \pi_t^i, \mu^{\pi_t}}(x'^i) \sum_{x^i, a^i \in \mathcal{X} \times \mathcal{A}} \mu_n^{i, \pi^*}(x^i) \pi_{n,t}^{i,*}(a^i | x^i) p(x'^i | x^i, a^i) \right]}_{= \mu_{n+1}^{i, \pi^*}(x'^i)} \\ &= \underbrace{\sum_{i=1}^{N_p} \sum_{n=0}^N \left[\sum_{x^i \in \mathcal{X}} \mu_n^{i, \pi^*}(x^i) V_n^{i, \pi_t^i, \mu^{\pi_t}}(x^i) \right]}_{= J^i(\pi_t^i, \mu^{\pi_t})} - \sum_{n=0}^N \left[\sum_{x'^i \in \mathcal{X}} V_{n+1}^{i, \pi_t^i, \mu^{\pi_t}}(x'^i) \mu_{n+1}^{i, \pi^*}(x'^i) \right] \\ &\quad - \underbrace{\sum_{i=1}^{N_p} \sum_{n=0}^N \left[\sum_{x^i \in \mathcal{X}} \mu_n^{i, \pi^*}(x^i) \langle \pi_{n,t}^{i,*}(\cdot | x^i), r^i(x^i, \cdot, \mu^{\pi_t}) \rangle \right]}_{= J^i(\pi^{i,*}, \mu^{\pi_t})} \\ &= \sum_{i=1}^{N_p} \left[J^i(\pi_t^i, \mu^{\pi_t}) - J^i(\pi^{i,*}, \mu^{\pi_t}) \right] = \Delta J(\pi_t, \pi^*) + \tilde{\mathcal{M}}(\pi_t, \pi^*). \end{aligned}$$

□

E. Weak monotonicity implies $\tilde{\mathcal{M}} \leq 0$

Proof of Lemma 1. Consider two policies π, π' . Denote by $\mu = \mu^\pi, \mu' = \mu^{\pi'}$ respectively the induced distribution sequences. Let ρ, ρ' be the associated joint distribution sequences:

$$\rho_n^i(x^i, a^i) = \mu_n^i(x^i) \pi_n^i(a^i | x^i)$$

and likewise for ρ' . By the weak monotonicity, we have:

$$0 \geq \sum_i \sum_{(x^i, a^i) \in \mathcal{X} \times \mathcal{A}} (\rho_n^i(x^i, a^i) - \rho_n^{\prime i}(x^i, a^i)) (r^i(x^i, a^i, \mu_n) - r^i(x^i, a^i, \mu_n')) = \Delta J(\pi, \pi') + \Delta J(\pi', \pi), \quad (8)$$

with

$$\Delta J(\pi, \pi') = \sum_i \sum_{(x^i, a^i) \in \mathcal{X} \times \mathcal{A}} (\rho_n^i(x^i, a^i) - \rho_n^{\prime i}(x^i, a^i)) r^i(x^i, a^i, \mu_n),$$

and

$$\Delta J(\pi', \pi) = \sum_i \sum_{(x^i, a^i) \in \mathcal{X} \times \mathcal{A}} (\rho_n^{\prime i}(x^i, a^i) - \rho_n^i(x^i, a^i)) r^i(x^i, a^i, \mu_n').$$

From here, we deduce (2). Similarly, the strictly weak monotonicity implies a strict inequality in (2). □

F. Strictly weak monotonicity implies uniqueness

Proof of Lemma 1. Consider a strictly weakly monotone game. For the sake of contradiction, assume that there exist two different Nash equilibria, say π, π' .

Proceeding as in the proof of Lemma 1, we obtain (8) with a strict inequality.

Note that $\Delta J(\pi, \pi')$ corresponds to the difference between the reward of a typical player following π when the population follows π and the reward of a typical player following π' when the population still follows π , and vice versa for $\Delta J(\pi', \pi)$. Moreover, π, π' are Nash equilibria, so we deduce that these two terms are non-negative, which yields a contradiction with (8). □

G. Online Mirror descent convergence

Proof of Theorem 2. Let Ξ be defined as :

$$\Xi(\pi^*, \pi) := \sum_{i=1}^{N_p} \sum_{n=0}^N \sum_{x^i \in \mathcal{X}} \mu_n^{i, \pi^*}(x^i) [D_h(\pi_n^{i, *}(x^i, \cdot), \pi_n^i(x^i, \cdot))].$$

We pick $\pi \in \Delta \mathcal{A}$. If $\Delta J(\pi, \pi^*) + \tilde{\mathcal{M}}(\pi, \pi^*) = 0$ then, $\tilde{\mathcal{M}}(\pi, \pi^*) = 0$ and we can deduce that $\mu^\pi = \mu^{\pi^*}$. This implies that π is a Nash as π and π^* share the same distribution and thus the reward of a best response against π or π^* will be the same.

Let us suppose now that π is a Nash and $\Delta J(\pi, \pi^*) + \tilde{\mathcal{M}}(\pi, \pi^*) < 0$, then $\sum_{i=1}^{N_p} J^i(\pi^i, \mu^\pi) - J^i(\pi^{i, *}, \mu^\pi) < 0$ meaning that there exists an i such that $J^i(\pi^i, \mu^\pi) - J^i(\pi^{i, *}, \mu^\pi) < 0$. But as π is a Nash, for all π^i, i , we have $J^i(\pi^i, \mu^\pi) - J^i(\pi^{i, *}, \mu^\pi) \geq 0$ which is a contradiction.

Hence, if $\Delta J(\pi, \pi^*) + \tilde{\mathcal{M}}(\pi, \pi^*) < 0$ then π is not a Nash.

This proves that the Bregman divergence $\min_{\pi^* \in \text{Nash}} \Xi(\pi^*, \cdot)$ is a strict Lyapunov function of the CTOMD system. Hereby, π_t converges to the set of Nash equilibria. \square

Related to the Hypothesis in Theorem 2, we can show the following:

Lemma 4. *If a MP-MFG satisfies $\tilde{\mathcal{M}}(\pi, \pi') < 0$ if $\mu^\pi \neq \mu^{\pi'}$ and 0 otherwise, then there is at most one Nash equilibrium distribution.*

Note that uniqueness of the equilibrium distribution does not imply uniqueness of the equilibrium policy. This implication holds however under extra assumptions (e.g., some kind of strict convexity of the cost function).


Proof. Consider a MP-MFG satisfying the assumption. Consider two Nash equilibria, say π, π' . For the sake of contradiction, assume that they generate two different distributions $\mu^\pi, \mu^{\pi'}$. We have:

$$\begin{aligned} 0 &> \tilde{\mathcal{M}}(\pi, \pi') \\ &= \sum_{i=1}^{N_p} [J^i(\pi^i, \mu^\pi) + J^i(\pi'^i, \mu^{\pi'}) - J^i(\pi^i, \mu^{\pi'}) - J^i(\pi'^i, \mu^\pi)] \\ &= \sum_{i=1}^{N_p} [J^i(\pi^i, \mu^\pi) - J^i(\pi'^i, \mu^\pi)] + \sum_{i=1}^{N_p} [J^i(\pi'^i, \mu^{\pi'}) - J^i(\pi^i, \mu^{\pi'})] \end{aligned}$$


where both terms are non-negative because π and π' are Nash equilibria. Hence we must have $\mu^\pi = \mu^{\pi'}$. \square

H. Numerical Experiments


H.1. Garnet

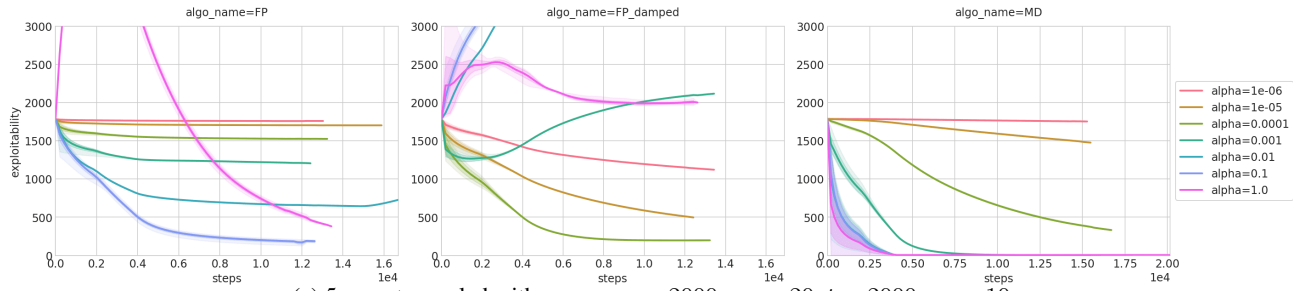

(a) 5 garnet sampled with param $n_x = 2000, n_a = 20, t = 2000, s_f = 10$

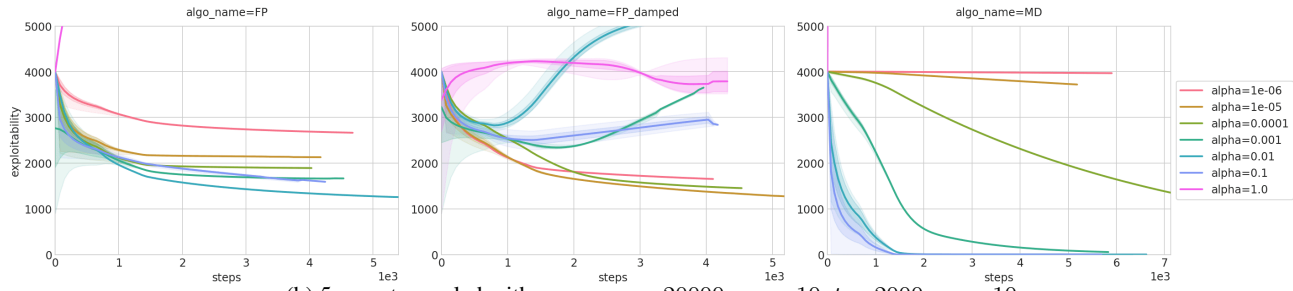

(b) 5 garnet sampled with param $n_x = 20000, n_a = 10, t = 2000, s_f = 10$

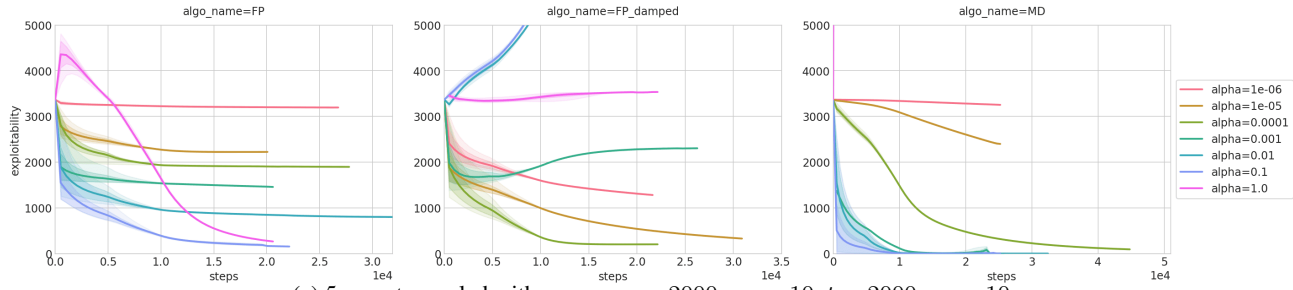

(c) 5 garnet sampled with param $n_x = 2000, n_a = 10, t = 2000, s_f = 10$

Figure 6. Garnet Experiments performances

H.2. Building experiment

H.2.1. BUILDING EXPERIMENT PERFORMANCES

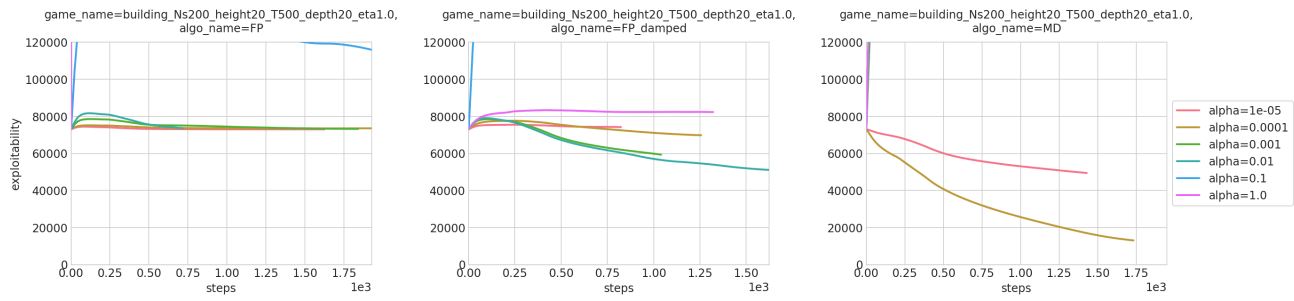


Figure 7. Building Experiment performances

H.2.2. BUILDING EXPERIMENT SOLUTION

The full building evacuation dynamics over the 20 floors is presented in Figure 8 below.

H.3. Crowd motion with randomly shifted point of interest

In this section, we discuss how to extend our results to the case of multi-population MFGs with common noise. In the example of Section 5.3, the common noise corresponds to the geographical shifts of the point of interest.

The action space and the state space are the same but the dynamics and the reward are affected by a common noise sequence $\{\xi_n\}_{0 \leq n \leq N}$. We denote $\Xi_n := \{\xi_k\}_{0 \leq k < n} = \Xi_{n-1} \cdot \xi_{n-1}$ the concatenation of the sequence Ξ_{n-1} and the new noise ξ_{n-1} . By convention, we denote by Ξ_0 the empty sequence $\{\}$. $|\Xi_n| = n$ represents the total length of the sequence. The distribution of ξ_n given the past sequence Ξ_n is denoted by $P(\cdot | \Xi_n)$. Here, ξ plays the role of a source or randomness which affects both the reward $r(x, a, \mu, \xi)$ and the probability transition function $p(x' | x, a, \xi)$. It appears on top of the idiosyncratic randomness affecting each player. Policies and population distributions are now functions of the common noise and denoted respectively by $\pi_n^i(a | x, \Xi)$ and $\mu_n^i(x | \Xi)$ for population i . We will sometimes simply write $\pi_{n|\Xi}^i(a | x)$ and $\mu_{n|\Xi}^i(x)$. Notice that the common noise is shared by all populations (we could also, with a slight modification, consider noises which are common to players of a given population and not shared with other populations). The Q function of the i -th population now satisfies the following backward equation:

$$\begin{aligned} Q_N^{i, \pi^i, \mu}(x^i, a^i | \Xi_N) &= r^i(x^i, a^i, \mu_N | \Xi_N, \xi_N) \\ Q_{n-1}^{i, \pi^i, \mu}(x^i, a^i | \Xi_{n-1}) &= \sum_{\xi} P(\xi_{n-1} = \xi | \Xi_{n-1}) \left[r^i(x^i, a^i, \mu_{n-1} | \Xi_{n-1}, \xi) \right. \\ &\quad \left. + \sum_{x'^i \in \mathcal{X}} p(x'^i | x^i, a^i, \xi) \mathbb{E}_{b^i \sim \pi_n^i(\cdot | x'^i, \Xi_{n-1}, \xi)} \left[Q_n^{i, \pi^i, \mu}(x^i, b^i | \Xi_{n-1}, \xi) \right] \right]. \end{aligned}$$

For each population, the evolution of the distribution is conditioned on the realization of the common noise. It satisfies the forward equation: for all $x^i \in \mathcal{X}$, $\mu_{0|\Xi_0}^{i, \pi^i}(x) = \mu_0^i(x)$ and for all $x'^i \in \mathcal{X}$,

$$\mu_{n+1|\Xi_n, \xi_n}^{i, \pi^i}(x'^i) = \sum_{(x^i, a^i) \in \mathcal{X} \times \mathcal{A}} \pi_n^i(a^i | x^i, \Xi_n) p(x'^i | x^i, a^i, \xi_n) \mu_{n|\Xi_n}^{i, \pi^i}(x^i)$$

for $n \leq N - 1$. We denote $\mu^\pi = (\mu^{i, \pi^i})_{i \in \{1, \dots, N_p\}}$.

The expected total reward for a representative player of population i using policy π^i and facing the crowd behavior given by μ is:

$$J^i(\pi^i, \mu) = \mathbb{E} \left[\sum_{n=0}^N r^i(x_n^i, a_n^i, \mu_n | \Xi_n, \xi_n) \mid x_0^i \sim \mu_0^i, a_n^i \sim \pi_n^i(\cdot | x_n^i, \xi_n), x_{n+1}^i \sim p(\cdot | x_n^i, a_n^i, \xi_n), \xi_n \sim P(\cdot | \Xi_n) \right].$$


Continuous time Online Mirror Descent for MP-MFGs with common noise:

In this setting, the Continuous Time Online Mirror Descent (CTOMD) algorithm is defined as: for all $i \in \{1, \dots, N_p\}$, $n \in \{0, \dots, N\}$, $y_{n,0}^i = 0$, and for all $t \in \mathbb{R}_+$,

$$y_{n,t}^i(x^i, a^i | \Xi_n) = \int_0^t Q_n^{i, \pi^i, \mu^{\pi^i}}(x^i, a^i | \Xi_n) ds, \quad (9)$$


$$\pi_{n,t}^i(\cdot | x^i, \Xi_n) = \Gamma(y_{n,t}^i(x^i, \cdot | \Xi_n)). \quad (10)$$

Our theoretical results naturally extend to this setting by following similar arguments as the ones in (Perrin et al., 2020).

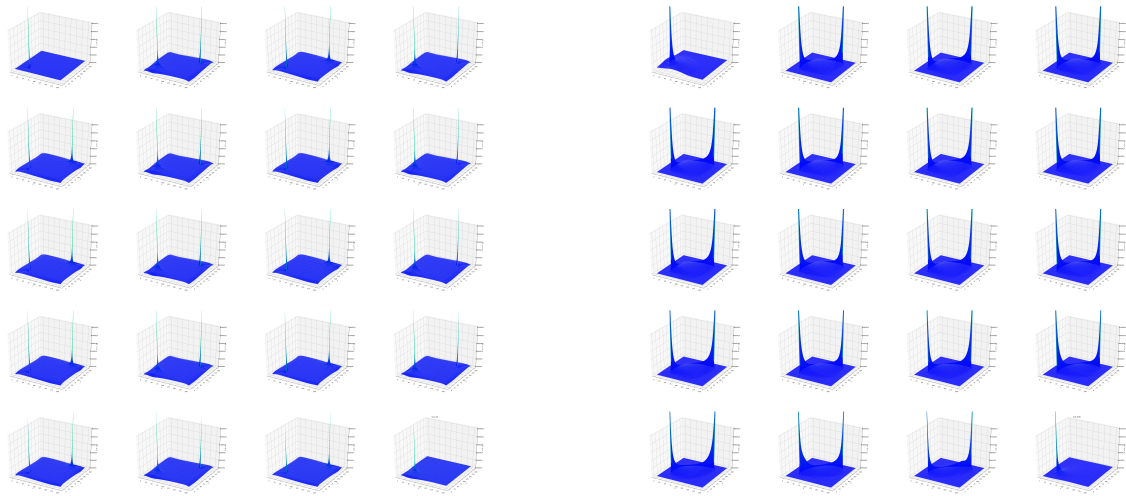

(a) After a few timesteps

(b) Intermediate time

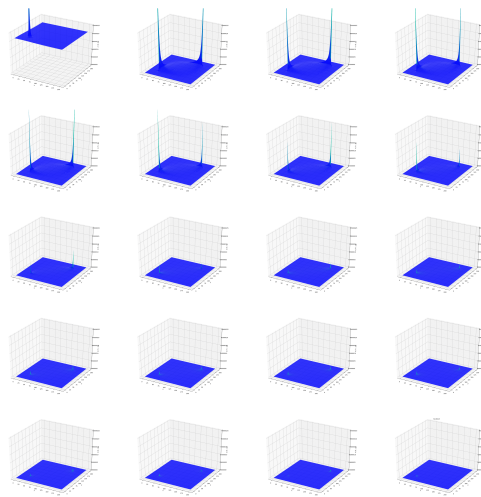

(c) Almost at arrival timestep

Figure 8. Building Experiment solution (ground floor on the upper left corner)

H.4. Multi-population

H.4.1. MONOTONY OF THE MULTI-POPULATION REWARD

We prove rigorously that the MP-MFG reward is monotone. As $\tilde{r}(x, a) = 0$, the separability condition is trivially verified. Furthermore, we have:

$$\begin{aligned}
 \sum_i \sum_{x \in \mathcal{X}} (\mu^i(x) - \mu'^i(x)) (\hat{r}^i(x, \mu) - \hat{r}^i(x, \mu')) &= \sum_i \sum_{x \in \mathcal{X}} (\mu^i(x) - \mu'^i(x)) (-\log(\mu^i(x)) + \\
 &\quad \sum_{j \neq i} \mu^j(x) \bar{r}^{i,j}(x) + \log(\mu^i(x)) - \sum_{j \neq i} \mu^j(x) \bar{r}^{i,j}(x)) \\
 &= \underbrace{\sum_i \sum_{x \in \mathcal{X}} (\mu^i(x) - \mu'^i(x)) (-\log(\mu^i(x)) + \log(\mu'^i(x)))}_{(1)} + \\
 &\quad \underbrace{\sum_i \sum_{x \in \mathcal{X}} (\mu^i(x) - \mu'^i(x)) (\sum_{j \neq i} \mu^j(x) \bar{r}^{i,j}(x) - \sum_{j \neq i} \mu^j(x) \bar{r}^{i,j}(x))}_{(2)};
 \end{aligned}$$

where we have:

- (1) ≤ 0 because $\forall x, \forall i, (\mu^i(x) - \mu'^i(x))(-\log(\mu^i(x)) + \log(\mu'^i(x))) \leq 0$ as log is an increasing function;
- (2) = 0 because $\forall i, \forall j, i \neq j, \bar{r}^{i,j}(x) = -\bar{r}^{j,i}(x)$.


Thus,

$$\sum_i \sum_{x \in \mathcal{X}} (\mu^i(x) - \mu'^i(x)) (\hat{r}^i(x, \mu) - \hat{r}^i(x, \mu')) \leq 0.$$


H.4.2. MULTI-POPULATION PERFORMANCES

The performances of Fictitious Play and Online Mirror Descent for the multi-population chasing Mean Field Game with different field topologies and initial distribution are presented in Figure 9.


Online Mirror Descent for Mean Field Games

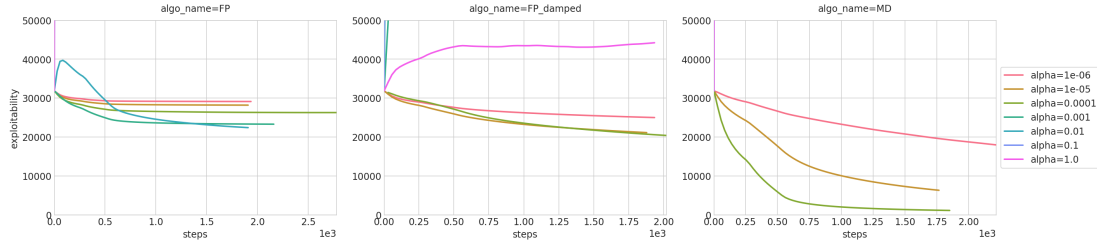


(a) Torus topology and corner initialization

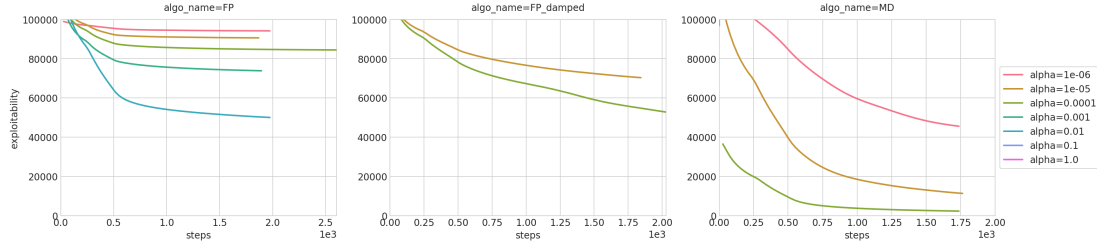


(b) Square topology and corner initialization

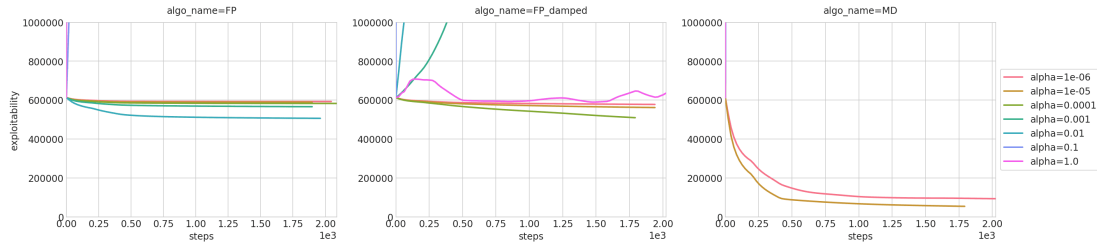


(c) Donut topology and corner initialization

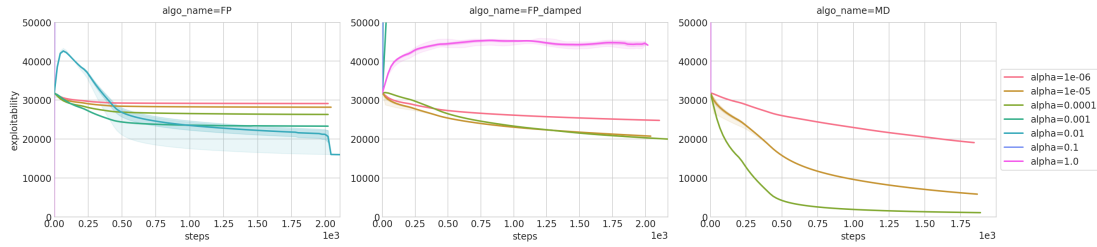

(d) Torus topology and random initialization

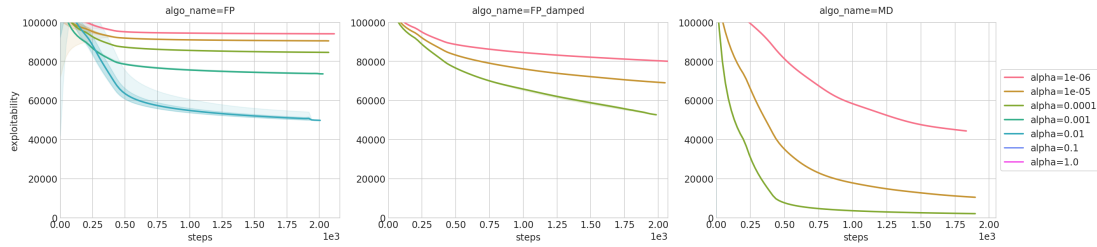

(e) Square topology and random initialization

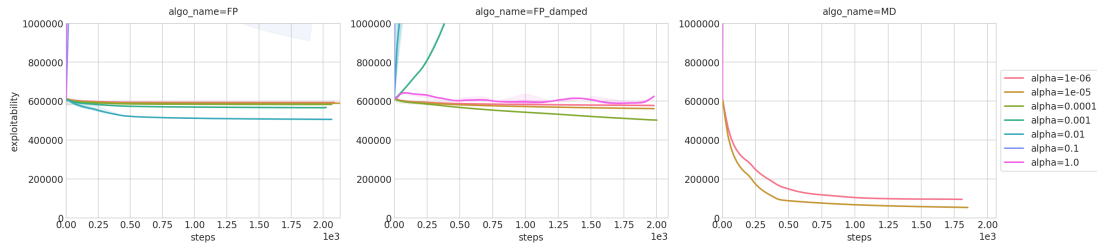

(f) Donut topology and random initialization

Figure 9. Multi-population experiments, performances with different topologies