

Semantic-Enhanced Explainable Finetuning for Open-Domain Dialogues

Yinhe Zheng, Yida Wang, Pei Ke, Zhenyu Yang, Minlie Huang

Abstract—This paper propose to combine pretrained language models with the modular dialogue paradigm for open-domain dialogue modeling. Our method, *semantic-enhanced finetuning*, instantiates conversation *understanding*, *planning*, and *response generation* as a language model finetuning task. At inference, we *disentangle* semantic and token variations by specifying sampling methods and constraints for each module separately. For training and evaluation, we present X-WEIBO, a Chinese multi-turn open-domain dialogue dataset with *automatic* annotation for emotions, DAs, and topical words. Experiments show that semantic-enhanced finetuning outperforms strong baselines on non-semantic and semantic metrics, improves the human-evaluated relevance, coherence, and informativeness, and exhibits considerable controllability over semantic variables.¹

Index Terms—Dialogue System, Open-domain Dialogue Modeling, Pre-trained Model, Semantic Variables, Dialogue Planning.

I. INTRODUCTION

BUILDING open-domain conversational agents is a longstanding goal of artificial intelligence [1]. Recently, open-domain dialogue systems built upon large-scale generative pretrained language models [2]–[5] achieve state-of-the-art conversation performances in terms of the quality, relevance, engagingness, and diversity. In the development of conversational agents, what has long been studied is the *modular* dialogue modeling [6], [7], which explicitly models the *understanding* and *planning* of *semantic* information [8], [9] that flows throughout the conversation. This modular idea has been explored in task-oriented dialogue systems [10]–[13], knowledge-driven conversations [14], [15], negotiation [16], and persuasion [17]. A benefit of this paradigm is its explainability and controllability [18], [19]. It also allows one to specify the type of modeled semantic variable, which makes the system robust to other variations.

In this paper, we propose to bridge the pretrained language models with the modular dialogue modeling paradigm for *open-domain* dialogue systems, which we name as *semantic-enhanced finetuning*. We model the understanding and planning of *emotions*, *dialogue acts* (DAs), and *topics* during the finetuning of open-domain dialogue models. We use a pretrained language model to instantiate three modules: *understanding*, *planning*, and *response generation*. Specifically, the *understanding* module infers the semantic variables of the dialogue history, the *planning* module plans the semantic variables of the next response, and the *response generation* module

generates diverse responses. An overview is shown in Figure 1. These three modules share the pretrained parameters and are jointly finetuned using the cross-entropy loss. At inference, we *disentangle* semantic and token variations by specifying sampling methods and constraints for each module separately. Specifically, we find that the *minimal length constraint* is effective for topic planning and response generation. We also design a *repetition constraint* for topic planning to address the repetition problem.

Semantic-enhanced finetuning has three benefits. **First**, it exploits the response generation capability acquired during pretraining, which improves the response generation step of the modular paradigm. **Second**, it equips chatbots with fine-grained *controllability*: One may manipulate the *plans* to control the emotions, DAs, and topics of the response; One may also keep the *plans* unchanged and manipulate the *response generation* module to generate stylized responses while preserving the emotions, DAs, and topics. **Third**, semantic-enhanced finetuning is *explainable*. For example, when an improper response is generated, one can *attribute the error* by checking the predicted semantic variables.

Our model should be finetuned on conversations annotated with semantic variables, but human annotation for large-scale conversation data faces the *scalability* challenge. Thus, we propose collecting a set of manually annotated dialogues and then automatically annotating semantic variables with pretrained classifiers. Based on conversations collected from Weibo, we present X-WEIBO, a Chinese multi-turn open-domain dialogue dataset with over 500k dialogue sessions, annotated with *emotions*, *dialogue acts*, and *topical words*.

We compare our method with strong baselines using the same pretrained weights and observe that it has the best BLEU scores [20], embedding-based metrics [21], diversity [22], and semantic-level agreement with human references. Human evaluation results show that our approach significantly outperforms the baselines regarding relevance, coherence, and informativeness. For controllability, we show that our method can guide the generation of responses by controlling the semantic variables. Our contributions are as follows:

- We propose semantic-enhanced finetuning for open-domain dialogue systems, which bridges large-scale pretrained models with modular dialogue modeling.
- We present the X-WEIBO dataset with automatic annotation for emotions, DAs, and topical words, which will be open-sourced.
- In the experiments, our method outperforms strong baselines in automatic metrics and human evaluation.

zhengyinhe1@163.com
kepei1106@outlook.com
aih Huang@tsinghua.edu.cn

¹Under review, code and data will be publicly available.

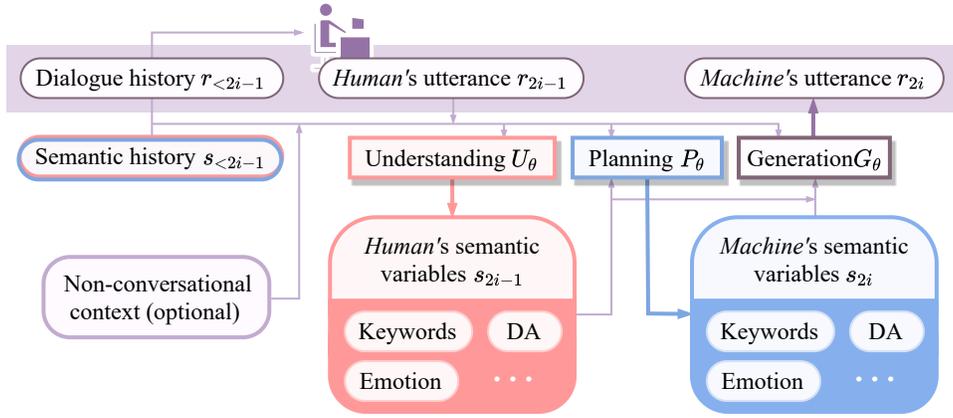


Fig. 1: Modular dialogue modeling. In each turn, the model reads *Human's* last utterance r_{2i-1} , predicts the semantic variables s_{2i-1} of this utterance (*understanding* U_θ), predicts the semantic variables s_{2i} of its response (*planning* P_θ), and generates the response r_{2i} (*response generation* G_θ).

II. RELATED WORK

Modeling semantic variables in conversation has a long history [8], [9]. Prior works in this direction build modular systems to capture dialogue states [6], [11], and various approaches focus on the task of understanding and planning in open-domain dialogues [7], [12]. However, most of these systems build separated models for the understanding, planning, and generation modules, while we instantiate these modules as a unified pre-trained language model.

Transformers [23] pretrained on large-scale conversation data achieve state-of-the-art performances on the open-domain dialogue modeling [24], [25], and examples include DialoGPT [2], Blender [3], [18], Meena [4]. These models view conversation data as sequences of tokens alternating between speakers and cast open-domain dialogue modeling as a language modeling task. Such simplicity enables scalability to large-scale conversation data. However, to truly understand human conversations, an agent should be able to connect utterances to explainable semantic concepts. Our focus is to combine the modular dialogue paradigm, which models conversational understanding and planning, with pretrained language models for open-domain dialogue systems.

It also worth noting that some works have studied the planning of general dialogue acts (DAs) [26], and others have designed DAs for specific domains, e.g., dialogue states [10], [13], [27], [28] for task-oriented dialogues, strategies [16] for negotiation, lexical-conceptual structures [17] for persuasion, and policy or intent planning [14], [15] that for knowledge-driven conversations. A recent work [29] extracts entities and topics and plans keywords on the knowledge-grounded TopicalChat dataset [30]. However, a prerequisite for these approaches is that the dialogue acts modeled in these works are specifically designed for different domains. In this study, we focus on general semantic variables shared by *most* conversations: emotions [31], [32], general dialogue acts [33], and topical words [34], which are more general and more transferable in the open domain.

Our work is also related to CVAE [35] and PLATO [5], [36], [37], which captures the discourse-level diversity in human

conversations with latent variables. Compared with them, the modular paradigm has a higher level of controllability (e.g., it can be intervened with human-specified plans) and explainability (e.g., it can be debugged by checking the predicted plans). Meanwhile, our semantic variables (i.e., emotions, DAs, and topical words) are more interpretable than Gaussian or categorical latent variables.

III. OUR APPROACH

A. Task Formulation

A multi-turn dialogue session is a sequence of utterances alternating between *Human* and *Machine*: (r_1, \dots, r_{2N}) . Without loss of generality, our formulation assumes that *Human* initiates the conversation, i.e., r_{2i-1} and r_{2i} ($i = 1, \dots, N$) are uttered by *Human* and *Machine*, respectively. Each session may also be grounded on some non-conversational context, e.g., persona and topics.

Semantic variables Each *Human's* or *Machine's* utterance r_i ($i = 1, \dots, 2N$) can be explained by K semantic variables $s_i = \{(s_key^k, s_val_i^k)\}_{k=1}^K$, where s_key^k is the type, and $s_val_i^k$ is the value. In our X-WEIBO dataset introduced in Section IV, $K = 3$ types of semantic variables are annotated for each utterance: topical words, DAs, and emotions. Specifically, the value of topical words is a list of deduplicated phrases (each phrase is a list of tokens); the value of DAs (emotions) is a list of DA (emotion) labels, each label corresponding to a sentence in the utterance. For example, if an utterance first answers a question and then post another question, then its DAs value is $[Inform, Question]$.

Dialogue decomposition With the semantic variables, modular dialogue modeling decomposes open-domain dialogues into three modules: *understanding* U_θ , *planning* P_θ , and *response generation* G_θ . Specifically, the *understanding* module infers the semantic variables of *Human's* last utterance. The *planning* module plans the semantic variables of *Machine's* response. The *response generation* module generates responses,

Semantic variable keys	$\langle \text{topical} \rangle$ $\langle \text{emotion} \rangle$ $\langle \text{dialog_act} \rangle$
List separator	$\langle \text{list_sep} \rangle$
End of key-value pair	$\langle \text{eokv} \rangle$
Start of conversation	[CLS]
Start of <i>Human</i> 's utt.	$\langle \text{human} \rangle$
Start of <i>Machine</i> 's utt.	$\langle \text{machine} \rangle$
End of utterance	[SEP]

TABLE I: Special tokens used in the model

which captures the syntactic variations that are not covered by the plan. Formally, the overall objective to be maximized is

$$\mathbb{E}_{\mathcal{D}} \left[\sum_{i=1}^N \left(\log U_{\theta}(s_{2i-1} | r_{\leq 2i-1}, g, s_{\leq 2i-1}) \right. \right. \\ \left. \left. + \log P_{\theta}(s_{2i} | r_{\leq 2i-1}, g, s_{\leq 2i-1}) \right. \right. \\ \left. \left. + \log G_{\theta}(r_{2i} | r_{\leq 2i-1}, g, s_{\leq 2i}) \right) \right] \quad (1)$$

where g is the non-conversational contexts and \mathcal{D} is the empirical distribution of data, e.g., the X-WEIBO dataset introduced in Section IV.

B. Semantic-Enhanced Finetuning

We propose to model the above three modules with the same generative pretrained weights, which we name as *semantic-enhanced finetuning*. Based on Eq. (1), we place the non-conversational context, utterances, and semantic variables in the order:

$$g, \underbrace{r_1, s_1, s_2, r_2 \dots r_{2N-1}, s_{2N-1}, s_{2N}, r_{2N}}_{\text{the } N^{\text{th}} \text{ turn}}. \quad (2)$$

The non-conversational context g is placed at the beginning since they are shared by all *Machine*'s utterances. In the i^{th} turn, the model infers the semantic variables s_{2i-1} ² of *Human*'s last utterance r_{2i-1} , (*understanding*), predicts the semantic variables s_{2i} of *Machine*'s next utterance (*planning*), and generates the next utterance r_{2i} (*response generation*). We define five token types [38] to distinguish the elements in Eq.(2), which include *Human*'s utterances, *Machine*'s utterances, *Human*'s semantic variables, *Machine*'s semantic variables, and non-conversational context. Based on Eq. (2), the three modules U_{θ} , P_{θ} , and G_{θ} are unified within a single sequence generation model (e.g., a generative LM or a seq2seq model) that can be trained end-to-end. When predicting each element in Eq. (2), the model is conditioned on all elements in the prefix. By switching the roles of *Human* and *Machine*, we derive *two* samples in the form of Eq. (2) from each dialogue session.

It still remains an open question how to represent *structured* semantic variables as a sequence. In this paper, we design several special tokens to linearize the structured variables. The special tokens are shown in Table I, and a linearized input is shown in Figure 2. We assign a special token for each s_key^k

²Note that s_{2i-1} contains key-value pairs for several variables, e.g., DAs, emotions, and topical words.

and use $\langle \text{eokv} \rangle$ to mark the end of a key-value pair. Since the values $s_val_i^k$ are all lists (Section IV), we define a list separator token $\langle \text{list_sep} \rangle$ to separate items in a list. In Figure 2, for example, *Machine*'s utterance “*My favorite band is KC. What about you?*” has two DAs: *Inform* and *Question*; thus, the DAs-value to be planned is linearized as “*Inform* $\langle \text{list_sep} \rangle$ *Question*”. We place a [CLS] between the non-conversational context and *Human*'s first utterance. We use $\langle \text{human} \rangle$ or $\langle \text{machine} \rangle$ to denote the speaker, and [SEP] stands for the end of an utterance. We place the semantic variables in a predefined order: emotion, dialogue act, and topical words, but note that different orders factorize the *same* joint distribution over the semantic variables.

To optimize the objective function in Eq. (1), we compute the autoregressive cross-entropy loss for the linearized semantic variables and *Machine*'s utterances in Eq. (2). Additionally, we do not compute loss for the semantic variables' keys s_key^k since they do not need to be predicted during inference. In the example in Figure 2, we put a tick over the tokens that we compute loss for. Our approach can adopt any sequence generation model.

C. Inference

At inference, tokens that we do not compute loss for are encoded or used as prompts for decoding. In each turn, three sequences need to be decoded. The *understanding* module first infers the semantic variables of *Human*'s last utterance, the *planning* module then plans the semantic variables for the next utterance, and finally the *response generation* module generates the response. We *disentangle* semantic-level and token-level variations by specifying *sampling methods* and *constraints* for each module separately, which is detailed as follows.

Understanding Decoding: For the *understanding* module, we do not set the minimum lengths, and we set the lengths for the linearized topical words, emotions, and DAs as 20, 10, 10. Greedy decoding is adopted.

Planning Decoding: For the *planning* module, we set the minimum (maximum) lengths for the linearized topical words, emotions, and DAs as 5 (20), 0 (10), 0 (10), and greedy decoding is used. The non-zero minimum length for topical words enforces non-trivial topical words to be generated, which is expected to improve the informativeness of the response.

Repetition constraint for topical planning We introduce the *repetition constraint* to avoid repeated topical words to be generated. Specifically, we suppress an n -gram prefix of a topical word to be generated if this prefix has been generated in the current plan. Note that the *repetition constraint* is not used for response generation since directly suppressing repeated n -grams in the response unavoidably causes disfluency, e.g., a grammatical sentence may contain two “*of the*”. Since our topical words only contain deduplicated informative words, we can more safely suppress repeated n -grams in topical words without sacrificing fluency.

Response Generation Decoding: For *response generation*, we use top- k sampling [39] and top- p sampling [40] with

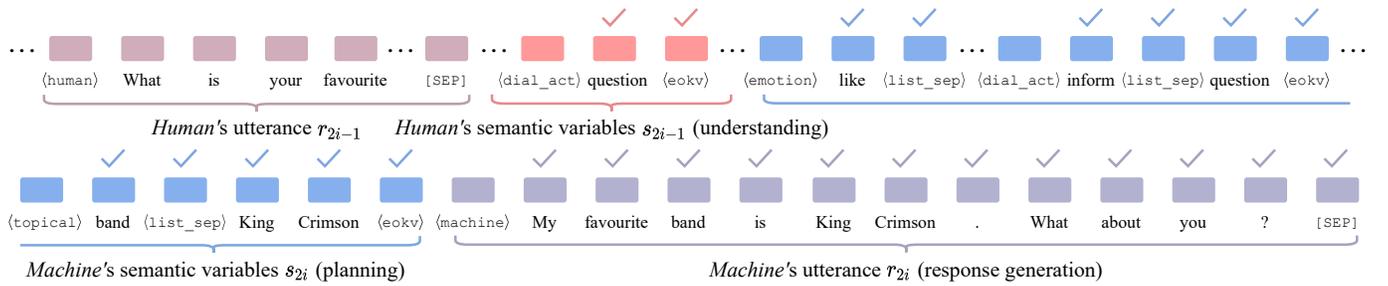


Fig. 2: The scheme we used to convert Eq. (2) into tokens. The type of sequences and the module that learn them are under the brackets. When predicting each sequence, all preceding tokens are used as the condition. We compute loss for tokens with a tick above. Denotations of special tokens are shown in Table I.

	Sessions	Utt./Session	Tokens/Utt.	DAs(Emotions)/Utt.	Topical Words/Utt.
Train	500K	5.20	15.52	1.23	1.14
Valid	20K	5.19	15.55	1.23	1.15
Test	10K	5.21	15.74	1.24	1.16

TABLE II: Dataset statistics. DA and Utt. stand for *dialogue act* and *utterance*, respectively.

temperature τ . We set $k = 50$, $p = 0.9$, and $\tau = 0.7$, which are shared by all models and baselines in Section V. In our implementation, the length constraints are achieved by manipulating the predicted probability of $\langle \text{eokv} \rangle$ (for *understanding* and *planning*) or $\langle \text{SEP} \rangle$ (for *response prediction*) as 0 or 1.

IV. X-WEIBO DATASET

A. Conversation Collection

Conversation data annotated with semantic variables is a prerequisite for our method. In this section, we introduce the X-WEIBO dataset that is collected to facilitate our study. Dialogues in X-WEIBO consist of comments issued by Weibo³ users. Each comment is regarded as an utterance in a dialogue, and the reply relations between these comments are used to construct dialogues in X-WEIBO. We use the data processing and cleaning pipelines proposed by [41] to filter low-quality dialogues. After filtering, dialogues are split into the training, validation, and test splits. Dataset statistics are shown in II.

B. Semantic Variables Annotation

The optimal way to acquire annotations for the semantic variables is to recruit well-trained human annotators with profound knowledge about linguistics. However, human annotation faces the *scalability* challenge for large-scale conversation data (e.g., over 3.3M sentences in X-WEIBO). Thus, we propose to annotate semantic variables with pretrained classifiers automatically. Specifically, three kinds of semantic variables are annotated: topical words, dialogue acts (DAs), and emotions since they carry important semantic information in human conversations. The annotation process for each variable is detailed as follows.

Topical words The topical words for each utterance in X-WEIBO are extracted using the THUCKE package [42], which uses a word trigger method to extract topical words

with the help of a learned word alignment table. We first concatenate all utterances in X-WEIBO to construct the input file for THUCKE and then use THUCKE to extract topical words for the entire corpus. We keep the most frequent 6,000 topical words as the final topical word vocabulary and align them to each utterance. Specifically, the topical words for an utterance are words that appear both in this utterance and the extracted topical word vocabulary.

Sentence split In this study, the labels for DA and emotion are annotated in a *finer-grained sentence-level* rather than the utterance-level. Specifically, we first split each utterance (i.e., each turn) in a dialogue session into several sentences based on the end-of-sentence punctuation marks such as the period or question marks. Then we obtain the DA and emotion label for each split sentence using pre-trained DA and emotion classifiers. This annotation scheme is designed based on our observations for dialogues in X-WEIBO, i.e., each dialogue utterance in X-WEIBO may correspond to several different DA or emotion labels. The sentence-level annotations of DA and emotion enable us to capture finer-grained semantics in our dialogue model.

Dialogue acts To obtain DA labels, we adopt the DA scheme employed in the DailyDialog dataset [33]. Specifically, four categories of DA are considered: *Inform*, *Question*, *Directive*, and *Commissive*. This study first extracts sentences with DA annotations from the DailyDialog dataset, which yields about 102.9K annotated sentences. Then we divide these sentences into the train and test set with the size of 101.0K and 1.9K, respectively. A DA classifier is built by fine-tuning the BERT-base [38] model on the training set. The resulting classifier achieves an accuracy score of 84.58% on the testing set, and it is further used to predict the DA labels for each sentence in our X-WEIBO dataset.

Emotions Emotions are annotated similar to DAs. Specifically, eight emotion categories are considered in our study: Fear, Surprise, Anger, Disgust, Like, Happiness, Sadness, and None, where the label None corresponds to sentences that

³Weibo is one of the largest Chinese social platforms.

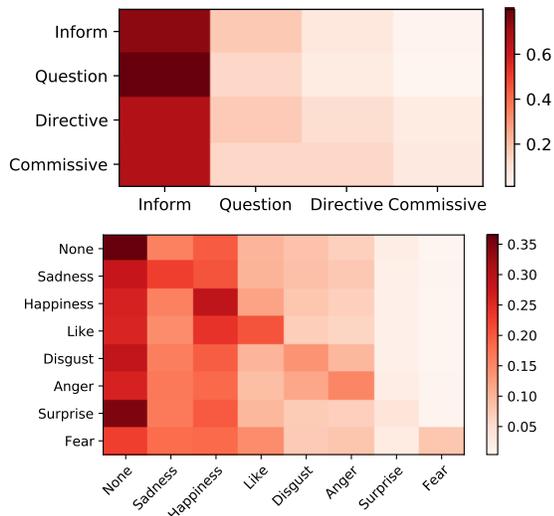


Fig. 3: DA (upper) and emotion (lower) label transitions. y -axis and x -axis represent the previous and the current utterance, respectively (e.g., the first row in the upper part shows the distribution of the DA of the current utterance when the DA of the previous utterance is *Inform*). For readability, we use utterance-level DAs and emotions in this figure, without the sentence split introduced in Section IV.

do not carry obvious emotions. For training, we merge two publicly available datasets^{4,5} [43] with such annotations and extract 83.29K annotated sentences. We split these data into the train and test set with the size of 80.0K and 3.29K, respectively, and obtain an emotion classifier by fine-tuning the BERT-base model. The resulting classifier achieves an accuracy score of 63.71% on the testing set.

Note that the automatic annotation scheme proposed above is a preliminary attempt towards scalable semantic annotations. We leave more advanced annotation methods for future studies (discussed in Section VI).

Data verification To validate the quality of the automatic annotation for DA and emotion, we conduct human evaluations on 1000 randomly sampled sentences from X-WEIBO. Each sentence is annotated by three independent annotators, and the majority vote determines the final annotation. The results indicate that 77.5% automatic emotion labels and 88.7% automatic DA labels are verified by human annotators. This proves that the automatic annotations for DAs and emotions in X-WEIBO are of relatively high quality. We measure the agreement between each annotator using free-marginal kappa [44], and the kappa score for the emotion and DA annotation is 0.49 (moderate agreement) and 0.75 (substantial agreement), respectively. We assume that the gap between the inter-annotator agreements of emotion and DA annotation can be attributed to the fact that emotions are more ambiguous for humans to distinguish. We also visualize the transition patterns of the DA and emotion labels in Figure 3.

V. EXPERIMENTS

A. Experimental Setting

We conduct experiments using *pairwise comparison*. We use two pretrained LMs as the backbones: 1) Chinese GPT-2 [45]⁶, which is pretrained on CLUECorpusSmall [46], and 2) CDialGPT-2⁷, which is pretrained on a large-scale Chinese conversation dataset named LCCC-base [41]. **We make sure that none of the pretraining data overlap with X-WEIBO.** For each backbone, the vanilla model (GPT-2 and CDialGPT-2) is optimized with the language modeling loss without using the semantic variables, as done in DialoGPT [2]. We observe that setting a minimal decoding length improves most automatic metrics, which echoes the observation by [3]. Thus, we also include a *min length* version of each backbone (GPT-2 + *min length* and CDialGPT-2 + *min length*) as a baseline. For a fair comparison, hyperparameters are shared by all models whenever possible. The minimal decoding length is set as 9, and the maximum decoding length is set as 32, which are tuned on the validation data.

Note that the data distribution of X-WEIBO is different from the pretraining data, i.e., CLUECorpusSmall [46] and LCCC-base [41]. Specifically, CLUECorpusSmall is used for general pretraining, and most sessions in LCCC-base are single-turn.

Models are validated for every 5000 steps, based on the perplexity (PPL) on the validation set. The batch size is 24. We use Adam [47] with the initial learning rate 5×10^{-5} and gradient clip with the norm as 1.0. The learning rate decays by half when the validation PPL does not improve five times, and training terminates after three decays. Each experiment is run on four TITAN X (Pascal) GPUs or four TITAN Xp GPUs. All models take around two days to converge.

B. Automatic Evaluation of Response Generation

We report several automatic metrics widely used by previous works, BLEU- $\{1,2,3\}$ [20], and Embedding- $\{Average, Extreme\}$ [21], which show the word-level similarity between the predictions and human references. To evaluate the diversity of model predictions, we adopt the Dist- $\{1,2\}$ metrics [22]. We do not report the perplexity (PPL) for our methods since it requires an intractable marginalization over all possible semantic plans. The embedding-based metrics use the Jieba parser⁸ to parse the responses into Chinese phrases (for accurate embedding lookup), and all other metrics view each Chinese character as a word. For the embedding-based metrics, we use the Chinese phrase embeddings by [48] for embedding lookup.

Table III shows similar patterns for the two backbones. Specifically, the vanilla models (GPT-2 and CDialGPT-2) have the worst BLEU scores and the worst embedding-based scores. The performances of the *min length* models show that by enforcing a minimum length for the responses, we can improve the BLEU scores and embedding-based scores, but the diversity is greatly sacrificed. Our SE-GPT-2 and SE-CDialGPT-

⁴<http://tcci.ccf.org.cn/conference/2013/>

⁵https://github.com/MingleiLI/emotion_corpus_weibo

⁶huggingface.co/user/gpt2-chinese-cluecorpussmall

⁷huggingface.co/thu-coai/CDial-GPT2_LCCC-base

⁸<https://github.com/fxsjy/jieba>

	Token-based				Embedding-based		Diversity	
	BLEU-1	BLEU-2	BLEU-3	PPL	Average	Extreme	Dist-1 %	Dist-2 %
GPT-2	<u>11.5</u>	<u>5.0</u>	<u>2.6</u>	21.2	<u>0.788</u>	<u>0.747</u>	0.61	10.42
GPT-2 + <i>min length</i>	12.7	5.5	2.8	21.2	0.807	0.779	<u>0.48</u>	<u>8.86</u>
SE-GPT-2 (ours)	13.2	6.2	3.1	—	0.806	0.785	0.55	11.57
<i>w/ gold variables</i> ^[1]	29.5	19.6	12.1	12.5	0.842	0.827	0.58	12.23
CDialGPT-2	<u>10.9</u>	<u>4.8</u>	<u>2.4</u>	23.5	<u>0.784</u>	<u>0.742</u>	0.54	9.62
CDialGPT-2 + <i>min length</i>	12.4	5.3	2.6	23.5	0.805	0.775	<u>0.41</u>	<u>7.96</u>
SE-CDialGPT-2 (ours)	13.1	6.1	3.1	—	0.806	0.783	0.47	10.53
<i>w/ gold variables</i> ^[1]	29.0	19.3	12.0	13.5	0.842	0.826	0.49	11.38

TABLE III: Non-semantic automatic evaluation. ^[1]Using gold semantic variables for the controllability test. For models that use planned semantic variables, best results are shown in **bold**, and worst results are underlined.

	Topical-Recall	DAs-F1	Emotions-F1
GPT-2	<u>4.1</u>	47.1	19.8
GPT-2 + <i>min length</i>	4.9	<u>45.5</u>	19.0
SE-GPT-2 (ours)	13.1	52.1	22.2
<i>w/ gold variables</i> ^[1]	91.8	89.7	69.8
CDialGPT-2	<u>3.7</u>	47.0	19.9
CDialGPT-2 + <i>min length</i>	4.3	<u>46.0</u>	<u>19.1</u>
SE-CDialGPT-2 (ours)	12.7	52.1	22.4
<i>w/ gold variables</i> ^[1]	92.5	89.2	67.6

TABLE IV: Semantic-level automatic evaluation. ^[1]Using gold semantic variables for the controllability test. For models that use planned semantic variables, best results are shown in **bold**, and worst results are underlined.

	Relevance and coherence	Informativeness	Engagingness
Human	2.27	2.05	1.98
GPT-2	<u>2.08</u>	<u>1.84</u>	<u>1.81</u>
GPT-2 + <i>min length</i>	2.13	1.95	1.93
SE-GPT-2 (ours)	2.20 ^{†‡}	2.07 ^{†‡}	1.94 [†]

TABLE V: Human evaluation results. The free-marginal kappa score for relevance and coherence, informativeness, and engagingness is 0.79, 0.70, and 0.74, respectively, which all show substantial agreement. [†] and [‡] denotes that our model is significantly better than GPT-2 and GPT-2 + *min length*, respectively ($p < 0.01$ with paired two-sample t -test). Best results are shown in **bold**, and worst results are underlined.

2 models largely improve the BLEU scores and embedding-based scores while maintaining comparable diversity with the vanilla models. This result indicates that responses generated by our models are more informative than the *min length* models. Given the fact that the only difference between our models and the *min length* models is the use of semantic variables, we claim that our method enables *long* responses to be *informative* as well. Additionally, results suggest that uni-gram diversity and bi-gram diversity are not correlated. It indicates that diversity is not only to generate rare words but also to generate diverse compositions of words (e.g., bi-grams).

Besides the conventional evaluation above, we also evaluate the generated responses at the *semantic level*. For topical words, we report the **Topical-Recall**, which is the proportion of labeled topical words in X-WEIBO that appear in the generated response. For the DAs and emotions, we first split the generated response into sentences based on the protocol in Section IV, which allows us to deal with utterances that contain more than one sentence with different DAs or emotions.

We use the pretrained DA / emotion classifiers in Section IV to classify each sentence. As mentioned in Section IV, we define the *label of an utterance as the list of labels of all sentences in it*. Using this definition of *label*, we report prevalence-weighted macro-average of F1 scores for DAs / emotions (**DAs / Emotions-F1**).

Table IV shows the results of semantic-level automatic evaluation. The vanilla models have higher DAs-F1 and Emotions-F1 than the *min length* models. It shows that by enforcing the models to generate long responses, we get sacrificed semantic-level agreement with human references. On the other hand, our SE-GPT-2 and CDialGPT-2 models largely improve the semantic-level metrics. This result shows that explicitly planning the semantic variables helps improve the semantic-level performance when generating long responses.

While the GPT-2 models generally outperform the CDialGPT-2 models in terms of the conventional metrics in Table III, their semantic-level performance is comparable. It indicates that pretrained weights have a larger influence at the token level than at the semantic level. Thus, it is probable

	Non-semantic metrics				Semantic-level metrics		
	BLEU-2	BLEU-3	Emb-Avg	Dist-2 %	Topical-R	DAs-F1	EMOs-F1
SE-GPT-2 (ours)	6.2	3.1	0.806	11.57	13.1	52.1	22.2
<i>w/o understanding</i>	6.1	3.1	0.805	11.27	12.7	52.2	22.8
<i>w/o planning</i>	<u>5.3</u>	<u>2.7</u>	0.805	<u>9.01</u>	5.0	<u>46.1</u>	<u>19.4</u>
<i>w/o repetition constraint</i>	6.1	3.1	0.804	11.46	12.9	52.0	21.8
<i>w/o topical words min length</i>	<u>5.3</u>	2.8	<u>0.794</u>	9.51	<u>2.7</u>	52.0	21.3
SE-CDialGPT-2 (ours)	6.1	3.1	0.806	10.53	12.7	52.1	22.4
<i>w/o understanding</i>	6.2	3.2	0.806	10.41	12.1	52.1	22.3
<i>w/o planning</i>	5.2	<u>2.6</u>	0.806	<u>8.02</u>	4.4	<u>45.6</u>	<u>19.1</u>
<i>w/o repetition constraint</i>	5.7	2.9	<u>0.794</u>	10.17	11.8	<u>52.1</u>	<u>22.2</u>
<i>w/o topical words min length</i>	<u>5.1</u>	2.7	<u>0.794</u>	8.52	<u>2.5</u>	52.1	21.6

TABLE VI: Ablation studies. Best results are shown in **bold**, and worst results are underlined.

that one needs to consider mechanisms besides pretraining (e.g., knowledge about the semantic transitions) to improve the semantic-level performance.

C. Controllability

A desirable feature of our method is its controllability, e.g., the semantic plans can be *intervened* by rules and humans. To evaluate controllability, we compute the similarity between model predictions and human references when providing the semantic plans in the original test data. Higher similarity indicates better controllability. Table III shows that the token-based and embedding-based metrics are greatly improved when semantic plans are provided. It shows that the semantic variables can effectively guide the response generation. Table III also shows that the controlled model has improved diversity over the non-controlled models. This observation shows that, in terms of diversity, there is still space for the *planning* module P_θ to be improved. Table IV shows that more than 90% topical words are generated in the guided responses, while the DA and emotion F1 scores are around 90% and 70%. In real-world scenarios, such controllability allows us to guide the chatbot when displaying certain contents, DAs, or emotions.

D. Human Evaluation

We also perform human evaluations to validate our method. We recruit annotators from a third-party crowd-sourcing platform to conduct the human evaluation. Each model prediction is scored based on its 1) relevance and coherence to the dialogue history, 2) informativeness, and 3) engagingness. We use 400 random test samples, and each model output is scored independently by three annotators using a 3-point Likert scale. Since the GPT-2 backbone generally has better automatic results, we only compare models that use GPT-2 as the backbone. As the upper bound, we also include the gold response as a baseline (note that we tell annotators that all responses are produced by machines).

Human evaluation results are presented in Table V. The free-marginal kappa score for relevance and coherence, informativeness, and engagingness is 0.79, 0.70, and 0.75, respectively, which all show substantial agreement. Human evaluation generally echoes the observations in automatic

evaluation. Specifically, the *min length* model outperforms the vanilla model, and our method outperforms the baselines in terms of all aspects. The improved relevance and coherence may result from the fact that understanding and planning help strengthen the semantic-level transition that flows throughout the conversation. The improved informativeness shows that the semantic plans with the constraints can mitigate the problem of generic responses [22]. We also note that the engagingness is *not significantly* improved. It can be attributed to the fact that the engagingness is related to the *way of presentation* and is less strongly related to the semantic-level property of conversation. *Unlike* prior works that increase the *model sizes* and *amounts of pretraining data*, our method uses the *same* model size and amount of data as the baselines. Thus, the significant improvements of relevance, coherence, and informativeness come solely from the modular framework.

E. Model Analysis

We conduct ablation studies to understand the contribution of some components: 1) *w/o understanding* and 2) *w/o planning* remove *Human's* and *Machine's* semantic variables from Eq. (2), respectively. 3) *w/o topical words min length* and 4) *w/o repetition constraint* remove the minimum length and the repetition constraint for the planning of topical words, respectively. Results are presented in Table VI. After removing the *understanding* component, we observe slightly dropped diversity and topical word recall, which suggests that explicitly tracking the topical words of the dialogue history improves the diversity and topical-level performance. Removing the *planning* component leads to a large drop in terms of nearly all metrics, which shows that *planning* contributes the most to our method. Although the repetition constraint does not significantly influence the performance, we view it as necessary since it avoids the repetition problem observed in preliminary experiments. The *w/o topical words min length* ablations have largely dropped topical words recall, which shows that the minimum length constraint for topic planning leads to more informative topical words to be generated.

We also evaluate the performance of the *understanding* module to investigate whether it can provide reliable semantic-level summaries of the dialogue history. We compute the *DAs* / *Emotions-F1* based on the *understanding* module's outputs

	Topical-F1	DAs-F1	EMOs-F1
SE-GPT-2	98.7	93.0	77.6
SE-CDialGPT-2	98.5	92.7	76.4

TABLE VII: Evaluation for the *understanding* module

and the semantic variables in X-WEIBO. For each sample, we compute the F1 score of predicted topical words and topical words in X-WEIBO, and we average them over all test samples, denoted as **Topical-F1**. Table VII shows that the *understanding* module achieves high performances for topical words and DAs. The comparably lower emotions F1 can be attributed to the fact that emotions are more ambiguous than DAs, which is analyzed in Section IV. The overall performance shows that the *understanding* module can provide reliable semantic-level summaries of the dialogue history.

VI. DISCUSSION

As discussed in Section IV, human annotation of the semantic variables faces the *scalability* problem when applied to large-scale conversation data (e.g., over 3.3M utterances in our dataset). To address this challenge, we provide a preliminary attempt by using automatic annotation with a careful selection of training data. Although we have provided a human verification of our annotation, such annotation unavoidably introduces the *distributional shift* between the classifier’s training data and the conversation data. Future researches may explore *semi-supervised learning* methods, e.g., variational inference [49] and domain adaptation methods [50], which helps address the distributional shift problem between datasets.

Our experimental results show that modeling *understanding* and *planning* with semantic variables improves open-domain dialogue modeling. Promising results suggest that *understanding* and *planning*, which are less investigated for open-domain dialogues, should get more attention. Specifically, the following directions can be investigated.

- Improved understanding and planning variables with end-to-end training. BLEU scores and PPL in Table III (w/ *gold variables*) show that there is a large space left for the response to be further annotated. The results suggest finer-grained variables to be studied for open-domain dialogue modeling.
- Controllable dialogue generation. Since *planning* disentangles semantic-level and token-level variations, it is natural to apply it to controllable dialogue generation, e.g., a speaker’s *style*, *stance*, and *bias* could be disentangled into the semantic level and the token level.

We adopt the DA scheme used in the DailyDialog dataset [33], while it should be noted that a wide range of fine-grained DAs have been proposed [51], [52]. Besides semantic meaning, human conversations also convey pragmatic meaning and implications that require commonsense reasoning [53], [54]. These messages are also beyond the token level and even go beyond the semantic level. Promising results in our experiments may encourage future research to explore such higher-level explainability, e.g., explicit *understanding* and *planning* aided by pragmatic and commonsense reasoning.

VII. CONCLUSIONS

In this paper, we propose *semantic-enhanced finetuning* to bridge the pretrained language models with the modular dialogue modeling paradigm for *open-domain* dialogue systems. Our method leverages the response generation ability of pretrained models while being explainable and controllable. To address the scalability issue of semantic annotation, we present X-WEIBO, which is automatically annotated with topical words, DAs, and emotions for each utterance. Experimental results show that our method outperforms strong baselines in terms of automatic and human evaluations and has considerable controllability. Finally, we discuss ways to further address the scalability problem of semantic annotation and possible future works to consider fine-grained semantic variables, controllability, and pragmatic and commonsense reasoning.

ACKNOWLEDGMENTS

This work was partly supported by the NSFC projects (Key project with No. 61936010 and regular project with No. 61876096). This work was also supported by the Guoqiang Institute of Tsinghua University, with Grant No. 2019GQG1 and 2020GQG0005.

REFERENCES

- [1] M. Huang, X. Zhu, and J. Gao, “Challenges in building intelligent open-domain dialog systems,” *ACM Trans. Inf. Syst.*, vol. 38, no. 3, pp. 21:1–21:32, 2020.
- [2] Y. Zhang, S. Sun, M. Galley, Y. Chen, C. Brockett, X. Gao, J. Gao, J. Liu, and B. Dolan, “DIALOGPT: Large-scale generative pre-training for conversational response generation,” in *Proceedings of ACL 2020, Online, July 5-10, 2020*, 2020, pp. 270–278.
- [3] S. Roller, E. Dinan, N. Goyal, D. Ju, M. Williamson, Y. Liu, J. Xu, M. Ott, K. Shuster, E. M. Smith, Y. Boureau, and J. Weston, “Recipes for building an open-domain chatbot,” *CoRR*, 2020.
- [4] D. Adiwardana, M. Luong, D. R. So, J. Hall, N. Fiedel, R. Thoppilan, Z. Yang, A. Kulshreshtha, G. Nemade, Y. Lu, and Q. V. Le, “Towards a human-like open-domain chatbot,” *CoRR*, 2020.
- [5] S. Bao, H. He, F. Wang, H. Wu, H. Wang, W. Wu, Z. Wu, Z. Guo, H. Lu, X. Huang *et al.*, “Plato-xl: Exploring the large-scale pre-training of dialogue generation,” *arXiv preprint arXiv:2109.09519*, 2021.
- [6] N. Roy, J. Pineau, and S. Thrun, “Spoken dialogue management using probabilistic reasoning,” in *Proceedings of ACL 2000*, 2000, pp. 93–100.
- [7] G. Tur and R. De Mori, *Spoken language understanding: Systems for extracting semantic information from speech*. John Wiley & Sons, 2011.
- [8] R. Schank and R. Albelson, “Scripts, plans, goals, and behavior,” 1977.
- [9] S. Carberry, *Plan recognition in natural language dialogue*. MIT press, 1990.
- [10] J. D. Williams, A. Raux, and M. Henderson, “The dialog state tracking challenge series: A review,” *Dialogue Discourse*, vol. 7, no. 3, pp. 4–33, 2016.
- [11] X. Li, Y.-N. Chen, L. Li, J. Gao, and A. Celikyilmaz, “End-to-end task-completion neural dialogue systems,” *arXiv preprint arXiv:1703.01008*, 2017.
- [12] A. Rastogi, R. Gupta, and D. Hakkani-Tur, “Multi-task learning for joint language understanding and dialogue state tracking,” in *Proceedings of the 19th Annual SIGdial Meeting on Discourse and Dialogue*, 2018, pp. 376–384.
- [13] B. Peng, C. Li, J. Li, S. Shayandeh, L. Liden, and J. Gao, “SOLOIST: few-shot task-oriented dialog with A single pre-trained auto-regressive model,” *CoRR*, 2020.
- [14] H. Su, X. Shen, X. Zhou, Z. Zhang, E. Chang, C. Zhang, C. Niu, and J. Zhou, “Moviechats: Chat like humans in a closed domain,” in *Proceedings of EMNLP 2020, Online, November 16-20, 2020*, 2020, pp. 6605–6619.

- [15] B. Hedayatnia, K. Gopalakrishnan, S. Kim, Y. Liu, M. Eric, and D. Hakkani-Tur, "Policy-driven neural response generation for knowledge-grounded dialogue systems," *arXiv preprint arXiv:2005.12529*, 2020.
- [16] H. He, D. Chen, A. Balakrishnan, and P. Liang, "Decoupling strategy and generation in negotiation dialogues," in *Proceedings of the EMNLP 2018, Brussels, Belgium, October 31 - November 4, 2018*, 2018, pp. 2333–2343.
- [17] S. Santhanam, Z. Cheng, B. Mather, B. J. Dorr, A. Bhatia, B. Hebenstreit, A. Zemel, A. Dalton, T. Strzalkowski, and S. Shaikh, "Learning to plan and realize separately for open-ended dialogue systems," in *Proceedings of EMNLP-Findings 2020, Online Event, 16-20 November 2020*, 2020, pp. 2736–2750.
- [18] M. Komeili, K. Shuster, and J. Weston, "Internet-augmented dialogue generation," *arXiv preprint arXiv:2107.07566*, 2021.
- [19] R. Thoppilan, D. De Freitas, J. Hall, N. Shazeer, A. Kulshreshtha, H.-T. Cheng, A. Jin, T. Bos, L. Baker, Y. Du *et al.*, "Lamda: Language models for dialog applications," *arXiv preprint arXiv:2201.08239*, 2022.
- [20] K. Papineni, S. Roukos, T. Ward, and W. Zhu, "Bleu: a method for automatic evaluation of machine translation," in *Proceedings of ACL 2002, July 6-12, 2002, Philadelphia, PA, USA.*, 2002, pp. 311–318.
- [21] C. Liu, R. Lowe, I. Serban, M. Noseworthy, L. Charlin, and J. Pineau, "How NOT to evaluate your dialogue system: An empirical study of unsupervised evaluation metrics for dialogue response generation," in *Proceedings of EMNLP 2016, Austin, Texas, USA, November 1-4, 2016*, 2016, pp. 2122–2132.
- [22] J. Li, M. Galley, C. Brockett, J. Gao, and B. Dolan, "A diversity-promoting objective function for neural conversation models," in *Proceedings of NAACL HLT 2016, San Diego California, USA, June 12-17, 2016*, 2016, pp. 110–119.
- [23] A. Vaswani, N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A. N. Gomez, L. Kaiser, and I. Polosukhin, "Attention is all you need," in *NIPS 2017, 4-9 December 2017, Long Beach, CA, USA*, 2017, pp. 5998–6008.
- [24] S. Golovanov, R. Kurbanov, S. Nikolenko, K. Truskovskiy, A. Tselousov, and T. Wolf, "Large-scale transfer learning for natural language generation," in *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, 2019, pp. 6053–6058.
- [25] T. Wolf, V. Sanh, J. Chaumond, and C. Delangue, "Transfertransfo: A transfer learning approach for neural network based conversational agents," *arXiv preprint arXiv:1901.08149*, 2019.
- [26] C. Xu, W. Wu, and Y. Wu, "Towards explainable and controllable open domain dialogue generation with dialogue acts," *CoRR*, 2018.
- [27] P. Budzianowski and I. Vulic, "Hello, it's gpt-2-how can i help you? towards the use of pre-trained language models for task-oriented dialogue systems," *EMNLP-IJCNLP 2019*, p. 15, 2019.
- [28] C.-S. Wu, S. C. Hoi, R. Socher, and C. Xiong, "Tod-bert: Pre-trained natural language understanding for task-oriented dialogue," in *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 2020, pp. 917–929.
- [29] S. Ghazarian, Z. Liu, T. Chakrabarty, X. Ma, A. Galstyan, and N. Peng, "DISCoL: Toward engaging dialogue systems through conversational line guided response generation," in *Proceedings of NAACL-HLT 2021: Demonstrations*, Online, Jun. 2021, pp. 26–34.
- [30] K. Gopalakrishnan, B. Hedayatnia, Q. Chen, A. Gottardi, S. Kwatra, A. Venkatesh, R. Gabriel, and D. Hakkani-Tür, "Topical-chat: Towards knowledge-grounded open-domain conversations," in *Interspeech 2019, Graz, Austria, 15-19 September 2019*, 2019, pp. 1891–1895.
- [31] H. Zhou, M. Huang, T. Zhang, X. Zhu, and B. Liu, "Emotional chatting machine: Emotional conversation generation with internal and external memory," in *Proceedings of AAAI 2018, New Orleans, Louisiana, USA, February 2-7, 2018*, 2018, pp. 730–739.
- [32] D. Varshney, A. Ekbal, and P. Bhattacharyya, "Modelling context emotions using multi-task learning for emotion controlled dialog generation," in *Proceedings of EACL 2021: Main Volume*, 2021, pp. 2919–2931.
- [33] Y. Li, H. Su, X. Shen, W. Li, Z. Cao, and S. Niu, "Dailydialog: A manually labelled multi-turn dialogue dataset," in *Proceedings of IJCNLP 2017, Taipei, Taiwan, November 27 - December 1, 2017 - Volume 1: Long Papers*, 2017, pp. 986–995.
- [34] Z. Liu, X. Chen, Y. Zheng, and M. Sun, "Automatic keyphrase extraction by bridging vocabulary gap," in *Proceedings of CoNLL 2011, Portland, Oregon, USA, June 23-24, 2011*, 2011, pp. 135–144.
- [35] T. Zhao, R. Zhao, and M. Eskénazi, "Learning discourse-level diversity for neural dialog models using conditional variational autoencoders," in *Proceedings of ACL 2017, Vancouver, Canada, July 30 - August 4, Volume 1: Long Papers*, 2017, pp. 654–664.
- [36] S. Bao, H. He, F. Wang, H. Wu, and H. Wang, "PLATO: pre-trained dialogue generation model with discrete latent variable," in *Proceedings of ACL 2020, Online, July 5-10, 2020*, 2020, pp. 85–96.
- [37] S. Bao, H. He, F. Wang, H. Wu, H. Wang, W. Wu, Z. Guo, Z. Liu, and X. Xu, "PLATO-2: towards building an open-domain chatbot via curriculum learning," *CoRR*, 2020.
- [38] J. Devlin, M. Chang, K. Lee, and K. Toutanova, "BERT: Pre-training of deep bidirectional transformers for language understanding," in *Proceedings of NAACL-HLT 2019, Minneapolis, MN, USA, June 2-7, 2019, Volume 1 (Long and Short Papers)*, 2019, pp. 4171–4186.
- [39] A. Fan, M. Lewis, and Y. N. Dauphin, "Hierarchical neural story generation," in *Proceedings of ACL 2018, Melbourne, Australia, July 15-20, 2018, Volume 1: Long Papers*, 2018, pp. 889–898.
- [40] A. Holtzman, J. Buys, L. Du, M. Forbes, and Y. Choi, "The curious case of neural text degeneration," in *ICLR 2020, Addis Ababa, Ethiopia, April 26-30, 2020*. OpenReview.net, 2020.
- [41] Y. Wang, P. Ke, Y. Zheng, K. Huang, Y. Jiang, X. Zhu, and M. Huang, "A large-scale chinese short-text conversation dataset," in *NLPCC 2020, Zhengzhou, China, October 14-18, 2020, Proceedings, Part I*, ser. Lecture Notes in Computer Science, vol. 12430. Springer, 2020, pp. 91–103.
- [42] Z. Liu, X. Chen, and M. Sun, "A simple word trigger method for social tag suggestion," in *Proceedings of EMNLP 2011, 27-31 July 2011, John McIntyre Conference Centre, Edinburgh, UK*. ACL, 2011, pp. 1577–1588.
- [43] M. Li, Y. Long, L. Qin, and W. Li, "Emotion corpus construction based on selection from hashtags," in *Proceedings of the Tenth International Conference on Language Resources and Evaluation (LREC'16)*, 2016, pp. 1845–1849.
- [44] J. L. Fleiss, "Measuring nominal scale agreement among many raters." *Psychological bulletin*, vol. 76, no. 5, p. 378, 1971.
- [45] A. Radford, J. Wu, R. Child, D. Luan, D. Amodei, and I. Sutskever, "Language models are unsupervised multitask learners," 2018.
- [46] L. Xu, X. Zhang, and Q. Dong, "Cluecorpus2020: A large-scale chinese corpus for pre-training language model," *CoRR*, 2020.
- [47] D. P. Kingma and J. Ba, "Adam: A method for stochastic optimization," in *ICLR 2015, San Diego, CA, USA, May 7-9, 2015*, 2015.
- [48] Y. Song, S. Shi, J. Li, and H. Zhang, "Directional skip-gram: Explicitly distinguishing left and right context for word embeddings," in *Proceedings of NAACL-HLT 2018, New Orleans, Louisiana, USA, June 1-6, 2018, Volume 2 (Short Papers)*, 2018, pp. 175–180.
- [49] D. P. Kingma and M. Welling, "Auto-encoding variational bayes," in *ICLR 2014, Banff, AB, Canada, April 14-16, 2014*, 2014.
- [50] A. Ramponi and B. Plank, "Neural unsupervised domain adaptation in NLP - A survey," *CoRR*, 2020.
- [51] S. Mezza, A. Cervone, E. A. Stepanov, G. Tortoreto, and G. Riccardi, "Iso-standard domain-independent dialogue act tagging for conversational agents," in *Proceedings of the 27th International Conference on Computational Linguistics, COLING 2018, Santa Fe, New Mexico, USA, August 20-26, 2018*, 2018, pp. 3539–3551.
- [52] H. Bunt, V. Petukhova, E. Gilmartin, C. Pelachaud, A. C. Fang, S. Keizer, and L. Prévot, "The ISO standard for dialogue act annotation, second edition," in *Proceedings of The 12th Language Resources and Evaluation Conference, LREC 2020, Marseille, France, May 11-16, 2020*, 2020, pp. 549–558.
- [53] A. Bosselut, H. Rashkin, M. Sap, C. Malaviya, A. Celikyilmaz, and Y. Choi, "COMET: commonsense transformers for automatic knowledge graph construction," in *Proceedings of ACL 2019, Florence, Italy, July 28- August 2, 2019, Volume 1: Long Papers*, 2019, pp. 4762–4779.
- [54] M. Sap, H. Rashkin, D. Chen, R. L. Bras, and Y. Choi, "Social iqa: Commonsense reasoning about social interactions," in *Proceedings of EMNLP-IJCNLP 2019, Hong Kong, China, November 3-7, 2019*, 2019, pp. 4462–4472.

VIII. BIOGRAPHY SECTION



Yinhe Zheng received his Ph.D. degree from China University of Geosciences (Beijing), Beijing, China, in 2017. He worked as a Post Doctor in a joint program of the Department of Computer Science and Technology, Tsinghua University, and Samsung Research China - Beijing (SRCB). His research interests include natural language processing and dialogue system, especially the tasks related to natural language understanding and natural language generation. He is the recipient of the Wuwenjun AI Award in 2019.



Minlie Huang received his Ph.D. degree from Tsinghua University, Beijing, China, in 2006. He is currently an Associate Professor with the Department of Computer Science and Technology, Tsinghua University. His research interests include natural language processing, particularly in dialog systems, reading comprehension, and sentiment analysis. He has published more than 60 papers in premier conferences and journals (ACL, EMNLP, AAAI, IJCAI, WWW, SIGIR, etc.). His work on emotional chatting machines was reported by MIT Technology Review, the Guardian, Nvidia, and many other mass media. He serves as standing reviewer for TACL, area chairs for ACL 2020/2016, EMNLP 2019/2014/2011, and Senior PC members for AAAI 2017-2020 and IJCAI 2017-2020, and reviewers for TASLP, TKDE, TOIS, TPAMI, etc. He is a nominee of ACL 2019 best demo papers, the recipient of IJCAI 2018 distinguished paper award, CCL 2018 best demo award, NLPCC 2015 best paper award, Hanvon Youngth Innovation Award in 2018, and Wuwenjun AI Award in 2019. He was supported by a NSFC key project, several NSFC regular projects, and many IT companies.



Yida Wang received his MS degree from Tsinghua University, Beijing, China in 2021. He is currently working as an investment researcher in an asset management company. His research interests include natural language processing and quantitative investment, especially the task related to dialogue system and portfolio optimization.



Pei Ke received the B.E. degree from Zhejiang University, China, in 2017. He is a PhD student at the Department of Computer Science and Technology, Tsinghua University. His research interests include natural language generation, dialogue systems, and sentiment analysis.



Zhenyu Yang received his B.Eng. and Ph.D. degrees from the University of Science and Technology of China, Hefei, Anhui, China, in 2005 and 2010, both in computer science. He is currently the Chief Research Scientist with the Center of Xiaobu Assistant, Guangdong OPPO Mobile Telecommunications Corp., Ltd, Shenzhen, China. His research interests include dialogue systems, metaheuristics and various real-world applications.