

# Handwritten text generation and strikethrough characters augmentation

Alex Shonenkov<sup>a</sup>, Denis Karachev<sup>b</sup>, Max Novopoltsev<sup>c</sup>, Mark Potanin<sup>d</sup>, Denis Dimitrov<sup>e</sup>, and Andrey Chertok<sup>f</sup>

<sup>a,c</sup>SBER AI, Moscow, Russia

<sup>b</sup>OCRv, Sochi, Russia

<sup>d</sup>SBER AI, MIPT, Moscow, Russia

<sup>e</sup>SBER AI, Lomonosov MSU, Moscow, Russia

<sup>f</sup>SBER AI, AIRI, Moscow, Russia

## ABSTRACT

We introduce two data augmentation techniques, which, used with a Resnet - BiLSTM - CTC network, significantly reduce Word Error Rate (WER) and Character Error Rate (CER) beyond best-reported results on handwriting text recognition (HTR) tasks. We apply a novel augmentation that simulates strikethrough text (HandWritten Blots) and a handwritten text generation method based on printed text (StackMix), which proved to be very effective in HTR tasks. StackMix uses weakly-supervised framework to get character boundaries. Because these data augmentation techniques are independent of the network used, they could also be applied to enhance the performance of other networks and approaches to HTR. Extensive experiments on ten handwritten text datasets show that HandWritten Blots augmentation and StackMix significantly improve the quality of HTR models.

**Keywords:** Data augmentation, handwritten text recognition, strikethrough text, computer vision, StackMix, Handwritten Blots.

## 1. INTRODUCTION

Handwriting text recognition (HTR) is a vital task. Automation allows for a dramatic reduction in labor costs for processing correspondence and application forms and deciphering historical manuscripts. The main problem with historical documents is the usual small amount of labeled data. However, HTR systems require many examples for training and setting parameters. Optical character recognition (OCR) is an area in which deep learning has proven itself perfectly. The situation in HTR, especially with historical documents, which are much worse. Since there are only a few open datasets, the quality of trained models recognition is much lower.

To improve the state-of-the-art of HTR system, we introduce two ways to increase the volume of training data: augmentation that simulates strikethrough text - HandWritten Blots and a "new text" generation method - StackMix.

The proposed HandWritten Blots simulates the strikethrough characters as close as possible to the originals. It can change the inclination, size, and transparency of drawing lines that strike out characters. This is illustrated in Fig.1. Stackmix generates handwritten text (phrase, string, or entire page) using characters images of the training dataset. We proposed weakly-supervised learning to extract characters boundaries from training images. As an example, we generated pages of texts from different sources. Some paragraphs from the first chapter of a Harry Potter book were used for all models (Fig.2, 3). The results suggest that it is possible to generate different texts with different styles and fonts.

---

Further author information:

Alex Shonenkov.: E-mail: shonenkov@phystech.edu

Denis Karachev.: E-mail: Denis.Karachev@OCRv.ru

Max Novopoltsev.: E-mail: MYNovopoltsev@sberbank.ru

Mark Potanin.: E-mail: mark.potanin@phystech.edu

Denis Dimitrov.: E-mail: denis.dimitrov@math.msu.su

Andrey Chertok.: E-mail: AChertok@sberbank.ru



Figure 1. Sample handwritten text image after using HandWritten Blots.

chaps me  
The Boy Who Lived  
Mr and Mrs Dursley of number four Privet Drive were proud to say  
that they were perfectly normal thank you very much they were in fact people  
and expect to be involved in anything strange or mysterious because they  
just didn't hold with such nonsense. Dursley was the director of a firm  
called Grunnings which made drills. He was a big beefy man with hardly any  
neck although he did have a very large mustache. Mrs Dursley was thin and  
bony and had nearly twice the usual amount of neck which came in very useful  
as she spent so much of her time coming over garden fence spying on the  
neighbors. The Dursleys had a small son called Dudley and in their opinion

Figure 2. Example first page of Harry Potter created using StackMix from IAM style.

These augmentations were designed initially for the system to decipher Peter the Great manuscripts that were first introduced at<sup>1</sup> by using marked-up lines of the text as input.

We evaluate our augmentation and normalization techniques using a Resnet - BiLSTM - CTC architecture to perform HTR. Our approach achieves low Word Error Rate (WER) and Character Error Rate (CER) on ten different handwritten texts dataset. This dataset consists of handwritten texts over thousands of authors and multiple languages written centuries apart.

## 2. RELATED WORK

### 2.1 Data Augmentation

Data augmentation consists of augmenting the training set with synthetically generated samples. It reduces the tendency to overfit when training models with many parameters and limited labeled data. In data augmentation for image classification problems, the training set is increased by modifying the original images through transformations such as scaling, rotation, or flipping images and generating new images from part of the images of the training dataset.

For example, in the CutMix approach,<sup>2</sup> parts of the images are cut from different samples and inserted into a new one. At the same time, the targets are mixed according to the proportions of the original parts of the images. A similar approach is used in SnapMix,<sup>3</sup> but the cutting of images is regulated using Class Activation Map. This approach allows for reducing the noise of the cut objects and selecting the most significant parts. Additionally, an exciting approach with mixing objects is presented in MixUp,<sup>4</sup> and MWH,<sup>5</sup> where images overlap each other with a transparency coefficient and mix the targets with the proportion. Unfortunately, these methods cannot be applied to the optical character recognition and handwritten text recognition tasks because mixing recursively dependent targets makes it very difficult to obtain a correct mapping of image and text. Therefore, we would like to introduce the StackMix approach, which improves the quality and stability of our neural network.

chapter one

the boy who lived

Mr and Mrs Dursley of number four Privet Drive were proud to say that they were perfectly normal thank you very much they were the last people you'd expect to be involved in anything strange or mysterious because they just didn't hold with such nonsense Mr Dursley was the director of a firm called Grunnings which made drills He was a big, bulky man with hardly any neck although he did have a very large nose Mr Dursley was thin, dry, blonde and had no, by no means the usual amount of neck which came in very useful as she spent so much of her 'evening' in garden fences sitting on the neighbour's, Mr Dursley had a small son called Dudley and in their opinion

Figure 3. Example first page of Harry Potter created using StackMix from Bentham style

Several authors have proposed specific augmentation techniques for HTR. In<sup>6</sup> the authors introduce a more robust augmentation technique and normalization to model the handwritten text variation of a given author. In,<sup>7</sup> they show some affine transformation methods for data augmentation in HTR.<sup>8</sup> and<sup>9</sup> synthesize new lines images by concatenating characters from different datasets. In,<sup>8</sup> the authors introduce a new method for matching double-sided historical documents to remove interference caused by handwriting from the reverse side due to ink sipping over long storage periods. This article proposes different strategies for obtaining synthetic handwritten Chinese documents using an existing segmented database at the character level. In,<sup>10</sup> the authors improve the performance by augmenting the training set with specially crafted multiscale data.

Common tricks may significantly improve the quality of HTR models. In,<sup>11</sup> the authors investigated data augmentation and transfer learning for small historical datasets.

Obtaining a massive corpus of labeled handwriting images for different languages is a cumbersome task. Authors use Generative Adversarial Networks (GAN) (called ScrabbleGAN) to generate training data.<sup>12</sup> ScrabbleGAN follows a semi-supervised approach to synthesize handwritten text images that are versatile both in style and lexicon. It can generate images of varying lengths. The generator can also manipulate the resulting text style, allowing us to decide whether the text must be cursive or how thick/thin the pen stroke should be.

## 2.2 Handwritten text Recognition systems

Handwritten text recognition is a long-standing computer vision problem. Early works on handwritten recognition problems suggest using a combination of Hidden Markov Models (HMM) and recurrent neural networks (RNNs).<sup>13,14</sup> The disadvantage of these approaches is the impossibility of end-to-end loss function optimization. With the advent of deep learning came tremendous improvements in handwriting recognition.

Poznanski and Wolf<sup>7</sup> perform word-level recognition by employing a fixed-size CNN architecture that evaluates binary lexical attributes over word images, such as whether a given portion of the image contains a certain unigram or bigram (PHOC<sup>15</sup>). The correct transcription is determined by the word in the lexicon closest to this representation. Authors<sup>16</sup> also employ a fixed-size CNN architecture to learn features for the PHOC representation for embedding the text and images into a common subspace.

Another general approach uses RNNs for HTR. These have been widely adopted with the introduction of Connectionist Temporal Classification (CTC). CTC is an algorithm used to deal with tasks like speech recognition, handwriting recognition, where just the input data and the output transcription are available, but there are no characters boundaries provided. The basic idea was to interpret the network outputs as a probability

distribution over all possible label sequences conditioned on a given input sequence. Given this distribution, an objective function can be derived that directly maximizes the probabilities of the correct labelings.

State-of-the-art HTR architectures combine a convolutional neural network (CNN) with Long Short-Term Memory Recurrent Neural Networks (LSTM) cells.<sup>17</sup> This type of network model can deal with sequential data to identify temporal patterns.

Large Multidimensional Long Short-Term Memory Recurrent Neural Networks (MDLSTM)<sup>18</sup> networks use 2D-RNN, which can deal with both axes of an input image. A simple model consists of several convolutional neural network (CNN) and MDLSTM layers, and using connectionist temporal classification (CTC) loss provides excellent metrics for the IAM<sup>19</sup> dataset.

However, MDLSTM models have some disadvantages like high computational costs and instability. In works<sup>20</sup> and,<sup>21</sup> the authors try to eliminate recurrent layers in CNN-LSTM-CTC to decrease the number of parameters. Their Gated Fully Convolutional Networks show relatively good results, even without a language model. Another alternative to the RCNN-CTC approach is seq2seq models.<sup>22</sup> The encoder extracts features from the input, and the decoder with an attention mechanism emits the output sequentially. OrigamiNet<sup>23</sup> is a module that combines segmentation and text recognition tasks. It can be added to any line-level handwritten text recognition model to make it page-level.

We compared the proposed model with the models described above. The data for comparison is given in section 5. We also found that different authors used various data partitions for train, test, and validation on the IAM dataset (see section 4.2). This made it difficult to compare the models correctly, so we present our model results for the same data sets used in the original papers.

### 3. PROPOSED AUGMENTATIONS ALGORITHMS

#### 3.1 Handwritten Blot Augmentation

The idea of augmentation appeared during the analysis of the Digital Peter dataset.<sup>1,24</sup> In the process of examining the dataset, we found examples of images in which some characters were crossed out and almost indistinguishable, but they were still present in the markup. Hence, the idea of using the Cutout augmentation<sup>25</sup> emerged since it allows for overlapping of some elements of symbols or entire symbols, which makes the augmentation a bit like crossed-out symbols.

However, in training the models, we decided to implement such an algorithm that would allow for simulating the strikethrough characters as close as possible to the originals. Since we did not find the implementation of such algorithms in open sources, we created it ourselves. We significantly improve the quality of HTR models using Handwritten Blot augmentation than using Cutout augmentation.

To implement the strikethrough effect, we decided to use the Bezier curve construction algorithm, which in our case smoothed the curve transition between points. The Bezier curve is a parametric curve and is a special case of the Bernstein polynomial. Finding basic polynomials of degree  $n$  are found by the formula:

$$b_{j,n} = \binom{n}{j} s^j (1-s)^{n-j} \tag{1}$$

Where  $j = 0, \dots, n$ . The definition of a curve as a linear combination is found as:

$$B(s) = \sum_{j=0}^n b_{j,n} \cdot v_j \tag{2}$$

Where  $v_j$  is the point in the space, and  $b_{j,n}$  define above. Since the sum of all polynomials must be equal to one, then.

$$b_{0,n} + b_{0,1} + \dots + b_{n,n} = (s + (1-s))^n = 1 \tag{3}$$

Where  $S$  is non-negative weights that sum to one. We found the implementation of the algorithm for constructing the Bezier curve in.<sup>26</sup>

Next, we implemented our algorithm that simulates strikethrough. A graphical description of the algorithm is shown in Fig. 4. The main steps were as follows:

- Determine the coordinates of the strikethrough area (Fig.4, a).
- Define areas for generating points to be used for drawing a Bezier curve (Fig.4, b).
- Generate points for the Bezier curve with the parameters of the intensity of the points and their coordinates to simulate the slope. Sometimes, a random point needs to be used several times for the loop to go slightly further from the curve (Fig.4, c).
- Draw a curve with specified transparency (Fig.4, d).

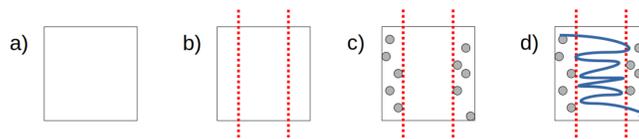


Figure 4. Graphic description of the algorithm.

The implementation of this algorithm can be found here.<sup>27</sup> We empirically selected the parameters for strikethrough ( $minh = 50$ ,  $maxh = 100$ ,  $minw = 10$ ,  $maxw = 50$ ,  $incline = 15$ ,  $intensity = 0.9$ ,  $transparency = 0.95$ ,  $count = 1 \dots 11$ ,  $proba = 0.5$ ) and tested it on different datasets. These parameters can change the inclination, transparency, and size of drawing lines that strikeout characters.

The effect of the Blot augmentation on quality metrics is shown in the "blots" row of Table 3 and in Figure 14.

The obtained data suggest that handwritten blot augmentation makes a significant contribution to the quality of training models. Therefore, we recommend using it to train models in handwriting recognition problems.

### 3.2 Handwritten text generation by StackMix algorithm

Proposed Handwritten text generation algorithm StackMix generates synthetic lines of text, given samples of the isolated characters. We used weakly-supervised learning to extract characters boundaries from training images. The algorithm is based on the post-processing of a supervised pretrained neural network via CTC loss. It gets characters boundaries using only weakly-supervised learning without any manual markup (Fig. 5). The training does not require character-level annotation and can be applied to many cases where only labeled words or entire phrases samples are available. During training the order of characters is given, and the goal is to separate the input image by these characters, proportional to the size of the output sequence. We use the intersection coordinates of the different characters to get the coordinates of the beginning and end of each character. We can generate any phrase from different datasets style with all characters coordinates in all the lines.

Character width is proportional to  $k \cdot W / N$ , where  $k$  - number of "cells" with maximum character probability;  $W$  - input images width;  $N$  - number of samples (Fig. 6). The main idea was to connect the last layer of RNN (after applying SoftMax activation for every character from image features) and image width. For training neural network can be used base scheme without any augmentations and tricks. To get high-quality marking of symbols boundaries, a sample from the training stage should be used. Example of image of symbol segmentation using weakly-supervised method for IAM dataset are given in Fig. 7).

The input for the algorithm is expected to be text from the external corpus, which creates a new image with this text using parts of images of the training dataset. The algorithm from natural language toolkit for python (nltk)<sup>28</sup> MWETokenizer<sup>29</sup> is used for tokenization. It processes tokenized text and merges multi-word expressions into single tokens. Collections of multi-word expressions are obtained from the training dataset,

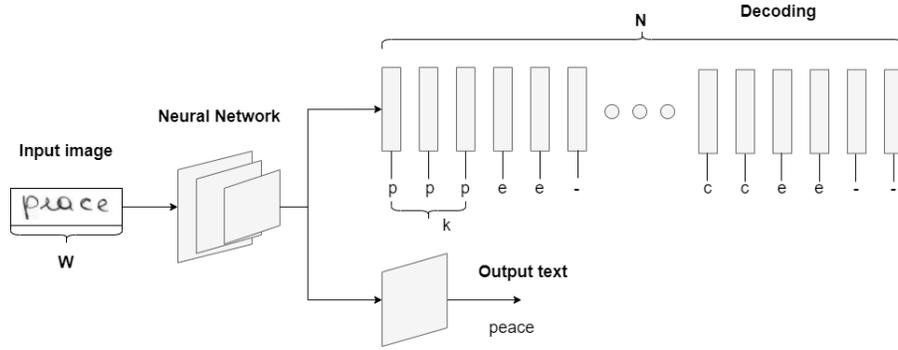


Figure 5. Post-processing scheme to get the boundaries of the symbols.




Figure 6. The boundaries of the symbols.

using symbol borders to connect parts of images and MWE tokens, including spaces and punctuation marks. In this study, we used one random MWE tokenizer from six with a token dimension of no more than 3, 4, 5, 6, 7, and 8 with probabilities 0.05, 0.15, 0.2, 0.2, 0.2, and 0.2, respectively. After this, each token was matched with part of an image from the training data. The pieces were stacked (hence the name "StackMix") together into a complete image, maintaining the correct order of the tokens.

The StackMix approach also requires an external text corpus that has the same alphabet as the main dataset. Corpus does not require special marking and only contains allowed symbols. We use different text corpus over thousands of authors and multiple languages written centuries apart corresponding to each dataset in Table 1.

Table 1. Text corpus for different datasets.

Dataset	Text corpus
Bentham, IAM	"Jigsaw Unintended Bias in Toxicity Classification" <sup>30</sup>
Saint Gall	"The Latin Library" <sup>31</sup>
HKR	Russian texts from Wikimedia <sup>32</sup>
Digital Peter	russian texts of the XVII-XVIII centuries

Examples of the StackMix algorithm for various datasets are given in Figures 9–13. Experiments result show that StackMix augmentation improves the quality of training models (Table 3, row StackMix). Despite the visible places where tokens were glued together, the algorithm significantly increased the quality of recognition. We tried to increase the realism of the generated text by alignment and selection of samples. However, it did not improve the quality of our experiments.

Nevertheless, after specific improvements, this algorithm may be used for the realistic generation of new documents.




Figure 7. Example images of symbol segmentation using semi-supervised methods. Images have ids: IAM-a02-082-05.

## 4. NEURAL NETWORK ARCHITECTURE AND HANDWRITTEN TEXTS DATASETS

### 4.1 Neural Network Architecture

The neural network underlying the proposed system consists of three parts: a feature generator, RNN to account for the order of the features, and the classifier that outputs the probability of each character (use CTC Loss).

As a feature generator, various network architectures were tested, and the final choice fell on Resnet (Fig. 8). We took only three first blocks from Resnet-34 and replaced the stride parameter in the first layer with 1 to increase the "width" of the objects.

After the features were extracted, they were averaged through the AdaptiveAvgPool2d layer and fed into the three BiLSTM layers to deal with feature sequences.

As a final classifier, we use two fully connected layers with GELU and dropout between them.

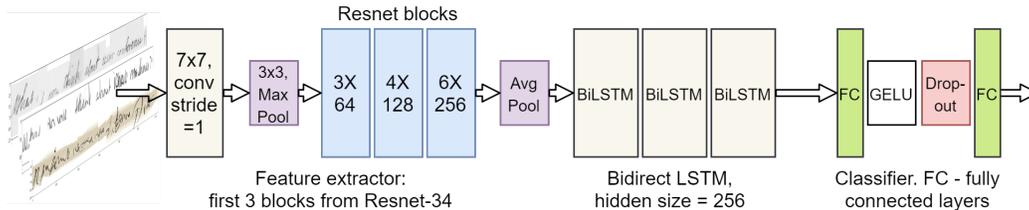


Figure 8. Neural network architecture.

The results achieved using the described architecture without any additional modifications are shown in the "base" row of Table 3.

### 4.2 Datasets

Ten different datasets were used in the experiments to prove state-of-the-art quality of our model. We have tested our two augmentations techniques over thousands of authors, and multiple languages were written centuries apart.

Bentham manuscripts refers to a large set of documents that were written by the renowned English philosopher and reformer Jeremy Bentham (1748-1832). Volunteers of the Transcribe Bentham\* initiative transcribed this collection. Currently, > 6 000 documents or > 25 000 pages have been transcribed using this public web platform.

For our experiments, we used the BenthamR0 dataset<sup>33</sup> a part of the Bentham manuscripts.

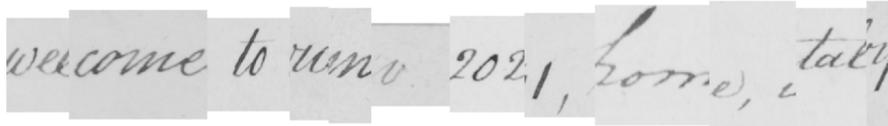


Figure 9. Stackmix example line from the Bentham. "Welcome to ICMV 2021, Rome, Italy."

IAM handwriting dataset contains forms of handwritten English text. It consists of 1 539 pages of scanned text from 657 different writers. This dataset is widely used for experiments in many papers. However, there is

\*[http://transcribe-bentham.ucl.ac.uk/td/Transcribe\\_Bentham](http://transcribe-bentham.ucl.ac.uk/td/Transcribe_Bentham)

a big problem with uncertainty in data splitting for model training and evaluation. This issue was described in.<sup>22</sup> The IAM dataset has different train/val/test splits that are shown in Table 2. The problem is that none of them are labeled as a standard, so the IAM dataset split differs from paper to paper. However, results should be compared on the same split.

In our experiments, we use the IAM-B<sup>†</sup> and IAM-D partitions. IAM-B was used to compare our model with others. IAM-D was a new partition inspired by the official page of project<sup>‡</sup>. This page contained "unknown", "val1" and "val2" split labels. We added "unknown" samples to the train set, and combined "val1" and "val2" together.

IAM-B was chosen because many recently published papers used this partition. We used IAM-D because it provides more training samples.

We create a github repository<sup>34</sup> with information and indexes corresponding to each IAM split in Table 2. It also contains links to papers that use these splits. We hope this helps researchers choose appropriate IAM partitions and make valid comparisons with other papers.

Table 2. IAM splits.

Split	Train	Val	Test
IAM-A	6161	966	2915
IAM-B	6482	976	2915
IAM-C	6161	940	1861
IAM-D	9652	1840	1861




Figure 10. Stackmix example line from the IAM. "Welcome to ICMV 2021, Rome, Italy."

Saint Gall dataset contains handwritten historical manuscripts written in Latin that date back to the 9th century. It consists of 60 pages, 1 410 text lines and 11 597 words.



Figure 11. Stackmix example line from the Saint Gall. "SaintGall dataset."

HKR<sup>35</sup> is a recently published dataset of modern Russian and Kazakh language. This database consists of > 1 400 filled forms. It contains 64 943 lines and > 715 699 symbols produced by about 200 different writers. Data are split in the following manner: 45 559 lines for a train set, 10 009 lines for validation, and 9 375 lines for test. This data splitting was found in github<sup>36</sup> of the authors of the HKR\_Dataset, but these proportions of train/valid/test were slightly different than those of the original paper.<sup>35</sup> We assumed that the seed was not fixed in a script to get split, which was not a big problem for comparing results.

<sup>†</sup><http://www.tbluche.com/resources.html>

<sup>‡</sup><https://fki.tic.heia-fr.ch/databases/iam-handwriting-database>



Figure 12. Stackmix example line from the HKR. "Добро пожаловать на конференцию, Рим, Италия."

Digital Peter is a completely new dataset of Peter the Great's manuscripts.<sup>1</sup> It consists of 9 694 images and text files corresponding to lines in historical documents. The open machine learning competition Digital Peter was held based on the considered dataset.<sup>24</sup> There are 6 237 lines in the training set, 1 527 lines in the validation set, and 1 930 lines in the testing set. Konzil dataset was created by specialists of the University of Greifswald.



Figure 13. Stackmix example line from the Peter. "Добро пожаловать на конференцию в Рим."

It contains manuscripts written in modern German. Train sample consists of 353 lines, validation – 29 lines and test – 87 lines.

Schiller contains handwritten texts written in modern German. Train sample consists of 244 lines, validation – 21 lines and test – 63 lines.

Ricordi contains handwritten texts written in Italian. Train sample consists of 295 lines, validation – 19 lines and test – 69 lines.

Patzig contains handwritten texts written in modern German. Train sample consists of 485 lines, validation – 38 lines and test – 118 lines.

Schwerin contains handwritten texts written in medieval German. Train sample consists of 793 lines, validation – 68 lines and test – 196 lines.

## 5. RESULTS AND DISCUSSION

The four most frequently used in HTR task datasets and Digital Peter dataset were used in the experiments to prove the state-of-the-art quality of our model. Digital Peter is an entirely new dataset.<sup>1</sup> Authors present detailed information about Digital Peter dataset and share links to data.

Proposed augmentations allows for metric improvements. In our experiments, we used StackMix "on the fly" during training. We added traditional augmentations of CLAHE,<sup>37</sup> JpegCompression, Rotate, and our augmentation (simulation of crossed-out letters) - "HandWritten Blots". Different combinations of augmentations were grouped in our experiments (Table 3, 4):

- "Base" - experiments without augmentations, 300 epoch (HKR 100 epoch)
- "Augs" - standart augmentations (CLAHE<sup>37</sup>, JpegCompression, Rotate), 300 epoch (HKR 100 epoch)
- "Blots" - using only our HandWrittenBlot augmentation, 500 epoch (HKR 150 epoch)
- "Stackmix" - using only our Stackmix approach, 1 000 epoch (HKR 300 epoch)
- "All" - using all previous augmentations (augs + blots + stackmix), 1 000 epoch (HKR 300 epoch)

Models with StackMix were trained during 1 000 epoch, but were not overfitted. We believe they should be trained more with bigger external text corpora. A comparison of our results for various datasets (IAM,<sup>19</sup> BenthamR0,<sup>33</sup> Digital Peter,<sup>1</sup> HKR\_Dataset,<sup>35</sup> Saint Gall<sup>38</sup>) is presented in Table 3, 4 and in Figure 14.

The effect of the proposed two augmentations on quality metrics is shown in Figure 14. Train time  $T_{arb}$  were measured in arbitrary units and obtained by the formula:

$$T_{arb} = \log_2(T/T_{min}) \quad (4)$$

Where  $T_{min} = 33.6$  ms is the minimum value of train time per one image. The colored lines represent obtained experiment points. Since the quality of approaches grows with increasing train time, some points have no line.

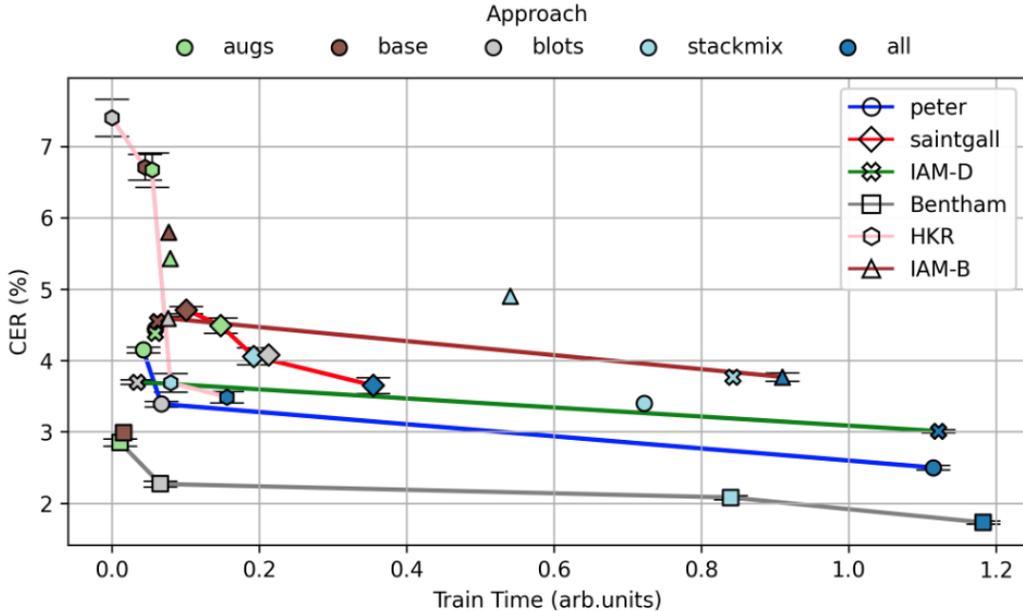


Figure 14. The relative train time and CER results of experiments for different datasets and approaches.

Moreover, we consider 5 more datasets named Konzilsprotokolle C (Konzil), Schiller, Ricordi, Patzig and Schwerin. The datasets were written in Italian modern, and medieval German and were first introduced in the ICFHR 2018 Competition over READ dataset to compare the performance of approaches learning with few labeled pages (as all of these datasets are relatively small).

In Table 4 we provide experimental results for datasets considered above (Konzil, Schiller, Ricordi, Patzig, Schwerin). Despite the small number of samples in each dataset, we succeeded in achieving good metrics. StackMix (and StacMix+Blots+Augmentations which is named "all") leads to significant improvement in recognition quality. This is the main result. StackMix approach helps to generate new training samples, which is vital for few samples datasets. These results show that our model could be applied not only for widespread big datasets but also for less-known small ones. It is enough about twelve translated pages on historical manuscripts to train a good performing model. The "All" approach achieves the best metric value for each dataset. It shows that our augmentations applied to small datasets lead to prosperous and stable training.

### 5.1 Ablation study

In this section, we present the comparison with other models (Table 5). Our model outperforms other approaches on the BenthamR0, HKR, and IAM-D datasets. It reached 3.77% of CER on the IAM-B dataset, which is very close to the best model published in 2016 that achieved 3.5% CER. On the Saint Gall dataset, we achieved 5.56% CER, which is very close to the current best solution of 5.26% CER.

IAM dataset has two versions because papers use various data splits. We included IAM-B and IAM-D partitions in Table 5 to compare them with other models of the same split.

Authors of the paper<sup>39</sup> provided open code for their model here.<sup>40</sup> We noticed that when evaluating the model, they lowered the characters in predicted and true strings. However, in our experiments, we did not convert the characters to lowercase. For real HTR tasks, it is not important to track the case of characters.

We compare our approach on a few labeled datasets (Konzil, Schiller, Ricordi, Patzig, Schwerin) with results from the paper.<sup>11</sup> Results are presented in Table 6. For our model, we took the best results from Table 4 and also we took the best results from Table 1 in paper.<sup>11</sup> Our model achieves better CER for 3 of 5 datasets. Additionally, we did not use transfer learning from bigger datasets, unlike authors of.<sup>11</sup>

Data which we used for Table 6 are located in "specific\_data" folder. Each image and text translation has index "train\_[1,4,16]" in their file names. So we set "train\_1" as a valid index, "train\_4" as test index, and "train\_16" as train index. We did it this way because "train\_1" has the smallest number of samples for each dataset, "train\_4" is slightly bigger, and train\_16 is the largest. So for the test set in Table 6, we took all files marked with "train\_4" for each dataset. But authors of<sup>11</sup> used the test set (with ground truth) for ICFHR 2018 Competition,<sup>41</sup> which is hidden for us. Despite the usage of different test sets, we think this comparison is relatively fair.

## 6. CONCLUSION

We have introduced two new data augmentation techniques, strikethrough text algorithm HandWritten Blots and handwritten text generation algorithm StackMix, based on weakly-supervised training. We have demonstrated their use with Resnet - BiLSTM - CTC network to produce the best result among the currently known handwriting recognition systems. These techniques produce the lowest word error rate (WER) and Character Error Rate (CER) to date over hundreds of authors, multiple languages, and thousands of documents, including challenging, medieval, historical documents with noise, ink bleed-through, and faint handwriting.

The presented system can significantly increase the speed of deciphering historical documents. For example, it took a team of 10-15 historians about three months to decipher 662 pages of manuscripts from the Digital Peter dataset. When working on the same dataset on a single Tesla V100, the average decryption speed was 95 lines/s or 380 pages/min, unattainable by historical scientists.

## REFERENCES

- [1] Mark Potanin, Denis Dimitrov, Alex Shonenkov, Vladimir Bataev, Denis Karachev, and Maxim Novopoltsev. Digital peter: Dataset, competition and handwriting recognition methods. *arXiv preprint arXiv:2103.09354*, 2021.
- [2] Sangdoon Yun, Dongyoon Han, Sanghyuk Chun, Seong Joon Oh, Youngjoon Yoo, and Junsuk Choe. CutMix: Regularization strategy to train strong classifiers with localizable features. In *2019 IEEE/CVF International Conference on Computer Vision (ICCV)*. IEEE, 2019.
- [3] Shaoli Huang, Xinchao Wang, and Dacheng Tao. SnapMix: Semantically proportional mixing for augmenting fine-grained data. In *Proceedings of the AAAI Conference on Artificial Intelligence*, number 2 in 35, pages 1628–1636, 2021.
- [4] Hongyi Zhang, Moustapha Cisse, Yann N. Dauphin, and David Lopez-Paz. mixup: Beyond empirical risk minimization. In *International Conference on Learning Representations*, 2018.
- [5] Hao Yu, Huanyu Wang, and Jianxin Wu. Mixup without hesitation. *arXiv preprint arXiv:2101.04342*, 2021.
- [6] Curtis Wigington, Seth Stewart, Brian Davis, Bill Barrett, Brian Price, and Scott Cohen. Data augmentation for recognition of handwritten words and lines using a cnn-lstm network. In *2017 14th IAPR International Conference on Document Analysis and Recognition (ICDAR)*, volume 1, pages 639–645. IEEE, 2017.
- [7] Arik Poznanski and Lior Wolf. CNN-N-Gram for Handwriting Word Recognition. *Proceedings of the IEEE Computer Society Conference on Computer Vision and Pattern Recognition*, 2016-December:2305–2314, 2016.
- [8] Praveen Krishnan and CV Jawahar. Matching handwritten document images. In *European Conference on Computer Vision*, pages 766–782. Springer, 2016.

- [9] Xi Shen and Ronaldo Messina. A method of synthesizing handwritten chinese images for data augmentation. In *2016 15th International Conference on Frontiers in Handwriting Recognition (ICFHR)*, pages 114–119. IEEE, 2016.
- [10] Edgard Chammas, Chafic Mokbel, and Laurence Likforman-Sulem. Handwriting recognition of historical documents with few labeled data. In *2018 13th IAPR International Workshop on Document Analysis Systems (DAS)*, pages 43–48. IEEE, 2018.
- [11] José Carlos Aradillas, Juan José Murillo-Fuentes, and Pablo M Olmos. Boosting offline handwritten text recognition in historical documents with few labeled lines. *IEEE Access*, 9:76674–76688, 2020.
- [12] Sharon Fogel, Hadar Averbuch-Elor, Sarel Cohen, Shai Mazor, and Roei Litman. Scrabblegan: Semi-supervised varying length handwritten text generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 4324–4333, 2020.
- [13] Yoshua Bengio et al. Markovian models for sequential data. *Neural Computing Surveys*, 2(199):129–162, 1999.
- [14] Hervé A. Bouchard and Nelson Morgan. Connectionist speech recognition: A hybrid approach. *Kluwer Academic Publishers*, 1994.
- [15] Jon Almazán, Albert Gordo, Alicia Fornés, and Ernest Valveny. Word spotting and recognition with embedded attributes. *IEEE transactions on pattern analysis and machine intelligence*, 36(12):2552–2566, 2014.
- [16] Praveen Krishnan, Kartik Dutta, and CV Jawahar. Deep feature embedding for accurate recognition and retrieval of handwritten text. In *2016 15th International Conference on Frontiers in Handwriting Recognition (ICFHR)*, pages 289–294. IEEE, 2016.
- [17] Sepp Hochreiter and Jürgen Schmidhuber. Long short-term memory. *Neural computation*, 9(8):1735–1780, 1997.
- [18] Paul Voigtlaender, Patrick Doetsch, and Hermann Ney. Handwriting recognition with large multidimensional long short-term memory recurrent neural networks. In *2016 15th International Conference on Frontiers in Handwriting Recognition (ICFHR)*, pages 228–233. IEEE, 2016.
- [19] U.-V. Marti and H. Bunke. The IAM-database: an English sentence database for offline handwriting recognition. *International Journal on Document Analysis and Recognition*, 5(1):39–46, 2002.
- [20] Denis Coquenot, Clément Chatelain, and Thierry Paquet. Recurrence-free unconstrained handwritten text recognition using gated fully convolutional network. In *2020 17th International Conference on Frontiers in Handwriting Recognition (ICFHR)*, pages 19–24. IEEE, 2020.
- [21] R. Reeve Ingle, Yasuhisa Fujii, Thomas Deselaers, Jonathan Baccash, and Ashok C. Popat. A scalable handwritten text recognition system. In *2019 International Conference on Document Analysis and Recognition (ICDAR)*, pages 17–24. IEEE, 2019.
- [22] Johannes Michael, Roger Labahn, Tobias Grüning, and Jochen Zöllner. Evaluating sequence-to-sequence models for handwritten text recognition. In *2019 International Conference on Document Analysis and Recognition (ICDAR)*, pages 1286–1293. IEEE, 2019.
- [23] Mohamed Yousef and Tom E. Bishop. OrigamiNet: Weakly-supervised, segmentation-free, one-step, full page text recognition by learning to unfold. In *2020 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 14710–14719. IEEE, 2020.
- [24] Competition Digital Peter. [https://github.com/sberbank-ai/digital\\_peter\\_aij2020](https://github.com/sberbank-ai/digital_peter_aij2020), 2020.
- [25] Terrance DeVries and Graham W. Taylor. Improved regularization of convolutional neural networks with cutout. *arXiv preprint arXiv:1708.04552*, 2017.
- [26] Danny Hermes. Helper for bézier curves, triangles, and higher order objects. *The Journal of Open Source Software*, 2(16):267, 2017.
- [27] Method implementation (our code). <https://github.com>, 2020.
- [28] S Bird, E Loper, and E Klein. Natural language processing with python o’reilly media inc. 2009.
- [29] Rob Malouf. Multi-word expression tokenizer. <https://www.nltk.org/modules/nltk/tokenize/mwe.html>.
- [30] The Conversation AI team. Jigsaw unintended bias in toxicity classification. <https://www.kaggle.com/c/jigsaw-unintended-bias-in-toxicity-classification>, 2018.

- [31] Credits for the Latin library. <https://www.thelatinlibrary.com/cred.html>.
- [32] Russian wikimedia downloads. <https://dumps.wikimedia.org/ruwiki/>, 2021.
- [33] B Gatos, Georgios Louloudis, Tim Causer, K Grint, Veronica Romero, Joan-Andreu Sánchez, A.H. Toselli, and E Vidal. Ground-truth production in the transcriptorium project. *IEEE*, pages 237–241, 2014.
- [34] Github repository with various IAM splits. <https://github.com>, 2020.
- [35] Daniyar Nurseitov, Kairat Bostanbekov, Daniyar Kurmankhojayev, Anel Alimova, and Abdelrahman Abdallah. HKR for Handwritten Kazakh and Russian database. *arXiv preprint arXiv:2007.03579*, 2020.
- [36] Github with HKR dataset splitting. <https://github.com/bosskairat/Dataset>, 2020.
- [37] Ali M. Reza. Realization of the contrast limited adaptive histogram equalization (CLAHE) for real-time image enhancement. *The Journal of VLSI Signal Processing-Systems for Signal, Image, and Video Technology*, 38(1):35–44, 2004.
- [38] Andreas Fischer, Volkmar Frinken, Alicia Fornés, and Horst Bunke. Transcription alignment of Latin manuscripts using Hidden Markov Models. In *Proceedings of the 2011 Workshop on Historical Document Imaging and Processing, HIP '11*, pages 29–36. ACM Press, 2011.
- [39] Arthur Flor de Sousa Neto, Byron Leite Dantas Bezerra, Alejandro Héctor Toselli, and Estanislau Baptista Lima. HTR-Flor: A deep learning system for offline handwritten text recognition. In *2020 33rd SIBGRAPI Conference on Graphics, Patterns and Images (SIBGRAPI)*, pages 54–61. IEEE, 2020.
- [40] HTR-Flor implementation. <https://github.com/arthurflor23/handwritten-text-recognition>, 2019.
- [41] Tobias Strauß, Gundram Leifert, Roger Labahn, Tobias Hodel, and Günter Mühlberger. Icfhr2018 competition on automated text recognition on a read dataset. In *2018 16th International Conference on Frontiers in Handwriting Recognition (ICFHR)*, pages 477–482. IEEE, 2018.
- [42] Denis Coquenot, Clément Chatelain, and Thierry Paquet. End-to-end handwritten paragraph text recognition using a vertical attention network. *arXiv preprint arXiv:2012.03868*, 2020.
- [43] Bastien Moysset and Ronaldo Messina. Are 2D-LSTM really dead for offline text recognition? *International Journal on Document Analysis and Recognition (IJ DAR)*, 22(3):193–208, 2019.
- [44] Tianwei Wang, Yuanzhi Zhu, Lianwen Jin, Canjie Luo, Xiaoxue Chen, Yaqiang Wu, Qianying Wang, and Mingxiang Cai. Decoupled attention network for text recognition. In *Proceedings of the AAAI Conference on Artificial Intelligence*, number 07 in 34, pages 12216–12224, 2020.
- [45] Abdelrahman Abdallah, Mohamed Hamada, and Daniyar Nurseitov. Attention-based fully gated CNN-BGRU for Russian handwritten text. *Journal of Imaging*, 6(12):141, 2020.

Table 3. Extended results for all experiments with CER/WER/ACC for valid and test partitions.

	BenthamR0					
	Valid CER, %	Valid WER, %	Valid ACC, %	Test CER, %	Test WER, %	Test ACC, %
base	5.28 ± 0.08	26.1 ± 0.1	24.9 ± 0.3	2.99 ± 0.06	11.8 ± 0.3	52.1 ± 0.8
aug	5.28 ± 0.03	25.9 ± 0.1	25.1 ± 0.4	2.85 ± 0.05	11.3 ± 0.1	52.8 ± 1.0
blots	4.61 ± 0.02	24.4 ± 0.1	26.9 ± 0.3	2.27 ± 0.04	9.5 ± 0.2	57.0 ± 0.4
stackmix	4.51 ± 0.01	24.2 ± 0.1	26.9 ± 0.4	2.08 ± 0.03	9.0 ± 0.1	58.2 ± 0.8
all	<b>4.20 ± 0.03</b>	<b>23.4 ± 0.1</b>	<b>28.1 ± 0.5</b>	<b>1.73 ± 0.02</b>	<b>7.8 ± 0.1</b>	<b>61.9 ± 1.1</b>
	IAM-B					
	Valid CER, %	Valid WER, %	Valid ACC, %	Test CER, %	Test WER, %	Test ACC, %
base	3.67 ± 0.07	13.2 ± 0.2	38.3 ± 0.2	5.80 ± 0.08	18.9 ± 0.2	29.3 ± 0.4
aug	3.50 ± 0.03	12.7 ± 0.2	38.8 ± 0.9	5.43 ± 0.04	17.7 ± 0.1	30.7 ± 0.5
blots	2.93 ± 0.07	10.7 ± 0.3	44.0 ± 0.7	4.59 ± 0.03	15.0 ± 0.1	36.4 ± 0.5
stackmix	3.13 ± 0.03	11.5 ± 0.0	45.4 ± 0.5	4.90 ± 0.07	16.4 ± 0.2	35.2 ± 0.5
all	<b>2.40 ± 0.05</b>	<b>8.9 ± 0.2</b>	<b>53.7 ± 1.1</b>	<b>3.77 ± 0.06</b>	<b>12.8 ± 0.2</b>	<b>43.6 ± 0.6</b>
	Digital Peter					
	Valid CER, %	Valid WER, %	Valid ACC, %	Test CER, %	Test WER, %	Test ACC, %
base	4.27 ± 0.06	22.5 ± 0.3	47.1 ± 0.3	4.44 ± 0.02	24.3 ± 0.2	43.7 ± 0.4
aug	3.89 ± 0.04	21.2 ± 0.2	49.2 ± 0.5	4.15 ± 0.04	23.0 ± 0.2	45.7 ± 0.4
blots	3.17 ± 0.06	17.3 ± 0.2	56.3 ± 0.7	3.39 ± 0.04	19.3 ± 0.4	51.9 ± 0.4
stackmix	3.19 ± 0.05	17.2 ± 0.2	55.5 ± 0.4	3.40 ± 0.05	19.2 ± 0.3	51.6 ± 0.7
all	<b>2.42 ± 0.08</b>	<b>13.3 ± 0.4</b>	<b>64.0 ± 0.8</b>	<b>2.50 ± 0.03</b>	<b>14.6 ± 0.2</b>	<b>60.8 ± 0.8</b>
	IAM-D					
	Valid CER, %	Valid WER, %	Valid ACC, %	Test CER, %	Test WER, %	Test ACC, %
base	3.72 ± 0.03	13.5 ± 0.1	40.3 ± 0.6	4.55 ± 0.06	14.5 ± 0.2	35.5 ± 0.7
aug	3.54 ± 0.03	12.9 ± 0.2	41.9 ± 0.6	4.38 ± 0.04	14.0 ± 0.2	36.3 ± 0.6
blots	2.94 ± 0.09	10.8 ± 0.3	46.8 ± 0.9	3.70 ± 0.03	11.8 ± 0.1	42.3 ± 0.6
stackmix	2.98 ± 0.04	11.1 ± 0.1	48.0 ± 0.3	3.77 ± 0.04	12.3 ± 0.1	42.4 ± 0.8
all	<b>2.32 ± 0.04</b>	<b>8.7 ± 0.1</b>	<b>55.1 ± 0.8</b>	<b>3.01 ± 0.02</b>	<b>9.8 ± 0.1</b>	<b>50.7 ± 0.2</b>
	HKR					
	Valid CER, %	Valid WER, %	Valid ACC, %	Test CER, %	Test WER, %	Test ACC, %
base	1.72 ± 0.03	5.8 ± 0.1	91.1 ± 0.1	6.71 ± 0.18	22.5 ± 0.3	71.1 ± 0.5
aug	1.78 ± 0.03	5.8 ± 0.1	91.2 ± 0.1	6.67 ± 0.24	21.5 ± 0.3	72.2 ± 0.1
blots	1.34 ± 0.04	4.1 ± 0.2	93.7 ± 0.3	7.40 ± 0.26	23.0 ± 0.5	72.6 ± 0.4
stackmix	1.72 ± 0.05	6.1 ± 0.1	90.7 ± 0.1	3.69 ± 0.13	14.4 ± 0.4	80.0 ± 0.3
all	<b>1.32 ± 0.02</b>	<b>4.3 ± 0.1</b>	<b>93.4 ± 0.1</b>	<b>3.49 ± 0.08</b>	<b>13.0 ± 0.3</b>	<b>82.0 ± 0.5</b>
	Saint Gall					
	Valid CER, %	Valid WER, %	Valid ACC, %	Test CER, %	Test WER, %	Test ACC, %
base	4.61 ± 0.08	31.8 ± 0.6	3.0 ± 0.6	4.71 ± 0.05	32.5 ± 0.3	2.2 ± 0.5
aug	4.39 ± 0.09	30.7 ± 0.5	3.8 ± 0.5	4.49 ± 0.11	31.3 ± 0.5	3.4 ± 0.7
blots	4.12 ± 0.04	28.6 ± 0.3	5.4 ± 1.1	4.08 ± 0.03	28.1 ± 0.2	4.6 ± 1.1
stackmix	4.11 ± 0.06	29.1 ± 0.4	7.5 ± 0.9	4.06 ± 0.12	28.8 ± 0.8	6.1 ± 0.8
all	<b>3.73 ± 0.06</b>	<b>26.5 ± 0.3</b>	<b>12.0 ± 2.5</b>	<b>3.65 ± 0.11</b>	<b>26.2 ± 0.6</b>	<b>11.8 ± 2.0</b>
	Washington CV1					
	Valid CER, %	Valid WER, %	Valid ACC, %	Test CER, %	Test WER, %	Test ACC, %
base	6.20 ± 0.40	24.4 ± 1.4	19.2 ± 3.0	7.05 ± 0.58	25.1 ± 1.5	18.6 ± 2.8
aug	6.35 ± 0.68	24.3 ± 2.1	19.2 ± 3.3	6.64 ± 0.56	24.0 ± 1.2	19.1 ± 5.1
blots	3.87 ± 0.23	16.0 ± 0.8	32.6 ± 3.2	4.03 ± 0.16	14.6 ± 0.8	38.4 ± 3.1
stackmix	3.65 ± 0.07	16.4 ± 0.2	33.3 ± 1.9	5.23 ± 0.08	20.8 ± 0.7	28.6 ± 1.2
all	<b>2.54 ± 0.05</b>	<b>11.8 ± 0.2</b>	<b>42.5 ± 1.2</b>	<b>3.66 ± 0.10</b>	<b>14.4 ± 0.6</b>	<b>41.1 ± 2.1</b>

Table 4. Extended results for ICFHR 2018 Competition over READ dataset with CER/WER/ACC for valid and test partitions.

	Konzil					
	Valid CER, %	Valid WER, %	Valid ACC, %	Test CER, %	Test WER, %	Test ACC, %
base	9.40 ± 0.34	40.3 ± 2.0	26.9 ± 2.9	10.46 ± 0.48	42.6 ± 1.1	21.8 ± 2.9
aug	8.39 ± 1.29	36.4 ± 3.9	30.3 ± 2.9	10.41 ± 1.49	41.1 ± 3.0	24.4 ± 2.5
blots	5.86 ± 0.47	27.6 ± 1.5	36.5 ± 3.1	7.38 ± 0.70	31.8 ± 2.2	30.3 ± 2.5
stackmix	4.20 ± 0.39	23.9 ± 2.6	41.4 ± 4.2	5.60 ± 0.20	28.7 ± 0.4	32.4 ± 1.5
all	<b>2.85 ± 0.24</b>	<b>16.9 ± 1.0</b>	<b>48.3 ± 2.4</b>	<b>3.31 ± 0.24</b>	<b>17.4 ± 1.4</b>	<b>46.7 ± 4.1</b>
	Ricordi					
	Valid CER, %	Valid WER, %	Valid ACC, %	Test CER, %	Test WER, %	Test ACC, %
base	49.39 ± 12.46	86.3 ± 9.6	2.1 ± 2.9	50.79 ± 12.07	88.6 ± 7.7	0.0 ± 0.0
aug	18.88 ± 3.28	56.9 ± 6.1	2.1 ± 2.9	19.84 ± 2.04	58.1 ± 3.3	0.0 ± 0.0
blots	49.77 ± 16.67	84.3 ± 12.1	2.1 ± 2.9	52.59 ± 15.64	88.2 ± 9.8	0.0 ± 0.0
stackmix	10.73 ± 1.55	39.0 ± 4.0	6.3 ± 2.4	12.25 ± 0.90	40.6 ± 2.1	2.3 ± 2.2
all	<b>9.89 ± 2.75</b>	<b>36.6 ± 6.7</b>	<b>9.2 ± 5.0</b>	<b>11.54 ± 2.00</b>	<b>38.4 ± 5.7</b>	<b>3.3 ± 3.2</b>
	Schiller					
	Valid CER, %	Valid WER, %	Valid ACC, %	Test CER, %	Test WER, %	Test ACC, %
base	14.60 ± 2.04	45.7 ± 3.9	2.9 ± 2.6	17.31 ± 1.17	58.5 ± 2.5	0.0 ± 0.0
aug	14.51 ± 3.20	44.9 ± 5.7	3.8 ± 4.0	16.35 ± 1.83	54.7 ± 2.9	0.0 ± 0.0
blots	8.98 ± 0.68	32.5 ± 2.5	13.3 ± 4.0	10.98 ± 0.64	41.3 ± 1.5	1.9 ± 1.3
stackmix	6.15 ± 0.29	27.2 ± 1.3	19.1 ± 5.8	8.42 ± 0.23	35.5 ± 1.3	5.4 ± 2.1
all	<b>3.68 ± 0.39</b>	<b>17.5 ± 1.2</b>	<b>27.6 ± 2.1</b>	<b>5.79 ± 0.31</b>	<b>26.1 ± 0.8</b>	<b>16.2 ± 2.1</b>
	Schwerin					
	Valid CER, %	Valid WER, %	Valid ACC, %	Test CER, %	Test WER, %	Test ACC, %
base	7.32 ± 0.00	27.2 ± 0.0	17.6 ± 0.0	8.65 ± 0.00	30.1 ± 0.0	14.3 ± 0.0
aug	16.56 ± 4.87	46.4 ± 12.0	3.2 ± 7.2	17.98 ± 4.47	49.5 ± 9.6	5.1 ± 4.6
blots	2.26 ± 0.00	9.1 ± 0.0	63.2 ± 0.0	3.28 ± 0.00	12.6 ± 0.0	53.6 ± 0.0
stackmix	2.13 ± 0.20	8.6 ± 0.6	61.2 ± 2.2	3.09 ± 0.25	12.8 ± 1.3	52.9 ± 3.4
all	<b>1.92 ± 0.11</b>	<b>7.6 ± 0.3</b>	<b>65.0 ± 1.9</b>	<b>2.91 ± 0.08</b>	<b>12.2 ± 0.3</b>	<b>53.5 ± 0.9</b>
	Patzig					
	Valid CER, %	Valid WER, %	Valid ACC, %	Test CER, %	Test WER, %	Test ACC, %
base	37.15 ± 1.90	77.0 ± 1.9	2.6 ± 0.0	37.92 ± 1.74	79.8 ± 1.4	0.2 ± 0.4
aug	34.76 ± 4.84	75.0 ± 5.4	2.1 ± 1.2	35.32 ± 5.02	76.3 ± 3.9	0.5 ± 0.8
blots	31.25 ± 1.73	71.5 ± 2.1	3.2 ± 1.2	32.70 ± 1.81	73.0 ± 1.8	0.0 ± 0.0
stackmix	14.97 ± 0.86	42.7 ± 1.8	11.6 ± 1.4	13.72 ± 0.61	46.5 ± 1.8	7.3 ± 2.3
all	<b>12.80 ± 1.25</b>	<b>37.3 ± 3.0</b>	<b>14.5 ± 3.4</b>	<b>11.34 ± 0.39</b>	<b>38.6 ± 0.3</b>	<b>13.6 ± 1.0</b>

Table 5. Comparison to other models, test set (IAM, Bentham, HKR, Saint Gall, Digital Peter).

Model	IAM-B	
	CER, %	WER, %
18	<b>3.5</b>	<b>9.3</b>
23	4.7	-
42	4.32	16.24
20	7.99	28.61
43	7.73	25.22
44	6.64	19.6
ours	3.77	12.8
	IAM-D	
45	7.8	25.5
ours	<b>3.01</b>	<b>9.8</b>
	Digital Peter	
24	10.5	44.4
ours	<b>2.50</b>	<b>14.6</b>
	BenthamR0	
45	7.1	20.9
39	3.98	9.8
ours	<b>1.73</b>	<b>7.9</b>
	HKR	
45	4.5	19.2
ours	<b>3.49</b>	<b>13.0</b>
	Saint Gall	
45	7.25	23.0
39	5.26	<b>21.14</b>
ours	<b>3.65</b>	26.2

Table 6. Comparison to other models, test CER for ICFHR 2018 Competition over READ dataset.

Dataset	Model	
	CNN-BLSTM (bidirectional LSTM)	ours
Konzil	4.37 [4.24-4.54]	<b>3.31 ± 0.24</b>
Ricordi	<b>11.2 [10.11-11.23]</b>	11.54 ± 2.00
Schiller	9.4 [9.31-9.46]	<b>5.79 ± 0.31</b>
Schwerin	3.5 [3.46-3.53]	<b>2.91 ± 0.08</b>
Patzig	<b>10.6 [10.52-10.65]</b>	11.34 ± 0.39