Dungeons and Data: A Large-Scale NetHack Dataset

Eric Hambro* Meta AI Roberta Raileanu Meta AI **Danielle Rothermel** Meta AI Vegard Mella Meta AI

Tim Rocktäschel University College London[†] Heinrich Küttler Inflection AI[†] Naila Murray Meta AI

Abstract

Recent breakthroughs in the development of agents to solve challenging sequential decision making problems such as Go [50], StarCraft [58], or DOTA [3], have relied on both simulated environments and large-scale datasets. However, progress on this research has been hindered by the scarcity of open-sourced datasets and the prohibitive computational cost to work with them. Here we present the NetHack Learning Dataset (NLD), a large and highly-scalable dataset of trajectories from the popular game of NetHack, which is both extremely challenging for current methods and very fast to run [23]. NLD consists of three parts: 10 billion state transitions from 1.5 million human trajectories collected on the NAO public NetHack server from 2009 to 2020; 3 billion state-action-score transitions from 100,000 trajectories collected from the symbolic bot winner of the NetHack Challenge 2021; and, accompanying code for users to record, load and stream any collection of such trajectories in a highly compressed form. We evaluate a wide range of existing algorithms including online and offline RL, as well as learning from demonstrations, showing that significant research advances are needed to fully leverage large-scale datasets for challenging sequential decision making tasks.

1 Introduction

Recent progress on deep reinforcement learning (RL) methods has led to significant breakthroughs such as training autonomous agents to play Atari [33], Go [50], StarCraft [58], and Dota [3], or to perform complex robotic tasks [24, 44, 26, 35, 16, 41]. In many of these cases, success relied on having access to large-scale datasets of human demonstrations [58, 3, 41, 26]. Without access to such demonstrations, training RL agents to operate effectively in these environments remains challenging due to the hard exploration problem posed by their vast state and action spaces. In addition, having access to a simulator is key for training agents that can discover new strategies not exhibited by human demonstrations. Therefore, training agents using a combination of offline data and online interaction has proven to be a highly successful approach for solving a variety of challenging sequential decision making tasks. However, this requires access to complex simulators and large-scale offline datasets, which tend to be computationally expensive.

The NetHack Learning Environment (NLE) was recently introduced as a testbed for RL, providing an environment which is both extremely challenging [15] and exceptionally fast to simulate [23]. NLE is a stochastic, partially observed, and procedurally generated RL environment based on the popular game of NetHack. Due to its long episodes (*i.e.* tens or hundreds of thousands of steps) and large state and action spaces, NLE poses a uniquely hard exploration challenge for current RL methods. Thus, one of the most promising research avenues towards progress on NetHack is leveraging human or symbolic-bot demonstrations to bootstrap performance, which also proved successful for StarCraft [58] and Dota [3].

^{*}Correspondence to ehambro@fb.com.

[†]Work done while at Meta AI.

In this paper, we introduce the NetHack Learning Dataset (NLD), an open and accessible dataset for large-scale offline RL and learning from demonstrations. NLD consists of three parts: first, NLD-NAO: a collection of state-only trajectories from 1.5 million human games of NetHack played on nethack.alt.org (NAO) servers between 2009 and 2020; second, NLD-AA: a collection of state-action-score trajectories from 100,000 NLE games played by the symbolic-bot winner of the 2021 NetHack Challenge [15]; third, TtyrecDataset: a highly-scalable tool for efficient training on any NetHack and NLE-generated trajectories and metadata. NLD, in combination with NLE, enables computationally-accessible research in multiple areas including imitation learning, offline RL, learning from sequences of only observations, as well as combining learning from offline data with learning from online interactions. In contrast with other large-scale datasets of demonstrations, NLD is highly efficient in both memory and compute. NLD-NAO can fit on a \$30 hard drive, after being compressed (by a factor of 160) from 38TB to 229GB. In addition, NLD-NAO can be processed in under 15 hours, achieving a throughput of 288,000 frames per second with only 10 CPUs. NLD's low memory and computational requirements makes large-scale learning from demonstrations more accessible for academic and independent researchers.

To summarize, the key characteristics of NLD are that: it is a **scalable dataset of demonstrations** (*i.e.* large and cheap) for a highly-complex sequential decision making challenge; it enables **research in multiple areas** such as imitation learning, offline RL, learning from observations of demonstrations, learning from both static data and environment interaction; and it has **many properties of real-world domains** such as partial observability, stochastic dynamics, sparse reward, long trajectories, rich environment, diverse behaviors, and a procedurally generated environment.

In this paper, we make the following core contributions: (i) we introduce NLD-NAO, a large-scale dataset of almost 10 billion state transitions, from 1.5 million NetHack games played by humans; (ii) we also introduce NLD-AA, a large-scale dataset of over 3 billion state-action-score transitions, from 100,000 games played by the symbolic-bot winner of the NeurIPS 2022 NetHack Competition; (iii) we open-source code for users to record, load, and stream any collection of NetHack trajectories in a highly compressed form; and (iv) we show that, while current state-of-the-art methods in offline RL and learning from demonstrations can effectively make use of the dataset, playing NetHack at human-level performance remains an open research challenge.

2 Related Work

Offline RL Benchmarks. Recently, there has been a growing interest in developing better offline RL methods [25, 39, 11, 60, 61, 21, 20, 6, 2, 49] which aim to learn from datasets of trajectories. With it, a number of offline RL benchmarks have been released [1, 62, 10, 42, 22, 43]. While these benchmarks focus specifically on offline RL, our datasets enable research on multiple areas including imitation learning, learning from observations only (i.e. without access to actions or rewards), as well as learning from both offline and online interactions. In order to make progress on difficult RL tasks such as NetHack, we will likely need to learn from both human data and environment interaction, as was the case with other challenging games like StarCraft [58] or Dota [3]. In contrast, the tasks proposed in current offline RL benchmarks are much easier and can be solved by training either only online or only offline [10, 62]. In addition, current offline RL benchmarks test agents on the exact same environment where the data was collected. As emphasized by [57], imitation learning algorithms drastically overfit to their environments, so it is essential to evaluate them on new scenarios in order to develop robust methods. In contrast, NLE has long procedurally generated episodes which require both long-term planning and systematic generalization in order to succeed. This is shown in [30], which investigates transfer learning between policies trained on different NLE-based environments.

For many real-world applications such as autonomous driving or robotic manipulation, learning from human data is essential due to safety concerns and time constraints [40, 10, 8, 5, 27, 52, 55, 17, 38, 18]. However, most offline RL benchmarks contain synthetic trajectories generated by either random exploration, pretrained RL agents, or simple hard-coded behaviors [10]. In contrast, one of our datasets consists entirely of human replays, while the other one is generated by the winner of the NetHack Competition at NeurIPS 2022 which is a complex symbolic bot with built-in knowledge of the game. Human data (like the set contained in NLD-NAO) is significantly more diverse and messy than synthetic data, as humans can vary widely in their expertise, optimize for different objectives (such as fun or discovery), have access to external information (such as the NetHack Wiki [34]),

and even have different observation or action spaces than RL agents. Hence, learning directly from human data is essential for making progress on real-world problems in RL.

Large-Scale Human Datasets. A number of large-scale datasets of human replays have been released for StarCraft [59], Dota [3], and MineRL [14]. However, training models on these datasets requires massive computational resources, which makes it unfeasible for academic or independent researchers. In contrast, NLD strikes a better balance between scale (*i.e.* a large number of diverse human demonstrations on a complex task) and efficiency (*i.e.* cheap to use and fast to run).

For many real-world applications such as robotic manipulation, we only have access to the demonstrator's observations and not their actions [29, 48, 40, 8, 51]. Research on this setting has been slower [9, 56, 7], in part due to the lack of efficient large-scale datasets. While there are some datasets containing only observations, they are either much smaller than NLD [32, 57, 48], too computationally expensive [59, 3], or lack a simulator which prevents learning from online interactions [12, 28, 8].

3 Background: The NetHack Learning Environment

The NetHack Learning Environment (NLE) is a *gym* environment [4] based on the popular "dungeon-crawler" game, NetHack [19]. Despite the visual simplicity, NetHack is widely considered one of the hardest video games in history since it can take years for humans to win the game [54]. Players need to explore the dungeon, manage their resources, as well as learn about the many entities and their dynamics (often by relying on external knowledge sources like the NetHack Wiki [34]). NetHack has a clearly defined goal, namely descend the dungeon, retrieve an amulet, and ascend back to win the game. At the beginning of each game, players are randomly assigned a given multidimensional character defined by role, race, alignment, and gender (which have varying properties and challenges), so they need to master all characters in order to win consistently. Thus, NLE offers a unique set of properties which make it well-positioned to advance research on RL and learning from demonstrations: it is a highly complex environment, containing hundreds of entities with different dynamics; it is procedurally generated, allowing researchers to test generalization; it is partially observed, highly stochastic, and has very long episodes (*i.e.* one or two orders of magnitude longer that Starcraft II [59]).

Following its release, several works have built on NLE to leverage its complexity in different ways. MiniHack [45] allows researchers to design their own environments to test particular capabilities of RL agents, by leveraging the full set of entities and dynamics from NetHack. The NetHack Challenge [15] was a competition at NeurIPS 2021, which sought to incentivise a showdown between symbolic and deep RL methods on NLE. Symbolic bots decisively outperformed deep RL methods, with the best performing symbolic bots surpassing state-of-the-art deep RL methods by a factor of 5.

4 The NetHack Learning Dataset

The NetHack Learning Dataset (NLD) contains three components:

- 1. NLD-NAO a directory of ttyrec.bz2 files containing almost 10 billion state trajectories and metadata from 1,500,000 human games of NetHack played on nethack.alt.org.
- 2. NLD-AA a directory of ttyrec3.bz2 files containing over 3 billion state-action-score trajectories and metadata from 100,000 games collected from the winning bot of the NetHack Challenge [15].
- 3. TtyrecDataset a Python class that can scalably load directories of ttyrec.bz2 / ttyrec3.bz2 files and their metadata into numpy arrays.

We are also releasing a new version of the NetHack environment, NLE v0.9.0, which contains new features and ensures compatibility with NLD (see Appendix C).

File Format. The ttyrec³ file format stores sequences of terminal instructions (equivalent to observations in RL), along with the times at which to play them. In NLE v0.9.0, we adapt this format to also store keypress inputs to the terminal (equivalent to actions in RL), and in-game scores over time (equivalent to rewards in RL), allowing a reconstruction of state-action-score trajectories. This

³https://nethackwiki.com/wiki/Ttyrec

adapted format is known as ttyrec3. The ttyrec.bz2 and ttyrec3.bz2 formats, compressed versions of ttyrec and ttyrec3, are the primary data formats used in NLD. Using TtyrecDataset, these compressed files can be written and read on-the-fly, resulting in data compression ratios of more than 138. The files can be decompressed into the state trajectory on a terminal, by using a terminal emulator and querying its screen. For more details see Appendix D.

Throughout the paper, we refer to a player's input at a given time as either state or observation. However, note that NetHack is partially observed, so the player doesn't have access to the full state of the game. We also sometimes use the terms score and reward interchangeably, since the increment in in-game score is a natural choice for the reward used to train RL agents on NetHack. Similarly, a human's keypress corresponds to an agent's action in the game.

Metadata. NetHack has an optional built-in feature for the logging of game metadata, used for the maintenance of all-time high-score lists. At the end of a game, 26 fields of data are logged to a common xlogfile⁴ for posterity. These fields include the character's *name*, *race*, *role*, *score*, *cause of death*, *maximum dungeon depth*, and more. See Appendix E for more details on these fields. With NLE v0.9.0, an xlogfile is generated for all NLE recordings. These files are used to populate all metadata contained in NLD.

State-Action-Score Transitions. As mentioned, NLD-AA contains sequences of state-action-score transitions from symbolic-bot plays, while NLD-NAO contains sequences of state transitions from human plays. These transitions are efficiently processed using the TtyrecDataset. The states consist of: tty_chars (the characters at each point on the screen), tty_colors (the colors at each point on the screen), tty_cursor (the location of the cursor on the screen), timestamps (when the state was recorded), and gameids (an identifier for the game in question). Additionally, keypresses and score observations are available for ttyrec3 files, as in the NLD-AA dataset. The states, keypresses, and scores from NLD map directly to an agent's observations, actions, and rewards in NLE. More information about these transitions can be found in Appendix F.

API. The TtyrecDataset follows the API of an IterableDataset defined in PyTorch. This allows for the batched streaming of ttyrec.bz2 / ttyrec3.bz2 files directly into fixed NumPy arrays of a chosen shape. Episodes are read sequentially in chunks defined by the unroll length, batched with a different game per batch index. The order of these games can be shuffled, predetermined or even looped to provide a never-ending dataset. This class allows users to load any state-action-score trajectory recorded from NLE v0.9.0 onwards.

The TtyrecDataset wraps a small sqlite3 database where it stores metadata and the paths to files. This design allows for the simple querying of metadata for any game, along with the dynamic subselection of games streamed from the TtyrecDataset itself. For example, in Figure 1, we generate sub-datasets from NLD-NAO and NLD-AA, selecting trajectories where the player has completed the game ('Ascended') or played a 'Human Monk' character, respectively. Appendix G shows how to load only a subset of trajectories, for example where the player has ascended, or a certain role has been used.

Scalability. The TtyrecDataset is designed to make our large-scale NLD datasets accessible even when the computational resources are limited. To that end, several optimizations are made to improve the memory efficiency and throughput of the data. Most notably, TtyrecDataset streams recordings directly from their compressed ttyrec.bz2 files. This format compresses the 30TB of frame data included in NLD-NAO down to 229GB, which can fit on a \$30 SSD⁵. This decompression requires on-the-fly unzipping and terminal emulation. The TtyrecDataset performs these in GIL-released C/C++. This process is fast and trivially parallelizable with Python Threadpool, resulting in throughputs of over 1.7 GB/s on 80 CPUs. This performance allows the processing of almost 10 billion frames of NLD-NAO in 15 hours, with 10 CPUs. See Table 1 for a quantitative description of our two datasets.

5 Dataset Analysis

In this section we perform an in-depth analysis of the characteristics of NLD-AA and NLD-NAO.

⁴https://nethackwiki.com/wiki/Xlogfile

⁵https://www.amazon.com/HP-240GB-Internal-Solid-State/dp/B09KFHTYWH

Table 1: NLD-AA and NLD-NAO in numbers.

	NLD-AA	NLD-NAO
Episodes Transitions Policies (Players) Policies Type Transition	109,545 3,481,605,009 1 symbolic bot (state, action, score)	1,511,228 9,858,127,896 48,454 human state
Disk Size (Compressed) Data Size (Uncompressed) Compression Ratio	96.7 GB 13.4 TB 138	229 GB 38.0 TB 166
Mean Epsiode Score Median Episode Score Median Episode Transitions Median Episode Game Turns	10,105 5,422 28,181 20,414	127,218 836 1,724.0 3,766
Epoch Time (10 CPUs)	4h 49m	14h 37m

5.1 NLD-AA

To our knowledge, AutoAscend⁶ is currently the best open-sourced artificial agent for playing NetHack 3.6.6, having achieved first place in the 2021 NeurIPS NetHack Challenge by a considerable margin [15]. AutoAscend is a symbolic bot, forgoing any neural network and instead relying on a priority list of hard-coded subroutines. These subroutines are complex, context dependant, and make significant use of NetHack domain knowledge and all NetHack actions. For instances, the bot keeps track of multiple properties for encountered entities and can even solve challenging puzzles such as Sokoban. A full description of AutoAscend's algorithm and behavior can be found in the NetHack Challenge Report [15].

NLD-AA was generated by running AutoAscend on the NetHackChallenge-v0 [15] task in NLE v0.9.0, utilising its built-in recording feature to generate ttyrec3.bz2 files. It consists of over 3 billion state-action-score transitions, drawn from 100,000 episodes generated by AutoAscend. Of the NLE tasks, NetHackChallenge-v0 most closely reproduces the full game of NetHack 3.6.6, and was introduced in NLE v0.7.0 to grant NetHack Challenge competitors access to the widest possible action space, and force an automated randomisation of the starting character (by race, role, alignment, and gender). By virtue of using ttyrec3.bz2 files, in-game scores and actions (in the form of keypresses) are stored along with the states, and metadata about the episodes.

Dataset Skill. The AutoAscend trajectories demonstrate a strong and reliable NetHack player, far exceeding all the deep learning based approaches, but still falling short of an expert human player. NetHack broadly defines a character with less than 2000 score as a 'Beginner'. AutoAscend comfortably surpasses the 'Beginner' classification in more than 75% of games for all roles, and in 95% of games for easier roles like Monk (see Figure 1). Given the high variance nature of NetHack games, and the challenge of playing with the more difficult roles, this is an impressive feat.

Compared to the human players in NLD-NAO, AutoAscend's policy finds itself just within the top 15% of all players when ranked by mean score. When ranked by median score⁸ it comes within the top 7%. However, these metrics are somewhat distorted by the long tail of dilettante players who played only a few games. If instead we define a 'competent' human player as one to have *ever* advanced beyond the Beginner classification, then AutoAscend ranks in the top 33% of players by mean score, and top 15% by median.

The competence of AutoAscend contrasts both with the poor performance of deep RL bots, and with the exceptional performance required to beat the game. As the winning symbolic bot of the NetHack Challenge, AutoAscend beat the winning deep learning bot by almost a factor of 3 in median score, and close to a factor of 5 in mean score. This performance is far outside what deep RL agents can currently achieve, and in some domains NLD-AA may be considered an "expert" dataset. However,

⁶https://github.com/maciej-sypetkowski/autoascend

⁷https://nethackwiki.com/wiki/Beginner

⁸Median score was the primary metric in the NetHack Challenge




Figure 1: Box plots of episode scores (left) and episode turns (right) for NLD-NAO and NLD-AA as well as for their corresponding subsets that contain only winning games ('Ascended') or games played with a 'Human Monk' character, respectively. These plots show the distribution in ability in NLD-NAO is heavy-tailed, along with the typical scores and game length needed to win, well above the median. By comparison, NLD-AA games are competent but not expert, even for easy characters like 'Human Monk'.

when compared to the distribution of winning games (*i.e.* those that have 'ascended'), both mean and median score are orders of magnitude short.

Dataset Coverage. Thanks to its scale, NLD-AA provides solid coverage of the early-to-mid game of NetHack. NLD-AA also provides good coverage of all possible actions and roles, with episodes that last for tens of thousands of transitions. Nevertheless, the dataset contains many complex and diverse behaviors. For the full breakdown of the symbolic bot's behaviors found in NLD-AA see Appendix E.

Datasest Noise. Since all trajectories were generated using NLE, these trajectories have no terminal rendering noise. NLE uses a VT100 emulator to record ttyrec3.bz2 files, and NLD uses the same emulator to load them.

5.2 NLD-NAO

The NetHack community has a long history of using public servers, wherein players can play together, stream and rewatch games of NetHack.⁹. The nethack.alt.org server, known as NAO¹⁰, is one of the longest running of such servers, having started in 2001, and hosts recordings dating back to 2009. The server attempts to record all games in ttyrec.bz2 format, and hosts them publicly on an S3 bucket¹¹. Unlike NLE, NAO offers players the option of saving a game and resuming play later, allowing for games that span multiple sessions, or last potentially days, weeks, months or years.

NLD-NAO was collected by downloading and filtering a dump of ttyrec.bz2 recordings and metadata from NAO. It consists of almost 10 billion state transitions, drawn from approximately 1.5 million games played by just under 50,000 humans of mixed ability. These games were played between 2009 and 2020, and span NetHack versions v3.4.0 to 3.6.6. Since NAO provides no link between episode metadata and available ttyrec recordings, we developed an algorithm to assign and correctly order ttyrec recordings to their corresponding episode metadata, and to filter out trivial or empty games. The full procedure is outlined in Appendix H.

Dataset Skill. The NAO trajectories were generated from humans of very different skill levels, ranging from novice to expert, and cover a vast distribution of outcomes. The distributions of episode scores, episode turns, and average player scores are highly Zipfian, with long correlated tails spanning several orders of magnitude. The correlation of these distributions greatly improves the quality of the dataset. While the median episode score does not progress beyond Beginner status, such short episodes contribute relatively few transitions to the overall dataset. The bulk of the transitions comes from medium-to-high scoring games that last a long time. The NLD-NAO dataset therefore combines two desirable properties: it contains a large number of diverse behaviors with varying levels of performance, as well as many good trajectories from expert demonstrators.

Dataset Coverage. Thanks to its size and expert policies, NLD-NAO provides an unparalleled coverage of the game of NetHack. The dataset contains many examples of advanced game sections not yet achievable by symbolic or RL bots, such as descending the dungeon and retrieving the amulet. Most importantly, it includes 22,000 examples of winning the game ("Ascension"), and includes several

⁹https://nethackwiki.com/wiki/Public_server

¹⁰https://nethackwiki.com/wiki/Nethack.alt.org

¹¹s3://altorg/ttyrec/

examples of doing so with special conducts such as "Nudist" (not wearing any armour). The full distribution of such achievements and conducts can be found in Appendix E.

Dataset Noise. Unlike NLE, NAO does not enforce any fixed terminal type on the player, nor any fixed screen dimensions or configuration. Variations in all these can lead to rendering noise that may include odd symbols or cropped layouts. These types of artefacts are common in real-world applications of learning from demonstrations, which makes NLD a suitable dataset for advancing research in this area. More details about these artefacts, as well as other types of noise (*e.g.* matching of recordings to players), see Appendix H.

6 Experiments

6.1 Methods

We demonstrate the utility and challenge of NLD by evaluating algorithms from a range of fields including online RL, offline RL, imitation learning, and learning from demonstrations.

All methods are implemented using the open-source asynchronous RL library moolib [31], allowing for continual evaluation of agents in order to generate training curves (even in the offline RL setting). In addition, all our methods use the same core model architecture, which is based on a popular open-source Sample Factory baseline¹², adapted to only use tty_* observations but still remain fast to run. Unless specified otherwise, all experiments were evaluated with 1024 episodes from NLE's NetHackChallenge-v0 task after training for 1.5B frames. The mean and standard deviation of the episode return was computed over 10 training seeds. Full details about the algorithms and their hyperparameters can be found in Appendix I. All our implementations will be open-sourced to enable fast research progress.

Online RL. For online RL baselines that do not make use of the NLD datasets, we use Asynchronous Proximal Policy Optimization (APPO) [47, 37] and Deep Q-Networks (DQN-Online). The former is a strong on-policy policy-gradient-based method for NLE, and the latter is a popular off-policy value-based method in the wider literature.

Offline RL. Since NLD-AA contains state-action-reward transitions, we can train a number of offline RL baselines on it. More specifically, we use a Deep Q-Network baseline trained on the dataset (DQN-Offline), as well as two state-of-the-art offline RL methods, Conservative Q-Learning (CQL) [21] and Implicit Q-Learning (IQL) [20]. Note that these methods cannot be trained on NLD-NAO since it doesn't contain actions or rewards.

Learning from Demonstrations. We also evaluate a number of baselines that do not make use of rewards, but instead use state-action or state-only transitions. For NLD-AA, we use Behavioural Cloning (BC), a popular imitation learning method, which trains a policy to match the corresponding actions in the dataset using a supervised learning objective. For NLD-NAO, we use Behavioral Cloning from Observations (BCO) [56] which is a popular baseline for learning from state-only demonstrations. This method performs BC on a learned inverse dynamics model which was trained to predict the action taken given two consecutive states. We then investigate the use of BC and BCO in an online setting by augmenting our APPO baseline in two ways. First, we add the BC or BCO loss between the agent's policy and the expert's action for observations in the dataset resulting in APPO + BC and APPO + BCO respectively. Second, we add a KL-divergence loss between the agent's policy and a pretrained BC(O) model resulting in Kickstarting BC(O), similar to [46]. These methods make use of state and action data but no rewards.

For NLD-AA, we investigate the performance of the above algorithms across two partitions: one with a single character ('Human Monk'), and one with all the characters (*i.e.* the full dataset). Each of these is evaluated on their corresponding environments. Full details about our experimental setup are available in Appendix I.

6.2 Results and Discussion

As Table 2 and Figure 2 show, NLD-AA poses a difficult challenge to modern offline RL algorithms. While CQL is able to use the offline trajectories to outperform both a random policy, IQL, as well as

¹²https://github.com/Miffyli/nle-sample-factory-baseline

Table 2: Average episode return across 10 seeds for a number of popular baselines using NLD and / or NLE. First, we evaluate a range of offline RL methods such as DQN-Offline, CQL, IQL and BC trained on NLD-AA and NLD-AA-Monk, as well as BCO trained on NLD-NAO. Second, we evaluate methods that combine offline and online learning such as Kickstarting + BC and APPO + BC trained on NLD-AA and NLD-AA-Monk, as well as Kickstarting + BCO and APPO + BCO trained on NLD-NAO. Finally, we evaluate a few methods that only have access to online interactions from NLE (no external datasets) such as a Random Policy, DQN-Online, and APPO. All evaluations are conducted with NLE's NetHackChallenge-vO task, using Random (@) characters for NLD-AA and NLD-NAO, and a Human Monk character for NLD-AA-Monk. We compare all these to the average episode return in the corresponding datasets. Methods that use both offline and online data outperform all others by a wide margin, but are still significantly worse than humans (by almost two orders of magnitude) and even the symbolic bot (by more than a factor of three). The top online algorithm, APPO, outperforms the top offline approach, BC. These results indicate that NLD poses a substantial challenge to state-of-the-art methods.

Random Policy DQN-Online APPO	0.0 ± 0.0 89 ± 46 868 ± 200	0.1 ± 0.3 130 ± 150 2046 \pm 360	(see col 1) (see col 1) (see col 1)
-		*** = ***	` '
Random Policy	0.0 ± 0.0	0.1 ± 0.3	(see col 1)
APPO + BC(O)	1282 ± 275	2809 ± 324	884 ± 117
Kickstarting + BC(O) APPO + BC(O)	962 ± 158	2090 ± 388	245 ± 125
BC(O)	554 ± 142	1058 ± 503	5.4 ± 2.7
	160 ± 70	201 ± 84	-
CQL	33 ± 70	56 ± 89	-
DQN-Offline	0.0 ± 0.0	0.0 ± 0.0	-
Character	Random	Human Monk	Random
	NLD-AA	NLD-AA-Monk	NLD-NAO
	CQL IQL BC(O)	Character Random DQN-Offline 0.0 ± 0.0 CQL 33 ± 70 IQL 160 ± 70 BC(O) 554 ± 142	Character Random Human Monk DQN-Offline 0.0 ± 0.0 0.0 ± 0.0 CQL 33 ± 70 56 ± 89 IQL 160 ± 70 201 ± 84 BC(O) 554 ± 142 1058 ± 503

online and offline variants of DQN, it falls short of capturing the average performance of trajectories in the dataset by over an order of magnitude. BC performs better due to the higher quality of the supervised learning signal, which is typically denser and less noisy than the RL one, but it too falls well short of the data generating policy. Prior work has shown that offline RL methods struggle to perform well in stochastic environments [36], and to generalize outside the distribution of state-action pairs in the dataset [13]. These challenges are particularly intensified with NLD, which is highly stochastic, partially observed, procedurally generated, and has a very large state and action space.

Methods that combine offline and online training such as Kickstarting + BC(O) or APPO + BC(O) outperform offline-only methods and outperform or match online-only methods, while also speeding up training. Despite being our best method, APPO + BC is still significantly worse than the average performance in the dataset, further emphasizing the difficulty of NLD.

Finally, our results demonstrate the utility of NLD-NAO while highlighting the challenge of learning from sequences of only observations. Our inverse model is trained with trajectories from a random policy, and therefore experiences an extremely small fraction of the entire state-action space. Even so, BCO on NLD-NAO labeled with these actions is able to yield performance that comfortably exceeds that of a random policy. While APPO + BCO performs similarly to APPO, training appears to be much more stable. Thus, using more sophisticated policies for training the inverse model (*e.g.* a mix between a pretrained RL policy and a random policy or an exploration method that maximizes the diversity of visited states and actions) could further improve performance.

7 Conclusion

In this paper, we introduce NLD, a large-scale dataset of demonstrations from NetHack, a complex, stochastic, partially observed, procedurally generated video game. NLD enables research in multiple areas such as imitation learning, offline RL, learning from sequences of observations, and learning from both offline data and online interactions. NLD allows researchers to learn from very large datasets of demonstrations without requiring extensive memory or compute resources. We train a number of

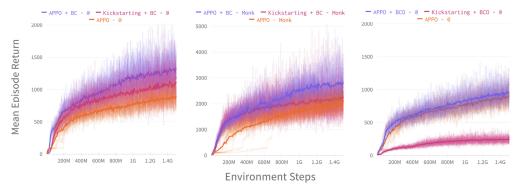


Figure 2: Mean episode return (with samples plotted) over 10 seeds during training for APPO, APPO + BC(O), and Kickstarting + BC(O) using NLD-AA (left), NLD-AA-Monk (center), and NLD-NAO (right). NLD-AA and NLD-NAO both are evaluated with Random character (②), while NLD-AA-Monk is evaluated with only the Human Monk character. Some sample curves associated with the pure online APPO methods exhibit a behaviour wherein performance appears to plateau, before bursting rapidly to a new performance level. This is a common pattern in NLE and corresponds to an agent learning a new behaviour that greatly unlocks yet more of the game, such as praying when starving or kicking down locked doors. Since NLE is highly procedurally generated with a vast action and state space, it is hard to predict when an agent will encounter sufficient opportunities to "take off" in this way. Such "taking off" phenomena are less visible when learning from NLD, as useful behaviours are present in the data throughout.

state-of-the-art methods in online RL (both on-policy and off-policy), offline RL, imitation learning, as well as learning from observation-only sequences. Our results indicate that significant research advances are needed to fully leverage large-scale datasets in order to solve challenging sequential decision making problems.

In many real-world applications such as robotics, it is common to have access to datasets of observations, without corresponding actions or rewards. Thus, one important direction for future research is to learn from trajectories containing only observations. NLD enables this type of research in a safe, cheap, fast, and reproducible environment, while still exhibiting many properties of real-world domains such as partial observability, high stochasticity, and long episodes. Due to NetHack being procedurally generated, in order to consistently win the game, an agent needs to learn a robust policy that generalizes to new scenarios. Our strongest baseline learns from both static data and environment interaction, so a promising avenue for future work is to develop more effective methods that combine offline and online learning. Existing algorithms for offline RL and learning from demonstrations struggle to match the average performance of trajectories in our datasets, suggesting that NLD is a good benchmark to probe the limits of these methods and inspire the development of approaches that are effective in more challenging and realistic domains.

8 Acknowledgements

We would like to thank Drew Streib and the NAO maintainers for their work in the NetHack community and their help throughout this project. We would also like to thank Michał Sypetkowski and Maciej Sypetkowski for their work on the AutoAscend bot.

References

- [1] Rishabh Agarwal, Dale Schuurmans, and Mohammad Norouzi. Striving for simplicity in off-policy deep reinforcement learning. *ArXiv*, abs/1907.04543, 2019.
- [2] Rishabh Agarwal, Dale Schuurmans, and Mohammad Norouzi. An optimistic perspective on offline reinforcement learning. In *ICML*, 2020.
- [3] Christopher Berner, Greg Brockman, Brooke Chan, Vicki Cheung, Przemyslaw Debiak, Christy Dennison, David Farhi, Quirin Fischer, Shariq Hashme, Christopher Hesse, Rafal Józefowicz, Scott Gray, Catherine Olsson, Jakub W. Pachocki, Michael Petrov, Henrique Pondé

- de Oliveira Pinto, Jonathan Raiman, Tim Salimans, Jeremy Schlatter, Jonas Schneider, Szymon Sidor, Ilya Sutskever, Jie Tang, Filip Wolski, and Susan Zhang. Dota 2 with large scale deep reinforcement learning. *ArXiv*, abs/1912.06680, 2019.
- [4] Greg Brockman, Vicki Cheung, Ludwig Pettersson, Jonas Schneider, John Schulman, Jie Tang, and Wojciech Zaremba. Openai gym. *arXiv preprint arXiv:1606.01540*, 2016.
- [5] Serkan Cabi, Sergio Gomez Colmenarejo, Alexander Novikov, Ksenia Konyushkova, Scott E. Reed, Rae Jeong, Konrad Zolna, Yusuf Aytar, David Budden, Mel Vecerík, Oleg O. Sushkov, David Barker, Jonathan Scholz, Misha Denil, Nando de Freitas, and Ziyun Wang. A framework for data-driven robotics. *ArXiv*, abs/1909.12200, 2019.
- [6] Ching-An Cheng, Tengyang Xie, Nan Jiang, and Alekh Agarwal. Adversarially trained actor critic for offline reinforcement learning. *ArXiv*, abs/2202.02446, 2022.
- [7] Samuel Cohen, Brandon Amos, Marc Peter Deisenroth, Mikael Henaff, Eugene Vinitsky, and Denis Yarats. Imitation learning from pixel observations for continuous control. In *Deep RL Workshop NeurIPS* 2021, 2021.
- [8] Sudeep Dasari, Frederik Ebert, Stephen Tian, Suraj Nair, Bernadette Bucher, Karl Schmeckpeper, Siddharth Singh, Sergey Levine, and Chelsea Finn. Robonet: Large-scale multi-robot learning. *ArXiv*, abs/1910.11215, 2019.
- [9] Ashley D. Edwards, Himanshu Sahni, Yannick Schroecker, and Charles Lee Isbell. Imitating latent policies from observation. *ArXiv*, abs/1805.07914, 2019.
- [10] Justin Fu, Aviral Kumar, Ofir Nachum, G. Tucker, and Sergey Levine. D4rl: Datasets for deep data-driven reinforcement learning. *ArXiv*, abs/2004.07219, 2020.
- [11] Scott Fujimoto, David Meger, and Doina Precup. Off-policy deep reinforcement learning without exploration. In *ICML*, 2019.
- [12] Andreas Geiger, Philip Lenz, Christoph Stiller, and Raquel Urtasun. Vision meets robotics: The kitti dataset. *The International Journal of Robotics Research*, 32:1231 1237, 2013.
- [13] Caglar Gulcehre, Sergio Gómez Colmenarejo, Jakub Sygnowski, Thomas Paine, Konrad Zolna, Yutian Chen, Matthew Hoffman, Razvan Pascanu, Nando de Freitas, et al. Addressing extrapolation error in deep offline reinforcement learning. 2020.
- [14] William H. Guss, Brandon Houghton, Nicholay Topin, Phillip Wang, Cayden Codel, Manuela M. Veloso, and Ruslan Salakhutdinov. Minerl: A large-scale dataset of minecraft demonstrations. *ArXiv*, abs/1907.13440, 2019.
- [15] Eric Hambro, Sharada Mohanty, Dmitrii Babaev, Minwoo Byeon, Dipam Chakraborty, Edward Grefenstette, Minqi Jiang, Daejin Jo, Anssi Kanervisto, Jongmin Kim, et al. Insights from the neurips 2021 nethack challenge. *arXiv preprint arXiv:2203.11889*, 2022.
- [16] Nicolas Manfred Otto Heess, TB Dhruva, Srinivasan Sriram, Jay Lemmon, Josh Merel, Greg Wayne, Yuval Tassa, Tom Erez, Ziyun Wang, S. M. Ali Eslami, Martin A. Riedmiller, and David Silver. Emergence of locomotion behaviours in rich environments. *ArXiv*, abs/1707.02286, 2017.
- [17] James Henderson, Oliver Lemon, and Kallirroi Georgila. Hybrid reinforcement/supervised learning of dialogue policies from fixed data sets. *Computational Linguistics*, 34:487–511, 2008.
- [18] Natasha Jaques, Asma Ghandeharioun, Judy Hanwen Shen, Craig Ferguson, Agata Lapedriza, Noah J. Jones, Shixiang Shane Gu, and Rosalind W. Picard. Way off-policy batch deep reinforcement learning of implicit human preferences in dialog. ArXiv, abs/1907.00456, 2019.
- [19] Kenneth Lorber. NetHack Home Page. https://nethack.org, 2020. Accessed: 2020-05-30.
- [20] Ilya Kostrikov, Ashvin Nair, and Sergey Levine. Offline reinforcement learning with implicit q-learning. *ArXiv*, abs/2110.06169, 2021.
- [21] Aviral Kumar, Aurick Zhou, G. Tucker, and Sergey Levine. Conservative q-learning for offline reinforcement learning. *ArXiv*, abs/2006.04779, 2020.
- [22] Vitaly Kurin, Sebastian Nowozin, Katja Hofmann, Lucas Beyer, and B. Leibe. The atari grand challenge dataset. *ArXiv*, abs/1705.10998, 2017.

- [23] Heinrich Kuttler, Nantas Nardelli, Alexander H. Miller, Roberta Raileanu, Marco Selvatici, Edward Grefenstette, and Tim Rocktäschel. The nethack learning environment. ArXiv, abs/2006.13760, 2020.
- [24] Joonho Lee, Jemin Hwangbo, Lorenz Wellhausen, Vladlen Koltun, and Marco Hutter. Learning quadrupedal locomotion over challenging terrain. Science Robotics, 5, 2020.
- [25] Sergey Levine, Aviral Kumar, G. Tucker, and Justin Fu. Offline reinforcement learning: Tutorial, review, and perspectives on open problems. ArXiv, abs/2005.01643, 2020.
- [26] Sergey Levine, Peter Pastor, Alex Krizhevsky, and Deirdre Quillen. Learning hand-eye coordination for robotic grasping with deep learning and large-scale data collection. *The International Journal of Robotics Research*, 37:421 436, 2018.
- [27] Lihong Li, Wei Chu, John Langford, and Robert E. Schapire. A contextual-bandit approach to personalized news article recommendation. *ArXiv*, abs/1003.0146, 2010.
- [28] Jeffrey Mahler, Matthew Matl, Vishal Satish, Michael Danielczuk, Bill DeRose, Stephen McKinley, and Ken Goldberg. Learning ambidextrous robot grasping policies. *Science Robotics*, 4, 2019.
- [29] Ajay Mandlekar, Danfei Xu, J. Wong, Soroush Nasiriany, Chen Wang, Rohun Kulkarni, Li Fei-Fei, Silvio Savarese, Yuke Zhu, and Roberto Mart'in-Mart'in. What matters in learning from offline human demonstrations for robot manipulation. *ArXiv*, abs/2108.03298, 2021.
- [30] Michael Matthews, Mikayel Samvelyan, Jack Parker-Holder, Edward Grefenstette, and Tim Rocktäschel. Hierarchical kickstarting for skill transfer in reinforcement learning, 2022.
- [31] Vegard Mella, Eric Hambro, Danielle Rothermel, and Heinrich Küttler. moolib: A Platform for Distributed RL. 2022.
- [32] Raphael Memmesheimer, Ivanna Mykhalchyshyna, Viktor Seib, and Dietrich Paulus. Simitate: A hybrid imitation learning benchmark. 2019 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS), pages 5243–5249, 2019.
- [33] Volodymyr Mnih, Koray Kavukcuoglu, David Silver, Alex Graves, Ioannis Antonoglou, Daan Wierstra, and Martin A. Riedmiller. Playing atari with deep reinforcement learning. *ArXiv*, abs/1312.5602, 2013.
- [34] NetHack Wiki. NetHackWiki. https://nethackwiki.com/, 2020. Accessed: 2020-02-01.
- [35] OpenAI, Ilge Akkaya, Marcin Andrychowicz, Maciek Chociej, Mateusz Litwin, Bob McGrew, Arthur Petron, Alex Paino, Matthias Plappert, Glenn Powell, Raphael Ribas, Jonas Schneider, Nikolas A. Tezak, Jerry Tworek, Peter Welinder, Lilian Weng, Qiming Yuan, Wojciech Zaremba, and Lei M. Zhang. Solving rubik's cube with a robot hand. *ArXiv*, abs/1910.07113, 2019.
- [36] Keiran Paster, Sheila McIlraith, and Jimmy Ba. You can't count on luck: Why decision transformers fail in stochastic environments. *arXiv preprint arXiv:2205.15967*, 2022.
- [37] Aleksei Petrenko, Zhehui Huang, Tushar Kumar, Gaurav Sukhatme, and Vladlen Koltun. Sample factory: Egocentric 3d control from pixels at 100000 fps with asynchronous reinforcement learning. In *International Conference on Machine Learning*, pages 7652–7662. PMLR, 2020.
- [38] Olivier Pietquin, Matthieu Geist, Senthilkumar Chandramohan, and Hervé Frezza-Buet. Sample-efficient batch reinforcement learning for dialogue management optimization. *ACM Trans. Speech Lang. Process.*, 7:7:1–7:21, 2011.
- [39] Rafael Figueiredo Prudencio, Marcos R.O.A. Maximo, and Esther Luna Colombini. A survey on offline reinforcement learning: Taxonomy, review, and open problems. *ArXiv*, abs/2203.01387, 2022.
- [40] Rongjun Qin, Songyi Gao, Xingyuan Zhang, Zhen Xu, Shengkai Huang, Zewen Li, Weinan Zhang, and Yang Yu. Neorl: A near real-world benchmark for offline reinforcement learning. *ArXiv*, abs/2102.00714, 2021.
- [41] Aravind Rajeswaran, Vikash Kumar, Abhishek Gupta, John Schulman, Emanuel Todorov, and Sergey Levine. Learning complex dexterous manipulation with deep reinforcement learning and demonstrations. *ArXiv*, abs/1709.10087, 2018.
- [42] Sabela Ramos, Sertan Girgin, L'eonard Hussenot, Damien Vincent, Hanna Yakubovich, Daniel Toyama, Anita Gergely, Piotr Stanczyk, Raphaël Marinier, Jeremiah Harmsen, Olivier Pietquin,

- and Nikola Momchev. Rlds: an ecosystem to generate, share and use datasets in reinforcement learning. *ArXiv*, abs/2111.02767, 2021.
- [43] Stéphane Ross, Geoffrey J. Gordon, and J. Andrew Bagnell. A reduction of imitation learning and structured prediction to no-regret online learning. In *AISTATS*, 2011.
- [44] Andrei A. Rusu, Matej Vecerík, Thomas Rothörl, Nicolas Manfred Otto Heess, Razvan Pascanu, and Raia Hadsell. Sim-to-real robot learning from pixels with progressive nets. *ArXiv*, abs/1610.04286, 2017.
- [45] Mikayel Samvelyan, Robert Kirk, Vitaly Kurin, Jack Parker-Holder, Minqi Jiang, Eric Hambro, Fabio Petroni, Heinrich Küttler, Edward Grefenstette, and Tim Rocktäschel. Minihack the planet: A sandbox for open-ended reinforcement learning research. arXiv preprint arXiv:2109.13202, 2021.
- [46] Simon Schmitt, Jonathan J. Hudson, Augustin Zídek, Simon Osindero, Carl Doersch, Wojciech M. Czarnecki, Joel Z. Leibo, Heinrich Küttler, Andrew Zisserman, Karen Simonyan, and S. M. Ali Eslami. Kickstarting deep reinforcement learning. *ArXiv*, abs/1803.03835, 2018.
- [47] John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal policy optimization algorithms. *arXiv preprint arXiv:1707.06347*, 2017.
- [48] Pratyusha Sharma, Lekha Mohan, Lerrel Pinto, and Abhinav Kumar Gupta. Multiple interactions made easy (mime): Large scale demonstrations data for imitation. In *CoRL*, 2018.
- [49] Noah Siegel, Jost Tobias Springenberg, Felix Berkenkamp, Abbas Abdolmaleki, Michael Neunert, Thomas Lampe, Roland Hafner, and Martin A. Riedmiller. Keep doing what worked: Behavioral modelling priors for offline reinforcement learning. *ArXiv*, abs/2002.08396, 2020.
- [50] David Silver, Aja Huang, Chris J Maddison, Arthur Guez, Laurent Sifre, George Van Den Driessche, Julian Schrittwieser, Ioannis Antonoglou, Veda Panneershelvam, Marc Lanctot, et al. Mastering the game of go with deep neural networks and tree search. *nature*, 529(7587):484–489, 2016.
- [51] Bradly C. Stadie, P. Abbeel, and Ilya Sutskever. Third-person imitation learning. ArXiv, abs/1703.01703, 2017.
- [52] Alexander L. Strehl, John Langford, Lihong Li, and Sham M. Kakade. Learning from logged implicit exploration data. In NIPS, 2010.
- [53] Michita Imai Takuma Seno. d3rlpy: An offline deep reinforcement library. In *NeurIPS 2021 Offline Reinforcement Learning Workshop*, December 2021.
- [54] The Telegraph. The 25 hardest video games ever. 2021. Accessed: 2021-05-05.
- [55] Philip S. Thomas, Georgios Theocharous, Mohammad Ghavamzadeh, Ishan Durugkar, and Emma Brunskill. Predictive off-policy policy evaluation for nonstationary decision problems, with applications to digital marketing. In *AAAI*, 2017.
- [56] Faraz Torabi, Garrett Warnell, and Peter Stone. Behavioral cloning from observation. *ArXiv*, abs/1805.01954, 2018.
- [57] Sam Toyer, Rohin Shah, Andrew Critch, and Stuart J. Russell. The magical benchmark for robust imitation. *ArXiv*, abs/2011.00401, 2020.
- [58] Oriol Vinyals, Igor Babuschkin, Wojciech M. Czarnecki, Michaël Mathieu, Andrew Dudzik, Junyoung Chung, David H. Choi, Richard Powell, Timo Ewalds, Petko Georgiev, Junhyuk Oh, Dan Horgan, Manuel Kroiss, Ivo Danihelka, Aja Huang, L. Sifre, Trevor Cai, John P. Agapiou, Max Jaderberg, Alexander Sasha Vezhnevets, Rémi Leblond, Tobias Pohlen, Valentin Dalibard, David Budden, Yury Sulsky, James Molloy, Tom Le Paine, Caglar Gulcehre, Ziyun Wang, Tobias Pfaff, Yuhuai Wu, Roman Ring, Dani Yogatama, Dario Wünsch, Katrina McKinney, Oliver Smith, Tom Schaul, Timothy P. Lillicrap, Koray Kavukcuoglu, Demis Hassabis, Chris Apps, and David Silver. Grandmaster level in starcraft ii using multi-agent reinforcement learning. *Nature*, pages 1–5, 2019.
- [59] Oriol Vinyals, Timo Ewalds, Sergey Bartunov, Petko Georgiev, Alexander Sasha Vezhnevets, Michelle Yeo, Alireza Makhzani, Heinrich Küttler, John P. Agapiou, Julian Schrittwieser, John Quan, Stephen Gaffney, Stig Petersen, Karen Simonyan, Tom Schaul, H. V. Hasselt, David Silver, Timothy P. Lillicrap, Kevin Calderone, Paul Keet, Anthony Brunasso, David Lawrence, Anders Ekermo, Jacob Repp, and Rodney Tsing. Starcraft ii: A new challenge for reinforcement learning. *ArXiv*, abs/1708.04782, 2017.

- [60] Yifan Wu, G. Tucker, and Ofir Nachum. Behavior regularized offline reinforcement learning. ArXiv, abs/1911.11361, 2019.
- [61] Chi Zhang, Sanmukh Rao Kuppannagari, and Viktor K. Prasanna. Brac+: Improved behavior regularized actor critic for offline reinforcement learning. In *ACML*, 2021.
- [62] Çaglar Gülçehre, Ziyun Wang, Alexander Novikov, Tom Le Paine, Sergio Gomez Colmenarejo, Konrad Zolna, Rishabh Agarwal, Josh Merel, Daniel Jaymin Mankowitz, Cosmin Paduraru, Gabriel Dulac-Arnold, Jerry Zheng Li, Mohammad Norouzi, Matthew D. Hoffman, Nicolas Manfred Otto Heess, and Nando de Freitas. Rl unplugged: A collection of benchmarks for offline reinforcement learning. In *NeurIPS*, 2020.

9 Checklist

- 1. For all authors...
 - (a) Do the main claims made in the abstract and introduction accurately reflect the paper's contributions and scope? [Yes]
 - (b) Did you describe the limitations of your work? [Yes] See Appendix K.
 - (c) Did you discuss any potential negative societal impacts of your work? [Yes] . See Appendix L.
 - (d) Have you read the ethics review guidelines and ensured that your paper conforms to them? [Yes]
- 2. If you are including theoretical results...
 - (a) Did you state the full set of assumptions of all theoretical results? [N/A]
 - (b) Did you include complete proofs of all theoretical results? [N/A]
- 3. If you ran experiments (e.g. for benchmarks)...
 - (a) Did you include the code, data, and instructions needed to reproduce the main experimental results (either in the supplemental material or as a URL)? [Yes] Code will be supplied with the dataset at the link provided in Appendix A.
 - (b) Did you specify all the training details (e.g., data splits, hyperparameters, how they were chosen)? [Yes] See Appendix I
 - (c) Did you report error bars (e.g., with respect to the random seed after running experiments multiple times)? [Yes] We report standard deviations across seeds for all results.
 - (d) Did you include the total amount of compute and the type of resources used (e.g., type of GPUs, internal cluster, or cloud provider)? [Yes] See Appendix I
- 4. If you are using existing assets (e.g., code, data, models) or curating/releasing new assets...
 - (a) If your work uses existing assets, did you cite the creators? [Yes] Although we do not use "assets" per se, we do cite the bot AutoAscend by linking to it and citing the author's own write up in the NetHack Challenge report.[15]
 - (b) Did you mention the license of the assets? [Yes] We mention the license of the dataset (same as NLE) in Appendix B
 - (c) Did you include any new assets either in the supplemental material or as a URL? [Yes] This is a dataset paper, so the 'assets' are the data, which is of course linked to in Appendix A.
 - (d) Did you discuss whether and how consent was obtained from people whose data you're using/curating? [N/A] We do not discuss this in the paper because: 1) some of the data is from an open source bot and 2) the human data is already public and completely anonymous. We did discuss this with the site creator (who collected the data, and put up terms of use) and we obtained his consent, as well as the consent of the creators of the bot.
 - (e) Did you discuss whether the data you are using/curating contains personally identifiable information or offensive content? [Yes] We discuss in Appendix H.3
- 5. If you used crowdsourcing or conducted research with human subjects...
 - (a) Did you include the full text of instructions given to participants and screenshots, if applicable? [N/A]
 - (b) Did you describe any potential participant risks, with links to Institutional Review Board (IRB) approvals, if applicable? [N/A]
 - (c) Did you include the estimated hourly wage paid to participants and the total amount spent on participant compensation? [N/A]

10 Datasets Checklist

Include extra information in the appendix. This section will often be part of the supplemental material. Please see the call on the NeurIPS website for links to additional guides on dataset publication.

- 1. Submission introducing new datasets must include the following in the supplementary materials:
 - (a) Dataset documentation and intended uses. Recommended documentation frameworks include datasheets for datasets, dataset nutrition labels, data statements for NLP, and accountability frameworks. [We document the code to use the dataset in the repository and provide many references in the Appendices.]
 - (b) URL to website/platform where the dataset/benchmark can be viewed and downloaded by the reviewers. [We provide this in Appendix A]
 - (c) Author statement that they bear all responsibility in case of violation of rights, etc., and confirmation of the data license. [We provide this in Appendix B and upon submission to OpenReview]
 - (d) Hosting, licensing, and maintenance plan. The choice of hosting platform is yours, as long as you ensure access to the data (possibly through a curated interface) and will provide the necessary maintenance. [We provide this in Appendix A]
- 2. To ensure accessibility, the supplementary materials for datasets must include the following:
 - (a) Links to access the dataset and its metadata. This can be hidden upon submission if the dataset is not yet publicly available but must be added in the camera-ready version. In select cases, e.g when the data can only be released at a later date, this can be added afterward. Simulation environments should link to (open source) code repositories. [We provide this in Appendix A]
 - (b) The dataset itself should ideally use an open and widely used data format. Provide a detailed explanation on how the dataset can be read. For simulation environments, use existing frameworks or explain how they can be used. [We provide example usage, documentation, and detailed specification in how data is stored in several Appendices]
 - (c) Long-term preservation: It must be clear that the dataset will be available for a long time, either by uploading to a data repository or by explaining how the authors themselves will ensure this. [We provide a maintenance plan in Appendix A]
 - (d) Explicit license: Authors must choose a license, ideally a CC license for datasets, or an open source license for code (e.g. RL environments). [We provide an open license in Appendix B]
 - (e) Add structured metadata to a dataset's meta-data page using Web standards (like schema.org and DCAT): This allows it to be discovered and organized by anyone. If you use an existing data repository, this is often done automatically. [We are in the process of building a site to host, but are happy to do this when completed.]
 - (f) Highly recommended: a persistent dereferenceable identifier (e.g. a DOI minted by a data repository or a prefix on identifiers.org) for datasets, or a code repository (e.g. GitHub, GitLab,...) for code. If this is not possible or useful, please explain why. [Code and instructions will always live on GitHub].
- 3. For benchmarks, the supplementary materials must ensure that all results are easily reproducible. Where possible, use a reproducibility framework such as the ML reproducibility checklist, or otherwise guarantee that all results can be easily reproduced, i.e. all necessary datasets, code, and evaluation procedures must be accessible and documented. [We provide access to code for experiments and will tidy and rehost upon release of the dataset.].
- 4. For papers introducing best practices in creating or curating datasets and benchmarks, the above supplementary materials are not required.

A Accessing the Dataset

For the duration of the review the information on how to download, install and use NLD will be available at https://github.com/dungeonsdatasubmission/dungeonsdata-neurips2022. This link contains a README.md file with instructions on how to download zip files for NLD-AA and NLD-NAO, as well as instructions on how to install and use the TtyrecDataset, and includes code used in the running of experiment.

After review, this information will migrate to the README.md for the NLE repo, hosted at https://github.com/facebookresearch/nle.

Hosting & Maintenance Plan The dataset is hosted in a dedicated, publicly accessible Facebook adminstered S3 bucket. This should be permanently available for the foreseeable future, and full links to download are provided in the NLE repo.

NLD-AA

- https://dl.fbaipublicfiles.com/nld/nld-aa/nld-aa-dir-aa.zip
- https://dl.fbaipublicfiles.com/nld/nld-aa/nld-aa-dir-ab.zip
- https://dl.fbaipublicfiles.com/nld/nld-aa/nld-aa-dir-ac.zip
- https://dl.fbaipublicfiles.com/nld/nld-aa/nld-aa-dir-ad.zip
- https://dl.fbaipublicfiles.com/nld/nld-aa/nld-aa-dir-ae.zip
- https://dl.fbaipublicfiles.com/nld/nld-aa/nld-aa-dir-af.zip
- https://dl.fbaipublicfiles.com/nld/nld-aa/nld-aa-dir-ag.zip
- https://dl.fbaipublicfiles.com/nld/nld-aa/nld-aa-dir-ah.zip
- https://dl.fbaipublicfiles.com/nld/nld-aa/nld-aa-dir-ai.zip
- https://dl.fbaipublicfiles.com/nld/nld-aa/nld-aa-dir-aj.zip
- https://dl.fbaipublicfiles.com/nld/nld-aa/nld-aa-dir-ak.zip
- https://dl.fbaipublicfiles.com/nld/nld-aa/nld-aa-dir-al.zip
- https://dl.fbaipublicfiles.com/nld/nld-aa/nld-aa-dir-am.zip
- https://dl.fbaipublicfiles.com/nld/nld-aa/nld-aa-dir-an.zip
- https://dl.fbaipublicfiles.com/nld/nld-aa/nld-aa-dir-ao.zip
- https://dl.fbaipublicfiles.com/nld/nld-aa/nld-aa-dir-ap.zip

NLD-NAO

- https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-aa.zip
- https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-ab.zip
- https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-ac.zip
- https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-ad.zip
- https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-ae.zip
- https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-af.zip
- https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-ag.zip
- https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-ah.zip
- https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-ai.zip
- https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-aj.zip
- https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-ak.zip
- https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-al.zip
- https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-am.zip
- https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-an.zip

```
• https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-ao.zip
• https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-ap.zip

    https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-aq.zip

• https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-ar.zip
• https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-as.zip
• https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-at.zip
• https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-au.zip
• https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-av.zip
• https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-aw.zip
• https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-ax.zip
• https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-ay.zip
• https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-az.zip
• https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-ba.zip
• https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-bb.zip
• https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-bc.zip
• https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-bd.zip
• https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-be.zip
• https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-bf.zip
• https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-bg.zip
• https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-bh.zip
• https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-bi.zip
• https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-bj.zip
• https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-bk.zip
• https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-bl.zip
• https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-bm.zip
• https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao-dir-bn.zip
• https://dl.fbaipublicfiles.com/nld/nld-nao/nld-nao_xlogfiles.zip
```

B License

Data is provided under the NetHack General Public License - A GPL style license that is used to covered the NetHack Game since 1989. The license can be found at https://github.com/facebookresearch/nle/blob/main/LICENSE, and is used by both the official NetHack repository¹³ and NLE.

C NLE v0.9.0

NLE v0.9.0 will be the latest version of NLE released, and will be released with NLD. The release branch is will be cut from main branch on the repo, hosted at (https://github.com/facebookresearch/nle/), and deployed to PyPI. The branch currently holds all the changes needed for compatibility with NLD, including the TtyrecDataset. A full changelog will be made public after release but the changes include:

- New ability to record ttyrec3.bz2 files directly from NLE. Previous versions recorded a modified ttyrec.bz2.
- The additional logging to an xlogfile for each episodes that finish naturally (*i.e.* when done is True).

¹³https://github.com/NetHack/NetHack

Figure 3: A screenshot of a tool to read raw ttyrec.bz2/ttyrec3.bz2 files, included in NLE v0.9.0. The numbers in green represent the frame count for each channel [0, 1, 2], followed by the timestamp, and the buffer contents in braces: channel 0 is displayed in yellow braces, 1 in blue braces, and 2 in pink braces. Terminal Escape Sequences are printed in dark grey.

- A C++ Converter class to load ttyrec.bz2/ttyrec3.bz2 files directly in to NumPy arrays, based on a V100 Terminal emulator (from libtmt 14).
- The TtyrecDataset class, to marshall the Converter objects into an Torch.IterableDataset interface, and handle metadata.

D The ttyrec format

The ttyrec is a file format that has historically been used to store recordings of terminal-based NetHack games. ¹⁵ The format consists of a stack of *frames* where each *frame* consists of a 12-byte header immediately followed by a variable-size buffer of terminal instructions. The header contains 8 bytes of time information (storing *when* these updates were recorded) and 4 bytes indicating the size of the subsequent buffer (storing *what* these updates were). The buffer's contents are then the instructions to be fed to a terminal that will be rendering ttyrec. As such, this buffer will then generally consist of terminal-specific Escape Sequences¹⁶ and text to be printed.

NLE's ttyrec3 has a 13-byte header, adding 1-byte channel to indicate *what kind* of content is in the buffer: 0 for terminal output; 1 for terminal input (i.e the keypresses corresponding to actions in the game); and, 2 for in-game score. These latter two channels are written just after and just before an action is taken (respectively).

It is worth noting that *frames* with channel 0 are written whenever NetHack intends to write to the screen, and therefore several may written before an action is required. An example of such an event occurs when zapping wand which animates a beam from the player. Such animations may result in a stack of frames with channels that resemble something like [0 2 1 0 0 0 2 1 ...], where several different states might correspond to one action. In this case ttyrec3.bz2 rendering loads the final state of the of the terminal NumPy arrays, alongside the score and action, while ttyrec.bz2 rendering loads every state/frame, having no clear delineation of where actions take place.

To further inspect ttyrec.bz2 and ttyrec3.bz2, NLE v0.9.0 comes with an adapted read_tty.py script that displays the raw, decompressed ttyrec/ttyrec3 contents, shown in Figure 3.

E NLD Gameplay Metadata Reference

The gameplay metadata in NLD is identical to that stored NetHacks's xlogfile at the end of a game, with the addition of a *gameid* which is used by NLD to identify games. The metadata consists of:

¹⁴https://github.com/deadpixi/libtmt

¹⁵https://nethackwiki.com/wiki/Ttyrec

¹⁶https://en.wikipedia.org/wiki/Escape_sequence

- 1. gameid (int) A unique id for the game, created by the local database.
- 2. version (str) The version of NetHack played.
- 3. *points* (int) The final in-game score of the episode.
- 4. *deathdnum* (int) The dungeon number where you died. These correspond to the dungeons found in dungeon.def file:
 - 0 The Dungeons of Doom
 - 1 Gehennom
 - 2 The Gnomish Mines
 - 3 The Ouest
 - 4 Sokoban
 - 5 Fort Ludios
 - · 6 Elemental Planes
- 5. *deathlev* (int) The dungeon level where you died. 17
- 6. maxlvl (int) The deepest dungeon level you reached.
- 7. hp (int) The number of hit points you ended the game with.
- 8. maxhp (int) The number of hit points you'd have had at "full health" at the game end.
- 9. *deaths* (int) The number of times you died. 18
- 10. deathdate (int) The day the game ended (format YYYYMMDD).
- 11. *birthdate* (int) The day the game started (format YYYYMMDD).
- 12. *uid* (int) An id used (in conjunction with player name) to identify players (for save games etc).
- 13. role (str) The Role of the player. The 13 roles are:
 - Arc Archaelogist
 - Bar Barbarian
 - Cav Cave(wo)man
 - Hea Healer
 - Kni Knight
 - Mon Monk
 - Pri Priest(ess)
 - Ran Ranger
 - Rog Rogue
 - Sam Samurai
 - Tou Tourist
 - Val Valkyrie
 - Wiz Wizard
- 14. race (str) The Race of the player. The 5 races are:
 - Dwa Dwarf
 - Elf Elf
 - Gno Gnome
 - Hum Human
 - Orc Orc
- 15. gender (str) The Gender of the player. The 2 genders are:
 - Fem Female
 - Mal Male
- 16. *align* (str) The Alignment of the player. The 3 alignments are:
 - · Cha Chaotic

¹⁷For more, see https://nethackwiki.com/wiki/Mazes_of_Menace

¹⁸In rare cases, you can die more than once. See https://nethackwiki.com/wiki/Amulet_of_life_saving

- · Law Lawful
- · Neu Neutral
- name (str) The name of the player. These are pseudonymised in the database for NLD-NAO.
- 18. death (str) A description of the manner in which the player died or ended the game.
- 19. *conduct* (str) a bitfield encoding the conducts¹⁹ completed in the game. The bitfield encodes:
 - 0x001: Foodless
 - 0x002: Vegan
 - 0x004: Vegetarian
 - 0x008: Atheist
 - 0x010: Weaponless
 - 0x020: Pacifist
 - 0x040: Illiterate
 - 0x080: Polypileless
 - 0x100: Polyselfless
 - 0x200: Wishless
 - 0x400: Artifact wishless
 - 0x800: Genocideless
- 20. turns (int) The number of in-game turns played by the player. This may not correspond to transitions, as several moves do not advance the in-game clock (eg checking the inventory or moving into a wall).
- 21. *achieve* (str) a bitfield encoding the achievements²⁰ attained in the game. The bitfield encodes:
 - 0x0001: Got the Bell of Opening
 - 0x0002: Entered Gehennom
 - 0x0004: Got the Candelabrum of Invocation
 - 0x0008: Got the Book of the Dead
 - 0x0010: Performed the Invocation
 - 0x0020: Got the Amulet of Yendor
 - 0x0040: Was in the End Game
 - 0x0080: Was on the Astral Plane
 - 0x0100: Ascended
 - 0x0200: Got the Luckstone at Mines' End
 - 0x0400: Finished Sokoban
 - 0x0800: Killed Medusa
 - 0x1000: Zen conduct intact
 - 0x2000: Nudist conduct intact
- 22. realtime (int) the duration of the game in seconds
- 23. *starttime* (int) the start time of the game as an (epoch) unix timestamp.
- 24. $\emph{endtime}$ (int) the end time of the game as an (epoch) unix timestamp.
- 25. gender0 (str) the starting gender of the player. Same options as gender.
- 26. align0 (str) the starting alignment of the player. Same options as align.
- 27. flags (str) a bitfield encoding some additional state of the game. The bitfield encodes:
 - 0x1: Wizard mode
 - 0x2: Discover mode
 - 0x4: Never loaded a Bones file

¹⁹https://nethackwiki.com/wiki/Conduct

²⁰https://nethackwiki.com/wiki/Xlogfile

F NLD Observations Reference

The TtyrecDataset loads minibatches of observations, with batch size B, and sequence/unroll length T. The following observations are present in each minibatch dictionary:

Name Type Shape Description	
tty_chars np.uint8 [B, T, H, W] The on-screen characters (default screen size 80 tty_colors np.int8 [B, T, H, W] The on-screen colors for each character. tty_cursor np.int16 [B, T, 2] The coordinates of the on-screen cursor. timestamps np.int64 [B, T] The time each frame was recorded. gameids np.int32 [B, T] The time each frame was recorded. done np.uint8 [B, T] An indicator that this frame is from a new game scores* np.int32 [B, T] The in-game score at this time (i.e. before keyp keypresses* np.uint8 [B, T] The keypress the player made in response to this (i.e. after seeing tty_*, scores, etc).	eid. oress).

The observations marked with an asterisk (*) are only available in ttyrec3.bz2 datasets.

G TtyrecDataset Reference

G.1 Design Overview

To load minibatches, the TtyrecDataset performs two main actions: first, at construction time, it obtains the list of gameids and ttyrec.bz2/ttyrec3.bz2 filepaths that constitute dataset, and second, at usage time, it constructs an Python generator²¹ that will sequentially load these files into fixed NumPy arrays.

The first of these actions is performed by querying a local *sqlite3* database file, which acts as the metadata information hub for all datasets. This database file need only be populated once, and from thenceforth can be copied, shared or swapped out, without issue. For more on how to add datasets see the Tutorial Notebook²², or Appendix G.4. The metadata in this database includes the location of files for each game, the association of which games are in which dataset, and the gameplay metadata for each game (see Appendix E). For more on the database schema see Appendix G.2.

The second of these actions is performed by the TtyrecDataset itself, by creating a lightweight C++ Converter object for each batch index in a generator, and loading from these objects when next is called. This process can be modified in a variety of different ways, including looping forever, shuffling, or using a threadpool. For more on the way these can be modified see Appendix G.3.

G.2 Database Layout

Table 3 shows the layout of the database, where fields of the same name map directly to each other. Each dataset is associated with a string (dataset_name), and once populated the dataset can be retrieved with this string.

G.3 TtyrecDataset API

The TtyrecDataset is documented primarily through Python docstrings, which provide a helpful way automatically documenting code objects, that can be queried by using Python's help function. An example usage can be clearly seen in the tutorial notebook²³ supplied with the submission, that will also migrate to NLE.

The TtyrecDataset accepts the following arguments, with all but first taking reasonable default values:

²¹https://peps.python.org/pep-0255/

²²https://github.com/dungeonsdatasubmission/dungeonsdata-neurips2022/blob/main/usage_tutorial_notebook.ipynb

²³https://github.com/dungeonsdatasubmission/dungeonsdata-neurips2022/blob/main/usage_tutorial_notebook.ipynb

Table 3: The layout of the *sqlite3* database used by the TtyrecDataset. The roots table stores information about the root directory of the files in a dataset, as well as ttyrec version, while ttyrecs table stores the data about the files and what games they belong to. The datasets table then associates the gameids to their dataset, and games contains the gameplay metadata for each gameid.

roots		games	
dataset_name	TEXT	gameid	INTEGER
root	TEXT	version	TEXT
ttyrec_version	INTEGER	points	INTEGER
		deathdnum	INTEGER
		deathlev	INTEGER
		maxlvl	INTEGER
datasets		hp	INTEGER
datasets		maxhp	INTEGER
gameids	INTEGER	deaths	INTEGER
dataset_name	TEXT	deathdate	INTEGER
		birthdate	INTEGER
		uid	INTEGER
		role	TEXT
ttyrecs		race	TEXT
		gender	TEXT
path	TEXT	align	TEXT
part	INTEGER	name	TEXT
size	INTEGER	death	TEXT
mtime	REAL	conduct	TEXT
gameid	INTEGER	turns	INTEGER
		achieve	TEXT
		realtime	INTEGER
		starttime	INTEGER
meta		endtime	INTEGER
шеса		gender0	TEXT
ctime	REAL	align0	TEXT
mtime	REAL	flags	TEXT

- 1. dataset_name (str) The name of the dataset to load. Each datasets is associated with a unique name.
- 2. batch_size (int) The number of simulataneous episodes to load (i.e. size B).
- 3. seq_length (int) The number of steps to unroll for each episode in a minibatch (*i.e.* size T).
- 4. rows (int) The row size of the terminal to emulate (i.e. size H).
- 5. cols (int) The column size of the terminal to emulate (*i.e.* size W).
- 6. dbfilename (str) The path to the database file used.
- 7. threadpool (Object) An executor class that has a map function (i.e. concurrent.futures.ThreadPoolExecutor.
- 8. gameids (List[str]) A predetermined list of gameids to iterate through.
- 9. shuffle (bool) Whether to shuffle the order of gameids before iterating.
- 10. loop_forever (bool) Whether to start again at the beginning of *gameids* when the iterator runs out. If False, empty batch indexes are padded with 0.
- 11. subselect_sql (str) A SQL string to dynamically generate subdataset, by select gameids.
- 12. subselect_args (Objects) Arguments to any SQL query provided in subselect_sql.

Figure 4: Example of how to simply create a database file and populate it with datasets. Note that each directory must be associated with a dataset name chosen by the user (*i.e.* ''nld-aa''). This is then used to access the data (as in Figure 5).

```
import nle.dataset as nld
path_to_nld_aa = "/path/to/nld-aa"
path_to_nld_nao = "/path/to/nld-nao"
path_to_custom = "/path/to/a/custom/nledata/directory"

# Chose a database name/path. By default, most methods with use nld.db.DB (='ttyrecs.db')
dbfilename = "ttyrecs.db"
if not nld.db.exists(dbfilename):
    nld.db.create(dbfilename)

# To add the NLE-AA data, or any data generated from nle, use `add_nledata_directory`.
    nld.add_nledata_directory(path_to_nld_aa, "nld-aa", dbfilename)

# to add the NLE-NAO data, use the `add_altorg_directory`.
    nld.add_altorg_directory(path_to_nld_nao, "nld-nao", dbfilename)
```

Figure 5: Example of how to use a ThreadPoolExecutor using Python 3's built-in concurrent.futures module. This parallelism allows control of how many CPU workers are use to load data, without having to resort to Python's multiprocessing.

```
from concurrent.futures import ThreadPoolExecutor
import nle.dataset as nld
with ThreadPoolExecutor(max_workers=10) as tp:
    dataset = nld.TtyrecDataset("nld-aa", threadpool=tp)
    for i, mb in enumerate(dataset):
        # Etc ...
```

G.4 Adding Datasets

Adding datasets to a the database is a very easy "one-off" operation. Examples are shown in the Tutorial Notebook and also in Figure 4.

Since the process for adding ttyrec3.bz2 and ttyrec.bz2 files are a little different from each other, two different methods should be used: nle.dataset.add_nledata_directory for ttyrec3.bz2, and nle.dataset.add_altorg_drectory for ttyrec.bz2 data from NAO. This is documented in the code and in the Tutorial Notebook.

G.5 ThreadPool Usage

All files are read independently, loaded into their own C++ Converter object that provides lightweight terminal emulation. This independence provides the potential for very effective parallelization along the batch index, B. In the Converter object, we release the GIL, allowing for very true parallelization of file processing with Python's own threads. This can provide a many-fold boost to performance and throughput of frames per second, as can be seen in Table 4. Note, however, that the benefits of parallelization are mainly found with long sequence lengths. Example usage is shown in Figure 5.

G.6 SQL Usage

With such a large and diverse dataset, it is highly likely that many will wish to train on subselections of the data according to certain criteria, contained in the metadata. The TtyrecDataset enables this very easily, by exposing the ability to subselect *gameids* on the basis of a SQL command. An example of this is shown in Figure 6, and was used to generate the plots in Figure 6.

G.7 Creating Custom Datasets

It is easy to create and add your own custom dataset using NLE and NLD. NLE includes the ability to record files to a given save directory. The directory can then be directly added to NLD using the add_nledata_directory methods referred to in Appendix G.4. An example is shown in Figure 7.

Table 4: The frames per second, mean (standard deviation), across 5 runs of 500k frames when served by the NLD dataset with different parameters for batch size, sequence length, and number of CPUs used (which corresponds to the number of threads in the threadpool).

				Sequence Length	1
			32	128	512
		32	20.6k (325)	19.4k (250)	20.7k (499)
1 CPU	Batch Size	128	16.5k (159)	18.9k (235)	21.2k (254)
		512	15.1k (325)	17.1k (218)	17.9k (94)
		32	73.8k (3.2k)	110.8k (3.0k)	142.7k (6.7k)
10 CPUs	Batch Size	128	113.1k (1.5k)	144.2k (1.9k)	167.0k (3.3k)
	512	114.2k (2.2k)	129.8k (2.7k)	139.1k (4.1k)	
		32	86.2k (2.3k)	134.6k (3.9k)	231.2k (7.2k)
80 CPUs	Batch Size	128	177.8k (2.9k)	372.9k (16.5k)	492.4k (24.4k)
		512	222.4k (7.9k)	446.7k (22.5k)	482.5k (10.4k)

Figure 6: Example of how to use a SQL queries to subselect a part of a dataset dynamically. This method was used to generate the NLD-AA-Monk runs only runs in Table 2 and Figure 2

Figure 7: Example of how to create a custom dataset using NLE and NLD. A variant of this method was used to create NLD-AA.

```
import gym
import nle
import nle.dataset as nld
def generate_rollouts(env):
      obs = env.reset()
games = 0
while games < 10:
           obs, reward, done, info = env.step(env.action_space.sample()) if done:
                 games += 1
                 env.reset()
# 1. Create some envs, chose savedir, save every X games
envA = gym.make("NetHackChallenge-v0", savedir="path/to/save/A", save_ttyrec_every=2)
envB = gym.make("NetHackScore-v0", savedir="path/to/save/B", save_ttyrec_every=1)
# 2. Generate rollouts, resetting when `done=True` generate_rollouts(envA)
generate_rollouts(envB)
# 3. Add to database (default dbfilename="ttyrecs.db")
nld.add_nledata_directory("path/to/save", "custom")
# 4. Use dataset
dataset = nld.TtvrecDataset("custom")
for mb in dataset:
     # Etc ...
```

Table 5: A table of the conducts and achievements accomplished as a percentage of total episodes for each dataset. Most notably we can see only 1.46% of episodes ascend in NLD-NAO, and 0.04% do this without any armour (Nudist). By contrast NLD-AA achieves only the occasional solving of the Sokoban, indicating NLD-NAO has a much better coverage of the late game.

Conducts	NLD-AA (%)	NLD-NAO (%)
Foodless	0.89	21.16
Vegan	1.35	29.50
Vegetarian	1.41	32.18
Atheist	2.36	52.13
Weaponless	7.71	17.77
Pacifist	0.26	8.53
Illiterate	33.36	34.61
Polypileless	100.00	96.88
Polyselfless	87.65	93.59
Wishless	98.91	95.88
Artifact wishless	100.00	98.74
Genocideless	100.00	96.90

Achievements	$\mathtt{NLD-AA}\ (\%)$	NLD-NAO $(\%)$
Got the Bell of Opening	0.00	2.15
Entered Gehennom	0.00	2.06
Got the Candelabrum of Invocation	0.00	1.73
Got the Book of the Dead	0.00	1.65
Performed the Invocation	0.00	1.62
Got the Amulet of Yendor	0.00	1.60
Was in the End Game	0.00	1.56
Was on the Astral Plane	0.00	1.53
Ascended	0.00	1.46
Got the Luckstone at Mines' End	0.00	3.95
Finished Sokoban	0.17	5.93
Killed Medusa	0.00	2.31
Zen conduct intact	0.00	0.05
Nudist conduct intact	0.00	0.04

H NAO Details

H.1 Conducts and Achievements

By analysing the Conducts and Achievement flags in the *conduct* and *achieve* metadata fields, one can see the variety of behaviours in the NLD-NAO dataset. The aggregated % of episodes with each conduct/achievement is shown for each dataset in Table 5

H.2 Metadata Matching Algorithm

On NAO, a game of NetHack can be saved and resumed, resulting in games split across several ttyrec.bz2 files and time periods. In these situations, only one entry is made to the communal xlogfile, and this is made at the very end of the game with no link to which files are part of the game.

However, it is possible to assign files to games making use of three pieces of information: first, that alt.org enforces that a user complete one game before starting another; second, that the xlogfile records the *starttime* and *endtime* of the game; and, third, that each file is saved with the same filename template indicating the user and file creation time (<username>/<file_creation_timestamp>.ttyrec.bz2).

Making use of these three pieces of information, we can assign the files to the games, by lining up all episodes per user in an xlogfile by start and endtime, and then assigning files created

between that start and endtime to that game. The full logic for this is carefully documented in the file nle/datasets/populate_db.py.

In this way it is possible to remove games that have started but not finished from the alt.org S3 bucket, whilst also filter out games that may have started well before the first *starttime* in an xlogfile (indicating for whatever reason the game was not logged). All this logic is vital in ensuring that NLD episodes can be seamlessly stitched together correctly from many file parts.

H.3 Filtering 'Bad' Episodes for NLD-NAO

We filtered 'bad' episodes for NLD-NAO in three ways. First, we removed episodes from the dataset where the player seems to have participated in 'start-scumming'. This practice involves starting a game of NetHack and ending it early if the randomly-generated starting attributes/inventory is not favourable enough. We filtered these games by filtering episodes from the dataset with fewer than 10 turns, where the death was 'quit' or 'escaped'.

We also filtered an episode with negative in-game *turns* - something which should be impossible! This single player had managed to survive many orders of magnitude longer than any other game, eventually successfully overflowing the *turns* counter (a 32-bit integer). While surviving this long is impressive, it is unlikely this episode demonstrate a drive to 'ascend' and may pose a large bias to our dataset, and so is filtered out.

Finally we also decided to remove the files of players with highly offensive names from our dataset. These accounted for very few episodes and frames (less than 0.1%) and largely from poor players. To add an extra layer of privacy, we pseudonymise all player names in the database, even though player names are generally already pseudonyms.

H.4 Noise Investigation

The NLD-NAO dataset is a real-world dataset collected over a decade, and as such contains some real world noise that can pose research problems.

The first problem is terminal rendering noise. Different terminals have different escape sequences and different characters sets, and some of these may not be interpretable by NLD's lightweight VT100 emulator. While NLD has made adjustments to support DEC graphics²⁴ and IBM graphics²⁵, it is still possible for a user to define their own exotic graphics which could render noisily in NLD, perhaps with extra, unusual symbols. This problem is also faced by alt.org's own webplayer, but thankfully, this issues is only encountered very rarely.

Another source of rendering noise, aside from graphics, is terminal size. Players can play NetHack with different terminal sizes, and NetHack's clever paging system will adapt the screen to the right size. In our case we chose by default to render on the screen size used by NLE, which is also the smallest "full size" you can play NetHack on (80 x 24). For episodes where the screen size was larger than this, we make the decision to crop the screen rather than wrap around the lines (as one typically would when emulating large commands on a small screen). It is possible to control the emulator size scren by using the rows and cols arguments to the constructor, if the user so wishes.

The second source of noise comes from errors introduced into the metadata assignment process, outlined in Appendix H.2. In some cases, such as under heavy traffic, NetHack can fail to write a line to an xlogfile, and drop the line entirely. This introduces noise into the our assignment algorithm and could result in a user's games potentially including some ttyrec files from a different one of their episodes. We check for discrepancies between metadata and in-game play, by rendering the last 10 frames of all episodes in NLD-NAO and checking whether the *point* and number of *turns* parsed from the screen match the gameplay metadata in NLD-NAO. Since these two values are themselves not always displayed or might change after game end, this itself is a noisy process, yet we managed to obtain a upper bound on the errors. In the episodes we found at most ~5% occurence of a discrepancy between the final frames of an episode and the metadata for *score* and *turns*, and were able to verify correct metadata for ~90% of episodes (~5% we were unable to classify).

²⁴https://en.wikipedia.org/wiki/DEC_Special_Graphics

²⁵https://nethackwiki.com/wiki/IBMgraphics

I Experiment Hyperparameters and Details

I.1 Methods

All methods are implemented using the open-source RL library moolib [31]. The online and online + offline RL methods are built on top of an APPO implementation based on [37]. The offline RL methods are built on top of the DQN algorithm. For CQL, we followed the implementation from [53], which is an established library for offline RL algorithms. For IQL, we followed the original implementation open-sourced by the authors [20]. We use the same base architecture and processing of the observations and actions for all algorithms. Please check out our open-sourced code for full details of these implementations. All experiments were run with 20 CPUs in approximately 1 day on single Volta 32GB GPUs.

I.2 Preprocessing

As a preprocessing step, a wrapper is used to render the observations tty_chars and tty_colors as pixels, which are then downsampled and cropped centered on tty_cursor. The resulting image is added as an observation known as screen_image. This preprocessing step is standard for the Chaotic Dwarf baseline model that we use. [15]

I.3 Model

We adapt the model from the standard Chaotic Dwarf Sample Factory baseline, that was open sourced²⁶ during the NetHack Challenge. [15] This model relies on three small encoders for observations, that combine their representations before passing through an LSTM and taking policy and baseline heads from the output.

The original model relied on NLE's blstats, message, and the preprocessed screen_image (outlined in Appendix I.2) observations. Since the former two do not exist in the raw terminal output, instead they are replaced with their closest proxies - the top and bottom two lines of tty_chars respectively. This involves slight changing to the normalization of the encoders. The full model can be found in our open sourced code.

I.4 Hyperparameter Sweeps

For DQN, we performed a hyperparameter search over $\epsilon_{start} \in [0.1, 0.2, 0.25, 0.5, 0.75, 0.8, 0.9]$, $\epsilon_{decay} \in [2500, 5000, 10000, 20000, 25000, 50000, 75000, 250000]$, target $update \in [40, 200, 400, 800, 2000, 4000]$ and tried both a MSE and a Huber loss. We found the following to work best: $\epsilon_{start} = 0.25$, $\epsilon_{decay} = 25000$, target update = 400, and MSE loss. For the common hyperparameters between CQL and IQL, we use the same values as the best ones found for DQN without additional tuning. For CQL, we also performed a hyperparameter search over $\tau \in [0.005, 0.05, 0.0005, 0.1, 0.01, 0.001, 0.0001]$ and for cql loss $coef \in [1.0, 0.5, 0.1, 2.0, 10.0]$. We found $\tau = 0.005$ and cql loss coef = 2.0 to work best. For IQL, we performed a hyperparameter search over $expectile \in [0.8, 0.7, 0.9]$ and $temperature \in [1.0, 0.1, 10.0, 0.5, 2.0]$. We found expectile = 0.8 and temperature = 1.0 to work best. Table 6 contains a list with all relevant hyperparameters used in our experiments (i.e. the best ones found following our HP search).

I.5 Evaluation

We evaluate performance using the eval.py script in the experiment code. This script creates a moolib.EnvPool and assigns each batch index a number of episodes to run, to collect data. We collect 1024 episodes in this way, per run.

It is important to note that this method of evaluating performance is slightly different to the one generating curves in Figure 2. For training curves, we add any episodes to a running mean as soon as they finish rolling out (*i.e.* just before training). The end consequence of this is that short episodes with low scores are sampled disproportionately more often that very long episodes with high scores in other words these curves are biased *down*. Accurately sampling these very high scoring and very long rollouts account for the discrepancy between the curves in Figure 2 and the values in Table 2.

²⁶https://github.com/Miffyli/nle-sample-factory-baseline

Table 6: List of hyperparameters used to obtain the results in this paper.

Hyperparameter	Value
activation function	relu
actor batch size	512
adam betea1	0.9
adam beta2	0.999
adam eps	0.0000001
adam learning rate	0.0001
appo clip policy	0.1
appo clip baseline	1.0
baseline cost	1
batch size	256
crop dim	18
grad norm clipping	4
normalize advantages	True
normalize reward	False
num actor batches	2
num actor cpus	20
pixel size	6
rms alpha	0.99
rms epsilon	0.000001
rms momentum	0
reward clip	10
reward scale	1
unroll length	32
use batchnorm	false
use lstm	true
virtual batch size	128
rms reward norm	true
initialisation	orthogonal
use global advantage norm	norm
msg embedding dim	32
msg hidden dim	512
kickstarting loss	1.0
ttyrec envpool size	4
ttyrec batch size	256
ttyrec unroll length	32
ttyrec envpool size	4
ϵ_{start}	0.25
ϵ_{end}	0.05
ϵ_{decay}	25000
target update	400
dqn loss	mse
au	0.005
cql loss coef	2.0
expectile	0.8
temperature	1.0

J On the Scale and Performance of NLD

We compare the scale and performance of NLE and NLD to two other large scale datasets of human demonstrations: MineRL [14] and StarCraft II [59]. In particular, we present the size of the datasets,

in terms of trajectories, and benchmark the performance of the datasets and environments, measured in frames per seconds (FPS). The overview can be found in Table 7.

Table 7: The mean frames per second (± standard deviation) across 5 runs for each environment or dataset. Although batch sizes and sequence length can affect performance, it is clear that NLD is considerably faster than rival datasets.

Dataset	NLD	StarCraft II	MineRL
Trajectories	100,000 - 1,500,000	971,000	<5000
Environment FPS Dataset FPS	26400 ± 1200 113100 ± 1500	200-700 1800 ± 2.9	68 ± 6.2 5000 ± 89

J.1 Overview

These results support the claim of NLD to be a large-scale dataset. NLD-NAO has more trajectories than dataset used in AlphaStar[58], and possibly also more transitions, since the average episode of NLE is longer than that of StarCraft II. Even NLD-AA has an order of magnitude more trajectories than MineRL.

These results also support the claims of NLD and NLE to be very performant in terms of frames per second. The NLE environment is at least an order of magnitude faster than either alternative environment, and NLD is potentially several orders of magnitude faster at loading data. Further details in how the batch size and unroll length affect the performance of NLD can be found in Table 4.

J.2 FPS Benchmarking Method

To compute the throughput of NLD we used the threadpool with 80 threads on a machine with 80 CPUs, a batch size of 128 and a sequence length of 32, taking the mean and standard deviation from 5 runs to 500k frames. All assessments are done with NLD-AA, the slower of the two datasets. For NLE we ran the environment for 500k frames, with an agent sampling random actions and a max episode length of 1000 frames.

For StarCraft II we include the throughput of the environment as reported in the original paper, and measure the throughput of the dataset by running the pysc2.bin.replay_actions function, provided in the github repo for batch processing replays, for 5 minutes with 80 threads on 80 cpus. This too was repeated 5 times.

For MineRL we used the MineRLTreechop-v0 environment and dataset. We measured the environment speed by running headless on a machine with 80 cpus for 10k steps, sampling random actions and assuming a max episode length of 30k steps (note, the MineRL documentation suggests that running headless slows down the environment by a factor of 2-3x because the rendering is performed on the CPU instead of the GPU). We measured the MineRL dataset throughput using the provided BufferedBatchIter with a batch size of 4096 for a full epoch. Once again, we repeated this 5 times.

Table 7 presents the mean and standard deviation of the frames per second.

K Limitations of our Work

One potential limitation of our work is our human dataset NLD-NAO doesn't contain any actions or rewards, so it cannot directly be used for imitation learning of offline RL. However, this is the case for many other domains of interests where you may have access to sequences of observations (e.g. when learning skills from human or agent videos in domains like robotics or autonomous driving). Thus, we believe our human dataset can enable research on this more realistic and important setting in a safe environment.

While NLD-AA contains both actions and rewards thus allowing research on imitation learning and offline RL, it is less diverse than NLD-NAO as it contains demonstrations from only one symbolic bot, the winner of the NetHack Challenge at NeurIPS 2022 [15]. In the future, we hope the community

will contribute many more datasets to NLD collected using a variety of bots (including learning-based ones). We believe that the current dataset is a good starting point to develop even better agents at playing NetHack. Then, those agents could be used to collect additional trajectories which can be added to NLD, resulting in a feedback loop that constantly grows the size and diversity of the dataset and develops better and better agents.

Another potential limitation of our work is that we use the in-game score to train our RL agents, which is the standard practice from [23] and [15]. While the in-game score roughly correlates with good performance on NetHack, it is not exactly the same as ascending *i.e.* winning the game, which is ultimately how we want to evaluate agents. For example, humans sometimes attempt to ascend with as low a score as possible, as an additional challenge. This misalignment is common in other real-world domains where it can be difficult to design a good reward function that illicits the desired behavior (*e.g.* autonomous driving). Thus, this is an open research challenge which could be enabled by our dataset, but lies outside the scope of the current work.

L Broader Impact Statement

Our work introduces a new large-scale dataset based on a computer game to enable research in multiple domains including learning from demonstrations, imitation learning, and reinforcement learning. Our dataset is cheap to run in order to democratize research on large-scale datasets of demonstrations, which have historically been restricted to well-resourced (industry) labs. This dataset contains human demonstrations, but these are already available online and the demonstrations are de-identified such that only a user's chosen usernames can be retrieved. Thus, we don't envision any direct negative social impact of this work. Of course, people could use our dataset to develop new methods for learning from demonstrations. Since these techniques can be quite general, they could also be used for other real-world applications such as autonomous driving, robotics, healthcare, financial services, or recommendation systems (where large-scale datasets may be available). Of course, these domains are more sensitive than computer games, so much more care is needed to mitigate the risks and develop safe, robust systems. While we believe this lies outside the scope of current work, researchers and practitioners using our dataset should always keep an eye on potential negative societal impacts.

M Corrections

A prior version of this work used a model evaluation script that had a bug resulting in the inflation of all scores by a roughly constant scale, in Table 2. This bug has been corrected and the results regenerated, using the same original checkpoints where possible. For IQL, CQL and both DQN experiments, original checkpoints had been deleted, so experiments were rerun in full. Despite the unfortunate error, it should be noted that these results still support relevant findings of Section 6.2 and the rest of the paper. Our thanks to Ulyana Piterbarg and Jens Tuyls for their help in spotting the bug.