

Advancing Multilingual Pre-training: TRIP Triangular Document-level Pre-training for Multilingual Language Models

Hongyuan Lu[♡], Haoyang Huang[♣], Shuming Ma[♣],
Dongdong Zhang[♣], Wai Lam[♡], Furu Wei[♣]

[♡]The Chinese University of Hong Kong

[♣]Microsoft Corporation

{hylu,wlam}@se.cuhk.edu.hk

{haohua,shumma,dozhang,fuwei}@microsoft.com

Abstract

Despite the success of multilingual sequence-to-sequence pre-training, most existing approaches rely on document-level monolingual corpora in many different languages, sentence-level bilingual corpora,¹ and sometimes synthetic document-level bilingual corpora. This hampers the performance with cross-lingual document-level tasks such as document-level translation. Therefore, we propose to mine and leverage document-level trilingual parallel corpora to improve sequence-to-sequence multilingual pre-training. We present **Triangular Document-level Pre-training (TRIP)**, which is the first in the field to accelerate the conventional monolingual and bilingual objectives into a trilingual objective with a novel method called Grafting. Experiments show that TRIP achieves several strong state-of-the-art (SOTA) scores on three multilingual document-level machine translation benchmarks and one cross-lingual abstractive summarization benchmark, including consistent improvements by up to 3.11 d-BLEU points and 8.9 ROUGE-L points.

1 Introduction

Conventional multilingual pre-training achieved promising results on machine translation (Liu et al., 2020) and cross-lingual classification (Xue et al., 2021). These pre-training paradigms usually rely on monolingual corpora in many different languages, with denoising objectives such as sentence permutation and span masking (Liu et al., 2020; Lewis et al., 2020b). Following the calls that the unsupervised scenario is not strictly realistic for cross-lingual learning (Artetxe et al., 2020), multilingual pre-training advanced into a supervised

¹In this paper, we use ‘bilingual corpora’ to denote parallel corpora with ‘bilingual translation pairs’ in many different language pairs, each consisting of two sentences/documents with the same meaning written in different languages. We use ‘trilingual corpora’ to denote parallel corpora with ‘trilingual translation pairs’ in many different language combinations, each consisting of three sentences/documents.

setting through sentence-level bilingual translation pairs (Chi et al., 2021; Reid and Artetxe, 2022) to provide a stronger signal for pre-training. Among these pioneering works, document-level multilingual pre-training with parallel data is currently an understudied topic. This direction is particularly significant for tasks that necessitate contextual comprehensions, such as document-level machine translation and cross-lingual summarization. As a workaround, DOCmT5 (Lee et al., 2022) resorts to using synthetic bilingual translation pairs to scale up document-level multilingual pre-training.

In addition to the lack of study for document-level multilingual pre-training with parallel data, prior works also overlooked the value of trilingual parallel data for multilingual pre-training. Compared to bilingual parallel data, trilingual parallel data is expected to better capture different linguistic clues and coherence among different languages such as past tense and gendered expressions,² which can enhance the model pre-training on aspects of document-level cross-lingual understanding and resolve cross-lingual ambiguities.

To this end, we present TRIP, a document-level multilingual pre-training method using trilingual parallel corpora. Because there is no publicly available document-level trilingual corpus, we propose a novel method to construct trilingual document pairs from document-level bilingual corpora. Subsequently, we augment the conventional multilingual pre-training by (i) Grafting two documents presented in two different languages into one mixed document, and (ii) predicting the remaining one language as the reference translation.

We conduct experiments on document-level machine translation on TED Talks (Cettolo et al., 2015), News benchmark (News-commentary) and Europarl (Koehn, 2005), and cross-lingual abstrac-

²For example, Chinese does not have past tense for verbs, while Japanese and English do have relevant clues. See Figure 1 for further explanation.

Models	Denoising	Translation	Trilingual	Trilingual	Document
	Pre-training	Pre-training	Document Pairs	Objective	Level
mBART	✓	✗	✗	✗	✓
mT5	○	✗	✗	✗	✓
mT6	○	✓	✗	✗	✓
PARADISE	○	✓	✗	✗	✗
DOCmT5	✓	✓	✗	✗	✓
TRIP	✓	✓	✓	✓	✓

Table 1: **Comparisons of various multilingual pre-training methods.** We denote the intermediate value as ○. For example, mT5 uses span corruption solely without sentence permutation, so we put a value of ○ for the column of Denoising Pre-training for mT5. The columns of **Denoising Pre-training** and **Translation Pre-training** refer to the pre-training objectives we introduce at the start of Section 2.

tive summarization on Wikilingua (Ladhak et al., 2020; Gehrmann et al., 2021). We found that TRIP clearly improves previous multilingual pre-training paradigms that use monolingual and bilingual objectives (Lee et al., 2022), and achieves strong SOTA results on both tasks.

In summary, we make three key contributions:

- TRIP proposes a novel trilingual pre-training objective through Grafting for multilingual pre-training, along with a novel method to construct trilingual data from parallel corpora.
- TRIP yields SOTA scores on both multilingual document-level MT and cross-lingual abstractive summarization.
- We conduct in-depth analyses on document-level cross-lingual understanding and compare TRIP to commercial systems.

2 Triangular Document-level Pre-training

We start by introducing the conventional methodologies previously used by the monolingual and bilingual objectives for multilingual pre-training:

- **Denoising Pre-training:** Sentence permutation (Liu et al., 2020) and span corruption (Xue et al., 2021) are effective denoising pre-training objectives for document-level multilingual pre-training.
- **Translation Pre-training:** Making the use of sentence-level translation pairs is a bilingual pre-training strategy for multilingual models (Kale et al., 2021; Tang et al., 2021).

Constructing a Trilingual Objective In comparison, **TRIP** is the first in the field to introduce a trilingual objective for multilingual pre-training. The core to making better use of trilingual data is to **Grafting**³ the documents by splitting the documents written in two different languages but with the same meaning half by half and concatenating each half to form a new document that retains the same meaning written in two different languages. TRIP then applies sentence permutation and span corruption on the Grafted documents.

Conventional monolingual and bilingual pre-training objectives overlooked the value to take such an advantage (Liu et al., 2020; Reid and Artetxe, 2022) of linguistic clues from different languages. In contrast, TRIP fuses authentic trilingual data, in which linguistic clues such as past tense and gendered nouns are usually preserved.

We present in Figure 1 to illustrate how TRIP operates to make use of linguistic clues through trilingual data. Given three documents with the same meaning written in Chinese, Japanese, and English, two of the documents are split and concatenated. The concatenation is randomly permuted at the sentence level, and the remaining unchanged document is used as the translation reference. Here, Chinese is tenseless, and TRIP effectively fuses useful linguistic clues for past tense written in Japanese and English into the Chinese text to resolve cross-lingual ambiguities.

Table 1 presents the characteristics that TRIP exhibits compared to existing methods. We report whether the models use trilingual document pairs for pre-training, and we report whether document-level tasks such as document-level machine translation or abstractive summarization are reported in their original papers. To our best knowledge, this is the first paper in our field to mine and use trilingual document pairs for multilingual pre-training. This is also the first work that features Grafting.

More formally, we first denote \mathcal{N} as the number of training document pairs in trilingual translation triplets of (x_1, x_2, x_3) in a pre-training corpus \mathcal{D} . Given a Seq2Seq generation model (Sutskever et al., 2014), TRIP optimizes the likelihood:

$$\sum_{n=1}^{\mathcal{N}} \mathbb{E}_{x_1^n, x_2^n, x_3^n \in \mathcal{D}} [-\log P_{\theta}(x_3 | x_1 \textcircled{\text{T}} x_2)], \quad (1)$$

³Grafting refers to joining two plants together by cutting and using scion (the upper part of the grafting) as the top and the understock (the lower part of the grafting) as the root.

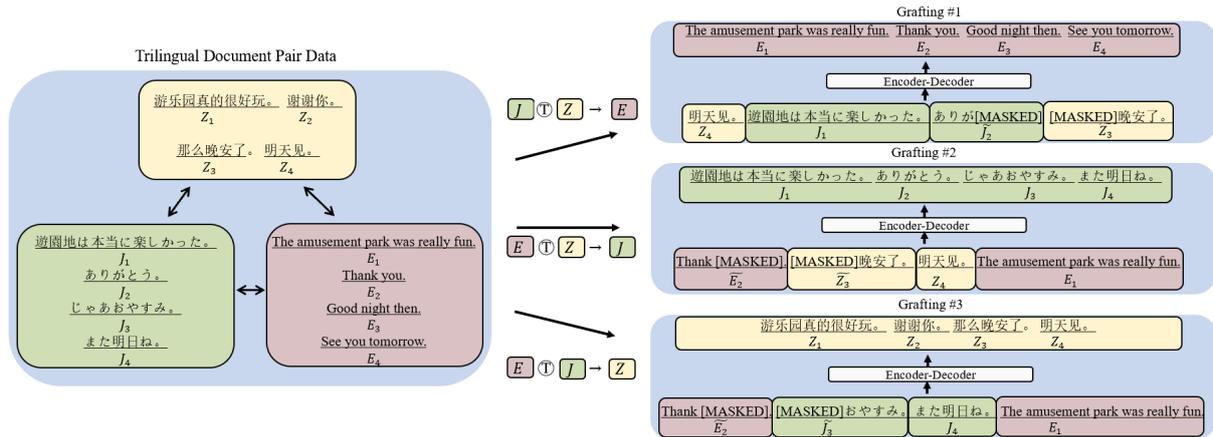


Figure 1: Overview of **Triangular Document-level Pre-training (TRIP)**. We select three languages for demonstration. Here, Chinese is tenseless, and Japanese and English contain past tense as the linguistic clues that can resolve cross-lingual ambiguities. We present three Grafting cases, representing three different language combinations. For each trilingual pair, two languages serve as the input with the remaining one as the reference translation. We define a novel symbol \oplus that denotes a noise function that combines operations in sequence: splitting by half and concatenation (**Grafting**), and sentence permutation and span corruption. Z_n , J_n , and E_n for $n = \{1, 2, 3, 4\}$ denotes four sentences written in three different languages. \tilde{Z}_n , \tilde{J}_n , and \tilde{E}_n denotes corrupted sentences.

where we define \oplus as a novel operation that takes two documents in different languages as the input and takes three operations in sequence: splitting by half, concatenating, and sentence permutation.⁴

Creating Trilingual Document Pairs As there is no public corpus with trilingual document pairs, TRIP creates **MTDD**,⁵ a high-quality trilingual parallel corpus with document translation pairs across 115 languages, 5,669 bilingual directions, and 99,628 trilingual combinations. The corpus is sourced from the high-quality news documents scoped from an in-house website⁶ timestamped from April 2021 to July 2022. The whole procedure is composed of two steps: (i) creating bilingual document pairs and (ii) creating trilingual document pairs based on the bilingual document pairs.

To obtain bilingual document pairs, we follow ParaCrawl (Bañón et al., 2020) to translate all the documents we have into English using a light-weighted word-based machine translation model. The resulting translation is used for pairing only and the documents are paired and thresholded with similarity scores such as tf-idf computed on their English translation (Bañón et al., 2020). To improve efficiency, we attempt to pair documents

⁴As a pre-training method, TRIP is robust and does not require the sentences in trilingual document pairs to be perfectly aligned in their orderings. Filtering the non-perfect pairs can throw away the data and deteriorate the performance gains.

⁵Full name is masked for anonymization.

⁶Full address is masked for anonymization.

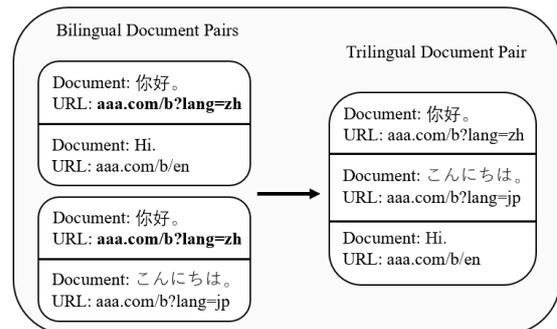


Figure 2: Illustration for the URL matching mechanism to create trilingual document pairs from bilingual data. In this case, we construct trilingual data by successfully matching the URL address for the Chinese document.

only if they are timestamped within a small window such as one week. The motivation is that the semantic news with the same meaning in different languages are often reported within a small timestamp window in high probabilities. The resulting document pairs are further thresholded and filtered with LASER (Artetxe and Schwenk, 2018),⁷ which is a multilingual sentence representation.

Given the bilingual data constructed as above, we follow previous works (Bañón et al., 2020; El-Kishky et al., 2020). These previous works leverage URL addresses for constructing bilingual data. In contrast, we use URL addresses to construct trilingual data pairs by matching and linking. Fig-

⁷<https://github.com/facebookresearch/LASER>

ure 2 depicts a detailed illustration.

For space reasons, we present statistics to illustrate the scale of MTDD in Table 9 in Appendix D. We also note that existing resources such as MTmC4 (Lee et al., 2022) used by DOCmT5 can be less favourable for our experiments as (i) MTmC4 is composed of synthetic data that could be of lower quality, (ii) MTmC4 is not publicly available at the time of writing, and (iii) MTmC4 can lead to potential data leakage for the test sets on TED Talks.

3 Experiments

3.1 TRIP Pre-training

Model Configuration We use a Transformer architecture that is composed of 24 Transformer encoder layers and 12 interleaved decoder layers. In addition, it has an embedding size of 1024, and a dropout rate of 0.1. The feed-forward network is configured to have a size of 4096 with 16 attention heads. For parameter initialization, we follow Ma et al. (2021) and Yang et al. (2021) to train a sentence-level MT system. The motivation is that previous studies have shown that the hybrid training of sentence-level and document-level MT can improve the performance of document-level translation (Sun et al., 2022). We call it the Baseline Model in the remaining of this paper.

Data and Pre-processing As described in Section 2, we create a trilingual document-level corpus, MTDD, for TRIP pre-training with the use of trilingual document pairs. We create a list of keywords to automatically clean and remove noisy text such as claims and advertisements. We follow Ma et al. (2021) to use SentencePiece (Kudo and Richardson, 2018) for tokenization, and we use the same SentencePiece model as Yang et al. (2021). Following the previous works, we prefix the inputs with a language tag that indicate the target language of the generation for both pre-training and fine-tuning.

Training Details We use the Adam optimizer (Kingma and Ba, 2014) with $\beta_1 = 0.9$ and $\beta_2 = 0.98$ for our multilingual pre-training. The learning rate is set as $1e-5$ with a warmup step of 4000. We use the label smoothing cross-entropy for our translation loss and we set label smoothing with a ratio of 0.1 for model training. All of our pre-trainings are conducted on 16 NVIDIA V100 GPUs. We set the batch size as 512 tokens per GPU. To simulate a larger batch size, we update the model every 128

Model	Fr→En	De→En	Zh→En	Vi→En	Cs→En	Th→En	Avg.
<i>Sentence-level MT Models</i>							
HAN†	-	-	24.00	-	-	-	-
M2M-100	50.18	42.24	26.62	34.92	37.84	27.28	36.51
mBART	48.69	44.80	28.39	37.18	39.47	-	-
Baseline Model	50.69	47.07	30.35	39.59	43.05	32.30	40.51
<i>Document-level MT Models</i>							
mT5†	-	-	24.24	-	-	-	-
M2M-100	49.43	43.82	26.63	35.91	39.04	25.93	36.79
mBART	49.16	44.86	29.60	37.09	39.64	-	-
MARGE†	-	-	28.40	-	-	-	-
DOCmT5†	-	-	31.40	-	-	-	-
Baseline Model	49.53	45.98	30.17	39.28	42.33	30.62	39.65
Baseline Model ⁺	50.74	46.46	30.65	39.67	42.64	31.70	40.31
TRIP (Ours)	51.94	48.24	31.63	40.52	44.22	32.87	41.57

Table 2: Results for document-level MT on TED Talks in the direction of ($X \rightarrow \text{En}$). We report the d-BLEU scores for all the results. †: scores are taken from the official papers for these models. -: the scores are not reported or the language is not supported. The Baseline Model refers to the model described in Section 3.1. The Baseline Model⁺ represents a document-level model continually pre-trained with the bilingual data in MTDD. For a fair comparison, the trilingual data used by TRIP are constructed from these bilingual data. We perturbed them on sentence permutation and span corruption as the noise functions, with no use of trilingual data.

steps. For the Grafting operation \textcircled{T} defined for TRIP, we split the documents 50% by 50%.

3.2 Multilingual Document-level MT

3.2.1 TED Talks

Experimental Settings Following DOCmT5, we use the IWSLT15 Campaign for the evaluation of TED Talks. Prior systems have reported scores on only 1 or 2 translation directions (Lee et al., 2022; Sun et al., 2022), and DOCmT5 supports only the translation direction into English ($X \rightarrow \text{En}$). We report more language directions while DOCmT5 only evaluates on ($\text{Zh} \rightarrow \text{En}$). Following DOCmT5, we split all documents into a maximum of 512 tokens for all train/dev/test sets during training and inference. We use the official parallel training data from IWSLT15 without any additional monolingual data, with the official 2010 dev set and 2010-2013 test set for evaluation (Lee et al., 2022). We compute d-BLEU (Papineni et al., 2002; Liu et al., 2020; Bao et al., 2021), a BLEU score for documents. We use SacreBLEU for evaluation.⁸

⁸<https://github.com/mjpost/sacrebleu>

Model	Fr→En	De→En	Zh→En	Cs→En	Avg.
<i>Sentence-level MT Models</i>					
M2M-100	31.58	25.65	18.47	28.17	25.97
mBART	29.93	29.31	18.33	30.15	26.93
Baseline Model	35.59	34.71	27.23	37.39	33.73
<i>Document-level MT Models</i>					
M2M-100	32.67	25.78	17.85	29.06	26.34
mBART	30.14	26.35	15.01	29.79	25.32
Baseline Model	36.38	34.24	25.58	36.97	33.29
Baseline Model ⁺	38.47	35.20	26.74	37.26	34.42
TRIP (Ours)	39.49	35.48	27.58	38.06	35.15

Table 3: Results for document-level MT on the News benchmark in the direction of ($X \rightarrow \text{En}$).

Baseline Systems We report strong baselines evaluated at both sentence and document levels, including SOTA models DOCmT5[†] (Lee et al., 2022), M2M-100 (Fan et al., 2022), mBART (Liu et al., 2020), HAN[†] (Miculicich et al., 2018), MARGE[†] (Lewis et al., 2020a), and the Baseline Model that we use to initialize the weights for TRIP. [†]: the scores are taken from existing papers. We also compare to the Baseline Model⁺, a document-level model pre-trained continually on the Baseline Model with the bilingual data used to construct the trilingual data in MTDD. We do not compare to PARADISE (Reid and Artetxe, 2022), a pre-trained model that uses dictionary denoising on monolingual data, as its weights are not publicly available so far. During our trials, we found that monolingual dictionary denoising can degrade document-level systems. We think that it could better serve sentence-level tasks such as sentence-level MT and cross-lingual classification as conducted in its original paper. See Appendix C for the number of model parameters.

Results Table 2 presents the evaluation results for TED Talks in the directions of ($X \rightarrow \text{En}$). TRIP clearly surpasses the baselines. TRIP surpasses the Baseline Model when both are fine-tuned at the document level by an average of 1.87 points in d-BLEU. TRIP surpasses the Baseline Model fine-tuned at the sentence level by an average of 1.01 points in d-BLEU. We postulate that the Baseline Model fine-tuned at the document level is no better than that of the sentence level due to the reason of the long input problem (Koehn and Knowles, 2017), and also due to the reason that the Baseline Model itself is pre-trained at the sentence level. TRIP beats the prior SOTA system DOCmT5. For space reasons, we present in Appendix A the evaluations in the ($X \rightarrow X$) directions, which also show that

TRIP effectively improves language pairs that are unseen during pre-training.

We also found that (i) the Baseline Model⁺ clearly surpasses the Baseline Model and (ii) TRIP clearly surpasses the Baseline Model⁺. This observation indicates two points: (i) the bilingual data in MTDD used to construct the trilingual data are of high quality and (ii) the trilingual objective with the Grafting mechanism is superior to the conventional bilingual objectives for multilingual pre-training.

3.2.2 News

Experimental Settings For evaluation on the News benchmark, we follow Sun et al. (2022) to use News Commentary v11 as the training set. For Cs and De, we use newstest2015 as the dev set, and newstest2016/newstest2019 as the test set respectively. For Fr, we use newstest2013 as the dev set and newstest2015 as the test set. For Zh, we use newstest2019 as the dev set and newstest2020 as the test set. We use the same dataset preprocessing and evaluation metric as for the TED Talks.

Baseline Systems As the weights for DOCmT5 are not available at the time of writing, we compare our system to various strong baselines such as M2M-100, mBART, the Baseline Model, and the Baseline Model⁺. The scores are obtained by fine-tuning the official checkpoints.

Results Table 3 shows obvious and consistent improvements by up to 3.11 d-BLEU points (from 36.38 to 39.49) with TRIP for ($\text{Fr} \rightarrow \text{En}$) compared to the Baseline Model.

3.2.3 Europarl

Experimental Settings For the Europarl dataset (Koehn, 2005), we follow Sun et al. (2022) to use Europarl-v7, and we experiment with the setting of ($X \rightarrow \text{En}$) where we test nine languages: Da, De, El, Es, Fr, It, Nl, Pt, and Sv. Like previous works (Bao et al., 2021; Sun et al., 2022), the dataset is randomly partitioned into train/dev/test divisions. Additionally, we split by English document IDs to avoid information leakage.

Baseline Systems As the weights for DOCmT5 are not available at the time of writing, we compare our system to various strong baselines such as M2M-100, mBART, the Baseline Model, and the Baseline Model⁺. The scores are obtained by fine-tuning the official checkpoints.

Model	Da→En	De→En	El→En	Es→En	Fr→En	It→En	Nl→En	Pt→En	Sv→En
<i>Sentence-level MT Models</i>									
M2M-100	50.40	47.38	52.28	52.03	48.26	49.70	46.78	49.84	52.34
mBART	-	48.28	-	-	49.16	50.83	47.48	-	-
Baseline Model	48.94	47.25	53.46	50.57	47.68	49.49	45.95	50.65	52.77
<i>Document-level MT Models</i>									
M2M-100	50.33	47.00	52.24	52.14	48.13	49.71	46.65	40.68	52.28
mBART	-	47.70	-	-	48.98	50.62	46.96	-	-
Baseline Model	49.85	47.64	53.34	51.32	48.46	50.26	47.12	50.13	52.42
Baseline Model ⁺	49.90	47.75	53.75	51.78	48.70	50.37	47.18	50.49	52.49
TRIP (Ours)	51.13	48.30	54.38	52.29	49.36	51.23	48.07	51.03	53.43

Table 4: Results for document-level machine translation on Europarl in the direction of (X → En).

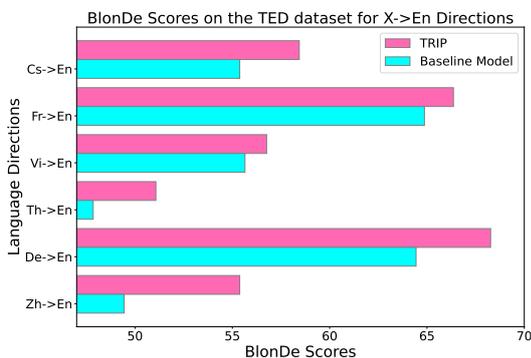


Figure 3: BlonDe scores on the TED Talks evaluated with TRIP and the Baseline Model (Document-level).

Results By comparing TRIP to strong baselines, we see that the improvements with TRIP are consistent in all directions, and surpass all the strong baselines. This validates TRIP’s effectiveness.

3.2.4 Coherence and Consistency Evaluation

BlonDe Evaluation Figure 3 depicts the evaluations on TED Talks with BlonDe scores (Jiang et al., 2022), an evaluation metric designed for document-level MT which considers coherence and consistency issues that require the model to resolve cross-lingual ambiguities. Consistent improvements can be observed in all the directions on TED Talks with TRIP, meaning that TRIP generates more coherent and consistent translations than the baseline does. As discussed in Section 2, we postulate that these improvements attribute to the Grafting mechanism that resolves cross-lingual ambiguities by exploiting useful linguistic clues in trilingual data. This improves translation in coherence and consistency as reflected in the BlonDe scores. We demonstrate case studies for more analysis of coherence and consistency issues.

Case Study Table 5 presents three case studies that demonstrate and compare the outputs between TRIP and the baseline systems. We highlight the correct translation in aqua and the wrong translation in hot pink. In addition to the comparison to the Baseline Models, we also present the outputs from popular commercial translation systems Google Translate, Microsoft Translator, and DeepL Translate. Each case demonstrates that TRIP is the best in terms of three characteristics respectively: (i) tense consistency (Jiang et al., 2022; Sun et al., 2022) across the sentences, (ii) noun-related issues (Jiang et al., 2022) such as singular and plural consistency as well as attaching definite article ‘the’ to a previously mentioned object ‘light’, and (iii) conjunction presence that indicates the relationship between sentences and makes the translation natural and fluent (Xiong et al., 2019; Sun et al., 2022). While some translations in the third case are acceptable, missing coordinating conjunction does not precisely capture the relationship between sentences and can make the translation less fluent.

TRIP is the best one among the systems at resolving cross-lingual ambiguities. This observation highlights the necessity of translating with document-level contexts for resolving cross-lingual ambiguities. The observations also align with the BlonDe measurements reported above.

3.3 Cross-lingual Abstractive Summarization

Experimental Settings We follow the same setting used by DOCmT5 (Lee et al., 2022) to evaluate cross-lingual abstractive summarization on the benchmark of Wikilingua (Ladhak et al., 2020). The only difference is that they put a special prefix “Summarize X to Y” where X and Y are the source and target language tags for summarization like mT5. We put a target language tag as the prefix.

Case 1: Tense Consistency (Jiang et al., 2022; Sun et al., 2022)	
Source, 但是这是一个大致的抽象的讨论, 当某些间隙的时候, 奥克塔维奥说, “保罗,也许我们可以观看TEDTalk。” TEDTalk用简单的方式就讲明了,
Reference But it was a fairly abstract discussion, and at some point when there was a pause, Octavio said , "Paul, maybe we could watch the TEDTalk." So the TEDTalk laid out in very simple terms, ...
Google Translate, But it's a roughly abstract discussion when at some point Octavio said , "Paul, maybe we can watch the TEDTalk." The TEDTalk said it in a simple way, ...
Microsoft Translator, But it's a roughly abstract discussion when, at certain intervals, Octavio said , "Paul, maybe we can watch TEDTalk." TEDTalk explains it in a simple way, ...
DeepL Translate, But it was a broadly abstract discussion, and when there were certain breaks, Octavio said , "Paul, maybe we can watch TEDTalk." TEDTalk uses simple way to illustrate, ...
Baseline Model (Sentence-level), But it's kind of an abstract discussion, and at some point, Octavio says , "Paul, maybe we can watch the TEDTalk." And the TEDTalk simply explains that, ...
Baseline Model (Document-level) But it's sort of an abstract discussion. And at some point, Octavio said , "Paul, maybe we can watch the TEDTalk." The TEDTalk explained , in a very simple way, ...
TRIP, But it was a sort of abstract discussion, and at some point in the intermission, Octavio said , "Paul, maybe we can watch the TEDTalk." And the TEDTalk made it clear, ...
Case 2: Noun-related Issues (Jiang et al., 2022)	
Source, 当光在西红柿上走过时, 它一直在闪耀。它并没有变暗。为什么? 因为西红柿熟了, 并且光在西红柿内部反射,
Reference, as the light washes over the tomato , It continues to glow. It doesn't become dark. Why is that? Because the tomato is actually ripe , and the light is bouncing around inside the tomato, ...
Google Translate, as the light passed over the tomatoes , It kept shining. It didn't get darker. Why? Because the tomatoes are ripe , and light is reflected inside the tomatoes, ...
Microsoft Translator, as the light walks over the tomatoes , It keeps shining. It didn't darken. Why? Because the tomatoes are ripe , and light is reflected inside the tomatoes, ...
DeepL Translate, as the light traveled over the tomatoes , it kept shining. It doesn't dim. Why? Because the tomatoes are ripe and the light is reflecting inside the tomatoes, ...
Baseline Model (Sentence-level), as the light goes over the tomato , It's always glowing. It's not darkening. Why? Because the tomato is ripe , and light is reflected inside the tomato, ...
Baseline Model (Document-level), as the light passes over the tomato , It keeps flashing. It doesn't get darker. Why? Because the tomatoes are ripe , and the light is reflected inside the tomato, ...
TRIP, as the light passes over the tomato , It's flashing all the time. It's not getting darker. Why? Because the tomato is ripe , and the light is reflected inside the tomato, ...
Case 3: Conjunction Presence (Xiong et al., 2019; Sun et al., 2022)	
Source, 我想提醒大家, 我已经谈论了很多前人的事情。我还想考虑一下, 民主会是什么样子,或者是已经是什么样子的可能性如果我们可以让更多的母亲参与进来,
Reference, I want to suggest to you that I've been talking a lot about the fathers. And I want to think about the possibilities of what democracy might look like, or might have looked like, if we had more involved the mothers, ...
Google Translate, I want to remind everyone that I've talked a lot about my predecessors. I also want to think about what democracy would look like, or is it already What the possibilities look like if we could get more mothers involved, ...
Microsoft Translator, I want to remind you that I have talked a lot about my predecessors. I would also like to consider what democracy would look like, or already be What kind of possibilities if we can involve more mothers, ...
DeepL Translate, I want to remind you that I've talked about a lot of things that have come before. I also want to consider the possibility of what democracy would look like, or what it already looks like if we could get more mothers involved in, ...
Baseline Model (Sentence-level), I want to remind you that I've talked about a lot of my predecessors. I also want to think about what democracy might look like, or what democracy might look like if we could get more mothers involved, ...
Baseline Model (Document-level), I'd like to remind you that I've talked about a lot of things before. I'd also like to think about the possibilities of what democracy might look like, or what it might be like, if we could get more mothers to participate, ...
TRIP, I want to remind you that I've talked a lot about the past. And I want to think about the possibilities of what democracy might look like, or already looks like, if we can get more mothers involved, ...

Table 5: Three case studies from TED Talks demonstrate that TRIP captures better tense consistency, noun-related issues, and conjunction presence. We highlight the correct translation in aqua (darker one when printed in B&W), and the mistakes in hot pink (lighter one when printed in B&W). Google Translate: <https://translate.google.com/>, Microsoft Translator: <https://www.bing.com/translator>, DeepL Translate: <https://www.deepl.com/translator>.

We use the F1 measure for ROUGE-1/ROUGE-2/ROUGE-L scores (Lin, 2004) for evaluation.

Baseline Systems We report the scores for DOCmT5 taken from Lee et al. (2022), and we use prior SOTA scores from the official GEM benchmark (Gehrmann et al., 2021) for mT5, ByT5 (Xue et al., 2022). We also employ mBART and the Baseline Models as the baselines. See Appendix C for the number of model parameters.

Results Table 6 demonstrates that TRIP clearly exceeds previous SOTA systems in several directions, including up to 8.9 ROUGE-L points in (Hi → En) compared to DOCmT5. Hence, we conclude that TRIP is an effective multilingual pre-training framework for cross-lingual abstractive summarization. We postulate that the improvement is attributed to the trilingual pre-training objective overlooked by previous works such as DOCmT5.

Model	Tr→En	Vi→En	Ru→En	Es→En	Hi→En	Fr→En	Id→En
mT5-XL†	40.0/18.3/33.3	37.6/14.9/31.2	37.2/14.6/30.9	41.2/17.2/34.6	-/-	-/-	-/-
ByT5†	35.9/15.8/29.8	32.7/12.2/27.2	31.4/11.0/26.2	35.1/13.5/29.1	-/-	-/-	-/-
mBART†	34.4/13.0/28.1	32.0/11.1/26.4	33.1/11.0/27.8	38.3/15.4/32.4	-/-	-/-	-/-
DOC-mT5†	37.7/16.7/31.4	32.4/11.9/27.0	33.6/12.8/28.5	36.8/15.0/31.5	34.2/13.3/27.9	36.3/14.3/30.8	35.2/13.7/29.5
Baseline Model	42.4/19.7/36.4	38.5/15.8/32.9	34.9/13.4/29.7	36.9/14.8/31.4	40.9/18.0/35.0	37.3/14.9/31.9	37.8/15.3/32.2
Baseline Model ⁺	42.6/19.6/36.6	38.8/16.1/33.1	34.9/13.3/29.6	37.1/14.8/31.5	40.7/18.1/34.9	37.2/14.9/31.8	37.6/15.2/31.9
TRIP (Ours)	45.3/22.5/39.0	40.8/17.3/34.4	36.6/14.6/30.8	38.7/15.9/32.7	42.8/19.9/36.8	38.5/16.0/32.9	39.4/16.4/33.3

Table 6: Results for cross-lingual abstractive summarization on Wikilingua in ($X \rightarrow \text{En}$). We report the scores of F-measure for ROUGE-1/ROUGE-2/ROUGE-L. -: the score is not reported. †: the scores are taken from Lee et al. (2022) and the official GEM benchmark (Gehrmann et al., 2021): <https://gem-benchmark.com/results>.

Also, we found that using bilingual data for Baseline Model⁺ seems less beneficial on Wikilingua for cross-lingual abstractive summarization. TRIP clearly surpasses the Baseline Model⁺. This observation indicates that the trilingual objective with the Grafting mechanism is superior to the conventional bilingual objectives for multilingual pre-training.

Case Study Table 7 in Appendix shows three case studies that TRIP outputs better abstractive cross-lingual summarization. For space reasons, we leave more details in Appendix B.

4 Related Work

4.1 Multilingual Pre-training

Multilingual pre-training has achieved great success. Previous works can be categorized into two streams: monolingual pre-training (Conneau et al., 2020; Liu et al., 2020; Xue et al., 2021) and bilingual pre-training (Huang et al., 2019; Chi et al., 2021; Ouyang et al., 2021; Tang et al., 2021; Chi et al., 2021; Reid and Artetxe, 2022; Lee et al., 2022). Monolingual pre-training uses monolingual corpora in many different languages and perturbs the inputs with sentence permutation (Liu et al., 2020) and span corruption (Xue et al., 2021) and requires the model to reconstruct the original input. Reid and Artetxe (2022) also proposes dictionary denoising on monolingual data. For bilingual pre-training, Tang et al. (2021) uses clean sentence-level bilingual translation pairs on pre-trained models to improve MT. Chi et al. (2021) extends mT5 with objectives such as translation span corruption. DOCmT5 (Lee et al., 2022) creates synthetic translation pairs and uses sentence permutation for a document-level multilingual pre-training.

So far, document-level multilingual pre-training with parallel data is currently understudied in the field, and all the works mentioned above overlooked the value of trilingual parallel data.

4.2 Document-level Cross-lingual Tasks

Document-level MT and cross-lingual abstractive summarization are the two document-level cross-lingual tasks that we investigate in this paper.

Document-level MT (Miculicich et al., 2018; Maruf et al., 2019, 2021; Lu et al., 2022) is a challenging translation task, possibly due to the long input problem (Pouget-Abadie et al., 2014; Koehn and Knowles, 2017) when directly modelling the long document and the necessity in understanding contexts (Voita et al., 2018, 2019). Therefore, many works focus on using sentence-level models with a smaller contextual window to simulate document-level MT (Zheng et al., 2020; Chen et al., 2020). This paper follows the challenging setting (Bao et al., 2021; Lee et al., 2022) that directly optimizes a document-level model with a longer context window that provides a richer source of context, which is also a double-edged sword that could be harder due to the long input problem.

Abstractive summarization is a generation task that requires an understanding of texts (Chopra et al., 2016; Fan et al., 2018). We focus on a cross-lingual setting where source and target are written in different languages (Ladhak et al., 2020).

5 Conclusions

We present a novel sequence-to-sequence multilingual document-level pre-training methodology called **TRIP**, which is the first in our field to propose a trilingual objective for multilingual pre-training through Grafting. We also propose a novel method to construct high-quality trilingual document pairs. Experimental results indicate that TRIP achieves competitive SOTA scores on both multilingual document-level machine translation and cross-lingual abstractive summarization. Future works could improve TRIP to include polygonal parallel translation pairs in multilingual pre-training. We plan to release the model checkpoints and a manu-

ally annotated benchmark created using our created document-level corpus MTDD to facilitate future research on multilingual document-level MT.

Limitations

TRIP TRIP leverages high-quality document-level trilingual translation pairs for pre-training on multilingual models. It is usually harder to collect high-quality trilingual data than to collect monolingual data written in different languages used by conventional methods. While we can possibly relax the quality bar for the data, additional experiments should be done to verify this view.

MTDD We create MTDD, a corpus that is composed of trilingual document pairs. It could be further extended to include polygonal parallel document pairs to provide a stronger signal for multilingual pre-training. We leave this to future works.

Large Language Models Large Language Models (LLMs) such as ChatGPT have shown good translation abilities (Lu et al., 2023), while they still lag behind supervised systems (Jiao et al., 2023; Zhu et al., 2023). We do not directly compare them, as they are much larger in their number of parameters than the systems described in this work.

Ethics Statement

We honour and support the EMNLP Code of Ethics. The datasets used in this work are well-known and widely used, and the dataset pre-processing does not use any external textual resource. We also curate a corpus for pre-training language models. Although we have made our best efforts in reducing potentially offensive and toxic data, the models are subject to generating offensive context. But the issues mentioned above are widely known to exist for these models commonly. Any content generated does not reflect the view of the authors.

References

Mikel Artetxe, Sebastian Ruder, Dani Yogatama, Gorka Labaka, and Eneko Agirre. 2020. [A call for more rigor in unsupervised cross-lingual learning](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 7375–7388, Online. Association for Computational Linguistics.

Mikel Artetxe and Holger Schwenk. 2018. [Massively Multilingual Sentence Embeddings for Zero-Shot Cross-Lingual Transfer and Beyond](#). *arXiv e-prints*, page arXiv:1812.10464.

Marta Bañón, Pinzhen Chen, Barry Haddow, Kenneth Heafield, Hieu Hoang, Miquel Esplà-Gomis, Mikel L. Forcada, Amir Kamran, Faheem Kirefu, Philipp Koehn, Sergio Ortiz Rojas, Leopoldo Pla Sempere, Gema Ramírez-Sánchez, Elsa Sarriás, Marek Strelec, Brian Thompson, William Waites, Dion Wiggins, and Jaume Zaragoza. 2020. [ParaCrawl: Web-scale acquisition of parallel corpora](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 4555–4567, Online. Association for Computational Linguistics.

Guangsheng Bao, Yue Zhang, Zhiyang Teng, Boxing Chen, and Weihua Luo. 2021. [G-transformer for document-level machine translation](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 3442–3455, Online. Association for Computational Linguistics.

Mauro Cettolo, Jan Niehues, Sebastian Stüker, Luisa Bentivogli, Roldano Cattoni, and Marcello Federico. 2015. [The IWSLT 2015 evaluation campaign](#). In *Proceedings of the 12th International Workshop on Spoken Language Translation: Evaluation Campaign*, pages 2–14, Da Nang, Vietnam.

Junxuan Chen, Xiang Li, Jiarui Zhang, Chulun Zhou, Jianwei Cui, Bin Wang, and Jinsong Su. 2020. [Modeling discourse structure for document-level neural machine translation](#). In *Proceedings of the First Workshop on Automatic Simultaneous Translation*, pages 30–36, Seattle, Washington. Association for Computational Linguistics.

Zewen Chi, Li Dong, Shuming Ma, Shaohan Huang, Saksham Singhal, Xian-Ling Mao, Heyan Huang, Xia Song, and Furu Wei. 2021. [mT6: Multilingual pretrained text-to-text transformer with translation pairs](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 1671–1683, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.

Zewen Chi, Li Dong, Shuming Ma, Shaohan Huang, Xian-Ling Mao, Heyan Huang, and Furu Wei. 2021. [MT6: Multilingual Pretrained Text-to-Text Transformer with Translation Pairs](#). *arXiv e-prints*, page arXiv:2104.08692.

Zewen Chi, Li Dong, Furu Wei, Nan Yang, Saksham Singhal, Wenhui Wang, Xia Song, Xian-Ling Mao, Heyan Huang, and Ming Zhou. 2021. [InfoXLM: An information-theoretic framework for cross-lingual language model pre-training](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 3576–3588, Online. Association for Computational Linguistics.

Sumit Chopra, Michael Auli, and Alexander M. Rush. 2016. [Abstractive sentence summarization with attentive recurrent neural networks](#). In *Proceedings of*

- the 2016 Conference of the North American Chapter of the Association for Computational Linguistics: *Human Language Technologies*, pages 93–98, San Diego, California. Association for Computational Linguistics.
- Alexis Conneau, Kartikay Khandelwal, Naman Goyal, Vishrav Chaudhary, Guillaume Wenzek, Francisco Guzmán, Edouard Grave, Myle Ott, Luke Zettlemoyer, and Veselin Stoyanov. 2020. [Unsupervised cross-lingual representation learning at scale](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 8440–8451, Online. Association for Computational Linguistics.
- Ahmed El-Kishky, Vishrav Chaudhary, Francisco Guzmán, and Philipp Koehn. 2020. [CCAligned: A massive collection of cross-lingual web-document pairs](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 5960–5969, Online. Association for Computational Linguistics.
- Angela Fan, Shruti Bhosale, Holger Schwenk, Zhiyi Ma, Ahmed El-Kishky, Siddharth Goyal, Mandeep Baines, Onur Celebi, Guillaume Wenzek, Vishrav Chaudhary, Naman Goyal, Tom Birch, Vitaliy Liptchinsky, Sergey Edunov, Edouard Grave, Michael Auli, and Armand Joulin. 2022. Beyond english-centric multilingual machine translation. *J. Mach. Learn. Res.*, 22(1).
- Angela Fan, David Grangier, and Michael Auli. 2018. [Controllable abstractive summarization](#). In *Proceedings of the 2nd Workshop on Neural Machine Translation and Generation*, pages 45–54, Melbourne, Australia. Association for Computational Linguistics.
- Sebastian Gehrmann, Tosin Adewumi, Karmanya Aggarwal, Pawan Sasanka Ammanamanchi, Anuoluwapo Aremu, Antoine Bosselut, Khyathi Raghavi Chandu, Miruna-Adriana Clinciu, Dipanjan Das, Kaustubh Dhole, Wanyu Du, Esin Durmus, Ondřej Dušek, Chris Chinenye Emezue, Varun Gangal, Cristina Garbacea, Tatsunori Hashimoto, Yufang Hou, Yacine Jernite, Harsh Jhamtani, Yangfeng Ji, Shailza Jolly, Mihir Kale, Dhruv Kumar, Faisal Ladhak, Aman Madaan, Mounica Maddela, Khyati Mahajan, Saad Mahamood, Bodhisattwa Prasad Majumder, Pedro Henrique Martins, Angelina McMillan-Major, Simon Mille, Emiel van Miltenburg, Moin Nadeem, Shashi Narayan, Vitaly Nikolaev, Andre Niyongabo Rubungo, Salomey Osei, Ankur Parikh, Laura Perez-Beltrachini, Niranjan Ramesh Rao, Vikas Raunak, Juan Diego Rodriguez, Sashank Santhanam, João Sedoc, Thibault Sellam, Samira Shaikh, Anastasia Shimorina, Marco Antonio Sobrevilla Cabezudo, Hendrik Strobelt, Nishant Subramani, Wei Xu, Diyi Yang, Akhila Yerukola, and Jiawei Zhou. 2021. [The GEM benchmark: Natural language generation, its evaluation and metrics](#). In *Proceedings of the 1st Workshop on Natural Language Generation, Evaluation, and Metrics (GEM 2021)*, pages 96–120, Online. Association for Computational Linguistics.
- Haoyang Huang, Yaobo Liang, Nan Duan, Ming Gong, Linjun Shou, Daxin Jiang, and Ming Zhou. 2019. [Unicoder: A universal language encoder by pre-training with multiple cross-lingual tasks](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 2485–2494, Hong Kong, China. Association for Computational Linguistics.
- Yuchen Jiang, Tianyu Liu, Shuming Ma, Dongdong Zhang, Jian Yang, Haoyang Huang, Rico Sennrich, Ryan Cotterell, Mrinmaya Sachan, and Ming Zhou. 2022. [BlonDe: An automatic evaluation metric for document-level machine translation](#). In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 1550–1565, Seattle, United States. Association for Computational Linguistics.
- Wenxiang Jiao, Wenxuan Wang, Jen-tse Huang, Xing Wang, and Zhaopeng Tu. 2023. [Is ChatGPT A Good Translator? Yes With GPT-4 As The Engine](#). *arXiv e-prints*, page arXiv:2301.08745.
- Mihir Kale, Aditya Siddhant, Noah Constant, Melvin Johnson, Rami Al-Rfou, and Linting Xue. 2021. [nmT5 – Is parallel data still relevant for pre-training massively multilingual language models?](#) *arXiv e-prints*, page arXiv:2106.02171.
- Diederik Kingma and Jimmy Ba. 2014. Adam: A method for stochastic optimization. *International Conference on Learning Representations*.
- Philipp Koehn. 2005. [Europarl: A parallel corpus for statistical machine translation](#). In *Proceedings of Machine Translation Summit X: Papers*, pages 79–86, Phuket, Thailand.
- Philipp Koehn and Rebecca Knowles. 2017. [Six challenges for neural machine translation](#). In *Proceedings of the First Workshop on Neural Machine Translation*, pages 28–39, Vancouver. Association for Computational Linguistics.
- Taku Kudo and John Richardson. 2018. [SentencePiece: A simple and language independent subword tokenizer and detokenizer for neural text processing](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 66–71, Brussels, Belgium. Association for Computational Linguistics.
- Faisal Ladhak, Esin Durmus, Claire Cardie, and Kathleen McKeown. 2020. [WikiLingua: A new benchmark dataset for cross-lingual abstractive summarization](#). In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pages 4034–4048, Online. Association for Computational Linguistics.

- Chia-Hsuan Lee, Aditya Siddhant, Viresh Ratnakar, and Melvin Johnson. 2022. [DOCmT5: Document-level pretraining of multilingual language models](#). In *Findings of the Association for Computational Linguistics: NAACL 2022*, pages 425–437, Seattle, United States. Association for Computational Linguistics.
- Mike Lewis, Marjan Ghazvininejad, Gargi Ghosh, Armen Aghajanyan, Sida Wang, and Luke Zettlemoyer. 2020a. Pre-training via paraphrasing. In *Proceedings of the 34th International Conference on Neural Information Processing Systems, NIPS'20*, Red Hook, NY, USA. Curran Associates Inc.
- Mike Lewis, Yinhan Liu, Naman Goyal, Marjan Ghazvininejad, Abdelrahman Mohamed, Omer Levy, Veselin Stoyanov, and Luke Zettlemoyer. 2020b. [BART: Denoising sequence-to-sequence pre-training for natural language generation, translation, and comprehension](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 7871–7880, Online. Association for Computational Linguistics.
- Chin-Yew Lin. 2004. [ROUGE: A package for automatic evaluation of summaries](#). In *Text Summarization Branches Out*, pages 74–81, Barcelona, Spain. Association for Computational Linguistics.
- Yinhan Liu, Jiatao Gu, Naman Goyal, Xian Li, Sergey Edunov, Marjan Ghazvininejad, Mike Lewis, and Luke Zettlemoyer. 2020. [Multilingual denoising pre-training for neural machine translation](#). *Transactions of the Association for Computational Linguistics*, 8:726–742.
- Hongyuan Lu, Haoyang Huang, Shuming Ma, Dongdong Zhang, Furu Wei, and Wai Lam. 2022. [Multilingual Transitivity and Bidirectional Multilingual Agreement for Multilingual Document-level Machine Translation](#). *arXiv e-prints*, page arXiv:2209.13940.
- Hongyuan Lu, Haoyang Huang, Dongdong Zhang, Haoran Yang, Wai Lam, and Furu Wei. 2023. [Chain-of-Dictionary Prompting Elicits Translation in Large Language Models](#). *arXiv e-prints*, page arXiv:2305.06575.
- Shuming Ma, Li Dong, Shaohan Huang, Dongdong Zhang, Alexandre Muzio, Saksham Singhal, Hany Hassan Awadalla, Xia Song, and Furu Wei. 2021. [DeltaLM: Encoder-Decoder Pre-training for Language Generation and Translation by Augmenting Pretrained Multilingual Encoders](#). *arXiv e-prints*, page arXiv:2106.13736.
- Sameen Maruf, André F. T. Martins, and Gholamreza Haffari. 2019. [Selective attention for context-aware neural machine translation](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 3092–3102, Minneapolis, Minnesota. Association for Computational Linguistics.
- Sameen Maruf, Fahimeh Saleh, and Gholamreza Haffari. 2021. [A survey on document-level neural machine translation: Methods and evaluation](#). *ACM Comput. Surv.*, 54(2).
- Lesly Miculicich, Dhananjay Ram, Nikolaos Pappas, and James Henderson. 2018. [Document-level neural machine translation with hierarchical attention networks](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 2947–2954, Brussels, Belgium. Association for Computational Linguistics.
- Xuan Ouyang, Shuohuan Wang, Chao Pang, Yu Sun, Hao Tian, Hua Wu, and Haifeng Wang. 2021. [ERNIE-M: Enhanced multilingual representation by aligning cross-lingual semantics with monolingual corpora](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 27–38, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Kishore Papineni, Salim Roukos, Todd Ward, and Wei-Jing Zhu. 2002. [Bleu: A method for automatic evaluation of machine translation](#). In *Proceedings of the 40th Annual Meeting on Association for Computational Linguistics, ACL '02*, page 311–318, USA. Association for Computational Linguistics.
- Jean Pouget-Abadie, Dzmitry Bahdanau, Bart van Merriënboer, Kyunghyun Cho, and Yoshua Bengio. 2014. [Overcoming the curse of sentence length for neural machine translation using automatic segmentation](#). In *Proceedings of SSST-8, Eighth Workshop on Syntax, Semantics and Structure in Statistical Translation*, pages 78–85, Doha, Qatar. Association for Computational Linguistics.
- Machel Reid and Mikel Artetxe. 2022. [PARADISE: Exploiting parallel data for multilingual sequence-to-sequence pretraining](#). In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 800–810, Seattle, United States. Association for Computational Linguistics.
- Zewei Sun, Mingxuan Wang, Hao Zhou, Chengqi Zhao, Shujian Huang, Jiajun Chen, and Lei Li. 2022. [Rethinking document-level neural machine translation](#). In *Findings of the Association for Computational Linguistics: ACL 2022*, pages 3537–3548, Dublin, Ireland. Association for Computational Linguistics.
- Ilya Sutskever, Oriol Vinyals, and Quoc V. Le. 2014. Sequence to sequence learning with neural networks. In *Proceedings of the 27th International Conference on Neural Information Processing Systems - Volume 2, NIPS'14*, page 3104–3112, Cambridge, MA, USA. MIT Press.
- Yuqing Tang, Chau Tran, Xian Li, Peng-Jen Chen, Naman Goyal, Vishrav Chaudhary, Jiatao Gu, and An-

- gela Fan. 2021. [Multilingual translation from denoising pre-training](#). In *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*, pages 3450–3466, Online. Association for Computational Linguistics.
- Elena Voita, Rico Sennrich, and Ivan Titov. 2019. [When a good translation is wrong in context: Context-aware machine translation improves on deixis, ellipsis, and lexical cohesion](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 1198–1212, Florence, Italy. Association for Computational Linguistics.
- Elena Voita, Pavel Serdyukov, Rico Sennrich, and Ivan Titov. 2018. [Context-aware neural machine translation learns anaphora resolution](#). In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1264–1274, Melbourne, Australia. Association for Computational Linguistics.
- Hao Xiong, Zhongjun He, Hua Wu, and Haifeng Wang. 2019. [Modeling coherence for discourse neural machine translation](#). In *Proceedings of the Thirty-Third AAAI Conference on Artificial Intelligence and Thirty-First Innovative Applications of Artificial Intelligence Conference and Ninth AAAI Symposium on Educational Advances in Artificial Intelligence, AAAI’19/IAAI’19/EAAI’19*. AAAI Press.
- Linting Xue, Aditya Barua, Noah Constant, Rami Al-Rfou, Sharan Narang, Mihir Kale, Adam Roberts, and Colin Raffel. 2022. [ByT5: Towards a token-free future with pre-trained byte-to-byte models](#). *Transactions of the Association for Computational Linguistics*, 10:291–306.
- Linting Xue, Noah Constant, Adam Roberts, Mihir Kale, Rami Al-Rfou, Aditya Siddhant, Aditya Barua, and Colin Raffel. 2021. [mT5: A massively multilingual pre-trained text-to-text transformer](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 483–498, Online. Association for Computational Linguistics.
- Jian Yang, Shuming Ma, Haoyang Huang, Dongdong Zhang, Li Dong, Shaohan Huang, Alexandre Muzio, Saksham Singhal, Hany Hassan, Xia Song, and Furu Wei. 2021. [Multilingual machine translation systems from Microsoft for WMT21 shared task](#). In *Proceedings of the Sixth Conference on Machine Translation*, pages 446–455, Online. Association for Computational Linguistics.
- Zaixiang Zheng, Xiang Yue, Shujian Huang, Jiajun Chen, and Alexandra Birch. 2020. [Towards making the most of context in neural machine translation](#). In *Proceedings of the Twenty-Ninth International Joint Conference on Artificial Intelligence, IJCAI-20*, pages 3983–3989. International Joint Conferences on Artificial Intelligence Organization. Main track.
- Wenhao Zhu, Hongyi Liu, Qingxiu Dong, Jingjing Xu, Shujian Huang, Lingpeng Kong, Jiajun Chen, and Lei Li. 2023. [Multilingual Machine Translation with Large Language Models: Empirical Results and Analysis](#). *arXiv e-prints*, page arXiv:2304.04675.

<i>Case 1</i>	
Source	Ayakkabılarını (ve bağcıklarınla tabanlıklarını) kuruması için orta derecede ışık alan bir yere koy. Sıcak bir yere (örneğin, radyatörün yanına) ya da doğrudan güneş ışığına koyma çünkü bu, ayakkabılara zarar verebilir. Ayakkabılarını kurutucuya koymak tavsiye edilmez çünkü kurutucu, ayakkabı tabanlarını yamulabilir.
Source (Google-translated)	Put your shoes (and your laces and insoles) in a moderately light place to dry. Do not place it in a hot place (for example, near a radiator) or in direct sunlight as this may damage the shoes. Putting your shoes in the dryer is not recommended because the dryer can warp the soles of your shoes.
Reference	Air-dry your shoes.
Baseline Model (Document-level)	Allow your shoes (and laces) to dry.
TRIP	Let your shoes (and the laces) air dry.
<i>Case 2</i>	
Source	Bunun için yeşil bir arka plan üzerindeki beyaz konuşma balonuna dokun. Ana Ekranlarından birinde olması gerekir. 'ye dokun. Mesajlar ekranının sol üst köşesindedir. Açık bir sohbetin varsa Mesajlar menüsüne dönmek için ekranın sol üst köşesindeki < butonuna dokun. 'e dokun. Ekranının sağ alt köşesindedir. Seçilen mesajların silinir.
Source (Google-translated)	To do this, tap the white speech bubble on a green background. It should be on one of their Home Screens. Tap It's in the upper-left corner of the Messages screen. If you have an open chat, tap the < button in the upper left corner of the screen to return to the Messages menu. Tap . It's in the lower right corner of your screen. The selected messages are deleted.
Reference	Open your iPhone's messages. Tap Edit. Select each conversation you wish to delete. Tap Delete.
Baseline Model (Document-level)	Open your iPhone's Settings . Tap Messages. Tap Delete Messages.
TRIP	Open Messages. Tap the Messages tab. Tap Delete. Tap Delete to confirm.
<i>Case 3</i>	
Source	Bazıları için geçmiş yaşamlar gidilecek bir yer değil, seni sen yapan şeyin bir kısmıdır. İnsanlığın tarihi boyunca birçok kültür reenkarnasyonu inançlarının merkezine koymuştur. İslam ve Hıristiyanlık reenkarnasyona inanmasa da, Hinduistler, bazı Museviler ve bazı Budistler buna inanır. En iyisi kendini bir dine tümüyle adamaktansa (çünkü dinler çok kısıtlayıcı olabilir) kendi yolunu keşfetmen. Kendi manevi doğrularını kendin bul.
Source (Google-translated)	For some, past lives are not a place to go but part of what makes you who you are. Throughout the history of humanity, many cultures have put reincarnation at the center of their beliefs. Although Islam and Christianity do not believe in reincarnation, Hinduists, some Jews, and some Buddhists do. It's best to explore your own path rather than devote yourself entirely to a religion (because religions can be too restrictive). Find your own spiritual truth.
Reference	Become spiritual.
Baseline Model (Document-level)	Understand that some people believe in reincarnation. Find your own way.
TRIP	Explore your own spiritual journey.

Table 7: Three case studies from Wikilingua (Tr → En) demonstrate that TRIP outputs better summarization.

	Zh	Cs	Fr	Vi	Th	De
Zh	-	17.07/ 16.96	26.78/ 25.58	26.66/ 27.26	16.99/ 16.65	21.85/ 21.46
Cs	28.60/ 27.32	-	34.69/ 34.06	31.33/ 31.72	18.72/ 18.40	30.84/ 30.17
En	31.07/ 31.33	30.94/ 30.74	49.58/ 49.22	38.23/ 37.91	22.19/ 21.92	38.63/ 38.50
Fr	28.90/ 27.55	26.47/ 24.83	-	35.05/ 35.09	19.66/ 19.93	33.86/ 33.47
Vi	26.93/ 27.01	21.08/ 20.77	34.37/ 34.37	-	18.94/ 18.46	26.13/ 25.44
Th	25.56/ 24.81	18.24/ 17.74	27.74/ 26.54	27.69/ 27.38	-	22.78/ 21.87
De	27.91/ 27.72	24.72/ 24.63	37.03/ 36.87	30.70/ 31.10	19.61/ 19.37	-

Figure 4: Results on TED Talks in ($X \rightarrow X$) with our TRIP checkpoint pre-trained in ($X \rightarrow \text{En}$) directions only. The scores are written in TRIP as the former and the Baseline Model as the latter. Rows represent the source languages and columns represent the target languages. We highlight in aqua when TRIP wins (darker one when printed in B&W) and in hot pink (lighter one when printed in B&W) when the Baseline Model wins.

A Unseen ($X \rightarrow X$) Language Pairs on MT

Figure 4 reports the performance on TED Talks in the direction of ($X \rightarrow X$) with our TRIP checkpoint pre-trained in ($X \rightarrow \text{En}$) directions with our corpus. The row represents the translation source language and the column represents the translation target language. TRIP clearly improves most of these translation directions which are unseen during pre-training. This indicates that fact the TRIP can generalize the cross-lingual understanding ability to unseen language pairs. This aligns with the fact reported in Lee et al. (2022).

B Case Study on Summarization

Table 7 shows that TRIP outputs better summarization in (i) precisely capturing the context in Case 1, (ii) outputting consistent nouns, i.e., ‘messages’ instead of ‘settings’ in Case 2 and (iii) producing concise and accurate summarization in Case 3. This highlights that TRIP captures better cross-lingual understanding than the baseline system, which effectively mitigates cross-lingual ambiguities.

C Number of Model Parameters

Model	Number of Parameters
M2M-100	418M
mBART	611M
MARGE	963M
mT5	1.23B*
DOCmT5	1.23B*
ByT5-Small	300M
ByT5-Base	582M
ByT5-Large	1.23B*
mT5-XL	3.74B
Baseline Model	862M
Baseline Model ⁺	862M
TRIP (Ours)	862M

Table 8: Comparison in the number of parameters for the pre-trained models used in our experiments. *: these models all use the model architecture of mT5-Large, and we report the number of model parameters taken from the original paper of mT5 reported by Xue et al. (2021).

Source	Target	Size/GB	Source	Target	Size/GB
Es	En	3.22	Pt	Es	2.71
Es	Ca	2.07	Uk	Ru	1.60
Fr	Es	1.47	Es	Pt	1.47
En	De	1.25	Pt	En	1.14
Ca	Es	1.12	Fr	En	1.03
Ru	Uk	0.87	Pt	Fr	0.73

Table 9: A language list in ISO code for the top 12 language directions for the bilingual high-quality pre-training data to illustrate the scale of size.

Table 8 presents the number of model parameters for the pre-trained models used in our experiments.

For the scores of ByT5 presented in Table 6, we report the maximum scores for each direction among ByT5-Base, ByT5-Small, and ByT5-Large. This is due to space reasons. See <https://gem-benchmark.com/results> for the tailored scores.

D MTDD Corpus Scale

Table 9 presents the top-12 English-centric bilingual data statistics to illustrate the scale of MTDD. The total size of the data is about 40/80 GB respectively for the bilingual and the trilingual data applied with Grafting.