

# Segment Anything in Non-Euclidean Domains: Challenges and Opportunities

Yongcheng Jing<sup>1</sup>, Xinchao Wang<sup>2</sup>, Dacheng Tao<sup>1</sup>

<sup>1</sup>School of Computer Science, The University of Sydney, Darlington, NSW 2008, Australia,

<sup>2</sup>Department of Electrical and Computer Engineering, National University of Singapore, Singapore  
xinchao@nus.edu.sg, dacheng.tao@gmail.com

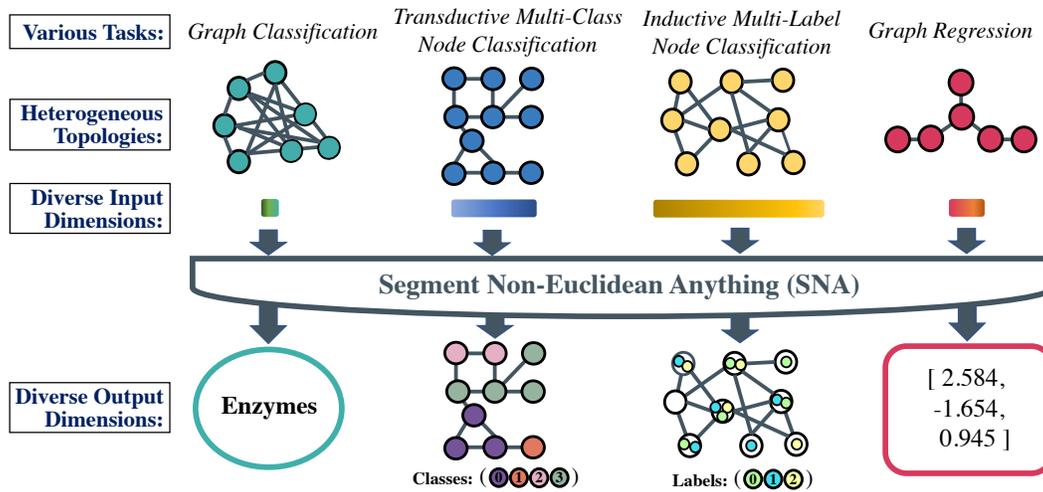


Figure 1: Illustrations of proposed foundation model in the non-Euclidean domain, which is referred to as “Segment Non-Euclidean Anything (SNA)”.

## Abstract

The recent work known as *Segment Anything (SA)* has made significant strides in pushing the boundaries of semantic segmentation into the era of *foundation models*. The impact of SA has sparked extremely active discussions and ushered in an encouraging new wave of developing foundation models for the diverse tasks in the Euclidean domain, such as object detection and image inpainting. Despite the promising advances led by SA, the concept has yet to be extended to the non-Euclidean graph domain. In this paper, we explore a novel **Segment Non-Euclidean Anything (SNA)** paradigm that strives to develop foundation models that can handle the diverse range of graph data within the non-Euclidean domain, seeking to expand the scope of SA and lay the groundwork for future research in this direction. To achieve this goal, we begin by discussing the recent achievements in foundation models associated with SA. We then shed light on the unique challenges that arise when applying the SA concept to graph analysis, which involves understanding the differences between the Euclidean and non-Euclidean domains from both the data and task perspectives. Motivated by these observations, we present several preliminary solutions to tackle the challenges of SNA and detail their corresponding limitations, along with several potential directions to pave the way for future SNA research. Experiments on five *Open Graph Benchmark*

(*OGB*) datasets across various tasks, including graph property classification and regression, as well as multi-label prediction, demonstrate that the performance of the naïve SNA solutions has considerable room for improvement, pointing towards a promising avenue for future exploration of *Graph General Intelligence*.

## 1 Introduction

Foundation models, as named in Bommasani et al. [2021], refer to models that demonstrate strong generalization across a wide range of downstream tasks, achieved through training on large-scale data. The era of foundation models marks a novel paradigm of artificial intelligence, which has been predominantly studied in the field of natural language processing (NLP) over the past few years. This line of research has led to several ground-breaking works, such as BERT Devlin et al. [2018], GPT-3 Brown et al. [2020], and GPT-4 OpenAI [2023a]. Of particular interest is the recent emergence of ChatGPT OpenAI [2023b], a specific application of the *Large Language Model (LLM)* of GPT-3.5. ChatGPT’s impressive ability to align natural language with human intent through interactive conversations has sparked a revolution towards artificial general intelligence Zhou et al. [2023].

Recently, the field of computer vision also witnessed a surge in the popularity of learning task-agnostic foundation models Wang et al. [2023a], Oquab et al. [2023], Yu et al. [2023], Liu et al. [2023a], Chen et al. [2023], Xu et al. [2023], Zou et al. [2023], Wang et al. [2023a], Fang et al. [2023], Yang et al. [2022a]. This movement, which we term as “Artificial Intelligence for Anything”, was sparked by the seminal work of Kirillov et al. Kirillov et al. [2023] with their *Segment Anything (SA)* model. SA introduced a prompt-based approach to segmentation that demonstrated impressive generalization capabilities across a range of downstream segmentation tasks. Concurrently, Zou et al. Zou et al. [2023] explored the use of a promptable, interactive model named SEEM (*Segmenting Everything Everywhere*) that offers support for a wider range of high-level semantic tasks and prompt types than SA. Notably, SEEM enables the composition of all prompt types, the complete coverage of every pixel in an image, and the semantic segmentation of every object. Additionally, Wang et al. Wang et al. [2023a] also contributed to this field with the development of SegGPT, a generalist model inspired by the visual prompt paradigm Bahng et al. [2022], Bar et al. [2022] that achieves zero-shot segmentation tasks. These advancements demonstrate significant promise for the development of robust and versatile foundation models for computer vision applications.

The breakthrough in visual foundation models has rapidly catalyzed further exploration in the field, leading to the development of several projects aimed at extending the SA paradigm. These include *Paint-Anything* Liu and Wang [2023a], *Transfer-Any-Style* Liu and Wang [2023b], Liu et al. [2023b], *Anything-3D* Yang and Wang [2023], Shen et al. [2023a], *Inpaint-Anything* Yu et al. [2023], *Napari-Segment-Anything* Bragantini [2023], *Image2Paragraph* Lab [2023a], *Segment-and-Track-Anything* Yang [2023a] and *Caption-Anything* Wang [2023]. A comprehensive survey of these developments is provided by Fang et al. in Fang and Wang [2023].

Despite the inspiring progress of visual foundation models in the Euclidean domain, there remains a lack of research studying foundation models in the non-Euclidean graph domain. To address this gap, this paper takes, to our knowledge, the first step towards developing foundation models tailored for non-grid graph data in the non-Euclidean domain, which we term as the “*Segment Non-Euclidean Anything (SNA)*” paradigm. The goal is to construct a foundation model for graph-related tasks, such as node- and graph-level property prediction and edge prediction, capable of handling diverse and irregular graph data with varying node numbers and feature dimensions across different domains, as shown in Fig. 1.

In terms of data, images are structured as regular grids with fixed three channels as inputs, while graphs exhibit irregular structures with diverse input channels and various topological configurations. Graphs also exhibit a higher degree of diversity than images, ranging from homogeneous graphs with single node and edge types to heterogeneous graphs containing various nodes and links across different domains such as social networks, molecule graphs, traffic graphs, and e-commerce product knowledge graphs. On the task side, graph analysis encompasses various task levels and settings, including transductive and inductive scenarios, and graph, node, and edge-level representation learning. The diversity of graph structures, data types, and tasks poses significant challenges to the development of foundation models in the non-Euclidean domain.

Driven by these observations, we propose several novel methods to alleviate the challenges faced by SNA. Specifically, we propose a meta-slimmable graph convolutional operation to address the issue of diverse input dimensions. This operation adaptively identifies a corresponding subset of neurons to handle the varying-dimension graphs. Furthermore, to tackle the problem of diverse-domain graph data and distinct task levels and settings, we propose the idea of a prompt-based graph analysis framework. This framework enables our SNA model to adapt to various downstream graphs and tasks by accepting an example labeled input-output pair as inputs. We acknowledge that our proposed methods are currently in a preliminary stage and intend to refine them further with feedback from the research community.

In sum, this paper makes four contributions to the field of foundation models:

- We give an overview on the evolution of foundation models in the Euclidean domain, with a focus on the recent advancements in foundation models associated with *Segment Anything*;
- We provide a discussion on the existing works related to foundation models in the non-Euclidean graph domain;
- We propose the task of *Segment Non-Euclidean Anything*, identify major challenges, and present several naïve SNA methods to address the dilemma;
- We present preliminary experimental results that demonstrate the inadequacy of existing vanilla solutions, highlighting the need for improved methods in the non-Euclidean domain.

We hope that our work can inspire future research into developing foundation models in the non-Euclidean domain.

## 2 Related Work: *The Evolution of Foundation Models*

In this section, we provide a brief overview of the development of foundation models in the Euclidean domain, spanning from their origins, their significant rise following the introduction of SA, and the new era of “*visual intelligence for anything*”.

### 2.1 The Origins of Foundation Models

The advent of *Natural Language Processing (NLP)* in late 2018 inaugurated the era of foundational models, epitomized by the proliferation of *Large Language Models (LLMs)* including but not limited to DALL-E Ramesh et al. [2021], BERT Devlin et al. [2018], and GPT-3 Brown et al. [2020]. These models are capable of adapting to diverse downstream tasks, thereby demonstrating their remarkable versatility. The first generation of foundation models has demonstrated an impressive range of linguistic capabilities, exhibiting a surprising degree of adaptability across a wide spectrum of linguistic contexts.

The burgeoning success of foundational models in NLP has sparked a wealth of research in this field. One such comprehensive investigation is presented by Bommasani et al. Bommasani et al. [2021], which delves into the technical aspects of foundation models, including their model architectures, training procedures, data, systems, security, and theory, as well as their societal impact, specifically concerning their potential for inequity and misuse. The study draws attention to the opportunities and risks associated with foundation models, which are based on conventional deep learning and transfer learning methodologies but possess emergent capabilities due to their scale. Furthermore, Bommasani et al. highlight the challenges of utilizing foundation models for lengthy legal documents and narratives. Bommasani et al. [2021] also suggests ways to assess the efficacy of foundation models and minimize the potential risks associated with their use. Bommasani et al. acknowledge that foundational models are still shrouded in uncertainty and that the current research marks only the beginning of a paradigm shift in the realm of AI systems.

The concept of foundational models in computer vision was introduced very early in the work of Hu et al. Hu et al. [2018] titled “*Learning to Segment Every Thing*”. This pioneering study, published in the early stages of research on visual foundation models, paved the way for the development of more advanced and accurate models in computer vision. Specifically, Hu et al. propose novel methods for the partial supervision training and weight transfer function of Mask R-CNN models to attain object instance segmentation. The work of Hu et al. addresses the challenge of using a smaller amount of annotated data for large-scale training and aim to surpass the limitations of current instance segmentation models, which are typically limited to 100 object categories. The new transfer

Table 1: An overview of the extensions of *Segment Anything*.

Paper / Repository	Title
Fang and Wang [2023]	Awesome-Anything
Jiang [2023]	Awesome Segment Anything
Xu [2023]	Awesome-Segment-Anything-Extensions
Chen et al. [2023]	Semantic Segment Anything
Xu et al. [2023]	Segment and Track Anything
Yang [2023a]	Segment-and-Track-Anything
Wang [2023]	Caption Anything
Liu and Wang [2023a]	Paint Anything
Liu and Wang [2023b]	Transfer Any Style
Yang and Wang [2023]	Anything-3D
Lab [2023a]	Image.txt: Transform Image Into Unique Paragraph
Bragantini [2023]	Napari-Segment-Anything
Yu et al. [2023]	Inpaint Anything
Bragantini [2023]	Napari-Segment-Anything
IDEA-Research [2023]	Grounded-Segment-Anything
Cao [2023]	GroundedSAM-Zero-Shot-Anomaly-Detection
Fei [2023]	Image Editing Anything
Lab [2023b]	Edit Anything by Segment-Anything
Rockey [2023]	Prompt-Segment-Anything
Li [2023]	SAM-RBox
Tin [2023]	Open-Vocabulary-Segment-Anything
Zho [2023]	SegDrawer
Hancharenka [2023]	Segment Anything EO Tools
Viet-Anh [2023]	AnyLabeling
Yang [2023b]	Optical Character Recognition with Segment Anything (OCR-SAM)
Amine [2023]	SAM Medical Imaging
Jaydeep_Dedaniya [2023]	LIME-SAM
Liu [2023]	SAM + MMDetection
Lab [2023c]	3D-Box via Segment Anything
Gao [2023]	Track-Anything
Dave [2023]	Towards Segmenting Anything That Moves (Segment-Any-Moving)

learning approach leverages mask prediction and task transfer learning strategies to construct a model that can efficiently segment classes with only bounding box annotations for local portions. Through this approach, each detected object can be segmented into foreground and background parts, leading to accurate object instance segmentation.

## 2.2 The Catalyst for the Rise of Foundation Models: “*Segment Anything*”

Despite the novel concept of the visual foundation model proposed in Hu et al. [2018], its segmentation performance has shown limitations, failing to draw significant attention to the research of vision foundation models. However, in a recent preprint titled “*Segment Anything (SA)*” Kirillov et al. [2023], Kirillov et al. present an improved model that achieves more encouraging and impressive performance. This work has garnered significant attention from the computer vision research community towards the field of visual foundation models.

The SA project in Kirillov et al. [2023] aims to establish a novel foundation model for image segmentation by leveraging a promptable segmentation model, and an extensive collection of over 1 billion masks. The proposed model design and training approach can be transferred to various tasks with zero-shot learning, demonstrating impressive zero-shot performance on multiple tasks, including competitive or superior performance to supervised models. The paper of Kirillov et al. [2023] also discusses the challenges of image segmentation, including tasks, models, and data, and presents corresponding solutions. Notably, the authors have created the SA-1B dataset, consisting of

over 1 billion masks and 110 million images, which is openly available for future research. The SA project has significant implications for advancing the field of image segmentation, particularly in the realm of zero-shot task-agnostic learning of vision foundation models.

A concurrent work by Zou et al. [2023] also developed a foundational segmentation model, referred to as SEEM, which aims to support various segmentation tasks and multiple interactive modes. The proposed model in Zou et al. [2023] utilizes learnable memory prompts and hierarchical segmentation to enhance semantic perception, demonstrating strong generalization ability and efficient computational performance. Experimental results demonstrate SEEM’s effectiveness across multiple segmentation tasks, with a larger range of prompt types compared to the previously proposed SA model.

Meanwhile, the work in Wang et al. [2023a] also presents a universal segmentation model, termed as SegGPT, that simultaneously addresses several segmentation tasks, including arbitrary object segmentation, multi-part segmentation, iris segmentation, video object segmentation, and finite-semantic segmentation, within a single framework. The devised approach in Wang et al. [2023a] uses random color mapping and contextual examples for training instead of relying on fixed colors, making the model more flexible and adaptive. As a result, the proposed SegGPT in Wang et al. [2023a] exhibits strong performance in both in-domain and out-of-domain segmentation tasks, and can generalize effectively across different domains, thereby enabling automatic execution of various segmentation tasks and providing a universal solution for segmentation problems.

### 2.3 The New Era of Foundation Models: “Visual Intelligence for Anything”

The success of the SA project has drawn significant attention in the computer vision field and has sparked a wave of research and development in vision foundation models in Euclidean domains Liang et al. [2022], Wang et al. [2023b], Dave et al. [2019], Xu et al. [2022], Shen et al. [2023b], Yang et al. [2022a], Wang et al. [2023a], Oquab et al. [2023], Yu et al. [2023], Liu et al. [2023a], Fang et al. [2023], Chen et al. [2023], Xu et al. [2023], Zou et al. [2023], Wang et al. [2023a], Yang et al. [2022b], Liang et al. [2023]. As shown in Tab. 1, recent extensions of the SA approach span a broad range of domains, such as *Image.txt: Transform Image Into Unique Paragraph* Lab [2023a], *AnyLabeling* Viet-Anh [2023], *Anything-3D* Yang and Wang [2023], *Caption-Anything* Wang [2023], *Paint-Anything* Liu and Wang [2023a], Liu et al. [2021a], *Inpaint-Anything* Yu et al. [2023], *Transfer-Any-Style* Liu and Wang [2023b], Liu et al. [2021b], *Napari-Segment-Anything* Bragantini [2023], and *Segment-and-Track-Anything* Yang [2023a].

An especially noteworthy development is the recent work known as DINOv2 Oquab et al. [2023], which presents a novel unsupervised learning approach for producing versatile visual features that can be utilized across a wide range of image distributions and tasks. The method proposed in Oquab et al. [2023] employs self-supervised learning and extensive data preprocessing to construct filtered and balanced datasets. The DINOv2 model, which is trained using the feed-forward neural network Vision Transformer architecture, demonstrates exceptional quality in various standard computer vision benchmark tests, thus highlighting the effectiveness of this simplified technique for visual reasoning.

Despite the growing interest in the development of foundation models in the field of computer vision, there remains a significant gap in the literature regarding the exploration of such models in the non-Euclidean graph domain. In response, this study aims to address this gap by extending the concept of foundation models to the domain of graph analysis. The primary goal of this work is to investigate the feasibility and effectiveness of incorporating foundation models in the context of non-Euclidean graphs, thereby contributing to the advancement of foundation models in this area.

## 3 Segment Non-Euclidean Anything Task

### 3.1 Preliminaries

Graph neural networks (GNNs) have emerged as a powerful model for non-grid data, where data is represented as a set of nodes with associated features, and the relationships among the nodes are represented as a graph Kipf and Welling [2017], Wu et al. [2020], Zhou et al. [2018], Dwivedi et al. [2020], Jing et al. [2022], Yan et al. [2018], Li et al. [2018a], Jing et al. [2021a], Yang et al. [2020a], Ma et al. [2019], Wang et al. [2018], Yang et al. [2019], Huang et al. [2018], Li et al.

[2018b], Yang et al. [2020b], NT and Maehara [2019]. The first-order approximation of spectral graph convolutions forms the basis of Graph Convolutional Network (GCN) Kipf and Welling [2017]. A range of methods have been proposed to enhance the performance of GCN, such as GraphSAGE by Hamilton et al. Hamilton et al. [2017], which makes the model scalable by sampling neighbors instead of using all of them. Graph attention network (GAT) Veličković et al. [2018] introduces the attention mechanism to learn the weights for each neighbor automatically. Other techniques like adaptive sampling have been proposed for efficient training Huang et al. [2018]. In recent years, several novel techniques such as PairNorm layer Zhao and Akoglu [2020] and DropEdge Rong et al. [2020] strategy have been proposed to overcome the oversmoothing problem in GNNs Rusch et al. [2023].

Despite the encouraging progress in graph neural networks, to the best of our knowledge, there is little research towards learning task-agnostic foundation models for universal graph analysis. But indeed, there are some works that are related to this topic of graph foundation models, such as knowledge transfer and graph reprogramming. In particular, the work in Jing et al. [2021b] introduces a novel knowledge transfer tasks that aims to obtain a multi-talented and lightweight student model, by amalgamating knowledge from heterogeneous teacher GNNs. This is specifically achieved by the use of topology attribute mapping (TAM) to clarify the topological semantics across different networks and a slimmable graph convolutional operation to tackle diverse feature dimensions. Also, the research presented in Jing et al. [2023] introduces a set of deep graph reprogramming techniques. These techniques allow for the adaptation of a pre-trained GNN model to a range of downstream tasks that were not previously seen during training. This is achieved by merely modifying a portion of the model inputs. As such, this technique may be regarded as a basic form of graph foundation model.

### 3.2 Task Definition

Inspired by the advance of “*Segment Anything*” in the Euclidean domain, we propose in this paper a novel task, termed as “*Segment Non-Euclidean Anything (SNA)*”, that aims to develop a foundational model that can readily support diverse graph-related downstream tasks in the Non-Euclidean domain:

**Task 1 (Segment Non-Euclidean Anything)** *The objective of Segment Non-Euclidean Anything (SNA) is to establish a foundation model within the Non-Euclidean domain for universal graph analysis. This includes handling various topological graph samples and diverse tasks, such as transductive and inductive node property prediction, link prediction, and graph classification and regression.*

The target *Segment Non-Euclidean Anything Model (SNAM)* is expected to have the following merits:

- ▶ SNAM has the ability to handle diverse graph samples from various domains, including citation networks, e-commerce product graphs, social networks, and molecule graphs, while accommodating different node/edge numbers and heterogeneous input dimensions;
- ▶ SNAM’s versatility allows it to tackle various homogeneous and heterogeneous graph analysis tasks and settings, such as transductive and inductive node classification, link property prediction, and graph classification and regression;
- ▶ SNAM’s flexibility extends to accepting various types of prompts in an interactive manner, making it easy to complete the relevant tasks.

### 3.3 Challenge Identification

Task 1 poses two primary challenges that must be addressed in order to achieve the ambitious goal of NSM:

- \* **Data Side:** The first challenge faced in Task 1 pertains to the management of downstream features of varying dimensions, as typical GNNs can only handle a single input dimension. For instance, nodes in the *Citeseer* citation network possess 3703 input features, while those in *Amazon Co-purchase* graphs have only 767. Furthermore, the output dimensions of different graph samples are also heterogeneous. In addition, the simultaneous processing of homogeneous and heterogeneous graph samples adds to the complexity of the task;
- \* **Task Side:** The diversity of graph-related tasks poses a significant challenge for the development of a foundational SNAM for general graph analysis. Basic graph-related tasks,

which include graph-, node-, and edge-level tasks, pose specific challenges for analysis. These tasks encompass a range of objectives, including graph property classification and regression, transductive and inductive node property prediction, as well as edge classification. The varying nature of these tasks necessitates a flexible and adaptable SNAM capable of accommodating different types of graph-related objectives.

### 3.4 Methodology Proposal

**Meta-Slimmable Graph Processing.** To address the challenge of accommodating diverse feature dimensions for varying tasks, the approach proposed in Jing et al. [2021b] introduces a specialized slimmable graph convolutional layer. This layer enables adaptive activation or deactivation of its channels based on the input feature dimensions. Specifically, prior to training, the slimmable graph convolutions in Jing et al. [2021b] require a maximum channel number to establish the weights’ shape in GCN layers. Then, given input nodes with different feature dimensions, the model dynamically utilizes the part of neurons to process the input features. By substituting the first layer and output layer with slimmable graph convolutional layers, the resulting GNN model can simultaneously process graph samples with varying input feature dimensions and different output dimensions.

While Jing et al. [2021b] has shown promising results, the manual selection of neurons for different input dimensions limits its potential as a foundation model for universal graph analysis. In light of this, we introduce an improved version of the slimmable graph convolution, named *Meta-Slimmable Graph Processing*. This approach employs a meta-learning strategy that learns to select the optimal neurons based on the downstream tasks, rather than relying on manual selection. By doing so, the model capacities can be increased, enabling the handling of a broader range of unseen tasks. This proposed method represents a step towards developing more versatile and adaptable foundation models for universal graph analysis.

**Prompt-based Foundation Framework.** Inspired by the success of the segment anything model presented in Kirillov et al. [2023], we introduce a prompt-based framework for general graph analysis, referred to as prompt-based SNA. This interactive framework enables users to input natural language prompts to perform a range of graph-related tasks. However, unlike the segment anything model, which mainly focuses on segmentation tasks, graph analysis tasks are more intricate and diverse, encompassing predictions at edge, node, and graph levels. To address these heterogeneous tasks, the SNA framework takes an exemplar small graph along with corresponding input and output pairs as inputs and leverages this information to replicate the necessary behavior to perform the desired downstream tasks on various input graphs. We aim to further investigate and refine the details of the proposed framework in our future work.

## 4 Experiments

In this section, we perform preliminary experiments to showcase the restrictions of current vanilla methods in relation to SNA.

**Implementation Details.** We employ five datasets from the Open Graph Benchmark (OGB) Hu et al. [2020] for molecular property prediction. These datasets include ogbg-molbace, ogbg-molbbbp, ogbg-molesol, ogbg-molpcba, and ogbg-molhiv. The ogbg-molesol dataset aims to perform molecular property regression, while the ogbg-molbace, ogbg-molbbbp, ogbg-molhiv, and ogbg-molpcba datasets are intended for single-label and multi-label prediction settings. Each graph within these datasets represents a molecule, with nodes denoting atoms and edges representing chemical bonds. The node features include the atomic number, chirality, and additional atom features such as formal charge. The learning rate setting is set to 0.005, with a weight decay of  $5 \times 10^{-4}$ . We use the Adam optimizer for pre-training. In this study, we utilize the slimmable graph convolutional operation, proposed in Jing et al. [2021b], as a vanilla method to adapt a pre-trained model to various downstream feature dimensions.

**Results.** Tab. 2 shows the results of using the Jing et al. [2021b] vanilla method to adapt a pre-trained model for downstream tasks. Despite the fact that all five OGB benchmarks used in this study are in the domain of molecule analysis, and share similar molecule graph structures as inputs, it remains highly difficult for a pre-trained model to address a wide range of tasks that were not

Table 2: Results on the OGB datasets across various tasks, including graph classification, property regression, and multi-label prediction.

<b>Pre-trained Datasets</b>	ogbg-molbace	ogbg-molbbbp	ogbg-molesol	ogbg-molpcba	ogbg-molpcba
Task Types	<i>Graph Classification</i>	<i>Graph Classification</i>	<i>Graph Regression</i>	<i>Multi-label Prediction</i>	<i>Multi-label Prediction</i>
Pre-trained Results	<i>ROC-AUC: 0.7734</i>	<i>ROC-AUC: 0.6709</i>	<i>RMSE: 1.3000</i>	<i>AP: 0.2145</i>	<i>AP: 0.2145</i>
<b>Downstream Datasets</b>	ogbg-molhiv	ogbg-molhiv	ogbg-molhiv	ogbg-molhiv	ogbg-molbace
Task Types	<i>Graph Classification</i>	<i>Graph Classification</i>	<i>Graph Classification</i>	<i>Graph Classification</i>	<i>Graph Classification</i>
Training from Scratch	<i>ROC-AUC: 0.7530</i>	<i>ROC-AUC: 0.7530</i>	<i>ROC-AUC: 0.7530</i>	<i>ROC-AUC: 0.7530</i>	<i>ROC-AUC: 0.7734</i>
Vanilla Method	<i>ROC-AUC: 0.4481</i>	<i>ROC-AUC: 0.3409</i>	<i>ROC-AUC: 0.3413</i>	<i>ROC-AUC: 0.5020</i>	<i>ROC-AUC: 0.5000</i>
<b>Pre-trained Datasets</b>	ogbg-molhiv	ogbg-molhiv	ogbg-molhiv	ogbg-molpcba	ogbg-molpcba
Task Types	<i>Graph Classification</i>	<i>Graph Classification</i>	<i>Graph Classification</i>	<i>Multi-label Prediction</i>	<i>Multi-label Prediction</i>
Pre-trained Results	<i>ROC-AUC: 0.7530</i>	<i>ROC-AUC: 0.7530</i>	<i>ROC-AUC: 0.7530</i>	<i>AP: 0.2145</i>	<i>AP: 0.2145</i>
<b>Downstream Datasets</b>	ogbg-molbace	ogbg-molbbbp	ogbg-molesol	ogbg-molbbbp	ogbg-molesol
Task Types	<i>Graph Classification</i>	<i>Graph Classification</i>	<i>Graph Regression</i>	<i>Graph Classification</i>	<i>Graph Regression</i>
Training from Scratch	<i>ROC-AUC: 0.7734</i>	<i>ROC-AUC: 0.6709</i>	<i>RMSE: 1.3000</i>	<i>ROC-AUC: 0.6709</i>	<i>RMSE: 1.3000</i>
Vanilla Method	<i>ROC-AUC: 0.6120</i>	<i>ROC-AUC: 0.3936</i>	<i>RMSE: 2.3214</i>	<i>ROC-AUC: 0.5268</i>	<i>RMSE: 3.7331</i>

encountered during training. These findings highlight the potential research obstacles involved in the development of foundational models for general graph analysis. Our future work entails conducting additional experiments on a broader range of datasets and delving deeper into the underlying reasons behind our experimental results.

## 5 Conclusions

In this paper, we introduce a novel *Segment Non-Euclidean Anything (SNA)* task, tailored for irregular and heterogeneous graph analysis. The proposed SNA paradigm basically extends the recent *Segment Anything* project to the domain of topological graph processing with the objective of building a foundation model for universal graph-related tasks. Towards this end, we identify two primary challenges from the data and task sides, respectively, and propose two dedicated vanilla solutions, including a meta-slimmable neural operation and a prompt-inspired framework, to overcome these challenges. Experiments on five benchmarks across various domains, including multi-label property prediction, graph classification, and property regression, demonstrate that the existing naïve solutions for developing a foundation graph model still have a long way to go to achieve favorable performance. In our future work, we will strive to refine the proposed SNA approaches through collaboration with passionate researchers in this field and pushing the boundaries towards building a well-established foundational model for graph general intelligence.

## Acknowledgements

This research is supported by Australian Research Council Projects in part by FL170100117 and IH180100002, and the National Research Foundation Singapore under its AI Singapore Programme (Award Number: AISG2-RP-2021-023).

## References

- Rishi Bommasani, Drew A Hudson, Ehsan Adeli, Russ Altman, Simran Arora, Sydney von Arx, Michael S Bernstein, Jeannette Bohg, Antoine Bosselut, Emma Brunskill, et al. On the opportunities and risks of foundation models. *arXiv preprint arXiv:2108.07258*, 2021.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*, 2018.
- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. Language models are few-shot learners. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2020.
- OpenAI. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023a.

- OpenAI. Introducing chatgpt. <https://openai.com/blog/chatgpt>, 2023b. Accessed: 2023-04-19.
- Ce Zhou, Qian Li, Chen Li, Jun Yu, Yixin Liu, Guangjing Wang, Kai Zhang, Cheng Ji, Qiben Yan, Lifang He, et al. A comprehensive survey on pretrained foundation models: A history from bert to chatgpt. *arXiv preprint arXiv:2302.09419*, 2023.
- Xinlong Wang, Xiaosong Zhang, Yue Cao, Wen Wang, Chunhua Shen, and Tiejun Huang. Seggpt: Segmenting everything in context. *arXiv preprint arXiv:2304.03284*, 2023a.
- Maxime Oquab, Timothée Darcet, Theo Moutakanni, Huy Vo, Marc Szafraniec, Vasil Khalidov, Pierre Fernandez, Daniel Haziza, Francisco Massa, Alaaeldin El-Nouby, Russell Howes, Po-Yao Huang, Hu Xu, Vasu Sharma, Shang-Wen Li, Wojciech Galuba, Mike Rabbat, Mido Assran, Nicolas Ballas, Gabriel Synnaeve, Ishan Misra, Herve Jegou, Julien Mairal, Patrick Labatut, Armand Joulin, and Piotr Bojanowski. DINOv2: Learning robust visual features without supervision. *arXiv:2304.07193*, 2023.
- Tao Yu, Runseng Feng, Ruoyu Feng, Jinming Liu, Xin Jin, Wenjun Zeng, and Zhibo Chen. Inpaint anything: Segment anything meets image inpainting. *arXiv preprint arXiv:2304.06790*, 2023.
- Shilong Liu, Zhaoyang Zeng, Tianhe Ren, Feng Li, Hao Zhang, Jie Yang, Chunyuan Li, Jianwei Yang, Hang Su, Jun Zhu, et al. Grounding dino: Marrying dino with grounded pre-training for open-set object detection. *arXiv preprint arXiv:2303.05499*, 2023a.
- Jiaqi Chen, Zeyu Yang, and Li Zhang. Semantic segment anything. <https://github.com/fudan-zvg/Semantic-Segment-Anything>, 2023.
- Yuanyou Xu, Yangming Cheng, Liulei Li, Zongxin Yang, Wenguang Wang, and Yi Yang. Segment and track anything. <https://github.com/fudan-zvg/Semantic-Segment-Anything>, 2023.
- Xueyan Zou, Jianwei Yang, Hao Zhang, Feng Li, Linjie Li, Jianfeng Gao, and Yong Jae Lee. Segment everything everywhere all at once. *arXiv preprint arXiv:2304.06718*, 2023.
- Gongfan Fang, Xinyin Ma, Mingli Song, Michael Bi Mi, and Xinchao Wang. Depgraph: Towards any structural pruning. *arXiv preprint arXiv:2301.12900*, 2023.
- Xingyi Yang, Daquan Zhou, Songhua Liu, Jingwen Ye, and Xinchao Wang. Deep model reassembly. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2022a.
- Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete Xiao, Spencer Whitehead, Alexander C Berg, Wan-Yen Lo, et al. Segment anything. *arXiv preprint arXiv:2304.02643*, 2023.
- Hyojin Bahng, Ali Jahanian, Swami Sankaranarayanan, and Phillip Isola. Exploring visual prompts for adapting large-scale models. *arXiv preprint arXiv:2203.17274*, 2022.
- Amir Bar, Yossi Gandelsman, Trevor Darrell, Amir Globerson, and Alexei Efros. Visual prompting via image inpainting. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2022.
- Songhua Liu and Xinchao Wang. Paint anything. <https://github.com/Huage001/Paint-Anything>, 2023a.
- Songhua Liu and Xinchao Wang. Transfer any style. <https://github.com/Huage001/Transfer-Any-Style>, 2023b.
- Songhua Liu, Jingwen Ye, and Xinchao Wang. Any-to-any style transfer: Making picasso and da vinci collaborate. *arXiv preprint arXiv:2304.09728*, 2023b.
- Xingyi Yang and Xinchao Wang. Anything-3d. <https://github.com/Anything-of-anything/Anything-3D>, 2023.
- Qihong Shen, Xingyi Yang, and Xinchao Wang. Anything-3d: Towards single-view anything reconstruction in the wild. *arXiv preprint arXiv:2304.10261*, 2023a.

Jordão Bragantini. Napari-segment-anything. <https://github.com/JoOkuma/napari-segment-anything>, 2023.

Show Lab. Image.txt: Transform image into unique paragraph. <https://github.com/showlab/Image2Paragraph>, 2023a.

Zongxin Yang. Segment-and-track-anything. <https://github.com/z-x-yang/Segment-and-Track-Anything>, 2023a.

Teng Wang. Caption anything. <https://github.com/ttengwang/Caption-Anything>, 2023.

Gongfan Fang and Xinchao Wang. Awesome-anything. <https://github.com/VainF/Awesome-Anything>, 2023.

Aditya Ramesh, Mikhail Pavlov, Gabriel Goh, Scott Gray, Chelsea Voss, Alec Radford, Mark Chen, and Ilya Sutskever. Zero-shot text-to-image generation. In *International Conference on Machine Learning (ICML)*, 2021.

Ronghang Hu, Piotr Dollár, Kaiming He, Trevor Darrell, and Ross Girshick. Learning to segment every thing. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2018.

Ting Jiang. Awesome segment anything. <https://github.com/Hedlen/awesome-segment-anything>, 2023.

Xiaohao Xu. Awesome-segment-anything-extensions. <https://github.com/JerryX1110/awesome-segment-anything-extensions>, 2023.

IDEA-Research. Grounded-segment-anything. <https://github.com/IDEA-Research/Grounded-Segment-Anything#grounded-segment-anything>, 2023.

Yunkang Cao. Groundedsam-zero-shot-anomaly-detection. <https://github.com/caoyunkang/GroundedSAM-zero-shot-anomaly-detection>, 2023.

Zhengcong Fei. Image editing anything. <https://github.com/feizc/IEA>, 2023.

Sea AI Lab. Edit anything by segment-anything. <https://github.com/sail-sg/EditAnything>, 2023b.

Rockey. Prompt-segment-anything. <https://github.com/RockeyCoss/Prompt-Segment-Anything>, 2023.

Qingyun Li. Sam-rbox. <https://github.com/Li-Qingyun/sam-mmrotate>, 2023.

Nguyen Thanh Tin. Open-vocabulary-segment-anything. [https://github.com/ngthanhtin/owlvit\\_segment\\_anything](https://github.com/ngthanhtin/owlvit_segment_anything), 2023.

Lujia Zho. Segdrawer. <https://github.com/lujiazho/SegDrawer>, 2023.

Aliaksandr Hancharenka. Segment anything eo tools. <https://github.com/aliaksandr960/segment-anything-eo>, 2023.

Nguyen Viet-Anh. Anylabeling. <https://github.com/vietanhdev/anylabeling>, 2023.

Zhenhua Yang. Optical character recognition with segment anything (ocr-sam). <https://github.com/yeungchenwa/OCR-SAM>, 2023b.

Mokhtari Mohammed El Amine. Sam medical imaging. <https://github.com/amine0110/SAM-Medical-Imaging>, 2023.

Jaydeep\_Dedaniya. Lime-sam. <https://github.com/jaydeep-work/LIME-SAM>, 2023.

Yanyi Liu. Sam + mmdetection. <https://github.com/liuyanyi/sam-with-mmdet>, 2023.

DV Lab. 3d-box via segment anything. <https://github.com/dvlab-research/3D-Box-Segment-Anything>, 2023c.

- Mingqi Gao. Track-anything. <https://github.com/gaomingqi/Track-Anything>, 2023.
- Achal Dave. Towards segmenting anything that moves (segment-any-moving). <https://github.com/achalddave/segment-any-moving>, 2023.
- Feng Liang, Bichen Wu, Xiaoliang Dai, Kunpeng Li, Yanan Zhao, Hang Zhang, Peizhao Zhang, Peter Vajda, and Diana Marculescu. Open-vocabulary semantic segmentation with mask-adapted clip. *arXiv preprint arXiv:2210.04150*, 2022.
- Jiaqi Wang, Pan Zhang, Tao Chu, Yuhang Cao, Yujie Zhou, Tong Wu, Bin Wang, Conghui He, and Dahua Lin. V3det: Vast vocabulary visual detection dataset. *arXiv preprint arXiv:2304.03752*, 2023b.
- Achal Dave, Pavel Tokmakov, and Deva Ramanan. Towards segmenting anything that moves. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV) Workshops*, 2019.
- Lumin Xu, Sheng Jin, Wang Zeng, Wentao Liu, Chen Qian, Wanli Ouyang, Ping Luo, and Xiaogang Wang. Pose for everything: Towards category-agnostic pose estimation. In *Proceedings of the European Conference on Computer Vision (ECCV)*, 2022.
- Yongliang Shen, Kaitao Song, Xu Tan, Dongsheng Li, Weiming Lu, and Yueting Zhuang. Hugginggpt: Solving ai tasks with chatgpt and its friends in huggingface. *arXiv preprint arXiv:2303.17580*, 2023b.
- Xingyi Yang, Jingwen Ye, and Xinchao Wang. Factorizing knowledge in neural networks. In *Proceedings of the European Conference on Computer Vision (ECCV)*, 2022b.
- Yaobo Liang, Chenfei Wu, Ting Song, Wenshan Wu, Yan Xia, Yu Liu, Yang Ou, Shuai Lu, Lei Ji, Shaoguang Mao, et al. Taskmatrix. ai: Completing tasks by connecting foundation models with millions of apis. *arXiv preprint arXiv:2303.16434*, 2023.
- Songhua Liu, Tianwei Lin, Dongliang He, Fu Li, Ruifeng Deng, Xin Li, Errui Ding, and Hao Wang. Paint transformer: Feed forward neural painting with stroke prediction. In *Proceedings of the IEEE International Conference on Computer Vision (ICCV)*, 2021a.
- Songhua Liu, Tianwei Lin, Dongliang He, Fu Li, Meiling Wang, Xin Li, Zhengxing Sun, Qian Li, and Errui Ding. Adaattn: Revisit attention mechanism in arbitrary neural style transfer. In *Proceedings of the IEEE International Conference on Computer Vision (ICCV)*, 2021b.
- Thomas N Kipf and Max Welling. Semi-supervised classification with graph convolutional networks. In *ICLR*, 2017.
- Zonghan Wu, Shirui Pan, Fengwen Chen, Guodong Long, Chengqi Zhang, and S Yu Philip. A comprehensive survey on graph neural networks. *TNNLS*, 2020.
- Jie Zhou, Ganqu Cui, Zhengyan Zhang, Cheng Yang, Zhiyuan Liu, Lifeng Wang, Changcheng Li, and Maosong Sun. Graph neural networks: A review of methods and applications. *arXiv preprint arXiv:1812.08434*, 2018.
- Vijay Prakash Dwivedi, Chaitanya K Joshi, Thomas Laurent, Yoshua Bengio, and Xavier Bresson. Benchmarking graph neural networks. *arXiv preprint arXiv:2003.00982*, 2020.
- Yongcheng Jing, Yining Mao, Yiding Yang, Yibing Zhan, Mingli Song, Xinchao Wang, and Dacheng Tao. Learning graph neural networks for image style transfer. In *Proceedings of the European Conference on Computer Vision (ECCV)*, 2022.
- Sijie Yan, Yuanjun Xiong, and Dahua Lin. Spatial temporal graph convolutional networks for skeleton-based action recognition. In *Proceedings of the AAAI Conference on Artificial Intelligence (AAAI)*, 2018.
- Ruoyu Li, Sheng Wang, Feiyun Zhu, and Junzhou Huang. Adaptive graph convolutional neural networks. In *Proceedings of the AAAI Conference on Artificial Intelligence (AAAI)*, 2018a.

- Yongcheng Jing, Yiding Yang, Xinchao Wang, Mingli Song, and Dacheng Tao. Meta-aggregator: Learning to aggregate for 1-bit graph neural networks. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, 2021a.
- Yiding Yang, Zunlei Feng, Mingli Song, and Xinchao Wang. Factorizable graph convolutional networks. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2020a.
- Jianxin Ma, Peng Cui, Kun Kuang, Xin Wang, and Wenwu Zhu. Disentangled graph convolutional networks. In *ICML*, 2019.
- Hongwei Wang, Jia Wang, Jialin Wang, Miao Zhao, Weinan Zhang, Fuzheng Zhang, Xing Xie, and Minyi Guo. Graphgan: Graph representation learning with generative adversarial nets. In *Proceedings of the AAAI Conference on Artificial Intelligence (AAAI)*, 2018.
- Yiding Yang, Xinchao Wang, Mingli Song, Junsong Yuan, and Dacheng Tao. Spagan: Shortest path graph attention network. In *International Joint Conference on Artificial Intelligence (IJCAI)*, 2019.
- Wenbing Huang, Tong Zhang, Yu Rong, and Junzhou Huang. Adaptive sampling towards fast graph representation learning. In *NeurIPS*, 2018.
- Qimai Li, Zhichao Han, and Xiao-Ming Wu. Deeper insights into graph convolutional networks for semi-supervised learning. In *Proceedings of the AAAI Conference on Artificial Intelligence (AAAI)*, 2018b.
- Yiding Yang, Jiayan Qiu, Mingli Song, Dacheng Tao, and Xinchao Wang. Distilling knowledge from graph convolutional networks. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2020b.
- Hoang NT and Takanori Maehara. Revisiting graph neural networks: All we have is low-pass filters. *arXiv preprint arXiv:1905.09550*, 2019.
- Will Hamilton, Zhitao Ying, and Jure Leskovec. Inductive representation learning on large graphs. In *NeurIPS*, 2017.
- Petar Veličković, Guillem Cucurull, Arantxa Casanova, Adriana Romero, Pietro Lio, and Yoshua Bengio. Graph attention networks. In *ICLR*, 2018.
- Lingxiao Zhao and Leman Akoglu. Pairnorm: Tackling oversmoothing in gnns. In *ICLR*, 2020.
- Yu Rong, Wenbing Huang, Tingyang Xu, and Junzhou Huang. Dropedge: Towards deep graph convolutional networks on node classification. In *ICLR*, 2020.
- T Konstantin Rusch, Michael M Bronstein, and Siddhartha Mishra. A survey on oversmoothing in graph neural networks. *arXiv preprint arXiv:2303.10993*, 2023.
- Yongcheng Jing, Yiding Yang, Xinchao Wang, Mingli Song, and Dacheng Tao. Amalgamating knowledge from heterogeneous graph neural networks. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2021b.
- Yongcheng Jing, Chongbin Yuan, Li Ju, Yiding Yang, Xinchao Wang, and Dacheng Tao. Deep graph reprogramming. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2023.
- Weihua Hu, Matthias Fey, Marinka Zitnik, Yuxiao Dong, Hongyu Ren, Bowen Liu, Michele Catasta, and Jure Leskovec. Open graph benchmark: Datasets for machine learning on graphs. *arXiv preprint arXiv:2005.00687*, 2020.