From Explicit Communication to Tacit Cooperation: A Novel Paradigm for Cooperative MARL

Dapeng Li, Zhiwei Xu, Bin Zhang, Guoliang Fan

Institute of Automation, Chinese Academy of Sciences School of Artificial Intelligence, University of Chinese Academy of Sciences {lidapeng2020,xuzhiwei2019,zhangbin2020,guoliang.fan}@ia.ac.cn

Abstract

Centralized training with decentralized execution (CTDE) is a widely-used learning paradigm that has achieved significant success in complex tasks. However, partial observability issues and the absence of effectively shared signals between agents often limit its effectiveness in fostering cooperation. While communication can address this challenge, it simultaneously reduces the algorithm's practicality. Drawing inspiration from human team cooperative learning, we propose a novel paradigm that facilitates a gradual shift from explicit communication to tacit cooperation. In the initial training stage, we promote cooperation by sharing relevant information among agents and concurrently reconstructing this information using each agent's local trajectory. We then combine the explicitly communicated information with the reconstructed information to obtain mixed information. Throughout the training process, we progressively reduce the proportion of explicitly communicated information, facilitating a seamless transition to fully decentralized execution without communication. Experimental results in various scenarios demonstrate that the performance of our method without communication can approaches or even surpasses that of QMIX and communication-based methods.

1 Introduction

Cooperative multi-agent reinforcement learning (MARL) has made significant progress in practical applications in recent years, such as traffic light control [1, 41], autonomous driving [27], game playing [2, 36], and multi-robot control [21, 7]. To effectively address multi-agent learning problems, various algorithms have emerged. Among these methods, the paradigm of centralized training with decentralized execution (CTDE) has gradually become the most concerned MARL paradigm due to its scalability and ability to handle non-stationary problems. The CTDE paradigm serves as a hybrid approach that combines the advantages of both centralized [13, 17] and decentralized [31] learning methods. The fundamental concept of the CTDE paradigm is that agents can access global information in a centralized manner during the training process while operating solely on local observations in a decentralized manner during execution. Based on this approach, many MARL algorithms [30, 25, 37, 11, 20, 44, 38] have demonstrated exceptional performance in complex decision-making tasks.

Despite achieving considerable success, the lack of information sharing among agents can hinder the formation of effective cooperation, particularly in Decentralized Partially Observable Markov Decision Process (Dec-POMDP) [22]. To address this issue, a variety of communication methods [5, 39, 12, 24, 29] have been proposed, which facilitate information sharing among agents, such as observations and intentions. These methods aim to enhance agents' understanding of the environment and other agents, ultimately fostering better cooperation patterns. However, a notable drawback of communication methods is that the more information that needs to be transmitted, the higher the

communication cost. Moreover, there are often situations where communication is not possible in actual deployment. Therefore, balancing practicality and effectiveness can be seen as a valuable trade-off problem in the MARL domain.

A possible approach that can reconcile this trade-off is each agent uses its local trajectory to reconstruct valuable global information. This approach enables practicality in decentralized systems and better collaboration in communication to be realized simultaneously. However, directly reconstructing global information from local observations is not feasible, and utilizing this inaccurate reconstructed information for decision-making may lead to training instability due to reconstructed bias.

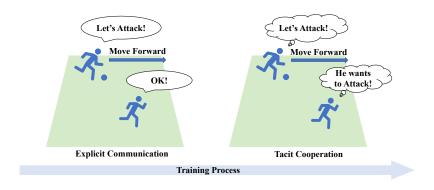


Figure 1: The process of human team cooperative learning.

In human teamwork (e.g., football and basketball games), a team in the initial stages of training requires communication to foster cooperation, as depicted in the left of Figure 1. As team members become more familiar and cohesive, the need for communication gradually reduces, as depicted in the right of Figure 1. For example, professional teams can achieve tacit cooperation by only observing the movements of their teammates during real competition. Drawing inspiration from human teamwork, in this paper, we propose a novel paradigm that can transition from explicit communication to **TA**cit **CO**operation (TACO). This paradigm enables agents to share information via an attention mechanism during the initial training stage while simultaneously reconstructing this information using local observations. We obtain mixed information by weighting and summing the reconstructed information and true global information. As training progresses, the accuracy of reconstructed information continues to improve. Consequently, we can reduce reliance on actual communication by gradually decreasing its ratio in mixed information, ultimately achieving the ability to infer teammate intentions without actual communication.

We evaluated the performance of TACO on three challenge environments, including StarCraft Multi-Agent Challenge (SMAC) [26], SMACv2 [9], and Google Research Football (GRF) [19]. The experimental results show that TACO can bring significant improvements to existing CTDE methods and achieve performance comparable to or even superior to communication methods without explicit communication. Additionally, the visualization results shows that the difference between the reconstructed information and the true global information is relatively small, so it can play a role in promoting cooperation.

2 Related Work

MARL has attracted considerable attention and made significant progress in recent years. To address scalability and non-stationary issues, CTDE flexibly combines the advantages of centralized learning [13, 17, 34] and independent learning [31, 10, 23], using global information for training and only local observations for execution. Value decomposition is a popular branch of CTDE, with VDN [30] and QMIX [25] being two representative works. VDN avoids the lazy agent problem by decomposing the joint action value function into individual action value functions for each agent. QMIX goes a step further by representing this decomposition process as a monotonic function, leading to improved performance. In a similar vein, MADDPG [20], COMA [11], FOP[47], MAPPO [44], MAAC[15], and HAPPO [18] achieve cooperation through centralized critics. However, the lack

of signal sharing between agents during execution significantly limits the performance of CTDE in complex scenarios.

Communication methods address the aforementioned issues by exchanging information among agents. A popular communication approach involves sharing local observations or observation embeddings [29, 28, 8, 5, 39, 12, 16] to facilitate cooperation. CommNet [29], for instance, employs the average of hidden layer outputs from all agents as a supplement to local observations. This averaging of hidden layer information, however, may result in information loss and disregard the differences among agents. In practical applications, communication costs often need to be considered, leading many existing methods to focus on developing efficient communication protocols that minimize the communication costs. For example, VBC [46] eliminates noise in messages by incorporating regularization to reduce communication overhead, MAIC [45] generates customized information through teammate modeling, and NDQ [39] further compresses message information by maximizing mutual information between messages and agent actions and applying regularization techniques. These studies Indicate the importance of minimizing explicit communication costs for the practical implementation of multi-agent reinforcement learning.

Unfortunately, communication methods inevitably cannot be directly deployed in environments where communication is not unavailable. Therefore, there is a class of methods that attempt to achieve consensus between agents without explicit communication. COLA [42] utilizes the idea of contrastive learning to promote consensus among different agents based on their local observations. PBL [32] attempts to construct implicit representations through actions. MACKRL [6] constructs shared knowledge through a hierarchical policy tree. The main disadvantage of these methods is that consensus formation is only implicitly promoted through the gradient signal during training. Without explicit communication between agents to guide consensus, it is difficult to form good consensus in complex scenarios. In contrast, our approach is more aligned with human teamwork, where effective collaboration and consensus are first achieved through explicit communication and gradually replaced by the reduction of communication reliance, leading to better tacit collaboration.

3 Preliminaries

3.1 Problem Formulation

The cooperative multi-agent problem can be considered as a Dec-POMDP game [3]. It can be formulated as a tuple $G = \langle S, U, \mathcal{N}, \Omega, \mathcal{T}, O, r, \gamma \rangle$, where $s \in S$ is the true global state of the environment. At each discrete time step t, each agent $i \in \mathcal{N} := \{1, \dots, n\}$ will select an action $u_i \in U_i$. $\mathcal{T}(s'|s, \boldsymbol{u}) : S \times U \times S \to P(S)$ is the state transition function, where $\boldsymbol{u} = \{u_1, \dots, u_n\} \in \boldsymbol{U} \equiv U^n$ is the joint action. In the partially observable Markov decision process (POMDP), the global state of the environment is not accessible and each agent i can only get its individual observation $o_i \in \Omega$ by the observation function $O(s,i) : S \times \mathcal{N} \to \Omega$. $r_i(s,u_i) : S \times U_i \to \mathbb{R}$ is the reward function for each agent i. In some scenarios all agent share the same reward function $r(s,\boldsymbol{u}) : S \times \boldsymbol{U} \to \mathbb{R}$, i.e. team reward. The goal for each agent is to maximize the expected return, and all agents need to achieve this goal through effective cooperation.

3.2 Cooperative Multi-Agent Reinforcement Learning

In a multi-agent system, each agent's policy is continually changing. If other agents are viewed solely as components of the environment, then each agent perceives the environment as unstable from its individual perspective. Therefore, single-agent reinforcement learning algorithms cannot be directly applied to multi-agent tasks. Alternatively, centralized methods consider all agents as a single entity, but this method has the disadvantage of the action space increasing exponentially with the number of agents.

The CTDE paradigm has gained popularity as a more viable multi-agent training method, serving as a compromise between the aforementioned methods. In the centralized training phase, agents can access information such as other agents' observations or policies. However, during decentralized execution, agents can only make decisions based on their local observations. This approach offers advantages in reducing environmental instability and is suitable for handling partially observable multi-agent tasks.

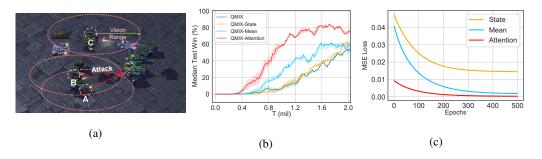


Figure 2: (a) A case study on the *MMM2* scenario. (b) The performance for QMIX with different extra global information. (c) The MSE loss of using local trajectory to reconstruct the different types of global information.

The value decomposition method is based on the CTDE paradigm, which combines individual utility functions Q_i of all agents to fit the global action value Q_{tot} . Two classic value decomposition baselines are VDN and QMIX, which decompose Q_{tot} under the assumptions of additivity and monotonicity, respectively. Subsequent value decomposition methods [43, 37, 40] have employed more complex decomposition techniques but continue to follow the assumption of Individual-Global-Max (IGM). IGM asserts that the overall optimality in multi-agent systems aligns with individual optimality and can be expressed as follows:

$$\arg\max_{\boldsymbol{u}} Q_{tot}(\boldsymbol{\tau}, \boldsymbol{u}) = \left(\arg\max_{u_1} Q_1(\tau_1, u_1), \dots, \arg\max_{u_n} Q_N(\tau_n, u_n)\right), \tag{1}$$

where τ represents the historical trajectory of all agents. In this way, agents in the value decomposition method only need to execute greedy policies, which corresponds to optimal global joint actions.

4 What Kind of Global Information Do We Need?

To achieve the goal that can balance the trade-off between communication and CTDE, we first need to figure out one question: What kind of global information can promote agents' cooperation? A naive assumption for this question is that the more information an agent has, the better its decisionmaking ability. However, in fact, receiving too much redundant information in complex environments may hinder the agent from extracting critical information. We use a motivating example on the MMM2 of StarCraft to illustrate this viewpoint. As shown in Figure 2(a), where agents A and B have similar observations due to their proximity. The rational collaborative decision for A and B would be to attack the same enemy simultaneously, highlighting the importance of sharing decision information between them. In contrast, information from another friendly agent C, who is not in their field of view, is less important. To verify this motivation, we use QMIX as the baseline and provide agents with different additional global information during execution, including the true global state, the average global feature obtained by mean-weighted hidden states of all friendly agents (QMIX-Mean), and the attention global feature obtained by weighted hidden states of friendly agents using attention as weights (QMIX-Attention). Experimental results in Figure 2(b) demonstrate that directly providing the global state is not helpful for multi-agent collaboration. Moreover, the improvement obtained by the mean-weighted method is limited, whereas the attention-weighted method significantly enhances the performance of QMIX.

Direct attention communication between agents can be impractical due to high communication costs. However, it is possible to avoid this problem by reconstructing relevant global information based on the local trajectories of agents. This idea is also intuitive: The historical trajectory of agent A includes observations of B, and the observations of A and B are very similar too, therefore it is much easier for agent A to reconstruct B's hidden state (or intention) than to reconstruct other irrelevant information (i.e., agent C's intention). Figure 2(c) shows the training Mean Square Error (MSE) loss for using local observations to reconstruct different global information through a simple Multilayer Perceptron (MLP). The results show that it is much easier to reconstruct relative attention information than the mean state of all friendly agents and true global states.

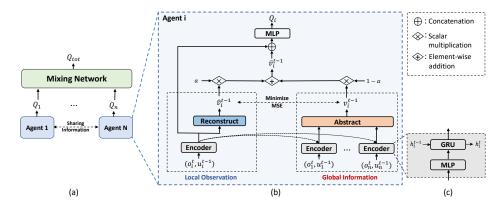


Figure 3: (a) The overall framework of TACO. (b) The detailed agent network. (c) Encoder network structure.

Based on the two findings mentioned above (relative information is useful and easy to be reconstructed) and inspired by the progressive cooperation of human beings, we propose the TACO paradigm, which utilizes the extraction of relevant global communication and the reconstruction of relative global communication using local trajectories. This approach involves a gradual transition from communication to tacit cooperation during the training process. In the subsequent sections, we will provide a comprehensive introduction to the TACO paradigm and present the results of our in-depth experimental research.

5 From Explicit Communication to Tacit Cooperation

This section aims to provide a comprehensive understanding of TACO, which is a novel multi-agent reinforcement learning paradigm. We will present the framework of TACO and provide a detailed explanation of its implementation to offer a comprehensive overview.

5.1 The TACO Framework

To enable a meaningful comparison with other paradigms, the overall structure of TACO adopts the classical value decomposition method, QMIX, which includes both a mixing network and an agent network. The core concept of TACO is to gradually reduce the dependence on communication. As a result, TACO can effectively balance the trade-off between communication and the CTDE method. The entire framework, as depicted in Figure 3(a), consists of a tacit reconstruct module and a communication abstract module, which is detailed in Figure 3(b). Each of these components will be introduced in detail below.

Observation Action Encoder: The encoder g for each agent i consists of an MLP and a GRU [4], as shown by the gray box in Figure 3(c). It takes the current local observation o_i^t , previous action u_i^t , and previous hidden state h_i^{t-1} as input and produces the current hidden state $h_i^t = g(\tau_i^t, u_i^t)$. To enhance learning efficiency, we have set all agents to share the same observation-action encoder. When there is no ambiguity, we omit the superscript of time to simplify notation.

Communication Abstract Module (CAM): Given that there are different types of multi-agent relative patterns, such as attention weight between agents, the distance between agents, etc. However, to keep the paper focused, we included only a detailed analysis of attention weights.

The attention weight uses a self-attention mechanism [35] to obtain highly relevant global information for each agent. Given the hidden state of agent i and agent j, the attention weight $w_{i,j}^{att}$ for agent i to agent j can be computed by using a bilinear mapping and then normalizing it with a softmax function, as shown below:

$$w_{i,j}^{att} = \frac{\exp(h_j^T W_k^T W_q h_i)}{\sum_{j \neq i} \exp(h_j^T W_k^T W_q h_i)},$$
 (2)

In the above equation, W_k and W_q are two learnable linear transformations that represent the "key" function and "query" function, respectively. Furthermore, to extract more diverse global information, we use multiple attention heads and concatenate their outputs together.

Using the relative weight for agent i, the global information v_i can be obtained by taking the weighted sum of the hidden state h_i of all other agents:

$$v_i = \sum_{j \neq i} w_{i,j} h_j. \tag{3}$$

Tacit Reconstruct Module (TRM): In the TRM, the reconstruct network is responsible for approximating the global attention information v_i based on the local trajectory of each agent. To achieve this, we use a two-layer fully connected network for simplicity. Specifically, the reconstruct network takes the hidden state h_i of agent i as input and outputs an approximation \hat{v}_i of the global attention information.

From Communication to Tacit Cooperation: To ensure a successful transition from communicate to tacit, we obtain the mixed information \bar{v}_i by taking the weighted average of the real attention information v_i and the reconstructed information \hat{v}_i :

$$\bar{v}_i = \alpha \hat{v}_i + (1 - \alpha)v_i. \tag{4}$$

The mixed weight α starts with an initial value α_{init} and using a simple linear increasing schedule, given by $\alpha = \min(\alpha_{init} + t\Delta\alpha, \alpha_{\max})$, which update during each training step. As the α increases, the ratio of the reconstructed information in the mixed information also increases. To ensure the agent can entirely transmit to fully tacit from explicit communication before training is complete, we usually set the $\alpha_{init} = 0$, $\alpha_{\max} = 1$, and $\Delta\alpha = \frac{1}{t_{\max}}$. The mixed information \bar{v}_i and the hidden state h_i are concatenated to input MLP to obtain $Q_i(\tau_i, u_i, \bar{v}_i)$. In the scenario where all agents share the same reward, the mixing network decomposes the joint action value function Q_{tot} into the individual action value estimation Q_i .

From a communication perspective, the TACO method is advantageous because the model learned does not require actual communication at the end of the training process, which eliminates the need to consider issues related to communication protocols such as bandwidth limitation. This makes TACO more practical compared to other multi-agent reinforcement learning methods that rely on communication.

5.2 Overall Learning Objective

We now introduce the learning objectives of TACO, which include two parts: the reinforcement learning part that tries to minimize the TD error, and the mixed information part that attempts to minimize the reconstruct error.

The reinforcement learning part end-to-end optimizes the same loss function in QMIX [25] which can be formed as follows:

$$\mathcal{L}_{TD} = \left(Q_{tot}(s, \tau, \boldsymbol{u}) - y^{tot} \right)^2, \tag{5}$$

where $y^{tot} = r + \gamma \max_{\boldsymbol{u}'} Q_{tot}(s', \boldsymbol{\tau}', \boldsymbol{u}')$.

To achieve the goal that enforcing the reconstructed information \hat{v}_i to be as close as possible to its corresponding true attention information v_i , TACO also includes a mixed information part that minimizes reconstruct loss. The similarity loss between the true global attention information v_i and the reconstructed information \hat{v}_i is measured by using MSE:

$$\mathcal{L}_{Rec} = \frac{1}{n} \sum_{i=0}^{n} MSE(v_i, \hat{v_i}).$$
 (6)

Both parts are optimized simultaneously during training. Thus, the total loss function can be written as:

$$\mathcal{L}_{tot} = \mathcal{L}_{TD} + \beta \mathcal{L}_{Rec}, \tag{7}$$

where the β is a fixed weighting term. For more difficult scenarios, we can set a higher β to increase the proportion of reconstruct loss in the gradient update. It should be noted that the abstract module is

updated by both the TD loss and the reconstruct loss gradients in Eq. 7. This means that the abstract module generates highly relevant information that is beneficial for agents to collaborate while also making the information easy to be reconstructed.

6 Experiments

This section presents experimental results in multiple scenarios that aim to answer the following questions related to TACO: Q1: Can TACO achieve performance close to that of communication methods in different scenarios? Q2: Can TACO be applied to different value decomposition baselines to improve their performance? Q3: Can TACO accurately reconstruct relative attention information from local observations? Q4: How do the model's hyperparameter settings affect its performance? We conducted our experiments with StarCraft II [26], SMACv2 [9], and Google Research Football [19]. All curves are presented with average performance and 25~75% deviation over four random seeds, with the solid lines representing the median win rates. Additional details about the experiments can be found in Appendix A.

6.1 Performance on SMAC and SMACv2

To evaluate our method and baselines, we applied them to the StarCraft II Multi-Agent Challenge benchmark, which includes a series of scenarios representing different levels of challenge, such as easy, hard, and super hard. We select four super hard maps: $3s5z_vs_3s6z$, MMM2, $27m_vs_30m$, Corridor and two hard maps: $2c_vs_64zg$, $5m_vs_6m$.

To demonstrate the performance of TACO, we used QMIX as the basic framework for TACO and selected two communication methods (NDQ [39] and QMIX-Attention [14]) and two classic value decomposition methods (QMIX [25] and VDN [30]) as baselines in the main results. Additionally, we compared improved variant of value decomposition methods (QPLEX [37]).

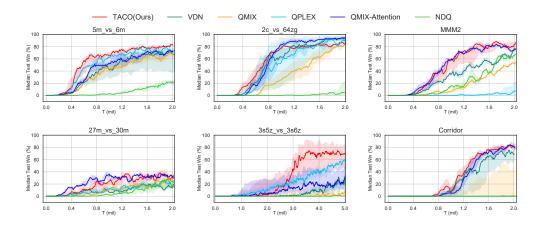


Figure 4: Performance comparison with baselines in different SMAC scenarios.

In Figure 4, it can be observed that there is not much difference between QMIX and QMIX-Attention with full communication in some relatively simple scenarios ($5m_vs_6m$ and $2c_vs_64zg$). However, the NDQ method performs poorly and has low learning efficiency, possibly due to its constraints on message passing and message instability. The performance of TACO is similar to that of QMIX-Attention and even exceeds QMIX-Attention in $5m_vs_6m$. In the super hard scenarios, the classic CTDE method performs poorly due to a lack of effective communication, whereas QMIX-Attention performs well. However, QMIX-Attention's success is mainly due to its lack of communication restrictions. The TACO method can achieve or even exceed the performance of QMIX-Attention without utilizing actual communication during the end of the training, which significantly enhances its practicality (Q1).

In SMACv2 [9], a new improved benchmark, the initial position of each agent is random in each episode, and they have more realistic observations. These changes significantly increase the difficulty




Figure 5: Performance comparison with baselines in different SMACv2 scenarios.

of the task and require agents to generalize to previously unseen settings during evaluation. Therefore, we further tested the performance of each algorithm in the SMACv2 environment to demonstrate the generalization and robustness of TACO. The result in Figure 5 shows that TACO reaches state-of-the-art performance in SMACv2. Especially, the performances of TACO on three scenarios are even better than QMIX-Attention, which we believe is due to the MSE loss of TACO, which can further promote the extraction of highly correlated global information, especially in complex tasks.

Visualization on SMAC In order to intuitively display the relationship between global features and the reconstructed features, we collected the real global information and global information reconstructed by all agents during the entire episode on $2c_vs_64zg$, and used the t-SNE[33] to reduce these high-dimensional data into a two-dimensional embedding for visualization.

The t-SNE embedding of true global information (blue) and reconstructed information (orange) are shown in Figure 6, it can be seen that although there are some deviations, the reconstructed information can still reflect the distribution of real global information to a certain extent, thereby promoting effective cooperation between agents (Q3).




Figure 6: Visualization.

6.2 Performance on GRF

The GRF environment is a challenging reinforcement learning environment that enables the training of multiple agents to engage in football games. We use VDN, QMIX, VDN-Attention, and QMIX-Attention as baseline models and combined TACO with VDN and QMIX, respectively. To validate the performance of our method, we conducted experiments on three representative official scenarios: <code>academy_counterattack_easy</code>, <code>academy_counterattack_hard</code>, and <code>academy_run_pass_and_shoot_with_keeper</code>.




Figure 7: Performance comparison with baselines in different Google Research Football scenarios.

As shown in Figure 7, baseline models can achieve good results in relatively simple scenarios (i.e. academy_counterstack_easy), but in more difficult scenarios (i.e. academy_counterstack_hard), QMIX and VDN perform poorly. QMIX-TACO and VDN-TACO have achieved significant improvements in all three scenarios compared to their baseline models, and are also superior to the QMIX-Attention and VDN-Attention(Q2).

6.3 Ablation Studies

In this section, we first tested the impact of several key hyperparameter settings on TACO through ablation experiments (Q4). We selected the MMM2 scenario of StarCraft and tested the impact of different β and attention dimensions on TACO-QMIX.

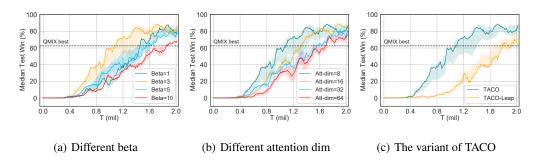


Figure 8: Ablation studies for TACO on MMM2 scenario of SMAC.

From Figure 8(a), it can be seen that a too-high β value can lead to the model paying too much attention to reconstruct information, thereby hindering the learning of cooperation between agents. From Figure 8(b), when the dimension of the attention value is lower, better results can be obtained. We believe that this is because lower attention dimensions are more easily reconstructed by local trajectory. The conclusions of the above two parameters in different scenarios are basically the same, but the optimal choice may be different. The detailed hyperparameters for each scenario can be found in Appendix A.4.

Next, we will demonstrate the necessity of a progressive transition process through experiments. To this end, we propose a variant of TACO called TACO-Leap, which uses full communication during the training phase, that is, α is always equal to zero. From Figure 8(c), the process of progressive learning provides a guidance effect, which can promote the learning efficiency of the TACO method and achieve better performance.

7 Closing Remarks

In this paper, we propose a simple and effective multi-agent collaboration training paradigm called TACO. This approach allows agents to explicitly share relevant information during the early stages of training to guide effective cooperation, and gradually replace real information with reconstructed information through local trajectories, ultimately achieving efficient cooperation under fully decentralized execution. Experimental results in multiple scenarios show that the TACO method can achieve close or even better performance than the same baseline using communication or global information without sharing information.

We believe that this work is beneficial for the multi-agent collaboration community, as existing communication methods often have practical limitations due to communication bandwidth and other issues, while mainstream CTDE training cannot achieve effective collaboration due to the lack of shared information. Our method opens up a new approach that combines the advantages of the above methods, which is both practical and effective.

It is worth noting that our method may fail when there is totally unrelated between the agents' trajectories or observations, as the effective reconstruction of shared information requires a certain degree of similarity between the historical trajectories of the agents. We will further investigate and attempt to mitigate this limitation in future research.

References

[1] Itamar Arel, Cong Liu, Tom Urbanik, and Airton G Kohls. Reinforcement learning-based multi-agent system for network traffic signal control. *IET Intelligent Transport Systems*, 4(2):128–135, 2010.

- [2] Christopher Berner, Greg Brockman, Brooke Chan, Vicki Cheung, Przemyslaw Debiak, Christy Dennison, David Farhi, Quirin Fischer, Shariq Hashme, Christopher Hesse, Rafal Józefowicz, Scott Gray, Catherine Olsson, Jakub Pachocki, Michael Petrov, Henrique Pondé de Oliveira Pinto, Jonathan Raiman, Tim Salimans, Jeremy Schlatter, Jonas Schneider, Szymon Sidor, Ilya Sutskever, Jie Tang, Filip Wolski, and Susan Zhang. Dota 2 with large scale deep reinforcement learning. *CoRR*, abs/1912.06680, 2019.
- [3] Daniel S. Bernstein, Robert Givan, Neil Immerman, and Shlomo Zilberstein. The complexity of decentralized control of markov decision processes. *Math. Oper. Res.*, 27(4):819–840, 2002. doi: 10.1287/moor.27.4.819.297.
- [4] Kyunghyun Cho, Bart van Merrienboer, Çaglar Gülçehre, Dzmitry Bahdanau, Fethi Bougares, Holger Schwenk, and Yoshua Bengio. Learning phrase representations using RNN encoder-decoder for statistical machine translation. In Alessandro Moschitti, Bo Pang, and Walter Daelemans, editors, *Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing, EMNLP 2014, October 25-29, 2014, Doha, Qatar, A meeting of SIGDAT, a Special Interest Group of the ACL*, pages 1724–1734. ACL, 2014. doi: 10.3115/v1/d14-1179. URL https://doi.org/10.3115/v1/d14-1179.
- [5] Abhishek Das, Théophile Gervet, Joshua Romoff, Dhruv Batra, Devi Parikh, Mike Rabbat, and Joelle Pineau. Tarmac: Targeted multi-agent communication. In Kamalika Chaudhuri and Ruslan Salakhutdinov, editors, Proceedings of the 36th International Conference on Machine Learning, ICML 2019, 9-15 June 2019, Long Beach, California, USA, volume 97 of Proceedings of Machine Learning Research, pages 1538–1546. PMLR, 2019.
- [6] Christian Schröder de Witt, Jakob N. Foerster, Gregory Farquhar, Philip H. S. Torr, Wendelin Boehmer, and Shimon Whiteson. Multi-agent common knowledge reinforcement learning. In Hanna M. Wallach, Hugo Larochelle, Alina Beygelzimer, Florence d'Alché-Buc, Emily B. Fox, and Roman Garnett, editors, Advances in Neural Information Processing Systems 32: Annual Conference on Neural Information Processing Systems 2019, NeurIPS 2019, December 8-14, 2019, Vancouver, BC, Canada, pages 9924–9935, 2019. URL https://proceedings.neurips.cc/paper/2019/hash/f968fdc88852a4a3a27a81fe3f57bfc5-Abstract.html.
- [7] Coline Devin, Abhishek Gupta, Trevor Darrell, Pieter Abbeel, and Sergey Levine. Learning modular neural network policies for multi-task and multi-robot transfer. In 2017 IEEE International Conference on Robotics and Automation, ICRA 2017, Singapore, Singapore, May 29 June 3, 2017, pages 2169–2176. IEEE, 2017. doi: 10.1109/ICRA.2017.7989250. URL https://doi.org/10.1109/ICRA.2017.7989250.
- [8] Ziluo Ding, Tiejun Huang, and Zongqing Lu. Learning individually inferred communication for multi-agent cooperation. *Advances in Neural Information Processing Systems*, 33:22069–22079, 2020.
- [9] Benjamin Ellis, Skander Moalla, Mikayel Samvelyan, Mingfei Sun, Anuj Mahajan, Jakob N. Foerster, and Shimon Whiteson. Smacv2: An improved benchmark for cooperative multi-agent reinforcement learning. CoRR, abs/2212.07489, 2022. doi: 10.48550/arXiv.2212.07489. URL https://doi.org/10.48550/arXiv.2212.07489.
- [10] Jakob N. Foerster, Nantas Nardelli, Gregory Farquhar, Triantafyllos Afouras, Philip H. S. Torr, Pushmeet Kohli, and Shimon Whiteson. Stabilising experience replay for deep multi-agent reinforcement learning. In Doina Precup and Yee Whye Teh, editors, Proceedings of the 34th International Conference on Machine Learning, ICML 2017, Sydney, NSW, Australia, 6-11 August 2017, volume 70 of Proceedings of Machine Learning Research, pages 1146–1155. PMLR, 2017. URL http://proceedings.mlr.press/v70/foerster17b.html.
- [11] Jakob N. Foerster, Gregory Farquhar, Triantafyllos Afouras, Nantas Nardelli, and Shimon Whiteson. Counterfactual multi-agent policy gradients. In Sheila A. McIlraith and Kilian Q. Weinberger, editors, Proceedings of the Thirty-Second AAAI Conference on Artificial Intelligence, (AAAI-18), the 30th innovative Applications of Artificial Intelligence (IAAI-18), and the 8th AAAI Symposium on Educational Advances in Artificial Intelligence (EAAI-18), New Orleans, Louisiana, USA, February 2-7, 2018, pages 2974–2982. AAAI Press, 2018.
- [12] Cong Guan, Feng Chen, Lei Yuan, Chenghe Wang, Hao Yin, Zongzhang Zhang, and Yang Yu. Efficient multi-agent communication via self-supervised information aggregation. In Alice H. Oh, Alekh Agarwal, Danielle Belgrave, and Kyunghyun Cho, editors, Advances in Neural Information Processing Systems, 2022. URL https://openreview.net/forum?id=n4wnZAdBavx.
- [13] Carlos Guestrin, Michail G. Lagoudakis, and Ronald Parr. Coordinated reinforcement learning. In Claude Sammut and Achim G. Hoffmann, editors, *Machine Learning, Proceedings of the Nineteenth International* Conference (ICML 2002), University of New South Wales, Sydney, Australia, July 8-12, 2002, pages 227–234. Morgan Kaufmann, 2002.

- [14] Jian Hu, Siyang Jiang, Seth Austin Harding, Haibin Wu, and Shih wei Liao. Rethinking the implementation tricks and monotonicity constraint in cooperative multi-agent reinforcement learning. 2021.
- [15] Shariq Iqbal and Fei Sha. Actor-attention-critic for multi-agent reinforcement learning. In Kamalika Chaudhuri and Ruslan Salakhutdinov, editors, Proceedings of the 36th International Conference on Machine Learning, ICML 2019, 9-15 June 2019, Long Beach, California, USA, volume 97 of Proceedings of Machine Learning Research, pages 2961–2970. PMLR, 2019.
- [16] Jiechuan Jiang and Zongqing Lu. Learning attentional communication for multi-agent cooperation. In Samy Bengio, Hanna M. Wallach, Hugo Larochelle, Kristen Grauman, Nicolò Cesa-Bianchi, and Roman Garnett, editors, Advances in Neural Information Processing Systems 31: Annual Conference on Neural Information Processing Systems 2018, NeurIPS 2018, December 3-8, 2018, Montréal, Canada, pages 7265–7275, 2018.
- [17] Jelle R. Kok and Nikos Vlassis. Collaborative multiagent reinforcement learning by payoff propagation. *J. Mach. Learn. Res.*, 7:1789–1828, 2006. URL http://jmlr.org/papers/v7/kok06a.html.
- [18] Jakub Grudzien Kuba, Ruiqing Chen, Muning Wen, Ying Wen, Fanglei Sun, Jun Wang, and Yaodong Yang. Trust region policy optimisation in multi-agent reinforcement learning. In *The Tenth International Conference on Learning Representations, ICLR 2022, Virtual Event, April 25-29, 2022.* OpenReview.net, 2022. URL https://openreview.net/forum?id=EcGGFkNTxdJ.
- [19] Karol Kurach, Anton Raichuk, Piotr Stanczyk, Michal Zajac, Olivier Bachem, Lasse Espeholt, Carlos Riquelme, Damien Vincent, Marcin Michalski, Olivier Bousquet, and Sylvain Gelly. Google research football: A novel reinforcement learning environment. In *The Thirty-Fourth AAAI Conference on Artificial Intelligence, AAAI 2020, The Thirty-Second Innovative Applications of Artificial Intelligence Conference, IAAI 2020, The Tenth AAAI Symposium on Educational Advances in Artificial Intelligence, EAAI 2020, New York, NY, USA, February 7-12, 2020*, pages 4501–4510. AAAI Press, 2020. URL https://ojs.aaai.org/index.php/AAAI/article/view/5878.
- [20] Ryan Lowe, Yi Wu, Aviv Tamar, Jean Harb, Pieter Abbeel, and Igor Mordatch. Multi-agent actor-critic for mixed cooperative-competitive environments. In Isabelle Guyon, Ulrike von Luxburg, Samy Bengio, Hanna M. Wallach, Rob Fergus, S. V. N. Vishwanathan, and Roman Garnett, editors, Advances in Neural Information Processing Systems 30: Annual Conference on Neural Information Processing Systems 2017, December 4-9, 2017, Long Beach, CA, USA, pages 6379–6390, 2017.
- [21] Laëtitia Matignon, Laurent Jeanpierre, and Abdel-Illah Mouaddib. Coordinated multi-robot exploration under communication constraints using decentralized markov decision processes. In Jörg Hoffmann and Bart Selman, editors, *Proceedings of the Twenty-Sixth AAAI Conference on Artificial Intelligence, July 22-26, 2012, Toronto, Ontario, Canada.* AAAI Press, 2012. URL http://www.aaai.org/ocs/index.php/AAAI/AAAI12/paper/view/5038.
- [22] Frans A. Oliehoek and Christopher Amato. A Concise Introduction to Decentralized POMDPs. Springer Briefs in Intelligent Systems. Springer, 2016. ISBN 978-3-319-28927-4. doi: 10.1007/978-3-319-28929-8. URL https://doi.org/10.1007/978-3-319-28929-8.
- [23] Shayegan Omidshafiei, Jason Pazis, Christopher Amato, Jonathan P. How, and John Vian. Deep decentralized multi-task multi-agent reinforcement learning under partial observability. In Doina Precup and Yee Whye Teh, editors, *Proceedings of the 34th International Conference on Machine Learning, ICML 2017, Sydney, NSW, Australia, 6-11 August 2017*, volume 70 of *Proceedings of Machine Learning Research*, pages 2681–2690. PMLR, 2017. URL http://proceedings.mlr.press/v70/omidshafiei17a.html.
- [24] Peng Peng, Quan Yuan, Ying Wen, Yaodong Yang, Zhenkun Tang, Haitao Long, and Jun Wang. Multiagent bidirectionally-coordinated nets for learning to play starcraft combat games. *CoRR*, abs/1703.10069, 2017. URL http://arxiv.org/abs/1703.10069.
- [25] Tabish Rashid, Mikayel Samvelyan, Christian Schröder de Witt, Gregory Farquhar, Jakob N. Foerster, and Shimon Whiteson. QMIX: monotonic value function factorisation for deep multi-agent reinforcement learning. In Jennifer G. Dy and Andreas Krause, editors, *Proceedings of the 35th International Conference* on Machine Learning, ICML 2018, Stockholmsmässan, Stockholm, Sweden, July 10-15, 2018, volume 80 of *Proceedings of Machine Learning Research*, pages 4292–4301. PMLR, 2018.
- [26] Mikayel Samvelyan, Tabish Rashid, Christian Schröder de Witt, Gregory Farquhar, Nantas Nardelli, Tim G. J. Rudner, Chia-Man Hung, Philip H. S. Torr, Jakob N. Foerster, and Shimon Whiteson. The starcraft multi-agent challenge. CoRR, abs/1902.04043, 2019. URL http://arxiv.org/abs/1902.04043.
- [27] Shai Shalev-Shwartz, Shaked Shammah, and Amnon Shashua. Safe, multi-agent, reinforcement learning for autonomous driving. CoRR, abs/1610.03295, 2016.

- [28] Amanpreet Singh, Tushar Jain, and Sainbayar Sukhbaatar. Learning when to communicate at scale in multiagent cooperative and competitive tasks. *arXiv preprint arXiv:1812.09755*, 2018.
- [29] Sainbayar Sukhbaatar, Arthur Szlam, and Rob Fergus. Learning multiagent communication with backpropagation. In Daniel D. Lee, Masashi Sugiyama, Ulrike von Luxburg, Isabelle Guyon, and Roman Garnett, editors, Advances in Neural Information Processing Systems 29: Annual Conference on Neural Information Processing Systems 2016, December 5-10, 2016, Barcelona, Spain, pages 2244–2252, 2016. URL https://proceedings.neurips.cc/paper/2016/hash/55b1927fdafef39c48e5b73b5d61ea60-Abstract.html.
- [30] Peter Sunehag, Guy Lever, Audrunas Gruslys, Wojciech Marian Czarnecki, Vinícius Flores Zambaldi, Max Jaderberg, Marc Lanctot, Nicolas Sonnerat, Joel Z. Leibo, Karl Tuyls, and Thore Graepel. Valuedecomposition networks for cooperative multi-agent learning. CoRR, abs/1706.05296, 2017.
- [31] Ming Tan. Multi-agent reinforcement learning: Independent versus cooperative agents. In Paul E. Utgoff, editor, *Machine Learning, Proceedings of the Tenth International Conference, University of Massachusetts, Amherst, MA, USA, June 27-29, 1993*, pages 330–337. Morgan Kaufmann, 1993. doi: 10.1016/b978-1-55860-307-3.50049-6. URL https://doi.org/10.1016/b978-1-55860-307-3.50049-6.
- [32] Zheng Tian, Shihao Zou, Ian Davies, Tim Warr, Lisheng Wu, Haitham Bou Ammar, and Jun Wang. Learning to communicate implicitly by actions. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 34, pages 7261–7268, 2020.
- [33] Laurens Van der Maaten and Geoffrey Hinton. Visualizing data using t-sne. *Journal of machine learning research*, 9(11), 2008.
- [34] Elise Van der Pol and Frans A Oliehoek. Coordinated deep reinforcement learners for traffic light control. *Proceedings of learning, inference and control of multi-agent systems (at NIPS 2016)*, 8:21–38, 2016.
- [35] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention is all you need. In Isabelle Guyon, Ulrike von Luxburg, Samy Bengio, Hanna M. Wallach, Rob Fergus, S. V. N. Vishwanathan, and Roman Garnett, editors, Advances in Neural Information Processing Systems 30: Annual Conference on Neural Information Processing Systems 2017, December 4-9, 2017, Long Beach, CA, USA, pages 5998–6008, 2017. URL https://proceedings.neurips.cc/paper/2017/hash/3f5ee243547dee91fbd053c1c4a845aa-Abstract.html.
- [36] Oriol Vinyals, Igor Babuschkin, Wojciech M. Czarnecki, Michaël Mathieu, Andrew Dudzik, Junyoung Chung, David H. Choi, Richard Powell, Timo Ewalds, Petko Georgiev, Junhyuk Oh, Dan Horgan, Manuel Kroiss, Ivo Danihelka, Aja Huang, Laurent Sifre, Trevor Cai, John P. Agapiou, Max Jaderberg, Alexander Sasha Vezhnevets, Rémi Leblond, Tobias Pohlen, Valentin Dalibard, David Budden, Yury Sulsky, James Molloy, Tom Le Paine, Çaglar Gülçehre, Ziyu Wang, Tobias Pfaff, Yuhuai Wu, Roman Ring, Dani Yogatama, Dario Wünsch, Katrina McKinney, Oliver Smith, Tom Schaul, Timothy P. Lillicrap, Koray Kavukcuoglu, Demis Hassabis, Chris Apps, and David Silver. Grandmaster level in starcraft II using multi-agent reinforcement learning. Nat., 575(7782):350–354, 2019. doi: 10.1038/s41586-019-1724-z.
- [37] Jianhao Wang, Zhizhou Ren, Terry Liu, Yang Yu, and Chongjie Zhang. QPLEX: duplex dueling multi-agent q-learning. In 9th International Conference on Learning Representations, ICLR 2021, Virtual Event, Austria, May 3-7, 2021. OpenReview.net, 2021. URL https://openreview.net/forum?id=Rcmk0xxIQV.
- [38] Rose E Wang, Michael Everett, and Jonathan P How. R-maddpg for partially observable environments and limited communication. *arXiv* preprint arXiv:2002.06684, 2020.
- [39] Tonghan Wang, Jianhao Wang, Chongyi Zheng, and Chongjie Zhang. Learning nearly decomposable value functions via communication minimization. In 8th International Conference on Learning Representations, ICLR 2020, Addis Ababa, Ethiopia, April 26-30, 2020. OpenReview.net, 2020. URL https://openreview.net/forum?id=HJx-3grYDB.
- [40] Tonghan Wang, Tarun Gupta, Anuj Mahajan, Bei Peng, Shimon Whiteson, and Chongjie Zhang. RODE: learning roles to decompose multi-agent tasks. In 9th International Conference on Learning Representations, ICLR 2021, Virtual Event, Austria, May 3-7, 2021. OpenReview.net, 2021. URL https://openreview.net/forum?id=TTUVg6vkNjK.
- [41] Cathy Wu, Aboudy Kreidieh, Eugene Vinitsky, and Alexandre M. Bayen. Emergent behaviors in mixed-autonomy traffic. In *1st Annual Conference on Robot Learning, CoRL 2017, Mountain View, California, USA, November 13-15, 2017, Proceedings*, volume 78 of *Proceedings of Machine Learning Research*, pages 398–407. PMLR, 2017. URL http://proceedings.mlr.press/v78/wu17a.html.

- [42] Zhiwei Xu, Bin Zhang, Dapeng Li, Zeren Zhang, Guangchong Zhou, and Guoliang Fan. Consensus learning for cooperative multi-agent reinforcement learning. *CoRR*, abs/2206.02583, 2022. doi: 10.48550/arXiv.2206.02583. URL https://doi.org/10.48550/arXiv.2206.02583.
- [43] Yaodong Yang, Jianye Hao, Ben Liao, Kun Shao, Guangyong Chen, Wulong Liu, and Hongyao Tang. Qatten: A general framework for cooperative multiagent reinforcement learning. *arXiv* preprint *arXiv*:2002.03939, 2020.
- [44] Chao Yu, Akash Velu, Eugene Vinitsky, Yu Wang, Alexandre M. Bayen, and Yi Wu. The surprising effectiveness of MAPPO in cooperative, multi-agent games. *CoRR*, abs/2103.01955, 2021.
- [45] Lei Yuan, Jianhao Wang, Fuxiang Zhang, Chenghe Wang, Zongzhang Zhang, Yang Yu, and Chongjie Zhang. Multi-agent incentive communication via decentralized teammate modeling. In *Thirty-Sixth AAAI Conference on Artificial Intelligence, AAAI 2022, Thirty-Fourth Conference on Innovative Applications of Artificial Intelligence, IAAI 2022, The Twelveth Symposium on Educational Advances in Artificial Intelligence, EAAI 2022 Virtual Event, February 22 March 1, 2022*, pages 9466–9474. AAAI Press, 2022. URL https://ojs.aaai.org/index.php/AAAI/article/view/21179.
- [46] Sai Qian Zhang, Qi Zhang, and Jieyu Lin. Efficient communication in multi-agent reinforcement learning via variance based control. *Advances in Neural Information Processing Systems*, 32, 2019.
- [47] Tianhao Zhang, Yueheng Li, Chen Wang, Guangming Xie, and Zongqing Lu. Fop: Factorizing optimal joint policy of maximum-entropy multi-agent reinforcement learning. In *International Conference on Machine Learning*, pages 12491–12500. PMLR, 2021.

A Experiment Details

All experiments in this paper are run on Nvidia GeForce RTX 3090 graphics cards and Intel(R) Xeon(R) Platinum 8280 CPU. Our code is based on PyMARL2 [14]. We fine-tuned the hyperparameter settings of all baselines for a fair comparison. We conducted our experiments using StarCraft II [26], and Google Research Football [19].





Figure 9: Visualization of experimental environments

A.1 SMAC

In SMAC, each unit is controlled by an agent and each agent has its vision range. At each time step, the agent can observe all friendly and enemy unit information within its vision range, including distance, relative position, health, shield amount, and unit type. In addition, the agent can obtain a candidate set of currently executable actions. During training, we can utilize the global status, including information about all units on the map. The goal of all friendly agents is to defeat enemy agents in combat, and the reward function is related to the health value of the enemy agent. Table A.1provides a detailed description of each SMAC scenario. 1

Table 1: SMAC maps in different scenarios.

Table 1. SiviAc maps in different sections.							
Name	Ally Units	Enemy Units	Туре	Difficulty			
2c_vs_64zg	2 Colossi	64 Zerglings	Homogeneous, Asymmetric, Large Action space	Hard			
5m_vs_6m	5 Marines	6 Marines	Homogeneous, Asymmetric, Massive Agents	Hard			
27m_vs_30m	27 Marines	30 Marines	Homogeneous, Asymmetric	Super Hard			
MMM2	1 Medivac 2 Marauders 7 Marines	1 Medivac 3 Marauder 8 Marines	Heterogeneous, Asymmetric, Macro tactics	Super Hard			
3s5z_vs_3s6z	3 Stalkers 5 Zealots	3 Stalkers 6 Zealots	Heterogeneous, Asymmetric	Super Hard			
Corridor	6 Zealots	24 Zerglings	Micro-trick: wall off	Super Hard			

A.2 SMACv2

In the collaborative problem of multi-agent reinforcement learning, SMAC is a very popular experimental environment. However, after long-term development and improvement, the difficulty of SMAC is no longer sufficient to distinguish the effectiveness of the new algorithm. Therefore, Ellis et al. proposed a new version of the benchmark called SMACv2. In SMACv2, scenarios are procedurally generated for each round, so it is required that the agent can generalize to settings that have not been seen before during testing. The three main improvements in SMACv2 include random

¹Detail information about SMAC can be found at https://github.com/oxwhirl/smac.

²The code for SMACv2 can be found at https://github.com/oxwhirl/smacv2

team compositions, random start positions, and increasing diversity of unit types by using true unit attack and sight ranges. Considering that random team composition is difficult to form a stable and effective communication protocol, we did not use a random team composition and keep the remaining two settings, i.e the random starting position and the true attack and sight ranges. The detailed setting of the three maps we used can be found in Table A.2.

Table 2: SMACv2 maps settings.

Name	Ally Units	Enemy Units	Туре
protoss_5_vs_6	5 Stalkers	6 Stalkers	Homogeneous, Asymmetric, Random Start Positions, True Attack and Sight Ranges
protoss_10_vs_12	10 Stalkers	12 Stalkers	Homogeneous, Asymmetric, Random Start Positions, True Attack and Sight Ranges
protoss_20_vs_23	20 Stalkers	23 Stalkers	Homogeneous, Asymmetric, Random Start Positions, True Attack and Sight Ranges

A.3 Google Research Football

In Google Football, we need to control multiple agents on the left to organize collaborative attacks, and the goal of the team is to score goals. Goalkeepers and opposing players are controlled by the game's built-in AI. Each agent can choose 19 actions, including moving forward, tackling, shooting, and passing the ball. The observation of each friendly agent includes the movement direction and position of all players and the ball. A goal scored, as well as a player returning to the left half, or reaching the maximum time step, will end the current round. Our team will get +100 when winning the game, otherwise get -1.

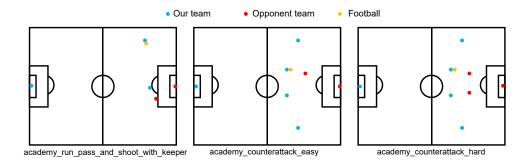


Figure 10: Visualization of the initial position of each agent in three GRF environments considered in our paper.

In our paper, we choose three official scenarios in Football Academy³ including academy_run_pass_and_shoot_with_keeper, academy_counterattack_easy, and academy_counterattack_hard. The initial positions of all players and the ball of all scenarios are shown in Figure 10. In academy_counterattack_easy, our team has four attacking players, while the enemy has a counter-attack player and a goalkeeper. The academy_counterattack_hard adds a counter-attack player to the enemy based on academy_counterattack_easy. In academy_run_pass_and_shoot_with_keeper, two of our players try to score, one is on the side with the ball. And the other one is at the center, next to the defender, and facing the opponent keeper.

³The official code for Football Academy: https://github.com/google-research/football

A.4 Hyperparameters

We follow the recommendations in [14] to fine-tune the hyperparameters of all baselines. The detailed hyperparameters of TACO and other baselines are shown in Table 3.

Description	Value
Type of optimizer	Adam
Learning rate	0.001
How many episodes to update target networks	200
Training epochs of each update	10
Batch size	128
The capacity of replay buffer (in episodes)	5000
Starting value for exploration rate annealing	1
Ending value for exploration rate annealing	20
Discount factor γ	0.99
Dimension of Embedding layer for Mixing network	32
Size of hidden state for default GRU cell	64
Reduce global norm of gradients	10
Beta	3 or 5
Dimension of Attention Embedding layer for Abstract module	8 or 32
Number of Attention Head	4
The maximum value of mixed ratio $\alpha_{\rm max}$	1
The initial value of mixed ratio α_{init}	0

Table 3: Hyperparameters.

B Pseudo Code of TACO

The entire algorithm of TACO is presented in Algorithm 1.

```
Algorithm 1: TACO
   Input: Hyperparameters: \beta, \alpha_{init}, \Delta \alpha.
 1 Initialize the replay buffer D
2 Initialize the parameters \theta of the agent network and the mixing network
3 Initialize the target parameters \theta^-
4 for episode \leftarrow 1 to M do
        Observe initial state s^1 and observation o_a^1 for each agent a
 5
        for t \leftarrow 1 to T do
 6
            for i \leftarrow 1 to n do
 7
                 Calculate the mixed information \bar{v}_i by Eq. 4
 8
                 With probability \epsilon select a random action u_i^t
                 Otherwise u_a^t = \arg \max_u Q_a(\tau_a^t, u, \bar{v})
10
11
             Take the joint action u^t, and get the next observation o_i^{t+1} and the reward r^t
12
            Store the transition (s^t, o^t, u^t, r^t, s^{t+1}, o^{t+1})
13
            Update the mixed ratio \alpha = \min(\alpha + \Delta \alpha, \alpha_{\max})
14
15
        end
        Sample a random mini-batch data from D
16
        Calculate total loss \mathcal{L}_{tot} defined by Eq. 7
17
        Update \theta by minimizing \mathcal{L}_{tot}
18
        Update target network parameters \theta^- = \theta periodically
19
20 end
```