# SemEval-2023 Task 2: Fine-grained Multilingual Named Entity Recognition (MultiCoNER 2)

Besnik Fetahu Sudipta Kar Zhiyu Chen Oleg Rokhlenko Shervin Malmasi

Amazon.com, Inc. Seattle, WA, USA

{besnikf,sudipkar,zhiyuche,olegro,malmasi}@amazon.com

## Abstract

We present the findings of SemEval-2023 Task 2 on Fine-grained Multilingual Named Entity Recognition (MULTICONER 2).<sup>1</sup> Divided into 13 tracks, the task focused on methods to identify complex fine-grained named entities (like WRITTENWORK, VEHICLE, MUSICALGRP) across 12 languages, in both monolingual and multilingual scenarios, as well as noisy settings. The task used the MULTICONER V2 dataset, composed of 2.2 million instances in Bangla, Chinese, English, Farsi, French, German, Hindi, Italian., Portuguese, Spanish, Swedish, and Ukrainian.

MULTICONER 2 was one of the most popular tasks of SemEval-2023. It attracted 842 submissions from 47 teams, and 34 teams submitted system papers. Results showed that complex entity types such as media titles and product names were the most challenging. Methods fusing external knowledge into transformer models achieved the best performance, and the largest gains were on the Creative Work and Group classes, which are still challenging even with external knowledge. Some finegrained classes proved to be more challenging than others, such as SCIENTIST, ARTWORK, and PRIVATECORP. We also observed that noisy data has a significant impact on model performance, with an average drop of 10% on the noisy subset. The task highlights the need for future research on improving NER robustness on noisy data containing complex entities.

#### 1 Introduction

Complex Named Entities (NE), like the titles of creative works, are not simple nouns and pose challenges for NER systems (Ashwini and Choi, 2014). They can take the form of any linguistic constituent, like an imperative clause ("Dial M for Murder"), and do not look like traditional NEs (Persons, locations, etc.). This syntactic ambiguity makes it challenging to recognize them based on context. We organized the Multilingual Complex NER (MultiCoNER) task (Malmasi et al., 2022b) at SemEval-2022 to address these challenges in 11 languages, receiving a positive community response with 34 system papers. Results confirmed the challenges of processing complex and long-tail NEs: even the largest pretrained Transformers did not achieve top performance without external knowledge. The top systems infused transformers with knowledge bases and gazetteers. However, such solutions are brittle against out of knowledge-base entities and noisy scenarios (e.g. spelling mistakes and typos). For entities with fine-grained classes, apart from the entity surface form, the context is critical in determining the correct class.

MULTICONER 2 expanded on these challenges by adding fine-grained NER classes, and the inclusion of noisy input. Fine-grained NER requires models to distinguish between sub-types of entities that differ only at the fine-grained level, e.g. SCIENTIST vs. ATHLETE. In these cases, it is crucial for models to capture the entity's context. In terms of noise, we assessed how small perturbations in the entity surface form and its context can impact performance. Noisy scenarios are quite common in many applications such as Web search and social media. These challenges are described in Table 1, and our tasks defined below.

- 1. **Monolingual**: NER systems are evaluated on monolingual setting, e.g. models are trained and tested on the same language (12 tracks in total).
- 2. **Multilingual**: NER systems are tested on a multilingual test set, composed from all languages in the monolingual track.

We released the MULTICONER v2 dataset (Fetahu et al., 2023) to address the aforementioned challenges. MULTICONER v2 includes data from Wikipedia which has been filtered to identify difficult low-context sentences, and further postprocessed. The data covers 12 languages, which

<sup>&</sup>lt;sup>1</sup>https://multiconer.github.io

Challenge	Description					
Fine-grained	The entity type can be different based on the context. For example, a creative work entity "Harry					
Entities Potter and the Sorcerer's Stone" could be s a book or a film, depending on the context.						
Noisy NER Gazetteer based models would not work for typos (e.g., "sony xperia" → "somy xpria")						
	spelling errors (e.g., "ford cargo" $\rightarrow$ "ford cargo") in entities, degrading significantly their					
	performance.					
<b>Ambiguous Entities</b>	Some NEs are ambiguous: they are not always entities, e.g. "Inside Out", "Among Us", and					
and Contexts	"Bonanza" may refer to NEs (a movie, video game, and TV show) in some contexts, but not in					
	others. Such NEs often resemble regular syntactic constituents.					
Surface Features	Capitalization/punctuation features are large drivers of success in NER (Mayhew et al., 2019), but					
	short inputs (ASR, queries) often lack such surface features. An <u>uncased</u> evaluation is needed to					
	assess model performance.					

Table 1: Challenges addressed by MULTICONER 2.

are used to define the 12 monolingual subsets of the task. Additionally, the dataset has a multilingual subset which has mixed data from all the languages.

MULTICONER 2 received 842 submissions from 47 teams, and 34 teams submitted system description papers. Results showed that usage of external data and ensemble strategies played a key role in the strong performance. External knowledge brought large improvements on classes containing names of creative works and groups, allowing those systems to achieve the best overall results.

Regarding noisy data, all systems show significant performance drop on the noisy subset, which included simulated typographic errors. Small perturbations to entities had a more negative effect than those to the context tokens surrounding entities. This suggests that current systems may not be robust enough to handle real-world noisy data, and that further research is needed to improve their performance in such scenarios. Finally, NER systems seem to be most robust to noise for PER, while most susceptible to noise for GRP.

In terms of fine-grained named entity types, we observed that performance was lower than the coarse types due to failure to correctly disambiguate sub-classes such as ATHLETE vs. SPORTSMANAGER. Some of the most challenging fine-grained classes include PRIVATECORP, SCIENTIST and ARTWORK.

## 2 MULTICONER v2 Dataset

The MULTICONER V2 dataset was designed to address the NER challenges described in §1. The data comes from the wiki domain and includes 12 languages, plus a multilingual subset. Some examples from our data can be seen in Figure 1. For a detailed description of the MULTICONER V2 data, we refer the reader to the dataset paper (Fetahu et al., 2023). The dataset is publicly available.<sup>2</sup>




Figure 1: Examples sentences from MULTICONER v2.

#### 2.1 Languages and Subsets

MULTICONER v2 covers 12 languages:

		00
Bangla (BN)	Chinese (ZH)	English (EN)
Farsi (FA)	French (FR)	German (DE)
Hindi (HI)	Italian (IT)	Portuguese (PT)
Spanish (ES)	Swedish (SV)	Ukrainian (UK)
Hindi (HI)	Italian (IT)	Portuguese (PT)

These languages were chosen to include a diverse typology of languages and writing systems, and range from well-resourced (EN) to low-resourced ones (FA). MULTICONER v2 contains 13 different subsets: 12 monolingual, and a multi-lingual subset (denoted as MULTI).

**Monolingual Subsets** Each of the 12 languages has its own subset.

**Multilingual Subset** This contains randomly sampled data from all the languages mixed into a single subset. This subset is designed for evaluating multilingual models, and should ideally be used under the assumption that the language for each sentence is unknown. From the test set of each language, we randomly selected at most 35,000 samples resulting in a total of 358,668 instances.

### 2.2 Dataset Creation

In this section, we provide a brief overview of the dataset construction process. Additional details are available in Fetahu et al. (2023).

MULTICONER V2 was extracted following the same strategy as Malmasi et al. (2022a), where sen-

<sup>&</sup>lt;sup>2</sup>https://registry.opendata.aws/multiconer

tences from the different languages are extracted from localized versions of Wikipedia. We select low-context sentences and the *interlinked* entities are resolved to the *entity types* using Wikidata as a reference, according to the NER class taxonomy shown in Table 2. Furthermore, to prevent models from leveraging surface form features, we lowercase the words and remove punctuation. These steps result in more challenging sentences that are more representative of real-world data.

## 2.3 Fine-grained NER Taxonomy

MULTICONER 2 builds on top of the WNUT 2017 (Derczynski et al., 2017) taxonomy entity types, and adds an additional layer of fine-grained types. We also drop the Corporation class, as it overlaps with the Group class. Furthermore, we introduce a new coarse grained class called Medical, which captures entities from the medical domain (e.g. DISEASE, ANATOMICALSTRUCTURE, etc.). Table 2 shows the 33 fine-grained classes, grouped across 6 coarse types.

The fine-grained taxonomy allows us to capture a wide array of entities, including complex entity structures, such as CW, or entities that are ambiguous without their context, e.g. SCIENTIST vs. ATHLETE as part of the PER coarse grained type.

#### 2.4 Noisy Subsets

NER systems are typically trained on carefully curated datasets. However, in real-world scenarios, various errors may arise due to human mistakes. We applied noise only on the test set to simulate environments where NER models are exposed directly to user-generated content.

To evaluate the robustness of NER models, we corrupt 30% of the test set with various types of simulated errors in 7 languages (EN, ZH, IT, ES, FR, PT, SV). The corruption can impact context tokens and entity tokens. For Chinese, we applied character-level corruption strategies (Wang et al., 2018) which involve replacing characters with visually or phonologically resembled ones. For other languages, we developed token-level corruption strategies based on common typing mistakes made by humans (e.g., randomly substituting a letter with a neighboring letter on the keyboard), utilizing language specific keyboard layouts.<sup>3</sup>

#### 2.5 Dataset Statistics

Table 3 shows the MULTICONER v2 dataset statistics. For most tracks, we released 16k training and 800 development instances (with the exception of DE, BN, HI, ZH due to data scarcity).

The test splits on the other hand are much larger. This is done for two reasons: (1) to assess the generalizability of NER models in identifying unseen and complex fine-grained entity types, where the entity overlap between train and test sets is small, and and (2) to assess how models handle noise in contextual or entity tokens. For practical reasons, we cap the number of test instances to be less than 250k per subset for most languages (with the exception of DE, BN, HI, ZH which are already small due to data scarcity).

#### **3** Task Description and Evaluation

The shared task is composed of 12 monolingual and 1 multilingual track. The multilingual track invited multilingual models capable of identifying entities from monolingual texts from any of the 12 languages. As described in Section 2.4, 30% of the test sets of the EN, ZH, IT, ES, FR, PT, and SV monolingual tracks are corrupted with simulated noise. We refer the subsets with corruption as **noisy subsets** and the rest as **clean subsets**.

For evaluation, we used the macro-averaged F1 scores to evaluate and rank systems. The F1 scores are computed over the fine-grained types using exact matching (i.e. the entity boundary and type must exact match the ground truth), and averaged across all types. We also report the performance on noisy subsets and clean subsets in Appendix A to study the impact on noise in §6.

## 4 Baseline System

Similar to the 2022 edition (Malmasi et al., 2022b), we train and evaluate a baseline NER system using XLM-RoBERTa (XLM-R) (Conneau et al., 2020), a multilingual Transformer model. The XLM-R model computes a representation for each token, which is then used to predict the token tag using a CRF classification layer (Sutton et al., 2012).

XLM-R is suited for multilingual scenarios, supporting up to 100 languages. It provides a solid baseline upon which the participants can build. It was trained with a learning rate of 2e - 5 and for 50 epochs, with an early stopping criterion of a non-decreasing validation loss for 5 epochs. The

<sup>&</sup>lt;sup>3</sup>We extended the keyboard layouts in this library to include 7 languages: https://github.com/ranvijaykumar/typo

PER (Person)	LOC (Location)	GRP (Group)	PROD (Product)	CW (Creative Work)	MED (Medical)
Artist	FACILITY	AEROSPACEMANUFACTURER	CLOTHING	ArtWork	ANATOMICALSTRUCTURE
ATHLETE	HUMANSETTLEMENT	CARMANUFACTURER	Drink	MUSICALWORK	DISEASE
CLERIC	STATION	MUSICALGRP	FOOD	SOFTWARE	MEDICALPROCEDURE
POLITICIAN	OTHERLOC	ORG	VEHICLE	VISUALWORK	MEDICATION/VACCINE
SCIENTIST		PRIVATECORP	OTHERPROD	WRITTENWORK	Symptom
SPORTSMANAGER		PUBLICCORP			
OTHERPER		SportsGRP			

Table 2: MULTICONER v2 NER taxonomy, consisting of 33 fine-grained classes, grouped across 6 coarse grained types.

Class	Split	EN	DE	FA	FR	ES	UK	sv	HI	BN	ZH	IT	PT	Multi
	train	9,294	5,508	8,006	9,295	8,360	6,441	7,695	3,609	3,778	4,862	10,387	8,241	85,476
PER	dev	481	280	413	483	442	341	445	174	194	239	548	447	4,487
	test	137,681	11,299	115,868	141,401	125,379	96,864	111,157	5,736	6,935	9,095	160,598	120,413	180,080
	train	4,084	2,466	3,661	5,438	3,606	2,907	3,714	1,646	1,981	2,264	5,048	3,839	40,654
CW	dev	215	127	184	268	183	146	200	90	103	112	267	206	2,101
	test	62,126	4,777	53,034	84,952	55,459	43,291	54,806	2,804	3,640	4,369	79,873	58,245	87,030
	train	4,224	2,815	3,209	3,745	3,632	3,204	3,459	2,273	2,227	2,696	3,416	3,788	38,688
GRP	dev	218	177	180	195	195	151	194	143	122	145	173	200	2,093
	test	60,026	4,418	38,807	52,987	50,259	39,709	46,929	3,897	3,651	4,715	46,271	48,994	73,226
	train	4,353	2,269	5,086	4,723	4,651	5,458	7,176	2,487	2,457	2,470	4,446	4,794	50,370
LOC	dev	197	117	267	242	230	294	370	133	127	129	248	250	2,604
	test	67,901	5,306	70,907	73,373	72,996	84,643	111,879	7,172	7,375	6,170	68,564	70,923	117,257
	train	1,935	1,571	2,049	1,946	1,989	2,258	1,989	1,420	1,384	1,529	1,770	1,927	21,767
PROD	dev	109	78	107	100	100	117	112	74	67	73	86	101	1,124
	test	27,580	1,643	18,212	28,274	28,469	30,071	22,686	1,611	1,493	1,869	22,887	21,115	35,545
	train	1,559	1,322	1,651	1,230	1,669	1,688	1,381	1,435	1,396	1,407	1,376	1,850	17,964
MED	dev	76	62	85	64	81	86	70	70	63	75	76	88	896
	test	22,491	1,434	15,287	17,208	23,812	20,796	13,702	1,979	1,919	1,781	19,029	21,062	29,553
	train	16,778	9,785	16,321	16,548	16,453	16,429	16,363	9,632	9,708	9,759	16,579	16,469	170,824
Total	dev	871	512	855	857	854	851	856	514	507	506	858	854	8,895
	test	249,980	20,145	219,168	249,786	246,900	238,296	231,190	18,399	19,859	20,265	247,881	229,490	358,668

Table 3: MULTICONER 2 dataset statistics for the different languages for the Train/Dev/Test splits. For each NER class we show the total number of entity instances per class on the different data splits. The bottom three rows show the total number of sentences for each language.

code and scripts for the baseline system were provided to the participants to use its functionalities and further extend it with their approaches.<sup>4</sup>

### **5** Participating Systems and Results

We have received submissions from 47 different teams. Table 4 shows the final rankings for all tracks (fine-grained Macro F1). Among the monolingual tracks, we have observed the highest participation in the English track with 34 teams. Ordered by the number of participating teams, the rest of the monolingual tracks are Chinese (22), German (17), Bangla (18), Spanish (18), Hindi (17), French (17), Portuguese (17), Swedish (16), Italian (15), Farsi (14), and Ukrainian (14). The number of participating teams for the Multilingual track is 18. Detailed performance breakdown for noisy and clean subsets of English, Spanish, French, Italian, Portuguese, Swedish, and Chinese is available in Appendix A.

## 5.1 Top Systems

**DAMO-NLP** (Tan et al., 2023) ranked  $1^{st}$  for most tracks, except being  $2^{nd}$  in BN, DE, ZH, and

 $4^{th}$  in HI. They proposed an unified retrievalaugmented system (U-RaNER) for the task. The system uses two different knowledge sources (Wikipedia paragraphs and the Wikidata knowledge graph) to inject additional relevant knowledge to their NER model. Additionally, they explored an infusion approach to provide more extensive contextual knowledge about entities to the model.

**PAI** (Ma et al., 2023b) ranked  $1^{st}$  in BN, DE,  $2^{nd}$  in FR, HI, IT, PT,  $3^{rd}$  in EN,  $4^{th}$  in ZH,  $5^{th}$  in MULTI,  $7^{th}$  in ES, FA, UK, and  $8^{th}$  in SV. They developed a knowledge base using entities and their associated properties like "instanceof", "subclassof" and "occupation" from Wikidata. For a given sentence, they used a retrieval module to gather different properties of the entities by string matching. They observed benefits on the clean subset through the dictionary fusing approach. The same benefits were not observed on the noisy subset.

**USTC-NELSLIP** (Ma et al., 2023a) ranked  $1^{st}$  in HI,  $3^{rd}$  in BN, ES,  $4^{th}$  in DE, UK,  $5^{th}$  in IT, SV,  $6^{th}$  in FA, FR, PT, ZH, MULTI, and  $8^{th}$  in EN. They proposed a two-stage training strategy. In the first stage, the representations of gazetteer network and language model are adapted at sentence and entity

<sup>&</sup>lt;sup>4</sup>https://github.com/amzn/multiconer-baseline

1 DAMO-NLP 85.53 11 LSISP 64.36 5 IXACegecomp 69.48 12 DZKLab   3 PAI 80.00 13 Sartipi-Scelighin 61.05 7 PAI 68.08 84 14 Sartipi-Scelighin 61.02 15 FIL Sartipi-Scelighin 60.02 15 ISISP   6 SRCB 75.62 15 FIL_Better 52.12 10 Sartipi-Scelighin 60.02 16 L3i+T   7 IXACogcomp 72.81 1 DAMO-NLP 89.02 13 SAB 52.24 1 FAI   10 BizNER 70.44 2 CAIR-NLP 81.02 BASELINE 73.41 1 DAMO-NLP 63.0 S NLPcopl   13 Satura 70.44 2 CAIR-NLP 81.02 BASELINE 73.41 1 PAI Satura 73.41 1 PAI Satura 73.41 1 PAI Satura 72.31 4 VSTC-NELSLIP 74.71 18 gar/NER 64.54 S NLPcopl	67.71
3   PAI   80.00   13   Sartipi-Sedighin   61.95   7   PAI   66.48   4   Sartipi-Sedighin   61.95   7   PAI   66.48   4   Sartipi-Sedighin   60.02   16   L3JSP     6   SRCB   75.62   15   FIL_Better   52.12   10   Sartipi-Sedighin   60.02   16   L3i++     8   USTC-NELSLIP   72.81   1   DAMO-NLP   89.02   12   Ertin   53.77 <b>I</b> Bartipi-Sedighin   61.83   NLPcople   71.81   1   DAMO-NLP   89.02   12   Bartipi-Sedighin   61.35   NLACogoomp   72.51   2   DAMO-NLP   80.02   NLPcople   71.41   NLACogoomp   72.51   2   DAMO-NLP   80.02   NLPcople   73.41   1   PA1   80.53   Sakura   7.67   9   Sakura     15   ITD   63.21   7   NLPcople   7.7.7   9   Sakura   7.67   9   Sakura   7.67   9   Sa	63.29
4   CAIR.NLP   79.30   14   SAB   SAB   8   Sakura   64.81   14   SAB     5   KDDIE   78.06   BASELINE   57.19   9   garNER   62.12   15   LSJSP     6   SRCB   72.82   16   IXA   22.96   11   D2KLab   54.01   17   IXA     9   NLPcople   71.18   1   DAMO-NLP   80.02   13   SAB   52.42   1   PAI     10   BiXRER   70.16   3   IXA/Cogcomp   73.25   14   IXA   1.83.7   3   USTC-NELSLIP   74.37   7   German (DE)   4   IXA/Cog     13   CodeNLP   63.21   7   PAI   72.33   IXA/Cogcomp   73.24   IXA/Cog   NUEcople   77.67   8   Satripi-Sedighin   67.25   4   USTC-NELSLIP   78.11   8   garNER     15   ITD   63.21   7   PAI   1.2   PAI   NUEabol	63.29
5 KDDIE 78.00 BASELINE 57.19 9 gurNER 6.2.12 10 Sarripi-Sedighin 60.02 16 L3i++   6 SRCB 75.62 15 FIL Better 22.12 10 Sarripi-Sedighin 60.02 16 L3i++   8 USTC-NELSLIP 72.82 16 LXA 25.96 1 Dake 5.42 1 PAL   9 NLPcople 71.81 1 DAMO·NLP 89.02 18 SASELINE 5.53 2 DAMO·NLP   11 Sakara 70.16 3 IXACogoomp 72.31 1 PAI 8.85 Sakara 7.8 NLPcople   13 CodeNLP 63.51 5 NLPcople 7.31 1 PAI 8.97 6 Sakara 7.67 9 signarp   14 Sartip-Sedighin 63.22 6 Sakara 7.67 9 signarp 9 D2KLab 61.29 NLPcople 7.67 9 signarp   15 ITD 63.21 12 SAB <	0
6 SRCB 7.5 FIL.Better 52.12 10 Sartipi-Sectighin 60.02 16 Lisi++   7 IXA/Cogcomp 72.82 16 IXA 25.96 11 D2KLab 54.20 17 IXA   9 NLPcople 71.81 I DAMO-NLP 89.02 13 SAB 52.42 1 PAI   10 BixNER 70.44 2 CAIR-NLP 81.02 IS SAB 52.42 1 PAI   12 RIGA 69.30 4 USTC-NELSLIP 73.71 IC German (DE) 4 IXA/Cogcomp 73.83 SUSTC-NI 14 SAA/Cogcomp 80.35 NLPcople 74.11 1 PAI TXAB gar/ER 16 SAKura 15 PAI TXA/Cogcomp 73.25 14 USTC-NELSLIP 80.37 1 SUSTC-NI 15 SAKura 15 NLPcople 76.71 SAKura 16 LSWA/Cogcomp 72.84 10 CAIR-NI 76.11 SAKura 10 DAIN-N 76.11 SAKura 10 SAKura <td>62.30 53.13</td>	62.30 53.13
7 IXA/Cogeomp 72.82 16 IXA 25.96 11 D2Lab 54.20 17 IXA   8 USTC-NELSLIP 72.15 Ukranian (UK) 12 Errim 53.77 UBang   10 BixNER 70.44 2 CAIR-NLP 89.02 13 SAB 52.42 1 PAI   11 Sakura 70.16 3 IXA/Cogeomp 75.25 14 IXA 15.87 2 DAMO-N   12 RIGA 63.51 5 NLPcople 77.41 1 PAI 80.97 6 Sakura   15 ITTD 63.21 7 PAI 71.28 3 IXA/Cogeomp 76.24 NLPcople 76.74 9 silp.nlp   15 BTD 63.81 7 PAI 71.28 4 IXA/Cogeomp 76.24 N BaseLIN 76.71 9 silp.nlp   16 garNER 61.29 10 D2KLab 61.41 KA 52.81 0 CAIR-NLP 77.17 9 silp.nlp 10 <	43.56
8 USTC-NELSLIP 7.1 Image of the second state of t	26.13
9 NLPcople 71.81 1 DAMO-NLP 89.02 13 SAB 52.42 1 PAI   10 BizNER 70.44 2 CAIR-NLP 81.29 BASELINE 51.56 2 DAMO-N   11 Sakura 67.016 3 IXA/Cogcomp 75.25 14 IXA 15.87 3 USTC-NELSLIP 7.437 German (DE) 4 IXA/Cog   12 RIGA 69.30 4 USTC-NELSLIP 7.431 2 DAMO-NLP 84.97 6 Sakura   15 IITD 63.21 7 PAI 71.28 3 IXA/Cogcomp 84.97 6 Sakura   15 BITD 63.21 7 PAI 71.28 4 USTC-NELSLIP 77.67 9 sign-nlp   16 garNER 61.29 10 D2KLab 61.41 63.88 7 CAIR-NLP 74.71 BASELINE   21 MEERQAT-IRIT 58.70 13 LSJSP SA07 BASELINE 67.12 12 VBD_NLP   22	
	84.39
13   CodeNLP   63.51   5   NLPcople   73.41   1   PAI   88.09   5   NLPcople     14   Sartipi-Sedighin   63.21   7   PAI   72.31   2   DAMO-NLP   80.35   7   NLab4C     15   IITD   63.21   7   PAI   71.128   3   IXA/Cogeome   80.35   7   NLab4C     16   garNER   62.73   8   Sartipi-Sedighin   67.25   4   USTC-NELSLIP   7.67   9   garNER     19   silp_nlp   60.85   11   silp_nlp   63.18   7   CAIR-NI   74.71   BASELINE   7.29   13   BASELINE   57.29   9   D2KLab   67.21   11   Sartipi-Sedighin   64.21   14   VBD_NLP     24   CLaC   55.05 <b>FOrtugese (PT)</b> 11   Sartipi-Sedighin   64.21   15   SAB     25   LiJA+   53.00   1   DAMO-NLP   \$5.97   12   garNER   64.21 <td></td>	
15 ITD 63.21 7 PAI 71.28 3 IXA/Cogcomp 80.35 7 MLlab4Q   16 garNER 62.73 8 Sartipi-Sedighin 67.25 4 USTC-NELSLIP 78.71 8 garNER   17 FULBetter 61.75 9 garNER 65.64 5 KNLPcople 77.67 9 sip_nlp   18 D2KLab 61.29 10 D2KLab 64.14 6 Sakura 76.24 10 CAIR-NI   19 silp_nlp 60.85 11 silp_nlp 63.18 7 CAIR-NIP 74.71 BASELINE   21 HERQAT-IRIT 58.70 13 LSJSP 58.07 BASELINE 67.20 13 BirxPeR   22 LSJSP 57.51 BASELINE 57.29 9 D2KLab 64.02 14 D2KLa   23 RGAT 50.01 1 DAMO-NLP 85.97 12 garNER 63.8 16 LSJSP   24 CLaC 52.05 2 PAI 10	78.24
	77.20
	76.27
18 D2Lab 61.29 10 D2KLab 64.14 6 Sakura 76.24 10 CAIR-NI   19 silp_nlp 60.85 11 silp_nlp 63.18 7 CAIR-NLP 74.71 BASELI   20 Errim 59.03 12 SAB 59.42 8 BizNER 71.21 11 Sartipi-Sc   21 MEERQAT-IRIT 58.70 13 LSJSP 58.07 BASELINE 67.21 12 VBD_XLab   23 RGAT 56.91 14 IXA 22.81 10 silp_nlp 64.92 14 D2KLab   24 CLaC 55.05 <b>Dortugese (PT)</b> 11 Sartipi-Sedighin 64.21 I Silp_nlp 64.21 I Silp_nlp 64.21 I Silp_NR 62.88 16 LSJSP   24 CLaC 53.00 1 DAMO-NLP 85.97 12 garNER 63.88 16 LSJSP   25 KAB S1.41 6 USTC-NELSLIP 71.71 T AA 16.09 2 PAI   26 VAB	73.39
19 silp_nlp 60.85 11 silp_nlp 63.18 7 CAIR-NLP 74.71 BASELI   20 Ertim 59.03 12 SAB 59.42 8 BitNER 71.21 11 Satripi-SA   21 MEEQAT-IRIT 58.07 13 LSISP 58.07 BASELINE 67.09 13 BizNER   23 RGAT 56.91 14 IXA 22.81 10 sitp_nlp 64.92 14 DZKLab 67.09 13 BizNER   24 CLaC 50.55 <b>Portugese (PT)</b> 11 Sartipi-Sedighin 64.22 14 DZKLab 63.88 16 LSISP   25 L3i++ 53.00 1 DAMO-NLP 85.67 12 garNER 63.88 16 LSISP   26 VBD_NLP 52.65 3 CAIR-NLP 80.16 14 LLM-RM 55.54 18 IXA   27 LM-RM 52.08 5 IXACOgcomp 72.28 16 L3i++ 46.55 1 DAMO-N   28	73.22
20   Err.   59.03   12   SAT   59.42   8   BizNER   71.21   11   Sartipi-Sa     21   MEERQAT-IRIT   58.70   13   LSISP   58.07   BASELINE   67.21   12   VBD_ML     22   LSISP   57.51   BASELINE   57.29   9   D2KLab   67.09   13   BizNER     23   RGAT   56.91   14   IXA   22.81   oilp_nlp   64.92   14   D2KLab     24   CLaC   55.05   Portugese (PT)   11   Sartipi-Sedighin   64.21   15   SAB     25   L3i++   53.00   1   DAMO-NLP   85.97   12   garNER   63.88   16   LIM-RM   55.48   1XA     26   VBD_NLP   52.65   3   CAIR-NLP   80.16   14   LLM-RM   55.54   IB AIMO-N     28   MIARM   52.08   7   Detearning Brasil   70.97   ICAinese (ZH)   3   SCAIR-NLP   80.05	
21 MEERQAT-IRIT 58.70 13 LSJSP 58.07 BASELINE 67.21 12 VBD_NL   22 LSJSP 57.51 BASELINE 57.29 9 D2KLab 67.09 13 BizNER   23 RGAT 56.91 14 IXA 22.81 10 silp_nlp 64.92 14 D2KLab   24 CLaC 55.05 Portugese (PT) 11 Sartipi-Sedighin 64.21 15 SAB   25 L3i++ 53.00 1 DAMO-NLP 85.97 12 garNER 63.88 16 LSJSP   BASELINE 52.98 2 PAI 81.61 13 FILBetter 55.86 17 L3i+   26 VBD_NLP 52.65 3 CAIR-NLP 80.16 14 LLM-RM 55.51 Italia   28 Minanto 51.47 6 USTC-NELSLIP 71.26 17 IXA 16.09 2 PAI 3 CAIR-NI   31 azaad@BND 47.42 8 NLPcople 70.84 PAI	
22   LSJSP   57.51   BASELINE   57.29   9   D2KLab   67.09   13   BizNER     23   RGAT   56.91   14   IXA   22.81   10   silp_nlp   64.92   14   D2KLab     24   CLaC   55.05   Portuges (PT)   11   Sartipi-Sedighin   64.92   14   D2KLab     25   L3i++   53.00   1   DAMO-NLP   85.97   12   garNER   63.88   16   LSISP     BASELINE   52.98   2   PAI   81.61   13   FILBetter   55.86   17   L3i++     26   VBD_NLP   52.05   3   CAIR-NLP   80.16   14   LM-RM   55.51   IT   Talibi     28   Minanto   51.47   5   IXA/Cogcomp   72.28   16   L3i++   46.55   1   DAMO-N     29   SAB   51.41   6   USTC-NELSLIP   71.26   17   IXA   16.99   2   DAMO-NLP <t< td=""><td>0</td></t<>	0
23 RGAT 56.91 14 IXA 22.81 10 silp_nlp 64.92 14 D2KLab   24 CLaC 55.05 Portugese (PT) 11 Saripi-Sedighin 64.21 15 SAB   25 L3i++ 53.00 1 DAMO-NLP 85.97 12 garNER 63.88 16 LSJSP   BASELINE 52.98 2 PAI 81.61 13 FILBetter 55.86 17 L3i++   26 VBD_NLP 52.65 3 CAIR-NLP 80.16 14 LLM-RM 55.54 18 IXA   27 LLM-RM 52.08 4 BiZNER 72.97 15 SAB 51.41 6 USTC-NELSLIP 71.46 17 IXA 16.09 2 PAI   30 ShathaTaymaaTeam 50.02 7 Deep Learning Brasil 70.97 Chinese (ZH) 3 CAIR-NL 3 CAIR-NL 3 CAIR-NL 3 SUSTC-NL 3 CAIR-NL 3 SUSTC-NL 3 SUSTC-NL 3 SUSTC-NL <td< td=""><td></td></td<>	
24 CLaC 55.05 Portuges (PT) 11 Saripi-Sedighin 64.21 15 SAB   25 L3i++ 53.00 1 DAMO-NLP 85.97 12 garNER 63.88 16 LSISP   BASELINE 52.98 2 PAI 81.61 61 14 LLM-RM 55.84 17 L3i++   26 VBD_NLP 52.65 3 CAIR-NLP 80.61 14 LLM-RM 55.54 18 IXA   27 LLM-RM 52.08 4 BizNER 72.97 15 SAB 55.51 Italiz   28 Minanto 51.41 6 USTC-NELSLIP 71.26 17 IXA 16.09 2 PAI   31 azaad@BND 47.42 8 NLPcople 70.16 1 NetEase.AI 84.05 4 BizNER   32 LISAC FSDM-USMB4 44.00 9 Sakura 69.82 2 DAMO-NLP 7.5 Sakura   34 IXA 15.39 11 Sartipi-Sedighin 61.28 4	64.37
25 L3i++ 53.00 1 DAMO-NLP 85.97 12 garNER 63.88 16 LSJSP   BASELINE 52.98 2 PAI 81.61 13 FIL_Better 55.84 17 L3i++   26 VBD_NLP 52.65 3 CAIR-NLP 80.16 14 LLM-RM 55.54 18 IXA   28 Minanto 51.47 5 IXA/Cogcomp 72.28 16 L3i++ 46.55 1 DAMO-N   29 SAB 51.41 6 USTC-NELSLIP 71.26 17 IXA 16.09 2 PAI   30 ShathaTaymaaTeam 50.02 7 Deep Learning Brasil 70.97 Chinese (ZH) 3 CAIR-NI   31 azaad@BND 47.42 8 NLPeople 70.16 1 NetEase.AI 84.05 4 BizNER   32 LISAC FSDM-USMBA 44.00 9 Sakura 69.98 2 DAMO-NLP 7.598 5 USTC-NI   33 YNU-HPCC 28.52 10 garNER	61.43 56.01
BASELINE   52.98   2   PAI   81.61   13   FIL_Better   55.86   17   L3i++     26   VBD_NLP   52.65   3   CAIR-NLP   80.16   14   LLM-RM   55.54   18   IXA     27   LLM-RM   52.08   4   BizNER   72.97   15   SAB   55.51   Italia     28   Minanto   51.47   5   IXA/Cogcomp   72.28   16   L3i++   46.55   1   DAMO-N     29   SAB   51.41   6   USTC-NELSLIP   71.26   17   IXA   16.09   2   PAI     30   ShathaTaymaaTeam   50.02   7   Deep Learning Brasil   70.97   IXA   16.09   2   PAIO-N     31   azaad@BND   47.42   8   NLPeople   70.16   1   NetEaseAI   84.05   4   BizNER     32   LISAC FSDM-USMBA   44.00   9   Sakura   69.98   2   DAMO-NLP   7.58   5	55.76
26 VBD_NLP 52.65 3 CAIR-NLP 80.16 14 LLM-RM 55.54 18 IXA   27 LLM-RM 52.08 4 BizNER 72.97 15 SAB 55.51 I Talia   28 Minanto 51.47 5 IXA/Cogcomp 72.28 16 L3i++ 46.55 1 DAMO-N   30 ShathaTaymaaTeam 50.02 7 Deep Learning Brasil 70.97 IXA 16.09 2 PAI   31 azaad@BND 47.42 8 NLPeople 70.16 1 NetEase.AI 84.05 4 BizNER   32 LISAC FSDM-USMBA 44.00 9 Sakura 69.98 2 DAMO-NLP 75.98 5 USTC-NE   33 YNU-HPCC 28.52 10 garNER 64.51 3 SCB 75.86 6 IXA/Cog   34 IXA 15.39 11 Sartipi-Sedighin 61.02 5 Taiji 72.52 8 NLPeople   1 DAMO-NLP 89.78 13	41.33
27LLM-RM52.084BizNER72.9715SAB55.51Italia28Minanto51.475IXA/Cogcomp72.2816L3i++46.551DAMO-N29SAB51.416USTC-NELSLIP71.2617IXA16.092PAI30ShathaTaymaaTeam50.027Deep Learning Brasil70.97IChinese (ZH)3CAIR-NI31azaad@BND47.428NLPeople70.161NetEase.AI84.054BizNER32LISAC FSDM-USMBA44.009Sakura69.982DAMO-NLP75.985USTC-NI33YNU-HPCC28.5210garNER64.513SRCB75.866IXA/Cog34IXA15.3911Satipi-Sedighin61.284PAI74.877Sakura5DAMO-NLP89.7813DZKLab60.796USTC-NELSLIP65.799garNER2CAIR-NLP83.6314MEERQAT-IRIT59.877NLPeople65.9610D2KLab3USTC-NELSLIP74.4415LSJSP58.238IXA/Cogcomp64.8611satipi-Sc4IXA/Cogcomp73.8116SAB54.129Sakura63.47BASELINE5Sakura72.7617IXA16.9711Ertim59.4513SAB <t< td=""><td>18.49</td></t<>	18.49
29SAB51.416USTC-NELSLIP71.2617IXA16.092PAI30ShathaTaymaaTeam50.027Deep Learning Brasil70.97 <b>Chinese (ZH)</b> 3CAIR-NI31azaad@BND47.428NLPeople70.161NetEase.AI84.054BizNER32LISAC FSDM-USMBA44.009Sakura69.982DAMO-NLP75.985USTC-NI33YNU-HPCC28.5210garNER64.513SRCB75.866IXA/Cog34IXA15.3911Sartipi-Sedighin61.284PAI74.877Sakura <b>bando-NLP</b> 89.7813D2KLab60.796USTC-NELSLIP66.579garNER2CAIR-NLP83.6314MEERQAT-IRIT59.877NLPeople65.9610D2KLab3USTC-NELSLIP74.4415LSJSP58.238IXA/Cogcomp64.8611Sartipi-Se4IXA/Cogcomp73.8116SAB54.129Sakura64.6112silp_nlp5sakura72.6617IXA16.9711Ertim59.4513SAB7PAI71.67 <b>French (FR)</b> 12Sartipi-Sedighin58.7014FIL_Bette8BizNER71.481DAMO-NLP89.5913CAIR-NLP58.4315IXA <t< td=""><td></td></t<>	
29SAB51.416USTC-NELSLIP71.2617IXA16.092PAI30ShathaTaymaaTeam50.027Deep Learning Brasil70.97 <b>Chinese (ZH)</b> 3CAIR-NI31azaad@BND47.428NLPeople70.161NetEase.AI84.054BizNER32LISAC FSDM-USMBA44.009Sakura69.82DAMO-NLP75.985USTC-NI33YNU-HPCC28.5210garNER64.513SRCB75.866IXA/Cog34IXA15.3911Sartpi-Sedighin61.055Taiji72.528NLPeople1DAMO-NLP89.7813D2KLab60.796USTC-NELSLIP66.579garNER2CAIR-NLP83.6314MEERQAT-IRIT59.877NLPeople65.9610D2KLab3USTC-NELSLIP74.4415LSJSP58.2210garNER63.47BASELIA4IXA/Cogcomp73.8116SAB54.129Sakura64.6112silp_nlp5Sakura72.6617IXA16.9711Ertim59.4513SAB6NLPeople72.7617IXA16.9711Ertim59.4513SAB7PAI71.67 <b>French (FR)</b> 12Sartpi-Sedighin58.7014FIL_Bette8 <td< td=""><td>.P 89.79</td></td<>	.P 89.79
31 azaad@BND 47.42 8 NLPeople 70.16 1 NetEase.AI 84.05 4 BizNER   32 LISAC FSDM-USMBA 44.00 9 Sakura 69.98 2 DAMO-NLP 75.98 5 USTC-NL   33 YNU-HPCC 28.52 10 garNER 64.51 3 SRCB 75.86 6 IXA/Cog   34 IXA 15.39 11 Satipi-Sedighin 61.28 4 PAI 74.87 7 Sakura <b>Spanish (ES)</b> 12 silp_nlp 61.05 5 Taiji 72.52 8 NLPeople   1 DAMO-NLP 89.78 13 D2KLab 60.79 6 USTC-NELSLIP 66.57 9 garNER   2 CAIR-NLP 83.63 14 MEERQAT-IRIT 59.87 7 NLPeople 65.96 10 D2KLab   3 USTC-NELSLIP 74.44 15 LSJSP 58.23 8 IXA/Cogcomp 64.61 12 sitp_nlp   5 Sakura 72.76 17	84.88
32 LISAC FSDM-USMBA 44.00 9 Sakura 69.98 2 DAMO-NLP 75.98 5 USTC-NU   33 YNU-HPCC 28.52 10 garNER 64.51 3 SRCB 75.86 6 IXA/Cog   34 IXA 15.39 11 Sartipi-Sedighin 61.28 4 PAI 74.87 7 Sakura <b>Spanish (ES)</b> 12 silp_nlp 61.05 5 Taiji 72.52 8 NLPeople   1 DAMO-NLP 89.78 13 D2KLab 60.79 6 USTC-NELSLIP 66.57 9 garNER   2 CAIR-NLP 83.63 14 MEERQAT-IRIT 59.87 7 NLPeople 65.96 10 D2KLab   3 USTC-NELSLIP 74.44 15 LSJSP 58.23 8 IXA/Cogcomp 64.61 12 silp_nlp   5 Sakura 72.85 BASELINE 53.52 10 garNER 63.47 BASELINE   6 NLPeople 72.76 17 IXA 16.97 <td>83.78</td>	83.78
33 YNU-HPCC 28.52 10 garNER 64.51 3 SRCB 75.86 6 IXA/cog   34 IXA 15.39 11 Sartipi-Sedighin 61.28 4 PAI 74.87 7 Sakura   I DAMO-NLP 89.78 13 D2KLab 60.79 6 USTC-NELSLIP 66.57 9 garNER   2 CAIR-NLP 83.63 14 MEERQAT-IRIT 59.87 7 NLPeople 65.96 10 D2KLab   3 USTC-NELSLIP 74.44 15 LSJSP 58.23 8 IXA/Cogcomp 64.86 11 Sartipi-Sed   4 IXA/Cogcomp 73.81 16 SAB 54.12 9 Sakura 64.61 12 silp_nlp   5 Sakura 72.55 BASELINE 53.52 10 garNER 63.47 BASELI   6 NLPeople 72.76 17 IXA 16.97 11 Ertim 59.45 13 SAB   7 PAI 71.67 French (FR) 12	76.48
34 IXA 15.39 11 Sartipi-Sedighin 61.28 4 PAI 74.87 7 Sakura   1 DAMO-NLP 89.78 13 D2KLab 60.79 6 USTC-NELSLIP 66.57 9 garNER   2 CAIR-NLP 83.63 14 MEERQAT-IRIT 59.87 7 NLPeople 65.96 10 D2KLab   3 USTC-NELSLIP 74.44 15 LSJSP 58.23 8 IXA/Cogcomp 64.86 11 Sartipi-Sed   4 IXA/Cogcomp 73.81 16 SAB 54.12 9 Sakura 64.61 12 silp-nlp   5 Sakura 72.55 BASELINE 53.52 10 garNER 63.47 BASELINE   6 NLPeople 72.76 17 IXA 16.97 11 Ertim 59.45 13 SAB   7 PAI 71.67 French (FR) 12 Sartipi-Sedighin 58.70 14 FII_Bette   8 BizNER 71.48 1 DAMO-NLP 89.59	LSLIP 75.70
Spanish (ES)   12   silp_nlp   61.05   5   Taiji   72.52   8   NLPeople     1   DAMO-NLP   89.78   13   D2KLab   60.79   6   USTC-NELSLIP   66.57   9   garNER     2   CAIR-NLP   83.63   14   MEERQAT-IRIT   59.87   7   NLPeople   65.96   10   D2KLab     3   USTC-NELSLIP   74.44   15   LSJSP   58.23   8   IXA/Cogcomp   64.66   11   Sartipi-Sc     4   IXA/Cogcomp   73.81   16   SAB   54.12   9   Sakura   64.61   12   silp_nlp     5   Sakura   72.85   BASELINE   53.52   10   garNER   63.47   BASELINE     6   NLPeople   71.67   T   IXA   16.97   11   Ertim   59.45   13   SAB     7   PAI   71.67   T   IXA   16.97   11   Satipi-Sedighin   58.03   Multilingu	•
1 DAMO-NLP 89.78 13 DZL ab 60.79 6 USTC-NELSLIP 66.57 9 garNER   2 CAIR-NLP 83.63 14 MEERQAT-IRIT 59.87 7 NLPeople 65.96 10 DZKLab   3 USTC-NELSLIP 74.44 15 LSJSP 58.23 8 IXA/Cogcomp 64.86 11 Sartipi-Sed   4 IXA/Cogcomp 73.81 16 SAB 54.12 9 Sakura 64.61 12 silp_nlp   5 Sakura 72.85 BASELINE 53.52 10 garNER 63.47 BASELINE   6 NLPeople 72.76 17 IXA 16.97 11 Ertim 59.45 13 SAB   7 PAI 71.67 French (FR) 12 Sartipi-Sedighin 58.70 14 FII_Bette   8 BizNER 71.48 1 DAMO-NLP 89.59 13 CAIR-NLP 58.43 15 IXA   9 garNER 63.73 2 PAI 86.17 <td< td=""><td>74.19</td></td<>	74.19
2CAIR-NLP83.6314MEERQAT-IRIT59.877NLPeople65.9610D2KLab3USTC-NELSLIP74.4415LSJSP58.238IXA/Cogcomp64.8611Sartipi-Sci4IXA/Cogcomp73.8116SAB54.129Sakura64.6112silp_nlp5Sakura72.85 <b>BASELINE</b> 53.5210garNER63.47 <b>BASELIN</b> 6NLPeople72.7617IXA16.9711Ertim59.4513SAB7PAI71.67 <b>French (FR)</b> 12Satipi-Sedighin58.7014FII_Better8BizNER71.481DAMO-NLP89.5913CAIR-NLP58.4315IXA9garNER63.732PAI86.17 <b>BASELINE</b> 58.03 <b>Multilingu</b> 10D2KLab63.173CAIR-NLP83.0814Janko57.901DAMO-N11silp_nlp62.904BizNER78.0115YNUNLP56.572CAIR-NL13LSJSP60.556USTC-NELSLIP74.2517silp_nlp51.654IXA/Cog14Satipi-Sedighin58.417Sakura72.8618SAB44.125PAI14Satipi-Sedighin58.417Sakura72.8618SAB44.125PAI15LLM-RM54.81<	73.71
3 USTC-NELSLIP 74.44 15 LSJSP 58.23 8 IXA/Cogcomp 64.86 11 Sartipi-Sedighin   4 IXA/Cogcomp 73.81 16 SAB 54.12 9 Sakura 64.61 12 silp_nlp   5 Sakura 72.85 BASELINE 53.52 10 garNER 63.47 BASELINE   6 NLPeople 72.76 17 IXA 16.97 11 Ertim 59.45 13 SAB   7 PAI 71.67 French (FR) 12 Satipi-Sedighin 58.70 14 FII_Better   8 BizNER 71.48 1 DAMO-NLP 89.59 13 CAIR-NLP 58.43 15 IXA   9 garNER 63.73 2 PAI 86.17 BASELINE 58.03 Multilingu   10 D2KLab 63.17 3 CAIR-NLP 83.08 14 Janko 57.90 1 DAMO-N   11 silp_nlp 62.90 4 BizNER 78.01 15 YNUNLP <	68.20
4 IXA/Cogcomp 73.81 16 SAB 54.12 9 Sakura 64.61 12 silp_nlp   5 Sakura 72.85 BASELINE 53.52 10 garNER 63.47 BASELINE   6 NLPeople 72.76 17 IXA 16.97 11 Ertim 59.45 13 SAB   7 PAI 71.67 French (FR) 12 Satripi-Sedighin 58.70 14 FII_Bette   8 BizNER 71.48 1 DAMO-NLP 89.59 13 CAIR-NLP 58.43 15 IXA   9 garNER 63.73 2 PAI 86.17 BASELINE 58.03 Multilingu   10 D2KLab 63.17 3 CAIR-NLP 83.08 14 Janko 57.90 1 DAMO-N   11 silp_nlp 62.90 4 BizNER 78.01 15 YNUNLP 56.57 2 CAIR-NI   12 MEERQAT-IRIT 60.93 5 IXA/Cogcomp 74.52 16 D2KLab 54.92	64.77 ighin 64.50
5 Sakura 72.85 BASELINE 53.52 10 garNER 63.47 BASELINE   6 NLPeople 72.76 17 IXA 16.97 11 Ertim 59.45 13 SAB   7 PAI 71.67 French (FR) 12 Sartipi-Sedighin 58.70 14 FII_Bette   8 BizNER 71.48 1 DAMO-NLP 89.59 13 CAIR-NLP 58.43 15 IXA   9 garNER 63.73 2 PAI 86.17 BASELINE 58.03 Multilingu   10 D2KLab 63.17 3 CAIR-NLP 83.08 14 Janko 57.90 1 DAMO-N   11 silp_nlp 62.90 4 BizNER 78.01 15 YNUNLP 56.57 2 CAIR-NI   12 MEERQAT-IRIT 60.93 5 IXA/Cogcomp 74.52 16 D2KLab 54.92 3 NLPeople   13 LSJSP 60.55 6 USTC-NELSLIP 74.25 17 silp_nlp	63.11
6 NLPeople 72.76 17 IXA 16.97 11 Ertim 59.45 13 SAB   7 PAI 71.67 French (FR) 12 Sartipi-Sedighin 58.70 14 FII_Bette   8 BizNER 71.48 1 DAMO-NLP 89.59 13 CAIR-NLP 58.43 15 IXA   9 garNER 63.73 2 PAI 86.17 BASELINE 58.03 Multilingu   10 D2KLab 63.17 3 CAIR-NLP 83.08 14 Janko 57.90 1 DAMO-N   11 silp_nlp 62.90 4 BizNER 78.01 15 YNUNLP 56.57 2 CAIR-NI   12 MEERQAT-IRIT 60.93 5 IXA/Cogcomp 74.52 16 D2KLab 54.92 3 NLPeople   13 LSJSP 60.55 6 USTC-NELSLIP 74.25 17 silp_nlp 51.65 4 IXA/Cog   14 Sattipi-Sedighin 58.41 7 Sakura 72.86 <t< td=""><td></td></t<>	
7 PAI 71.67 French (FR) 12 Sartipi-Sedighin 58.70 14 FII_Bettet   8 BizNER 71.48 1 DAMO-NLP 89.59 13 CAIR-NLP 58.70 14 FII_Bettet   9 garNER 63.73 2 PAI 86.17 BASELINE 58.03 Multilingu   10 D2KLab 63.17 3 CAIR-NLP 83.08 14 Janko 57.90 1 DAMO-N   11 silp_nlp 62.90 4 BizNER 78.01 15 YNUNLP 56.57 2 CAIR-NI   12 MEERQAT-IRIT 60.93 5 IXA/Cogcomp 74.52 16 D2KLab 54.92 3 NLPeople   13 LSJSP 60.55 6 USTC-NELSLIP 74.25 17 silp_nlp 51.65 4 IXA/Cog   14 Sartipi-Sedighin 58.41 7 Sakura 72.86 18 SAB 44.12 5 PAI   15 LLM-RM 54.81 8 NLPeople 72.85	57.57
8   BizNER   71.48   1   DAMO-NLP   89.59   13   CAIR-NLP   58.43   15   IXA     9   garNER   63.73   2   PAI   86.17   BASELINE   58.03   Multilingu     10   D2KLab   63.17   3   CAIR-NLP   83.08   14   Janko   57.90   1   DAMO-N     11   silp_nlp   62.90   4   BizNER   78.01   15   YNUNLP   56.57   2   CAIR-NI     12   MEERQAT-IRIT   60.93   5   IXA/Cogcomp   74.52   16   D2KLab   54.92   3   NLPeople     13   LSJSP   60.55   6   USTC-NELSLIP   74.25   17   silp_nlp   51.65   4   IXA/Cog     14   Sartipi-Sedighin   58.41   7   Sakura   72.85   19   NCUEE-NLP   44.12   5   PAI     15   LLM-RM   54.81   8   NLPeople   72.85   19   NCUEE-NLP   44.09 <td>56.36</td>	56.36
10 D2KLab 63.17 3 CAIR-NLP 83.08 14 Janko 57.90 1 DAMO-N   11 silp_nlp 62.90 4 BizNER 78.01 15 YNUNLP 56.57 2 CAIR-NI   12 MEERQAT-IRIT 60.93 5 IXA/Cogcomp 74.52 16 D2KLab 54.92 3 NLPeople   13 LSJSP 60.55 6 USTC-NELSLIP 74.25 17 silp_nlp 51.65 4 IXA/Cog   14 Sartipi-Sedighin 58.41 7 Sakura 72.86 18 SAB 44.12 5 PAI   15 LLM-RM 54.81 8 NLPeople 72.85 19 NCUEE-NLP 44.09 6 USTC-NL   16 FII_Better 54.51 9 Ertim 66.30 20 L3i++ 35.34 7 Sakura   BASELINE 53.43 10 garNER 65.68 21 YNU-HPCC 31.66 8 MaChAm	18.41
11 silp_nlp 62.90 4 BizNER 78.01 15 YNUNLP 56.57 2 CAIR-NI   12 MEERQAT-IRIT 60.93 5 IXA/Cogcomp 74.52 16 D2KLab 54.92 3 NLPeople   13 LSJSP 60.55 6 USTC-NELSLIP 74.25 17 silp_nlp 51.65 4 IXA/Cog   14 Sartipi-Sedighin 58.41 7 Sakura 72.86 18 SAB 44.12 5 PAI   15 LLM-RM 54.81 8 NLPeople 72.85 19 NCUEE-NLP 44.09 6 USTC-NL   16 FII_Better 54.51 9 Ertim 66.30 20 L3i++ 35.34 7 Sakura   BASELINE 53.43 10 garNER 65.68 21 YNU-HPCC 31.66 8 MaChAm	(MULTI)
12   MEERQAT-IRIT   60.93   5   IXA/Cogcomp   74.52   16   D2KLab   54.92   3   NLPeople     13   LSJSP   60.55   6   USTC-NELSLIP   74.25   17   silp_nlp   51.65   4   IXA/Cog     14   Sartipi-Sedighin   58.41   7   Sakura   72.86   18   SAB   44.12   5   PAI     15   LLM-RM   54.81   8   NLPeople   72.85   19   NCUEE-NLP   44.09   6   USTC-NL     16   FII_Better   54.51   9   Ertim   66.30   20   L3i++   35.34   7   Sakura     BASELINE   53.43   10   garNER   65.68   21   YNU-HPCC   31.66   8   MaChAm	
13 LSJSP 60.55 6 USTC-NELSLIP 74.25 17 silp_nlp 51.65 4 IXA/Cog   14 Sartipi-Sedighin 58.41 7 Sakura 72.86 18 SAB 44.12 5 PAI   15 LLM-RM 54.81 8 NLPeople 72.85 19 NCUEE-NLP 44.09 6 USTC-NL   16 FII_Better 54.51 9 Ertim 66.30 20 L3i++ 35.34 7 Sakura   BASELINE 53.43 10 garNER 65.68 21 YNU-HPCC 31.66 8 MaChAm	
14 Sartipi-Sedighin 58.41 7 Sakura 72.86 18 SAB 44.12 5 PAI   15 LLM-RM 54.81 8 NLPeople 72.85 19 NCUEE-NLP 44.09 6 USTC-NL   16 FII_Better 54.51 9 Ertim 66.30 20 L3i++ 35.34 7 Sakura   BASELINE 53.43 10 garNER 65.68 21 YNU-HPCC 31.66 8 MaChAm	78.38
15   LLM-RM   54.81   8   NLPeople   72.85   19   NCUEE-NLP   44.09   6   USTC-NL     16   FII_Better   54.51   9   Ertim   66.30   20   L3i++   35.34   7   Sakura     BASELINE   53.43   10   garNER   65.68   21   YNU-HPCC   31.66   8   MaChAm	
16   FII_Better   54.51   9   Ertim   66.30   20   L3i++   35.34   7   Sakura     BASELINE   53.43   10   garNER   65.68   21   YNU-HPCC   31.66   8   MaChAm	77.00
BASELINE   53.43   10   garNER   65.68   21   YNU-HPCC   31.66   8   MaChAn	
	73.82
11 5AB 40.22 11 D2KLau 04.09 22 IAA 0.95 9 COdeNLI	73.74
18   IXA   16.01   12   silp_nlp   62.39   Hindi (HI)   10   Lumi	73.22
18   IXA   10.01   12   snp_mp   62.39   Hindi (H1)   10   Lumi     Swedish (SV)   13   MEERQAT-IRIT   58.90   1   USTC-NELSLIP   82.14   11   Sartipi-Se	
1   DAMO-NLP   89.57   14   LSJSP   56.83   2   PAI   80.96   12   garNER	69.16
1   Difficient   0.00   1   Difficient   0.00   12   galitation     2   CAIR-NLP   82.88   BASELINE   55.91   3   IXA/Cogcomp   79.56   13   LEINLP	64.63
2   Critic Har   52.00   Driving   73.00   13   Editor     3   IXA/Cogcomp   76.54   15   SAB   55.07   4   DAMO-NLP   78.56   14   D2KLab	63.83
4 BizNER 76.12 16 Sartipi-Sedighin 54.94 5 NLPeople 78.50 BASELI	
5 USTC-NELSLIP 75.47 17 IXA 17.40 6 Sakura 78.37 15 SAB	59.55
6   NLPeople   75.08   Farsi (FA)   7   silp_nlp   74.32   16   LSJSP	51.74
7   Sakura   73.79   1   DAMO-NLP   87.93   8   CAIR-NLP   72.23   17   SibNN	50.55
8 PAI 72.38 2 CAIR-NLP 77.50 9 garNER 71.23 18 L3i++	44.37
9 garNER 67.63 3 BizNER 73.49 BASELINE 71.20	

Table 4: Rankings for all tracks based on Macro F1. The "SRC - Beijing" team is "Samsung Research China - Beijing".

level through minimizing the KL divergence between their representations. In the second stage, two networks are trained together on the NER objective. The final predictions are derived from an ensemble of trained models. The results indicate that the gazetteer played a crucial role in accurately identifying complex entities during the NER process, and the implementation of a two-stage training strategy was effective.

NetEase.AI (Lu et al., 2023) ranked  $1^{st}$  in ZH. Their proposed system consists of multiple modules. First, a BERT model is used to correct any potential errors in the original input sentences. The NER module takes the corrected text as input and consists of a basic NER module and a gazetteer enhanced NER module. This approach boosted the performance on the entity level noise and gave the system a strong advantage over the other teams (Table 11). A retrieval system takes the candidate entity as input and retrieves additional context information, which is subsequently used as input to a text classification model to calculate the probability of the entity's type label. A stacking model is trained to output the final prediction based on the features from multiple modules.

### 5.2 Other Noteworthy Systems

CAIR-NLP (N et al., 2023) ranked 2<sup>nd</sup> in MULTI, ES, FA, SV, UK,  $3^{rd}$  in FR, IT, PT,  $4^{th}$  in EN,  $7^{th}$ in DE,  $8^{th}$  in HI,  $10^{th}$  in BN, and  $13^{th}$  in ZH. They developed a multi-objective joint learning system (MOJLS) that learns an enhanced representation of low-context and fine-grained entities. In their training procedure they minimize for: 1) representation gaps between fine-grained entity types within a coarse grained type, 2) representation gaps between an input sentence and the input augmented with external information for a given entity, 3) negative log-likelihood loss, 4) biaffine layer label prediction loss. Additionally, external context is retrieved via search engines for an input text, as well as ConceptNet data (Speer et al., 2016) to better represent an entity class with alternative names, aliases, and relation types to other concepts.

**SRCB** (Zhang et al., 2023b) ranked  $3^{rd}$  in ZH and  $6^{th}$  in EN. The proposed approach, for an input sentence retrieves external evidence coming from Wikidata and Wikipedia, which is concatenated with the original input using special tokens (e.g. "context", "prompt & description") to allow their models (based on (Li et al., 2020)), to

distinguish the different contexts. To retrieve the external context, the authors first detect entity mentions (Su et al., 2022) from the input sentence, then query the corresponding external sources.

**NLPeople** (Elkaref et al., 2023) ranked  $3^{rd}$  in MULTI,  $4^{th}$  in FA,  $5^{th}$  in BN, DE, HI, UK,  $6^{th}$  in ES, SV,  $7^{th}$  in ZH,  $8^{th}$  in FR, IT, PT, and  $8^{th}$  in EN. They developed a two stage approach. First they extract spans that can be entities, while in the second step they classify spans into the most likely entity type. They augmented the training data with external context by adding relevant paragraphs, infoboxes, and titles from Wikipedia. On languages with smaller test sets, the infoboxes showed to obtain better performance than adding relevant paragraphs.

IXA/Cogcomp (García-Ferrero et al., 2023) ranked  $3^{rd}$  in DE, HI, UK, SV,  $4^{th}$  in MULTI, BN, ES,  $5^{th}$  in PT, FA, FR,  $6^{th}$  in IT,  $7^{th}$  in EN,  $8^{th}$ in ZH, and  $8^{th}$  in EN. They first trained an XLM-RoBERTa model for entity boundary detection, by recognizing entities within the dataset and classifying them using the B-ENTITY and I-ENTITY tags. They employed a pre-trained mGENRE entity linking model to predict the corresponding Wikipedia title and Wikidata ID for each entity span based on its context. Then, they retrieved the "part of", "instance of", "occupation" attributes and the article summary from Wikipedia. Finally, they trained a text classification model to categorize each entity boundary into a fine-grained category using the original sentence, entity boundaries and the external knowledge.

Samsung Research China (SRC) - Beijing (Zhang et al., 2023a) ranked  $2^{nd}$  in EN. They fine-tuned a RoBERTa based ensemble system using a variant of dice loss (Li et al., 2019) to enhance the model's robustness on long tail entities. In their case dice loss uses soft probabilities over classes, to avoid the model overfitting on the more frequent classes. Additionally, a Wikipedia knowledge retrieval module was built to augment the sentences with Wikipedia passages.

**Sakura** (Poncelas et al., 2023) ranked  $5^{th}$  in ES,  $6^{th}$  in BN, DE, HI, UK,  $7^{th}$  in IT, SV, MULTI,  $8^{th}$  in FA,  $9^{th}$  in PT, ZH, and  $11^{th}$  in EN. They used mBART-50 (Tang et al., 2020) to translate data from a source language to other target languages part of the shared task. Then, they aligned the tokens using SimAlign (Jalili Sabet et al., 2020) to annotate the entity tokens in the target language. Using the translated examples they increased the

training data size between 30K to 102K sentences depending on the language, providing them with a 1% increase in terms of macro-F1.

**KDDIE** (Martin et al., 2023) ranked  $5^{th}$  in EN. Using a retrieval index based on Wikipedia they enrich the original training data with additional sentences from Wikipedia. The data is used to train an ensemble of models, and the final NER scores is based on the vote from the different modules such as BERT-CRF, RoBERTa and DeBERTa.

**MLlab4CS** (Mukherjee et al., 2023) ranked  $7^{th}$  in BN. MuRIL (Khanuja et al., 2021) was fine-tuned with an additional CRF layer used for decoding. MuRIL is specifically designed to deal with the linguistic characteristics of Indic languages.

**CodeNLP** (Marcińczuk and Walentynowicz, 2023) ranked  $9^{th}$  in MULTI and  $13^{th}$  in EN. mLUKElarge (Yamada et al., 2020) was fine tuned using different data augmentation strategies, where multiple data instances are concatenated as a single input. Their experiments show that the NER model benefits from the additional context, even when the context was unrelated to the original sentence.

**silp\_nlp** (Singh and Tiwary, 2023) ranked  $7^{th}$  in HI,  $9^{th}$  in BN,  $10^{th}$  in DE, SV,  $11^{th}$  in ES, UK,  $12^{th}$  in FR, IT, PT,  $17^{th}$  in ZH,  $19^{th}$  in EN. Their model is trained in two stages. XLM-RoBERTa is first pre-trained using the multilingual set. Then, the checkpoint is fine-tuned for individual languages.

garNER (Hossain et al., 2023) ranked  $8^{th}$  in BN,  $9^{th}$  in ES, SV, UK, FA, HI, IT,  $10^{th}$  in PT, FR, ZH,  $12^{th}$  in DE, MULTI, and  $16^{th}$  in EN. The authors proposed an approach augmented with external knowledge from Wikipedia. For a given sentence and an entity, the Wikipedia API is called, and the retrieved result is concatenated together with the sentence to provide additional context for token classification. The entities are extracted via spaCy for English, and for other languages XLM-RoBERTa is used to detect entities. The authors performed ablation studies to analyze the model performance and found that the relevance of the augmented context is a significant factor in the model's performance. Useful context can help the model to identify some hard entities correctly, while irrelevant context can negatively affect model's predictions.

**Sartipi-Sedighin** (Sartipi et al., 2023) ranked  $8^{th}$  in UK,  $10^{th}$  in FA,  $11^{th}$  in BN, DE, IT, PT, MULTI,  $12^{th}$  in ZH,  $13^{th}$  in HI, SV,  $14^{th}$  in EN, ES, and  $16^{th}$  in FR. They used a data augmentation approach, where for entities in the training dataset, additional

sentences from Wikipedia are retrieved. The retrieved sentences are used as additional context. Then, they experimented with Transformer based model variations fine-tuned on different languages. Data augmentation helped their model in certain classes, but negatively impacted some other classes by increasing false negatives, e.g. SYMPTOM.

**MaChAmp** (van der Goot, 2023) ranked 8<sup>th</sup> in MULTI. mLUKE-large(Yamada et al., 2020) was fine-tuned on data coming from all SemEval2023 text based tasks. For NER a CRF decoding layer used. For hyper-parameters they relied on the MaChAmp toolkit (van der Goot et al., 2021). They also experimented with separate decoders for each language, using intermediate task pre-training with other SemEval tasks, but did not find it useful for further improvements.

**D2KLab** (Ehrhart et al., 2023) ranked  $9^{th}$  in DE,  $10^{th}$  in ES, IT, UK,  $11^{th}$  in FA, FR,  $12^{th}$  in HI, SV,  $13^{th}$  in PT,  $14^{th}$  in BN, MULTI,  $16^{th}$  in ZH, and  $18^{th}$  in EN. T-NER library (Ushio and Camacho-Collados, 2021) was used to fine-tune a Transformer model. They additionally used 10 other publicly available NER datasets, in addition to the data from MultiCoNER 2 and MultiCoNER.

**ERTIM** (Deturck et al., 2023) ranked  $9^{th}$  in FR,  $11^{th}$  in ZH,  $12^{th}$  in FA, and  $20^{th}$  in EN. They finetuned different models for the different languages, e.g. BERT, DistilBERT, CamemBERT, and XLM-RoBERTa. Additionally, each input sentence is enriched with relevant Wikipedia articles for additional context. Furthermore, they annotated a set of additional Farsi sentences extracted from news articles, which provides their system with an improvement of 4.2% in terms of macro-F1 for FA.

**LSJSP** (Chatterjee et al., 2023) ranked  $11^{th}$  in SV,  $13^{th}$  in ES, UK,  $14^{th}$  in FR,  $15^{th}$  in HI, PT,  $16^{th}$  in BN, MULTI, and  $22^{nd}$  in EN. They rely on a nearest neighbor search method, based on Fast-Text's (Bojanowski et al., 2016) implementation, to deal with noisy entities in the dataset. Next, they use pre-trained transformer models, with a CRF layer for NER prediction.

**LLM-RM** (Mehta and Varma, 2023) ranked  $11^{th}$  in HI,  $14^{th}$  in DE,  $15^{th}$  in ES,  $27^{th}$  in EN by fine-tuning XLM-RoBERTa.

**MEERQAT-IRIT** (Lovon-Melgarejo et al., 2023) ranked  $12^{th}$  in ES,  $13^{th}$  in FR,  $14^{th}$  in PT,  $21^{st}$  in EN. First, they developed hand-crafted tag descriptors for the fine-grained classes, then, an ensemble representation using the original input

and the tag descriptors are used as input to the final CRF layer on top of XLM-RoBERTa.

**RIGA** (Mukans and Barzdins, 2023) ranked  $12^{th}$  in EN. The original data was augmented using GPT-3 to obtain additional context information, then XLM-RoBERTa (large) was fine-tuned using the adapter fusion approach (Pfeiffer et al., 2021). The additional context extracted through GPT-3 provides them with a performance boost of 4% in terms of macro-F1. The context is separated from the input sentence using the separator token [SEP].

**VBD\_NLP** (Hoang et al., 2023) ranked  $12^{th}$  in BN and  $26^{th}$  in EN. First, training data was augmented based on BabelNet and Wikipedia redirects to automatically annotate named entities from Wikipedia articles. Then, mDeBERTaV3 with a BiLSTM-CRF layer was fine-tuned for NER. While their model outperformed the baseline in Bangla, it underperformed in English.

**SAB** (Biales, 2023) ranked  $29^{th}$  in EN,  $17^{th}$  in ES,  $14^{th}$  in ES, HI,  $12^{th}$  in UK,  $16^{th}$  in PT,  $15^{th}$  in FR, DE, BN, MULTI,  $13^{th}$  in FA, IT,  $18^{th}$  in ZH. First, POS tags and dependency relation tags are obtained from open-sourced tools for all languages except BN and MULTI track. XLM-R (base) was fine-tuned under a multi-task setup where POS tags, dependency relations and NER labels are predicted. However, they found that using POS and dependency relation did not improve the results.

**FII\_Better** (Lupancu et al., 2023) ranked  $13^{th}$  in DE,  $14^{th}$  in IT,  $15^{th}$  in SV,  $16^{th}$  in ES, and  $17^{th}$  in EN. A BERT model was fine-tuned to label each input token for NER.

**IXA** (Andres Santamaria, 2023) ranked  $14^{th}$  in FA, UK,  $15^{th}$  in IT,  $16^{th}$  in SV,  $17^{th}$  in DE, HI, FR, PT,  $18^{th}$  in BN, ES,  $22^{nd}$  in ZH, and  $34^{th}$  in EN. XLM-RoBERTa was fine-tuned for each track separately.

**Janko** (Li et al., 2023) ranked 14<sup>th</sup> in ZH. The authors use the last layer of BERT embeddings to represent input tokens, which is then used in a Bi-LSTM model for NER. Additionally, a dropout layer is added, namely R-DROP.

**IITD** (Choudhary et al., 2023) ranked  $15^{th}$  in EN. A two-stage pipeline to fine-tune BERT is proposed: the model is first trained with focal loss to avoid class imbalance issues (Lin et al., 2017). Then, each input is augmented with sentences retrieved from MS-MARCO (Nguyen et al., 2016) and KILT (Petroni et al., 2020) datasets.

**YUNLP** (Li and Zhou, 2023) ranked  $15^{th}$  in ZH. A BERT based approach with a top CRF layer for the NER tag prediction was used. Additionally, a R-Drop layer for regularization to increase the model's robustness was used.

L3i++ (Gonzalez-Gallardo et al., 2023) ranked  $16^{th}$  in DE, ES, HI,  $17^{th}$  in BN,  $18^{th}$  in FA, FR, MULTI,  $20^{th}$  in IT, PT, UK, SV, ZH, and  $25^{th}$  in EN. They submitted three systems. The first model is built with stacked Transformer blocks on top of the BERT encoder with an additional conditional CRF layer. The second one approached the problem with a seq2seq framework: sentences and statement templates filled by candidate named entity span are regarded as the source sequence and the target sequence. In the third approach they transformed NER into a QA task, where a prompt is generated for each type of named entity. The third approach showed strong performance in recall but overall performance was better using the stacked approach.

**RGAT** (Chakraborty, 2023) ranked  $23^{rd}$  in EN. They used dependency parse trees from sentences and encode them using a graph attention network. The node representations were computed by taking into account the neighboring nodes and the dependency type. Additionally, they used features from BERT to make the final prediction for a token.

**CLaC** (Verma and Bergler, 2023) ranked 24<sup>th</sup> in EN. They fine-tuned XLM-RoBERTa, finding that the span prediction approach is better than the sequence labeling approach.

**Minanto** (Höfer and Mottahedin, 2023) ranked 28<sup>th</sup> in EN. XLM-RoBERTa was trained using the training data and a set of translated data from CoNLL 2003 and WNUT 2016 datasets.

### **6** Insights from the Systems

**Integrating External Knowledge:** To overcome the challenges of complex entities, unseen entities, and low context, the integration of external data was a common theme among the submitted systems, similar to the prior edition. However, this time we observed many new and diverse knowledge sources and novel ways to inject the data into the models for NER prediction. For example, apart from using paragraphs retrieved from Wikipedia using search engine, participating teams used Wikidata, Wikipedia Infoboxes, and ConceptNet. Some of these approaches used knowledge sources to compute better representation of the entity labels.

**Multilingual Models:** Most participants in the multilingual track opted to use the task's baseline model, XLM-RoBERTa. Additionally, some par-

ticipants used mLUKE, mDEBERTA, and mBERT. In terms of external multilingual resources, participants made mostly use of Wikipedia.

**Complex Entities:** Our task includes several classes with complex entities such as media titles. The most challenging entities at the coarse level were from PROD class, where the average macro-F1 score across all participants was 0.68. This classes contains challenging entities, with highly complex and ambiguous surface forms, such as CLOTHING, where the average across all participants was macro-F1=0.58. There is a high variation among on the challenging coarse types, such as PROD. For instance, for EN the top ranked system, DAMO-NLP, achieves an F1 of 0.88, while the lowest ranking system IXA achieves a F1 of 0.21. This is highly related to whether the systems used external knowledge.

Figure 2 shows a confusion matrix of coarsegrained performance. We note that PROD, MED and CW have low recall with more than 25% of the entities not being identified correctly. GRP is misclassified in 4.2% of the cases with other types such as LOC or CW, highlighting the surface form ambiguity of this type. On the other hand, PER obtains the highest score with 93.7%, yet at finegrained level often there is confusion among the different PER fine-grained types.




Figure 2: Confusion matrix of baseline performance computed at the coarse type level for the EN test set.

**Impact of Fine-grained classes:** For coarse types such as PER, participants obtain very high scores, e.g. DAMO-NLP obtains an F1 of 0.97 on the noise-free test set. However, if we inspect the performance at the fine-grained level we notice high variance. For instance, SCIENTIST and OTHERPER obtain significantly lower scores with F1 scores of 0.70. This gap provides two main insights. First, while the PER class is often very easy to spot, distinguishing the more fine-grained types is much more challenging given their high *ambiguity*. Second, for fine-grained NER, captur-

ing context is important. In this case we see that for a class like SCIENTIST, where its entities are often in scientific reporting context (e.g. research breakthroughs), pre-trained Transformer models often confuse such entities as either ARTIST or POLITICIAN, for which such models have much more pretrained knowledge. Appendix B provides an in-depth error analysis at the fine-grained entity type level for all coarse grained types.

**Impact of Noise:** Evaluation on the noisy subsets shows that most of the participants were impacted significantly. Comparing the difference in terms of macro-F1 on the noisy and the clean subsets, we notice that across all participants and languages, there is an average performance drop of 10%. The most impact is observed for ZH, where the gap can be as high as macro-F1 =  $\checkmark$  48%.

Finally, we note that noise is mostly harmful when it affects named entity tokens, while noise on other has a minor impact in terms of NER performance. Across all participants and languages, the average performance dropped 11.1% when corruption was applied to entity tokens and 4.3% when it was applied to context tokens.

**ChatGPT and LLMs:** Our evaluation concluded in Jan 2023, and participants did not use ChatGPT for the submissions. **DAMO-NLP** (Tan et al., 2023) reported that the performance of ChatGPT on MULTI track is poor and it only achieved 14.78% F1 score. This matches the results of Lai et al. (2023) where they evaluated ChatGPT on MultiCoNER task from last year (Malmasi et al., 2022b).

## 7 Conclusion

We presented an overview of the SemEval shared task on identifying complex entities in multiple languages. We received system submissions from 47 teams, and 34 system papers. On average, the wining systems for all tracks outperformed the baseline system by a large margin of 35% F1.

All top-performing teams in MULTICONER 2 utilized external knowledge bases like Wikipedia and gazetteers to provide additional context. We have also observed systems that provided information about the entity classes to help models know the definition of the entity. In terms of modeling, ensemble strategies helped the systems achieve strong performance. Finally, the impact of noise was significant for all submitted systems, with the macro-F1 dropping significantly when compared between the noisy and clean subsets of test data.

## References

- Edgar Andres Santamaria. 2023. IXA at SemEval-2023 Task 2: Baseline Approach. In *Proceedings of the 17th International Workshop on Semantic Evaluation*, Toronto, Canada. Association for Computational Linguistics.
- Sandeep Ashwini and Jinho D. Choi. 2014. Targetable named entity recognition in social media. *CoRR*, abs/1408.0782.
- Siena Biales. 2023. SAB at SemEval-2023 Task 2: Does Linguistic Information Aid in Named Entity Recognition? In *Proceedings of the 17th International Workshop on Semantic Evaluation*, Toronto, Canada. Association for Computational Linguistics.
- Piotr Bojanowski, Edouard Grave, Armand Joulin, and Tomas Mikolov. 2016. Enriching word vectors with subword information. *arXiv preprint arXiv:1607.04606*.
- Abir Chakraborty. 2023. RGAT at SemEval-2023 Task 2: Named Entity Recognition Using Graph Attention Network. In *Proceedings of the 17th International Workshop on Semantic Evaluation*, Toronto, Canada. Association for Computational Linguistics.
- Shilpa Chatterjee, Leo Evenss, Pramit Bhattacharyya, and Joydeep Mondal. 2023. LSJSP at SemEval-2023 Task 2: FTBC: A FastText Based Framework with Pre-trained BERT for NER. In *Proceedings of the 17th International Workshop on Semantic Evaluation*, Toronto, Canada. Association for Computational Linguistics.
- Shivani Choudhary, Niladri Chatterjee, and Subir Kumar Saha. 2023. IITD at SemEval-2023 Task 2: A Multi-stage Information Retrieval Approach for Finegrained Named Entity Recognition. In *Proceedings* of the 17th International Workshop on Semantic Evaluation, Toronto, Canada. Association for Computational Linguistics.
- Alexis Conneau, Kartikay Khandelwal, Naman Goyal, Vishrav Chaudhary, Guillaume Wenzek, Francisco Guzmán, Edouard Grave, Myle Ott, Luke Zettlemoyer, and Veselin Stoyanov. 2020. Unsupervised cross-lingual representation learning at scale. In Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics, pages 8440– 8451, Online. Association for Computational Linguistics.
- Leon Derczynski, Eric Nichols, Marieke van Erp, and Nut Limsopatham. 2017. Results of the wnut2017 shared task on novel and emerging entity recognition. In *Proceedings of the 3rd Workshop on Noisy User*generated Text, pages 140–147.
- Kevin Deturck, Pierre Magistry, Bénédicte DIOT-PARVAZ AHMAD, Ilaine Wang, Damien Nouvel, and Hugo Lafayette. 2023. Ertim at SemEval-2023 Task 2: Fine-tuning of Transformer Language Models and External Knowledge Leveraging for NER

in Farsi, English, French and Chinese. In *Proceedings of the 17th International Workshop on Semantic Evaluation*, Toronto, Canada. Association for Computational Linguistics.

- Thibault Ehrhart, Julien Plu, and Raphael Troncy. 2023. D2KLab at SemEval-2023 Task 2: Leveraging T-NER to Develop a Fine-tuned Multilingual Model for Complex Named Entity Recognition. In *Proceedings of the 17th International Workshop on Semantic Evaluation*, Toronto, Canada. Association for Computational Linguistics.
- Mohab Elkaref, Nathan Herr, Shinnosuke Tanaka, and Geeth de Mel. 2023. NLPeople at SemEval-2023 Task 2: A Staged Approach for Multilingual Named Entity Recognition. In *Proceedings of the 17th International Workshop on Semantic Evaluation*, Toronto, Canada. Association for Computational Linguistics.
- Besnik Fetahu, Zhiyu Chen, Sudipta Kar, Oleg Rokhlenko, and Shervin Malmasi. 2023. Multi-CoNER v2: a Large Multilingual dataset for Finegrained and Noisy Named Entity Recognition.
- Iker García-Ferrero, Jon Ander Campos, Oscar Sainz, Ander Salaberria, and Dan Roth. 2023. IXA/Cogcomp at SemEval-2023 Task 2: Contextenriched Multilingual Named Entity Recognition Using Knowledge Bases. In *Proceedings of the 17th International Workshop on Semantic Evaluation*, Toronto, Canada. Association for Computational Linguistics.
- Carlos-Emiliano Gonzalez-Gallardo, Thi Hong Hanh Tran, Nancy Girdhar, Emanuela Boros, Jose G. Moreno, and Antoine Doucet. 2023. L3I++ at SemEval-2023 Task 2: Prompting for Multilingual Complex Named Entity Recognition. In *Proceedings of the 17th International Workshop on Semantic Evaluation*, Toronto, Canada. Association for Computational Linguistics.
- Phu Gia Hoang, Le Thanh, and Hai-Long Trieu. 2023. VBD\_NLP at SemEval-2023 Task 2: Named Entity Recognition Systems Enhanced by BabelNet and Wikipedia. In *Proceedings of the 17th International Workshop on Semantic Evaluation*, Toronto, Canada. Association for Computational Linguistics.
- Md Zobaer Hossain, Averie Ho Zoen So, Silviya Silwal, H. Andres Gonzalez Gongora, Ahnaf Mozib Samin, Jahedul Alam Junaed, Aritra Mazumder, Sourav Saha, and Sabiha Tahsin Soha. 2023. garNER at SemEval-2023: Simplified Knowledge Augmentation for Multilingual Complex Named Entity Recognition. In *Proceedings of the 17th International Workshop on Semantic Evaluation*, Toronto, Canada. Association for Computational Linguistics.
- Antonia Höfer and Mina Mottahedin. 2023. Minanto at SemEval-2023 Task 2: Fine-tuning XLM-RoBERTa for Named Entity Recognition on English Data. In *Proceedings of the 17th International Workshop on Semantic Evaluation*, Toronto, Canada. Association for Computational Linguistics.

- Masoud Jalili Sabet, Philipp Dufter, François Yvon, and Hinrich Schütze. 2020. SimAlign: High quality word alignments without parallel training data using static and contextualized embeddings. In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pages 1627–1643, Online. Association for Computational Linguistics.
- Simran Khanuja, Diksha Bansal, Sarvesh Mehtani, Savya Khosla, Atreyee Dey, Balaji Gopalan, Dilip Kumar Margam, Pooja Aggarwal, Rajiv Teja Nagipogu, Shachi Dave, Shruti Gupta, Subhash Chandra Bose Gali, Vish Subramanian, and Partha Talukdar. 2021. Muril: Multilingual representations for indian languages.
- Viet Dac Lai, Nghia Trung Ngo, Amir Pouran Ben Veyseh, Hieu Man, Franck Dernoncourt, Trung Bui, and Thien Huu Nguyen. 2023. Chatgpt beyond english: Towards a comprehensive evaluation of large language models in multilingual learning. *arXiv preprint arXiv:2304.05613*.
- Jiankuo Li, Zhengyi Guan, and Haiyan Ding. 2023. Janko at SemEval-2023 Task 2: Bidirectional LSTM Model Based on Pre-training for Chinese Named Entity Recognition. In *Proceedings of the 17th International Workshop on Semantic Evaluation*, Toronto, Canada. Association for Computational Linguistics.
- Jing Li and Xiaobing Zhou. 2023. YNUNLP at SemEval-2023 Task 2: The Pseudo Twin Tower Pretraining Model for Chinese Named Entity Recognition. In *Proceedings of the 17th International Workshop on Semantic Evaluation*, Toronto, Canada. Association for Computational Linguistics.
- Xiaoya Li, Jingrong Feng, Yuxian Meng, Qinghong Han, Fei Wu, and Jiwei Li. 2020. A unified MRC framework for named entity recognition. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 5849–5859, Online. Association for Computational Linguistics.
- Xiaoya Li, Xiaofei Sun, Yuxian Meng, Junjun Liang, Fei Wu, and Jiwei Li. 2019. Dice loss for data-imbalanced nlp tasks. *arXiv preprint arXiv:1911.02855*.
- Tsung-Yi Lin, Priya Goyal, Ross B. Girshick, Kaiming He, and Piotr Dollár. 2017. Focal loss for dense object detection. *CoRR*, abs/1708.02002.
- Jesus Lovon-Melgarejo, Jose G. Moreno, Romaric Besançon, Olivier Ferret, and Lynda Lechani. 2023. MEERQAT-IRIT at SemEval-2023 Task 2: Leveraging Contextualized Tag Descriptors for Multilingual Named Entity Recognition. In *Proceedings of the 17th International Workshop on Semantic Evaluation*, Toronto, Canada. Association for Computational Linguistics.
- Ruixuan Lu, Zihang Tang, Guanglong Hu, Dong Liu, and Jiacheng Li. 2023. NetEase.AI at SemEval-2023 Task 2: Enhancing Complex Named Entities Recognition in Noisy Scenarios via Text Error Correction

and External Knowledge. In *Proceedings of the* 17th International Workshop on Semantic Evaluation, Toronto, Canada. Association for Computational Linguistics.

- Viorica-Camelia Lupancu, Alexandru-Gabriel Platica, Cristian-Mihai Rosu, Daniela Gifu, and Diana Trandabat. 2023. FII\_Better at SemEval-2023 Task 2: MultiCoNER II Multilingual Complex Named Entity Recognition. In *Proceedings of the 17th International Workshop on Semantic Evaluation*, Toronto, Canada. Association for Computational Linguistics.
- Jun-Yu Ma, Jia-Chen Gu, Jiajun Qi, Zhenhua Ling, Quan Liu, and Xiaoyi Zhao. 2023a. USTC-NELSLIP at SemEval-2023 Task 2: Statistical Construction and Dual Adaptation of Gazetteer for Multilingual Complex NER. In *Proceedings of the 17th International Workshop on Semantic Evaluation*, Toronto, Canada. Association for Computational Linguistics.
- Long Ma, Kai Lu, Tianbo Che, Hailong Huang, Weiguo Gao, and Xuan Li. 2023b. PAI at SemEval-2023 Task 2: A Universal System for Named Entity Recognition with External Entity Information. In *Proceedings of the 17th International Workshop on Semantic Evaluation*, Toronto, Canada. Association for Computational Linguistics.
- Shervin Malmasi, Anjie Fang, Besnik Fetahu, Sudipta Kar, and Oleg Rokhlenko. 2022a. Multiconer: A large-scale multilingual dataset for complex named entity recognition. In *Proceedings of the 29th International Conference on Computational Linguistics, COLING 2022, Gyeongju, Republic of Korea, October 12-17, 2022*, pages 3798–3809. International Committee on Computational Linguistics.
- Shervin Malmasi, Anjie Fang, Besnik Fetahu, Sudipta Kar, and Oleg Rokhlenko. 2022b. SemEval-2022 Task 11: Multilingual Complex Named Entity Recognition (MultiCoNER). In Proceedings of the 16th International Workshop on Semantic Evaluation (SemEval-2022). Association for Computational Linguistics.
- Michał Marcińczuk and Wiktor Walentynowicz. 2023. CodeNLP at SemEval-2023 Task 2: Data Augmentation for Named Entity Recognition by Combination of Sequence Generation Strategies. In *Proceedings* of the 17th International Workshop on Semantic Evaluation, Toronto, Canada. Association for Computational Linguistics.
- Caleb Martin, Huichen Yang, and William Hsu. 2023. KDDIE at SemEval-2023 Task 2: External Knowledge Injection for Named Entity Recognition. In *Proceedings of the 17th International Workshop on Semantic Evaluation*, Toronto, Canada. Association for Computational Linguistics.
- Stephen Mayhew, Tatiana Tsygankova, and Dan Roth. 2019. ner and pos when nothing is capitalized. In Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the

9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP), pages 6256– 6261, Hong Kong, China. Association for Computational Linguistics.

- Rahul Mehta and Vasudeva Varma. 2023. LLM-RM at SemEval-2023 Task 2: Multilingual Complex NER Using XLM-RoBERTa. In *Proceedings of the 17th International Workshop on Semantic Evaluation*, Toronto, Canada. Association for Computational Linguistics.
- Eduards Mukans and Guntis Barzdins. 2023. RIGA at SemEval-2023 Task 2: NER Enhanced with GPT-3. In *Proceedings of the 17th International Workshop on Semantic Evaluation*, Toronto, Canada. Association for Computational Linguistics.
- Shrimon Mukherjee, Madhusudan Ghosh, girish., and Partha Basuchowdhuri. 2023. MLlab4CS at SemEval-2023 Task 2: Named Entity Recognition in Low-resource Language Bangla Using Multilingual Language Models. In Proceedings of the 17th International Workshop on Semantic Evaluation, Toronto, Canada. Association for Computational Linguistics.
- Sangeeth N, Biswajit Paul, and Chandramani Chaudhary. 2023. CAIR-NLP at SemEval-2023 Task 2: A Multi-objective Joint Learning System for Named Entity Recognition. In *Proceedings of the 17th International Workshop on Semantic Evaluation*, Toronto, Canada. Association for Computational Linguistics.
- Tri Nguyen, Mir Rosenberg, Xia Song, Jianfeng Gao, Saurabh Tiwary, Rangan Majumder, and Li Deng. 2016. Ms marco: A human generated machine reading comprehension dataset. *choice*, 2640:660.
- Fabio Petroni, Aleksandra Piktus, Angela Fan, Patrick Lewis, Majid Yazdani, Nicola De Cao, James Thorne, Yacine Jernite, Vladimir Karpukhin, Jean Maillard, et al. 2020. Kilt: a benchmark for knowledge intensive language tasks. *arXiv preprint arXiv:2009.02252*.
- Jonas Pfeiffer, Aishwarya Kamath, Andreas Rücklé, Kyunghyun Cho, and Iryna Gurevych. 2021. AdapterFusion: Non-destructive task composition for transfer learning. In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pages 487–503, Online. Association for Computational Linguistics.
- Alberto Poncelas, Maksim Tkachenko, and Ohnmar Htun. 2023. Sakura at SemEval-2023 Task 2: Data Augmentation via Translation. In *Proceedings of the 17th International Workshop on Semantic Evaluation*, Toronto, Canada. Association for Computational Linguistics.
- Amir Sartipi, Amirreza Sedighin, Afsaneh Fatemi, and Hamidreza Baradaran Kashani. 2023. Sartipisedighin at SemEval-2023 Task 2: Fine-grained Named Entity Recognition with Pre-trained Contextual Language Models and Data Augmentation from

Wikipedia. In *Proceedings of the 17th International Workshop on Semantic Evaluation*, Toronto, Canada. Association for Computational Linguistics.

- Sumit Singh and Uma Shanker Tiwary. 2023. Silp\_nlp at SemEval-2023 Task 2: Cross-lingual Knowledge Transfer for Mono-lingual Learning. In *Proceedings of the 17th International Workshop on Semantic Evaluation*, Toronto, Canada. Association for Computational Linguistics.
- Robyn Speer, Joshua Chin, and Catherine Havasi. 2016. Conceptnet 5.5: An open multilingual graph of general knowledge. *CoRR*, abs/1612.03975.
- Jianlin Su, Ahmed Murtadha, Shengfeng Pan, Jing Hou, Jun Sun, Wanwei Huang, Bo Wen, and Yunfeng Liu. 2022. Global pointer: Novel efficient span-based approach for named entity recognition. arXiv preprint arXiv:2208.03054.
- Charles Sutton, Andrew McCallum, et al. 2012. An introduction to conditional random fields. *Foundations and Trends*® *in Machine Learning*, 4(4):267–373.
- Zeqi Tan, Shen Huang, Zixia Jia, Jiong Cai, Yinghui Li, Weiming Lu, Yueting Zhuang, Kewei Tu, Pengjun Xie, Fei Huang, and Yong Jiang. 2023. DAMO-NLP at SemEval-2023 Task 2: A Unified Retrievalaugmented System for Multilingual Named Entity Recognition. In *Proceedings of the 17th International Workshop on Semantic Evaluation*, Toronto, Canada. Association for Computational Linguistics.
- Yuqing Tang, Chau Tran, Xian Li, Peng-Jen Chen, Naman Goyal, Vishrav Chaudhary, Jiatao Gu, and Angela Fan. 2020. Multilingual translation with extensible multilingual pretraining and finetuning.
- Asahi Ushio and Jose Camacho-Collados. 2021. T-NER: An all-round python library for transformerbased named entity recognition. In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: System Demonstrations*, pages 53–62, Online. Association for Computational Linguistics.
- Rob van der Goot. 2023. MaChAmp at SemEval-2023 Tasks 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, and 12: On the Effectiveness of Intermediate Training on an Uncurated Collection of Datasets. In *Proceedings of the 17th International Workshop on Semantic Evaluation*, Toronto, Canada. Association for Computational Linguistics.
- Rob van der Goot, Ahmet Üstün, Alan Ramponi, Ibrahim Sharaf, and Barbara Plank. 2021. Massive choice, ample tasks (MaChAmp): A toolkit for multitask learning in NLP. In Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: System Demonstrations, pages 176–197, Online. Association for Computational Linguistics.

- Harsh Verma and Sabine Bergler. 2023. CLaC at SemEval-2023 Task 2: Comparing Span-prediction and Sequence-labeling Approaches for NER. In *Proceedings of the 17th International Workshop on Semantic Evaluation*, Toronto, Canada. Association for Computational Linguistics.
- Dingmin Wang, Yan Song, Jing Li, Jialong Han, and Haisong Zhang. 2018. A hybrid approach to automatic corpus generation for chinese spelling check. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 2517–2527.
- Ikuya Yamada, Akari Asai, Hiroyuki Shindo, Hideaki Takeda, and Yuji Matsumoto. 2020. LUKE: Deep contextualized entity representations with entityaware self-attention. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 6442–6454, Online. Association for Computational Linguistics.
- Haojie Zhang, Xiao Li, Renhua Gu, Xiaoyan Qu, Xiangfeng Meng, Shuo Hu, and Song Liu. 2023a. Samsung Research China Beijing at SemEval-2023 Task 2: An AL-r Model for Multilingual Complex Named Entity Recognition. In *Proceedings of the 17th International Workshop on Semantic Evaluation*, Toronto, Canada. Association for Computational Linguistics.
- Yuming Zhang, Hongyu Li, Yongwei Zhang, Shanshan Jiang, and Bin Dong. 2023b. SRCB at SemEval-2023 Task 2: A System of Complex Named Entity Recognition with External Knowledge. In Proceedings of the 17th International Workshop on Semantic Evaluation, Toronto, Canada. Association for Computational Linguistics.

# Appendix

## A Detailed Results for Noisy Test Sets

In this section, we provide the detailed performance for a subset of the monolingual tracks that contain a noisy test subset. For each team, we report the F1 scores for the clean subset and the subset with entity level and context level noise.

- Table 5 English (EN)
- Table 6 Italian (IT)
- Table 7 Spanish (ES)
- Table 8 French (FR)
- Table 9 Portuguese (PT)
- Table 10 Swedish (SV)
- Table 11 Chinese (ZH)

Rank	Team	Clean Subset F1	Noisy Subset F1	Entity Noise F1	Context Noise F1	Macro F1
1	DAMO-NLP	88.13	79.76	79.07	86.30	85.53
2	Samsung Research China - Beijing	85.36	77.94	77.33	83.74	83.09
3	PAI	86.16	65.41	63.23	84.74	80.00
4	CAIR-NLP	81.29	74.89	74.58	77.83	79.33
5	KDDIE	80.08	73.50	73.03	78.05	78.06
6	SRCB	79.74	66.21	65.06	76.56	75.62
7	IXA/Cogcomp	76.64	64.36	63.81	69.59	72.82
8	USTC-NELSLIP	74.87	65.76	65.35	69.18	72.15
9	NLPeople	76.00	62.23	60.93	74.52	71.81
10	BizNER	72.12	66.64	66.32	69.65	70.44
11	Sakura	72.86	64.06	63.79	66.39	70.16
12	RIGA	70.74	66.07	65.84	68.23	69.30
13	CodeNLP	66.04	57.84	57.58	60.17	63.51
14	Sartipi-Sedighin	67.10	54.56	53.68	62.86	63.25
15	IITD	67.52	53.59	52.82	60.47	63.21
16	garNER	65.25	56.96	56.73	58.90	62.73
17	FII_Better	65.67	52.74	51.87	60.60	61.75
18	D2KLab	64.72	53.54	53.12	57.24	61.29
19	silp_nlp	62.59	56.96	56.91	57.22	60.85
20	Ertim	61.85	52.78	52.76	52.75	59.03
21	MEERQAT-IRIT	60.46	54.72	54.68	55.03	58.70
22	LSJSP	60.67	50.48	50.44	50.59	57.51
23	RGAT	61.29	47.15	46.56	52.04	56.91
24	CLaC	57.68	49.06	48.91	50.26	55.05
25	L3i++	55.87	46.70	46.47	48.68	53.00
26	VBD_NLP	57.00	42.44	41.45	51.06	52.65
27	LLM-RM	54.73	46.30	46.17	47.45	52.08
28	Minanto	53.43	47.00	47.03	46.48	51.47
29	SAB	54.28	44.96	44.82	46.16	51.41
30	ShathaTaymaaTeam	52.34	44.78	45.09	41.67	50.02
31	azaad@BND	50.09	41.28	41.09	42.94	47.42
32	LISAC FSDM-USMBA	47.36	36.58	36.27	39.32	44.00
33	YNU-HPCC	29.95	25.31	25.31	25.21	28.52
34	IXA	16.88	11.84	11.49	15.09	15.39

Table 5: Detailed results for the English track.

Rank	Team	Clean Subset F1	Noisy Subset F1	Entity Noise F1	Context Noise F1	Macro F1
1	DAMO-NLP	91.85	85.89	85.30	90.99	89.79
2	PAI	88.94	76.53	75.14	89.56	84.88
3	CAIR-NLP	85.08	81.00	80.58	84.63	83.78
4	BizNER	77.24	74.81	74.34	79.33	76.48
5	USTC-NELSLIP	78.06	70.65	70.05	75.91	75.70
6	IXA/Cogcomp	78.16	67.66	66.77	75.95	74.67
7	Sakura	76.67	69.03	68.53	73.18	74.19
8	NLPeople	77.45	65.88	64.58	78.87	73.71
9	garNER	70.16	63.99	63.53	67.81	68.20
10	D2KLab	68.17	57.68	57.07	63.15	64.77
11	Sartipi-Sedighin	67.61	57.95	57.16	65.31	64.50
12	silp_nlp	64.53	60.13	60.00	61.00	63.11
13	SAB	60.36	51.60	51.15	55.56	57.57
14	FII_Better	60.32	47.85	46.76	58.36	56.36
15	IXA	20.05	14.82	14.38	18.84	18.41

Table 6: Detailed results for the Italian track.

Rank	Team	Clean Subset F1	Noisy Subset F1	Entity Noise F1	Context Noise F1	Macro F1
1	DAMO-NLP	91.74	85.81	85.29	91.06	89.78
2	CAIR-NLP	85.03	80.66	80.44	82.92	83.63
3	USTC-NELSLIP	77.25	68.52	68.00	73.73	74.44
4	IXA/Cogcomp	77.65	66.09	65.48	72.30	73.81
5	Sakura	75.42	67.39	66.93	72.01	72.85
6	NLPeople	77.22	63.53	62.43	74.76	72.76
7	PAI	79.35	55.25	53.16	75.10	71.67
8	BizNER	72.60	69.11	69.08	69.53	71.48
9	garNER	66.19	58.43	58.21	60.35	63.73
10	D2KLab	66.69	55.75	55.26	60.47	63.17
11	silp_nlp	64.88	58.77	58.66	59.71	62.90
12	MEERQAT-IRIT	63.04	56.42	56.16	58.78	60.93
13	LSJSP	63.39	54.46	54.26	56.21	60.55
14	Sartipi-Sedighin	62.27	50.25	49.70	55.57	58.41
15	LLM-RM	57.42	49.32	49.19	50.47	54.81
16	FII_Better	58.96	44.77	43.57	56.07	54.51
17	SAB	50.83	42.62	42.58	42.87	48.22
18	IXA	17.65	12.16	11.83	14.59	16.01

Table 7: Detailed results for the Spanish track.

Rank	Team	Clean Subset F1	Noisy Subset F1	Entity Noise F1	Context Noise F1	Macro F1
1	DAMO-NLP	91.62	85.14	84.58	90.49	89.59
2	PAI	89.50	78.71	77.64	88.96	86.17
3	CAIR-NLP	84.67	79.54	79.22	82.55	83.08
4	BizNER	79.09	75.63	75.29	78.92	78.01
5	IXA/Cogcomp	78.60	65.81	64.93	74.14	74.52
6	USTC-NELSLIP	76.81	68.49	67.93	73.55	74.25
7	Sakura	75.58	66.86	66.38	71.26	72.86
8	NLPeople	77.12	63.40	62.02	76.51	72.85
9	Ertim	69.73	58.60	57.77	66.09	66.30
10	garNER	68.09	60.22	59.77	64.27	65.68
11	D2KLab	67.70	56.05	55.30	63.12	64.09
12	silp_nlp	64.40	58.04	57.81	60.02	62.39
13	MEERQAT-IRIT	61.29	53.65	53.23	57.32	58.90
14	LSJSP	58.74	52.60	52.34	54.93	56.83
15	SAB	57.98	48.61	48.19	52.41	55.07
16	Sartipi-Sedighin	56.99	50.40	50.22	52.05	54.94
17	IXA	18.90	13.89	13.49	17.29	17.40

Table 8: Detailed results for the French track.

Rank	Team	Clean Subset F1	Noisy Subset F1	Entity Noise F1	Context Noise F1	Macro F1
1	DAMO-NLP	87.33	83.38	83.04	88.00	85.97
2	PAI	84.56	76.12	75.50	82.87	81.61
3	CAIR-NLP	81.73	77.10	76.94	78.61	80.16
4	BizNER	74.36	70.35	70.12	72.81	72.97
5	IXA/Cogcomp	76.00	65.54	64.91	72.32	72.28
6	USTC-NELSLIP	74.04	65.91	65.49	70.37	71.26
7	Deep Learning Brasil	72.07	68.91	68.75	70.11	70.97
8	NLPeople	74.50	62.22	61.27	73.48	70.16
9	Sakura	72.74	64.76	64.29	69.57	69.98
10	garNER	66.81	60.04	59.82	61.52	64.51
11	Sartipi-Sedighin	63.75	56.57	56.30	59.32	61.28
12	silp_nlp	63.07	57.23	56.99	59.93	61.05
13	D2KLab	64.44	53.98	53.47	59.01	60.79
14	MEERQAT-IRIT	61.82	56.17	56.01	58.00	59.87
15	LSJSP	60.63	53.60	53.32	56.23	58.23
16	SAB	57.55	47.56	47.21	51.08	54.12
17	IXA	18.40	13.91	13.61	17.95	16.97

Table 9: Detailed results for the Portuguese track.

Rank	Team	Clean Subset F1	Noisy Subset F1	Entity Noise F1	Context Noise F1	Macro F1
1	DAMO-NLP	91.08	86.76	86.34	91.41	89.57
2	CAIR-NLP	84.54	79.75	79.49	80.75	82.88
3	IXA/Cogcomp	80.75	68.69	67.99	74.81	76.54
4	BizNER	77.23	73.87	73.54	77.78	76.12
5	USTC-NELSLIP	78.51	69.64	69.22	72.87	75.47
6	NLPeople	79.31	67.15	66.30	75.22	75.08
7	Sakura	76.74	68.12	67.66	71.74	73.79
8	PAI	81.53	55.22	53.04	77.04	72.38
9	garNER	70.40	62.19	61.86	66.01	67.63
10	silp_nlp	67.15	60.87	60.53	63.74	65.00
11	LSJSP	67.23	58.63	58.18	64.13	64.36
12	D2KLab	66.78	55.80	55.29	61.14	62.98
13	Sartipi-Sedighin	64.69	56.57	56.15	60.38	61.95
14	SAB	61.58	51.14	50.90	52.90	58.03
15	FII_Better	56.66	43.11	42.20	50.67	52.12
16	IXA	27.96	21.72	21.30	26.72	25.96

Table 10: Detailed results for the Swedish track.

Rank	Team	Clean Subset F1	Noisy Subset F1	Entity Noise F1	Context Noise F1	Macro F1
1	NetEase.AI	88.47	69.05	67.80	86.43	84.05
2	DAMO-NLP	82.91	54.32	52.26	81.45	75.98
3	SRCB	87.19	39.39	35.37	88.37	75.86
4	PAI	86.23	41.90	38.57	85.31	74.87
5	Taiji	75.70	61.39	60.53	72.28	72.52
6	USTC-NELSLIP	70.10	55.06	54.16	64.75	66.57
7	NLPeople	71.43	48.95	47.91	61.57	65.96
8	IXA/Cogcomp	70.35	48.37	47.36	59.88	64.86
9	Sakura	68.79	51.20	50.43	59.73	64.61
10	garNER	67.50	50.17	49.57	58.23	63.47
11	Ertim	64.26	44.38	43.26	59.44	59.45
12	Sartipi-Sedighin	62.60	46.46	46.10	49.10	58.70
13	CAIR-NLP	62.89	44.74	43.84	56.16	58.43
14	Janko	62.45	44.70	44.14	52.15	57.90
15	YNUNLP	61.45	42.69	42.17	50.29	56.57
16	D2KLab	58.75	43.34	42.67	48.12	54.92
17	silp_nlp	54.65	42.11	41.57	48.95	51.65
18	SAB	47.71	33.37	32.46	42.82	44.12
19	NCUEE-NLP	51.36	18.24	15.39	43.74	44.09
20	L3i++	38.02	27.13	26.63	32.99	35.34
21	YNU-HPCC	34.24	24.07	23.52	32.50	31.66
22	IXA	8.06	4.49	4.35	5.20	6.93

Table 11: Detailed results for the Chinese track.

## **B** Fine-Grained Results Analysis

Figure 3 shows the misclassification across the different fine-grained types for the baseline approach on the EN test set. An ideal classifier would have a 100% performance on the diagonal.

**CW.** For this class, the baseline has low recall, with many of the entities being missed (O tag). In terms of misclassifying the fine-grained types, we note that the highest confusion is between MUSICALWORK and VISUALWORK, with 7.4% of false positives.

**GRP.** In the case of GRP, we notice a high confusion between ORG, PUBLICCORP and PRIVATECORP, with error rates going up to 26.3%. This highlights the difficulty of the different fine-grained classes, where context capture is important. Even more importantly in this particular problem of fine-grained NER, external knowledge or world knowledge of entities is crucial to distinguish between such fine-grained differences. In this case, external knowledge about different corporations may be necessary to correctly distinguish between different named entity types.

LOC. For this class, most of the errors are between FACILITY and OTHERLOC.

**PER.** In the case of PER, SPORTSMANAGER is confused as ATHLETE in 41.2% of the cases (this is because many sports managers are former athletes). The PER coarse type is highly challenging in some of the fine-grained types, given that the surface forms can be highly ambiguous, and only the context can differentiate between the different types (ATHLETE, SCIENTIST, ARTIST, etc.)

**MED.** In this case, we notice a high confusion between DISEASE and SYMPTOM, with 21.6%. This is an interesting insights, given that often, names for diseases and symptoms are used interchangeably (i.e., a symptom may cause a disease that is referred using the same name).

**PROD.** Finally, here we notice that DRINK and FOOD are often confused with each other with 10.7%. This highlights some of the ambiguous cases where a drink may be considered both, e.g. *milk*. Finally, the most misclassification happen between VEHICLE and OTHERPROD. A potential cause for this is the lack of detailed type assignment of entities in Wikidata, which may lead to such misclassifications, i.e. OTHERPROD entities may actually belong to VEHICLE, however they are not explicitly associated with this type in Wikidata.

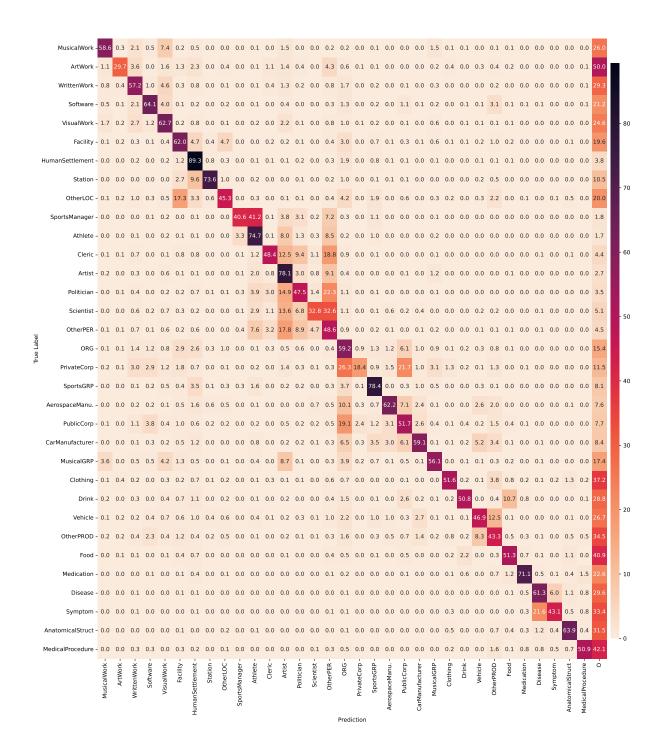


Figure 3: Confusion matrix of baseline performance computed at the fine-grained level for the EN test set.