A Diagonal Splitting Algorithm for Adaptive Group Testing

Chaorui Yao University of California, Los Angeles, Los Angeles, CA 90095, USA chaorui@ucla.edu Pavlos Nikolopoulos EPFL 1015 Lausanne, Switzerland pavlos.nikolopoulos@epfl.ch Christina Fragouli University of California, Los Angeles, Los Angeles, CA 90095, USA christina.fragouli@ucla.edu

Abstract—Group testing enables to identify infected individuals in a population using a smaller number of tests than individual testing. To achieve this, group testing algorithms commonly assume knowledge of the number of infected individuals; nonadaptive and several adaptive algorithms fall in this category. Some adaptive algorithms, like binary splitting, operate without this assumption, but require a number of stages that may scale linearly with the size of the population. In this paper, we contribute a new algorithm that enables a balance between the number of tests and the number of stages used, and which we term diagonal splitting algorithm (DSA). Diagonal splitting, like binary splitting, does not require knowledge of the number of infected individuals, yet unlike binary splitting, is orderoptimal w.r.t. the expected number of tests it requires and is guaranteed to succeed in a small number of stages that scales at most logarithmically with the size of the population. Numerical evaluations, for diagonal splitting and a hybrid approach we propose, support our theoretical findings.

I. INTRODUCTION

The group testing (GT) problem dates back in the times of World War II and Dorfman's seminal work [1]. Simply stated, it assumes a population of individuals out of which some are infected, and the goal is to design efficient testing strategies to identify the infections from the test results. The main component of group testing is the so-called *pooled test*, which mixes together the diagnostic samples from multiple individuals, and (in its noiseless form) returns "negative", if all the considered individuals in the pool are healthy; otherwise, it returns "positive", if at least one of them is infected.

Needless to say, group testing does not apply only to medical testing—it has a large number of applications, but it is currently being "re-discovered" in the context of COVID-19 [2]–[7], with several countries (including US, EU states, and China) having already deployed some variant of it [8], [9]. While the focus of this paper is also on medical testing, our approach is not bound to it in any sense.

A large number of GT variations have been examined since Dorfman's paper (see [10]–[12] and references therein); to the best of our knowledge, however, the following setting is still open and only a few sub-optimal solutions exist: Consider a population size of n individuals and suppose that either k of them are infected (with all combinations $\binom{n}{k}$ being equiprobable), or everyone is infected i.i.d. with probability p, but no information is available for k or p, which are assumed to be completely nknown.

We explore this setting by being interested in questions such as: can we minimize the *number of tests*, when the infection probability is completely unknown? Does it make sense to administer further testing to estimate it and use that estimate to administer new tests, or should we directly apply some well-established group testing algorithm (such as [13]–[15]) and expect small numbers of tests? do we need new algorithms?

In addition to the number of tests, we are also interested in the *number of stages*. Adaptive algorithms achieve zeroerror recovery of all infection statuses with few tests, but they typically use a large and variable number of stages. On the other hand, non-adaptive group testing can achieve zeroerror recovery in one testing stage, but it typically requires the knowledge of k to be efficient and tends to "blow up" the number of tests as the number of infections grows large; in fact, classic individual testing has been proved to be asymptotically optimal among non-adaptive designs in the linear $(k = \Theta(n))$ [16] and the mildly sublinear infection regime $(k = \omega(\frac{n}{\log n}))$ [17]. We ask: can we achieve *exact recovery* with a smaller number of stages, without increasing the expected number of tests?

The practical application of such a setting is straightforward. Suppose we want to test a population that has been exposed to a new disease for epidemiological purposes: e.g., to update known epidemiological models (such as [18]) or come up with new ones based on the test outcomes. We want our testing to be both fast and accurate; so, erroneous recovery and/or a large number of testing stages, especially if each stage may last more than a day (as with molecular PCR tests), are out of the question. Another application lies in a recent line of work [19]-[24] that examines the group testing problem under the assumption that infections are governed by community spread, hence individuals that belong to the same community groups [19]-[23] or have experienced the same social interactions [24] are assumed to be infected with approximately equal probability. That probability, however, can be hardly known in new viral-disease cases, because little is known about how a new virus propagates inside the community, and even if an arguably (in)accurate epidemiological model is used, the information about the initial state and the exact epidemiological trajectory of the disease is missing. So, one is left with multiple group testing strategies, without knowing which one to use.

In this regard, we contribute a new algorithm, which we call diagonal splitting algorithm (DSA), which is order-optimal w.r.t. the expected number of tests it requires and is guaranteed to succeed in a small number of stages that equals $\log_2 n$ in the worst case. Our algorithm is a noiseless adaptive group testing algorithm and leverages the following observation in order to reduce the number of tests and stages: Consider the binary tree representation of testing via binary search (akin to Binary splitting); we can test across "diagonals" in this tree, so that, at each stage, we test in parallel all possibly infected members of the population, but partitioned in groups of variable sizes. This enables a balance between the number of tests and stages used, performing well across both dimensions.

The paper is organized as follows: we first give some background and discuss related work (Section II), then we describe and analyze DSA (Section III-A) and finally evaluate its performance (Section IV).

II. PRELIMINARIES

A. Infection model and Problem formulation

Three infection models are usually studied in the group testing literature: (I) in the "combinatorial-priors model," a fixed number of individuals k (selected uniformly at random), are infected; (II) in "i.i.d probabilistic-priors model," each individual is i.i.d infected with some probability p, so that the expected number of infected members is $\bar{k}=np$; (III) in the "non-identical probabilistic-priors model," each item i is infected independently of all others with prior probability p_i . Models (I) and (II) have received attention from researchers for the most part (see for example, [16], [17], [25]–[33]), while model (III) is the least studied one [34], [35]. We refer the reader to [10] for an excellent summary of existing work—the related parts to our work are described in the next section.

In this paper, we consider the noiseless adaptive group testing problem in the first two settings, where either k (in the combinatorial setting (I)) or p (in probabilistic setting (II)) are unknown. However, our algorithm(s) can be used and the results of our analysis can be extended to model (III), as well.

Our goal is to design an algorithm that can identify the infection status of all individuals by using both a small number of tests and a small number of stages. This *zero-error* recovery requirement is achievable with noiseless adaptive group testing (see next section), but well-known algorithms for doing so typically use a variable number of tests and stages. So, to fairly compare our proposed approaches against them, we use as performance metrics both: the expected numbers of tests and the expected number of stages.

B. Background and Related work

A pooled test indexed by τ takes as input samples from a set of individuals δ_{τ} and outputs a binary value: 1 ("positive") if at least one of the samples is infected, and 0 ("negative") if none of them is infected. More precisely, let $U_i=1$ if individual i is infected, and 0 otherwise. The output of pooled test τ is calculated as $Y_{\tau}=\bigvee_{i\in\delta_{\tau}}U_i$, where \bigvee stands for the OR operator (disjunction).

Minimum number of tests: In the combinatorial model (I), since T tests allow to distinguish among 2^T combinations of test outputs, we need $T \geq \log_2 \binom{n}{k}$ to identify k randomly infected individuals out of n. This is known as the *counting bound* and implies that in a sparse regime (i.e. $k = \Theta(n^\alpha)$ and $\alpha \in [0,1)$), no algorithm can use less than $O(k \log \frac{n}{k})$ tests to achieve zero-error identification [11], [36]. In the probabilistic model (II), a similar bound exists for the number of tests needed on average: $T \geq nh_2(p)$, where h_2 is the binary entropy function [10].

Adaptive GT: Adaptive algorithms utilize the outcome of previous tests to determine what tests to perform next. They achieve zero-error recovery using a small but variable number of tests, and they typically use a large number of stages.

The commonest example is the binary splitting algorithm (BSA), which implements a form of binary search (see [13, Procedure R4] or [10, Algorithm 1.1]. BSA was the first to introduce the idea of recursively splitting the population, but it failed to match the counting bound for any k, as it is guaranteed to succeed in less than $k \log_2 n + k$ tests [37]. Also, as the outcome of a test must be known in order to administer the next one and no tests can be conducted in parallel, BSA needs on average as many stages as tests, i.e. linear in k.

Another example is *Hwang's generalized binary splitting algorithm (HGBSA)* [15], which also uses binary search and is already known to be order-optimal in terms of the number of tests. Given known k, HGBSA is guaranteed to succeed in $T = \log_2 \binom{n}{k} + k$ tests [15], [37], and the expected numbers of stages is also reduced compared with BSA. HGBSA can be also applied with only an upper bound of k; however, its large benefits are achievable, only if the exact k value is known.

The most closely related work in our context of unknown k is [14], which we will call *Sobel's Binary Splitting algorithm* (SBSA), for simplicity, after one of the authors of [14] (same as in [13]). SBSA is similar to BSA, but does not perform binary search blindly; instead, at each stage the algorithm also takes into account the results of previous positive/negative tests and selects the size of the next pooled test accordingly.

Although SBSA has been empirically shown to require few tests when k is unknown, it bears several weaknesses with regard to our (more practical) setting: First, according to the tables provided in [14], the worst-case number of stages happens when everyone is infected (i.e. k=n), and it scales as O(n). Second, at each stage, the algorithm chooses the size X of the next pooled test based on some recursive expressions that depend on four parameters that may take any value close to n; and as a result, the "on-line" recursive computation becomes quickly intractable, while an "off-line" pre-computation of all X values for any possible quadruple of parameters is quite expensive, scaling as $O(n^4)$. Last, the recursive expressions in [14] cannot help provide theoretical guarantees on the average number of tests or characterize SBSA's asymptotic behavior.

¹The achievability/converse results are usually proved for combinatorial model (I) (a summary is in [32]), but they are directly applicable to model (II) by considering p = k/n (see Theorems 1.7 and 1.8 in [10] or [17]).




Fig. 1: An illustration of DSA for n=8. The blue nodes correspond to the pooled tests of the first stage.

Few-stage adaptive GT algorithms: Prior works on adaptive GT with few stages and a near-optimal number of tests do exist, but none of them is directly applicable to our context. Some of the algorithms proposed require prior knowledge of the exact value of k (or p) to achieve a small number of tests (e.g. see [38], [39] and Section 5.2 of [10]), but this violates our assumption of unknown k—of course, one might obtain an estimate of k (e.g. by using approaches from [38] or [40]), but this would require initially even more tests and/or stages. Other algorithms can only guarantee a limited number of stages under the PAC (instead of zero-error) recovery criterion [41]. Finally, as mentioned in Section 5.3 of [10], which offers a survey on GT "universality," i.e. the case where no prior knowledge is assumed, the question of the optimal order of required tests for exact recovery is still open.

III. DIAGONAL SPLITTING ALGORITHM (DSA)

A. Algorithm

Suppose that $n=2^d$, $d\in\{1,2,\ldots\}$ and consider the binary tree representation of testing via binary search. Figure 1 depicts an example of a population of 8 individuals. Each leaf of the tree corresponds to an individual of the group that may be "negative" (i.e., healthy) or "positive" (i.e., infected). Following the standard terminology of pooled testing, at each particular level of the binary tree, a node is considered to be "positive", if at least one of the leaves of the sub-tree rooted from that node is positive, and it is "negative" otherwise.

Algorithm 1 applies pooled testing only across diagonals in this tree: At the first stage (line 1), we select d-1 (internal) nodes, starting from the second level and going down to the last-but-one level (of the leaves), so that: (a) no two nodes are at the same level, and (b) all the sub-trees rooted from the selected nodes are disjoint. Then, we conduct a total of d-1 pooled tests; each pooled test corresponds to a particular node and contains the diagnostic samples of all the leaves of the sub-tree that is rooted from it. The outcome of each pooled test is also the label (positive or negative) of the corresponding node. At the same (first) stage, we also test individually the only two leaves that do not belong to any sub-tree, which gives a total of d+1 tests. See, for example, the blue nodes in the example of Figure 1.

At each subsequent stage (lines 2-3), we just apply the same diagonal pooled testing procedure in parallel across all sub-

Algorithm 1 DSA (multi-stage).

- 1: Apply diagonal pooled tests to the set A.
- 2: If all the preceding results are negative, A contains no defective items, and we halt. Otherwise, continue.
- 3: If any preceding pooling consists of a single item, then that item is defective. Otherwise, apply diagonal pooled tests to all positive sub-trees.

trees whose root node was found positive in the current stage. In the example of Figure 1, if all test outcomes return positive in stage one, in stage two we perform 5 tests in parallel, a group test for leaves 1 and 2, and individual tests for leaves 3-6. An extended example is provided in Appendix A of [42].

The key concept behind DSA follows from a variant of HGBSA that is described in [10]: If one knows the exact value of k, they can reduce both the number of tests and stages by first splitting the population into k subsets. Since each of these subsets contains an average of one infected individual, if we use BSA in each subset, we can find all infections using no more than $k\log_2(n/k) + O(k)$ [10] tests, which is generally smaller than what is achieved by BSA and SBSA.

Similarly, the main benefit of DSA is that: at each stage, we test in parallel all possibly infected members of the population, but partitioned into groups of variable sizes. This observation is critical for our work; as we show next, this partitioning enables finding a good balance between the expected number of tests and the expected number of stages.

B. Analysis

Given that infections follow either the combinatorial (I) or probabilistic (II) model, we next analyze the performance of Algorithm 1 w.r.t. the expected number of tests and stages. For the sake of simplicity of the computations, we will assume that an initial pooled test of the entire population has already been found positive before Algorithm 1 is called.

We first list a few properties of the tree structure:

- (1) At each depth $i \in \{1, 2, \dots, d-1\}$, only 2^{i-1} nodes can be possibly tested by Algorithm 1.
- (2) Any sub-tree rooted from a node at depth i has $n_i = 2^{d-i}$ leaves.
- (3) At any stage of Algorithm 1, if a node is found positive at depth i, with $i \in \{0, \dots, d-1\}$, then this triggers $T_i = d i + 1$ new pooled tests at the next stage.
- (4) When a leaf is identified by Algorithm 1, so is its sibling—hence, both need the same number of tests.

Lemma 1. The expected number of tests required by Algorithm 1 for exact recovery is:

$$\mathbb{E}[T] = d + 1 + \sum_{i=1}^{d-1} 2^{i-1} \cdot \mathbb{P}_{i,*}^+ \cdot (d-i+1), \tag{1}$$

where $\mathbb{P}^+_{i,*}$ is the probability that a node at depth i is found

positive and depends on the underlying infection model; i.e.:

$$\mathbb{P}_{i,Comb}^{+} = 1 - \frac{\binom{n-k}{n_i}}{\binom{n}{n_i}}, \qquad \mathbb{P}_{i,Prob}^{+} = 1 - (1-p)^{n_i}. \quad (2)$$

Proof. Note that the expected number of tests is equal to: $\mathbb{E}[T] = d + 1 + \sum_{i=1}^{d-1} T_i \cdot \mathbb{E}[\# \text{ positive nodes at depth } i]$, where $T_i = d - i + 1$ by property (3).

Consider the nodes that can be tested by Algorithm 1 at some depth i and observe that the probability of any such node being positive is the same for all the nodes at the same depth. Denote that common probability by $\mathbb{P}^+_{i,*}$; this equals the probability of at least one of the leaves of the sub-tree rooted from a node at depth i being infected. For a combinatorial model, $\mathbb{P}^+_{i,*}$ is computed with the help of the hypergeometric distribution, as: $\mathbb{P}^+_{i,Comb} = 1 - \binom{n-k}{n_i} / \binom{n}{n_i}$. For a probabilistic model with infection probability of p, $\mathbb{P}^+_{i,*}$ is computed with the help of the binomial distribution, as: $\mathbb{P}^+_{i,Prob} = 1 - (1-p)^{n_i}$. Using the above and property (1), we have: $\mathbb{E}[\#$ positive nodes at depth $i] = 2^{i-1} \cdot \mathbb{P}^+_{i,*}$.

Combining all the above concludes the proof.

Corollary 1. If
$$k = 1$$
 or $p = 1/n$, then $\mathbb{E}[T] = \frac{1}{4}d^2 + \frac{5}{4}d + \frac{1}{2}$.
Corollary 2. If $k = n$ or $p = 1$, then $\mathbb{E}[T] = \frac{3}{2}n - 1$.

A few observations w.r.t. the expected number of tests:

- The expected number of tests of DSA in the combinatorial and the probabilistic model have the same asymptotic behavior (as n goes to infinity), if p = k/n.
- If k = 1 (or p = 1/n), DSA is slightly worse than BSA, which needs $\log_2 n + 1$ tests on average. If k = n (or p = 1), DSA compares favorably to BSA, which needs $n(\log_2 n + 1)$ tests on average (see Section II for details).
- In the case of arbitrary fixed k (or p), DSA is asymptotically order-optimal w.r.t. the performance of HGBSA (and the counting bound), albeit with a possibly large constant. This claim is proved using a loose upper bound in Appendix B of [42], and it is also validated in our numerics (e.g. see Fig. 3a).

Lemma 2. The number of stages required by Algorithm 1, in the worst case, equals $\log_2 n$.

Proof. The worst case for Algorithm 1 is when (at least) one of the two leftmost leaves is infected, which results in a number of stages equal to the depth of the tree $d = \log_2 n$.

An important observation that follows from the above is that the worst-case number of stages of Algorithm 1 becomes significantly smaller than the expected number of stages of BSA (which scales as $O(k \log_2 n)$), as the number of infections k grows large (see also Fig. 3b for numerical evidence).

It is worth repeating that DSA achieves all the above without knowing anything about k (or p).

C. A hybrid variant

We observe that the DSA neither assumes knowledge of the number of infections k, nor attempts to estimate it. However,

Algorithm 2 Hybrid GT (multi-stage).

- 1: Apply diagonal pooled tests to the set A. Get pattern s.
- 2: Estimate $k = \arg \max_{k} L_s(k)$. Allocate k to each positive sub-trees proportionally to the number of their leaves.
- 3: Use HGBSA in positive sub-trees with allocated estimates.

even from the outcome of the first stage of diagonal tests, we may be able to get an estimate of k that we can then use to further reduce the number of tests needed. For example, if all test outcomes at the first stage return positive, then with a high probability more than 30% of the population size is infected, and thus we may directly proceed with individual testing (according to [43]).

In this section, we propose a simple hybrid algorithm that builds on this observation. We merge the diagonal splitting algorithm with HGBSA as described in Algorithm 2. Recall that HGBSA decides the size of group tests depending on k, and reduces to individual testing for large k. To estimate k, we simply use the test outcomes of the first stage of DSA. We do so via likelihood calculations: for different numbers of infections k, certain test outcome patterns s of the diagonal algorithm are more likely to occur.

Given the population size n, we first construct a (n+1)-by-(2n) matrix M, where the rows correspond to the possible number of defective items k, the columns correspond to possible outcome pattern of the first/upper diagonal slicing, and each element M[k,s] counts the possible occurrences of a test outcome pattern s for a given number of infections k—we represent the test outcomes with binary vectors, hence the bold font of s. Let s_0 denote the pattern, where we modify the first nonzero bit of s to zero. Also, denote by N_0 the number of leaves in the sub-tree, where the first nonzero bit of s refers to. The following lemma enables us to efficiently populate the table M. Its proof is given in Appendix D of [42]; an example such matrix is in Appendix C of [42].

Lemma 3. The elements of M have the following recurrence:

$$M[k, s] = \sum_{i=1}^{k} {N_0 \choose i} M[k-i, s_0], \text{ where } M[0, 0] = 1. (3)$$

Next, we normalize M by row to get the likelihood values for each k: $L_s(k) = \mathbb{P}[s|k]$.

Our hybrid variant uses the normalized version of M and Algorithm 2 to identify the status of every individual: it first applies one stage of diagonal pooled tests to obtain the test outcome pattern s (line 1). Given s, it estimates the total number of estimated infections k as: $\hat{k} = \arg\max_k L_s(k)$, and it allocates \hat{k} to each positive-identified sub-tree proportionally to the number of its leaves (line 2). Finally, in each positive sub-tree, it runs HGBSA assuming that the number of infections equals the allocated estimate (line 3).

IV. NUMERICAL EVALUATION

Experimental setup: In various populations of two different sizes (n = 16 and n = 1024), some individuals are randomly

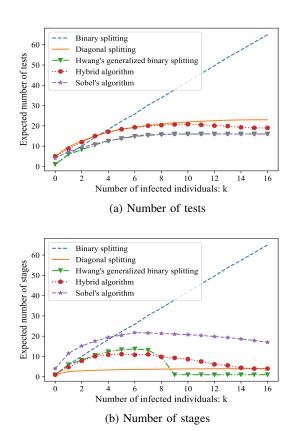



Fig. 2: Case n = 16, results averaged over 500 instances.

infected according to the combinatorial and probabilistic infection models from Section II. We use BSA, HGBSA, SBSA and our Algorithms 1 and 2 to identify the infected individuals without error, and each time we evaluate their performance in terms of both the total number of tests and stages they need. For brevity, we report only the combinatorial case—the probabilistic case is in Appendix E of [42] with similar results.

Notes: (a) HGBSA does leverage the exact knowledge of k or p, while the other algorithms are agnostic to them; (b) SBSA was proved to be computationally expensive, and we could only evaluate its performance in the case of n=16.

Combinatorial setting: To examine the performance of the algorithms w.r.t. various numbers of infected individuals k, we range k in $\{1, ..., n\}$. For each integer value of k, we generate at least 500 random instances of infected populations over which we average our results. Following the combinatorial infection model in each instance, we randomly select k people to be infected, so that all $\binom{n}{k}$ combinations are equiprobable.

Results: Figures 2a and 3a depict the performance w.r.t. the average number of tests: We observe that SBSA and HGBSA outperform all other algorithms, while BSA has mixed performance characteristics—it offers marginal benefits over SBSA when k is low, but the number of tests quickly increases as k becomes larger. The latter is expected, as the performance of BSA is linear to the number of infections (see Section II). DSA largely outperforms BSA and performs order-optimally w.r.t. HGBSA (having a degradation of about 20%), while our






Fig. 3: Case n = 1024, results averaged over 1000 instances.

hybrid variant offers further benefits compared with DSA as \boldsymbol{k} grows large.

Things seem to get reversed in Figures 2b and 3b that show our results w.r.t. the average number of stages: DSA significantly outperforms all algorithms, except for HGBSA whenever $k \geq (n+1)/2$. This is because, in that regime, HGBSA applies individual testing that can occur in one stage; however, to accomplish this, HGBSA requires the exact knowledge of k. Similarly, our hybrid variant performs better than prior approaches for k < n/2, while it matches the performance of DSA as k goes close to n. For all algorithms, there seems to be an interesting trade-off between the tests and the stages (that is perhaps worth analyzing) and DSA does keep a good balance in this regard.

V. CONCLUSION

In this paper, we present a diagonal splitting algorithm (DSA) for adaptive group testing with no prior information about the number or the probability of infection(s). We theoretically analyze and empirically evaluate its performance, and we show that it operates well in terms of both the number of tests and the number of stages, thereby keeping a good balance between testing economy and timeliness. In our opinion, it would be interesting to further explore the trade-off between the number of stages and the number of tests, potentially by adaptively updating the estimate of k along the course of the stages and utilizing it efficiently.

REFERENCES

- [1] R. Dorfman, "The detection of defective members of large population," *The Annals of Mathematical Statistics*, vol. 14, pp. 436–440, 1943.
- [2] C. Gollier and O. Gossner, "Group testing against covid-19," April 2020, see https://www.tse-fr.eu/publications/group-testing-against-covid-19.
- [3] M. Broadfoot, "Coronavirus test shortages trigger a new strategy: Group screening," May 2020, see https://www.scientificamerican.com/article/ coronavirus-test-shortages-trigger-a-new-strategy-group-screening2/.
- [4] J. Ellenberg, "Five people. one test. this is how you get there." NYtimes, May 2020.
- [5] C. Verdun et al., "Group testing for SARS-CoV-2 allows up to 10fold efficiency increase across realistic scenarios and testing strategies," medRxiv, 2020.
- [6] S. Ghosh et al., "Tapestry: A single-round smart pooling technique for covid-19 testing," medRxiv, 2020.
- [7] L. M. Kucirka, S. A. Lauer, O. Laeyendecker, D. Boon, and J. Lessler, "Variation in false-negative rate of reverse transcriptase polymerase chain reaction–based SARS-CoV-2 tests by time since exposure," *Annals of Internal Medicine*, vol. 173, pp. 262–267, Aug. 2020.
- [8] S. Mallapaty, "The mathematical strategy that could transform coronavirus testing," 2020. [Online]. Available: https://www.nature. com/articles/d41586-020-02053-6
- [9] FDA, "Pooled sample testing and screening testing for COVID-19," 2020. [Online]. Available: https://www.fda. gov/medical-devices/coronavirus-covid-19-and-medical-devices/ pooled-sample-testing-and-screening-testing-covid-19
- [10] M. Aldridge, O. Johnson, and J. Scarlett, "Group testing: an information theory perspective," *CoRR*, vol. abs/1902.06002, 2019.
- [11] D.-Z. Du and F. K. Hwang, Combinatorial Group Testing and Its Applications. WORLD SCIENTIFIC, 1993. [Online]. Available: https://www.worldscientific.com/doi/abs/10.1142/1936
- [12] Y. Malinovsky and P. S. Albert, "Revisiting nested group testing procedures: new results, comparisons, and robustness," *American Statistician*, August 2016, see also https://arxiv.org/abs/1608.06330.
- [13] M. Sobel and P. A. Groll, "Group testing to eliminate efficiently all defectives in a binomial sample," *The Bell System Technical Journal*, vol. 38, no. 5, pp. 1179–1252, 1959.
- [14] M. Sobel and P. A. Groll, "Binomial group-testing with an unknown proportion of defectives," *Technometrics*, vol. 8, no. 4, pp. 631–656, 1966
- [15] F. K. Hwang, "A method for detecting all defective members in a population by group testing," *Journal of the American Statistical Association*, vol. 67, no. 339, pp. 605–608, 1972.
- [16] M. Aldridge, "Individual testing is optimal for nonadaptive group testing in the linear regime," *IEEE Transactions on Information Theory*, vol. 65, no. 4, pp. 2058–2061, 2019.
- [17] W. H. Bay, E. Price, and J. Scarlett, "Optimal non-adaptive probabilistic group testing requires $\theta(\min\{k \log n, n\})$ tests," 2020.
- [18] I. Kiss, J. Miller, and P. Simon, Mathematics of Epidemics on Networks, 01 2017, vol. 46.
- [19] P. Nikolopoulos, S. Rajan Srinivasavaradhan, T. Guo, C. Fragouli, and S. Diggavi, "Group testing for connected communities," in *Proceedings* of The 24th International Conference on Artificial Intelligence and Statistics, vol. 130. PMLR, 2021, pp. 2341–2349.
- [20] P. Nikolopoulos, S. R. Srinivasavaradhan, T. Guo, C. Fragouli, and S. Diggavi, "Group testing for overlapping communities," in *ICC 2021* - *IEEE International Conference on Communications*, 2021, pp. 1–7.
- [21] S. Ahn, W.-N. Chen, and A. Ozgur, "Adaptive group testing on networks with community structure," arXiv preprint arXiv:2101.02405, 2021.
- [22] S. R. Srinivasavaradhan, P. Nikolopoulos, C. Fragouli, and S. Diggavi, "Dynamic group testing to control and monitor disease progression in a population," arXiv preprint arXiv:2106.10765, 2021.
- [23] —, "An entropy reduction approach to continual testing," in 2021 IEEE International Symposium on Information Theory (ISIT). IEEE, 2021, pp. 611–616.
- [24] J. Zhu, K. Rivera, and D. Baron, "Noisy pooled PCR for virus testing," arXiv preprint arXiv:2004.02689, 2020.
- [25] G. K. Atia and V. Saligrama, "Boolean compressed sensing and noisy group testing," *IEEE Transactions on Information Theory*, vol. 58, no. 3, pp. 1880–1901, 2012.
- [26] M. Aldridge, L. Baldassini, and O. Johnson, "Group testing algorithms: Bounds and simulations," *IEEE Transactions on Information Theory*, vol. 60, no. 6, pp. 3671–3687, 2014.

- [27] C. L. Chan, S. Jaggi, V. Saligrama, and S. Agnihotri, "Non-adaptive group testing: Explicit bounds and novel algorithms," *IEEE Transactions* on *Information Theory*, vol. 60, no. 5, pp. 3019–3035, 2014.
- [28] J. Scarlett and V. Cevher, "Phase transitions in group testing," in Proceedings of the Twenty-Seventh Annual ACM-SIAM Symposium on Discrete Algorithms, SODA 2016, Arlington, VA, USA, January 10-12, 2016. SIAM, 2016, pp. 40–53.
- [29] O. Johnson, M. Aldridge, and J. Scarlett, "Performance of group testing algorithms with near-constant tests per item," *IEEE Transactions on Information Theory*, vol. 65, no. 2, pp. 707–723, 2019.
- [30] A. Coja-Oghlan, O. Gebhard, M. Hahn-Klimroth, and P. Loick, "Optimal group testing," in *Proceedings of Thirty Third Conference* on Learning Theory, ser. Proceedings of Machine Learning Research, J. Abernethy and S. Agarwal, Eds., vol. 125. PMLR, 09–12 Jul 2020, pp. 1374–1388. [Online]. Available: https://proceedings.mlr.press/v125/ coja-oghlan20a.html
- [31] I. Armendáriz, P. A. Ferrari, D. Fraiman, J. M. Martínez, and S. P. Dawson, "Group testing with nested pools," *arXiv preprint* arXiv:2005.13650, 2020.
- [32] E. Price and J. Scarlett, "A fast binary splitting approach to non-adaptive group testing," arXiv preprint arXiv:2006.10268, 2020.
- [33] A. Coja-Oghlan, O. Gebhard, M. Hahn-Klimroth, and P. Loick, "Information-theoretic and algorithmic thresholds for group testing," *IEEE Transactions on Information Theory*, vol. 66, no. 12, pp. 7911–7928, 2020.
- [34] T. Li, C. L. Chan, W. Huang, T. Kaced, and S. Jaggi, "Group testing with prior statistics," in 2014 IEEE International Symposium on Information Theory (ISIT), 2014, pp. 2346–2350.
- [35] S. R. Srinivasavaradhan, P. Nikolopoulos, C. Fragouli, and S. Diggavi, "Improving group testing via gradient descent," in 2022 IEEE International Symposium on Information Theory (ISIT), 2022, pp. 2243–2248.
- [36] O. Johnson, "Strong converses for group testing from finite blocklength results," *IEEE Transactions on Information Theory*, vol. 63, no. 9, pp. 5923–5933, 2017.
- [37] L. Baldassini, O. Johnson, and M. Aldridge, "The capacity of adaptive group testing," in 2013 IEEE International Symposium on Information Theory (ISIT), 2013, pp. 2676–2680.
- [38] P. Damaschke and A. S. Muhammad, "Competitive group testing and learning hidden vertex covers with minimum adaptivity," *Discrete Mathematics, Algorithms and Applications*, vol. 02, no. 03, pp. 291–311, 2010. [Online]. Available: https://doi.org/10.1142/S179383091000067X
- [39] M. Aldridge, "Conservative two-stage group testing in the linear regime," 2022.
- [40] M. Falahatgar, A. Jafarpour, A. Orlitsky, V. Pichapati, and A. T. Suresh, "Estimating the number of defectives with group testing," in 2016 IEEE International Symposium on Information Theory (ISIT), 2016, pp. 1376– 1380.
- [41] A. De Bonis, L. Gasieniec, and U. Vaccaro, "Optimal two-stage algorithms for group testing problems," SIAM Journal on Computing, vol. 34, no. 5, pp. 1253–1270, 2005. [Online]. Available: https://doi.org/10.1137/S0097539703428002
- [42] C. Yao, P. Nikolopoulos, and C. Fragouli, "A diagonal splitting algorithm for adaptive group testing," *arXiv preprint arXiv:2305.06737*, 2023.
- [43] M. C. Hu, F. K. Hwang, and J. K. Wang, "A boundary problem for group testing," SIAM Journal on Algebraic Discrete Methods, 1981.

APPENDIX

A. A larger testing tree structure

Figure 4 is an illustration of diagonal splitting for a population of 16 with 3 infections. The colored nodes correspond to the pooled tests of each stage.

B. Order-optimality of the number of tests

Claim 1. The expected number of tests $\mathbb{E}[T]$ for probabilistic model is upper bounded as follows: $\mathbb{E}[T] \leq \frac{1}{C} \log_2 \binom{n}{k} +$ $(\log_2 C + 2)k$, for some constant C.

Proof. Choose a depth β s.t. $\epsilon = 1 - e^{-\frac{k}{2\beta}} > 0$ is a small positive constant. Then,

$$\beta = \log_2 \frac{k}{-\ln\left(1 - \epsilon\right)}.\tag{4}$$

From Lemma 1, we have:

$$\mathbb{E}[T] = 1 + d + \sum_{i=1}^{d-1} 2^{i-1} \cdot \mathbb{P}_{i,Prob}^{+} \cdot (d-i+1)$$

$$= 1 + d + \sum_{i=1}^{d-1} 2^{i-1} \cdot (1 - (1 - \frac{k}{n})^{2^{d-i}}) \cdot (d-i+1)$$

$$\stackrel{(a)}{\sim} 1 + d + \sum_{i=1}^{d-1} 2^{i-1} \cdot (1 - e^{-\frac{k}{2^{i}}}) \cdot (d-i+1)$$

$$\stackrel{(b)}{\leq} 1 + d + \sum_{i=1}^{\beta} 2^{i-1} \cdot (d-i+1) + \epsilon \sum_{i=\beta+1}^{d-1} 2^{i-1} \cdot (d-i+1),$$

$$\stackrel{(b)}{\leq} 1 + d + \sum_{i=1}^{\beta} 2^{i-1} \cdot (d-i+1) + \epsilon \sum_{i=\beta+1}^{d-1} 2^{i-1} \cdot (d-i+1),$$

where:

- (a) holds because $\lim_{n\to\infty}(1-\frac{k}{n})^r=e^{-\frac{kr}{n}}$ and $n=2^d$; (b) holds because $1-e^{-\frac{k}{2^i}}\leq 1$, and $1-e^{-\frac{k}{2^i}}\leq \epsilon$ for $i>\beta$; the latter holds because $1 - e^{-\frac{k}{2^i}}$ is monotonically decreasing

Next, we compute the two terms (c) and (d), as follows:

$$(c) = (d+1)\sum_{i=1}^{\beta} 2^{i-1} - \sum_{i=1}^{\beta} i2^{i-1} = (d+1)(2^{\beta} - 1) - (e).$$
 (6)

and

$$(e) = \sum_{i=1}^{\beta} \frac{\partial}{\partial x} x^{i} \Big|_{x=2} = \frac{\partial}{\partial x} \sum_{i=1}^{\beta} x^{i} \Big|_{x=2}$$

$$= \frac{\partial}{\partial x} \left(\frac{1 - x^{\beta + 1}}{1 - x} - 1 \right) \Big|_{x=2}$$

$$= \frac{x^{\beta} (\beta x - \beta - 1) + 1}{(x - 1)^{2}} \Big|_{x=2}$$

$$= (\beta - 1)2^{\beta} + 1.$$
(8)

by the linearity of operations.

Similarly,

$$(d) \stackrel{(f)}{=} \epsilon \sum_{j=2}^{d-\beta} j 2^{d-j}$$

$$= \frac{1}{2} \epsilon \cdot 2^d \sum_{j=2}^{d-\beta} j \left(\frac{1}{2}\right)^{j-1}$$

$$= \frac{1}{2} \epsilon \cdot 2^d \left(-1 + \sum_{j=1}^{d-\beta} j \left(\frac{1}{2}\right)^{j-1}\right)$$

$$\stackrel{(g)}{=} \epsilon \cdot 2^\beta (\beta - d - 2) + \frac{3}{2} \epsilon \cdot 2^d$$
 (9)

where:

- (f) holds, if we set j := d i + 1;
- (g) is obtained from eq. (7) after substituting β with $d \beta$ and by taking x = 1/2.

We now combine (5), (6), (8) and (9), and we get (as ngoes to infinity):

$$\mathbb{E}[T] \le (1 - \epsilon) \cdot 2^{\beta} (d - \beta + 2) + \frac{3}{2} \epsilon \cdot 2^{d} - 1$$

$$< 2^{\beta} (d - \beta + 2) + \frac{3}{2} \epsilon \cdot 2^{d} - 1$$

$$\stackrel{(4)}{=} \frac{k}{-\ln(1 - \epsilon)} \left(\log_{2} n - \log_{2} \frac{k}{-\ln(1 - \epsilon)} + 2 \right) + \frac{3}{2} \epsilon n - 1$$

$$= \frac{k}{C} \log \frac{n}{k} + \frac{\log_{2} C + 2}{C} k + \frac{3}{2} \epsilon n - 1$$

$$\le \frac{1}{C} \log \binom{n}{k} + (\log_{2} C + 2) \frac{k}{C} + \frac{3}{2} \epsilon n - 1,$$

$$(12)$$

where $C = -\ln(1 - \epsilon)$, and inequality (12) holds because of the lower bound of the binomial coefficient: $\binom{n}{k} \geq \left(\frac{n}{k}\right)^k$.

Since ϵ is an arbitrarily small constant used by our upperbounding technique, we can always select $\epsilon = o(1/n)$, so that $\mathbb{E}[T] < \frac{1}{C}\log\binom{n}{k} + (\log_2 C + 2)\frac{k}{C} + o(1)$, which gives an overall asymptotic behavior of $\mathbb{E}[T] = O(\log_2\binom{n}{k} + k)$, where the hidden term $\frac{1}{C}$ may be large.

C. An example of occurrence matrix

Figure 5 is an example of an occurrence matrix M for a population size of 8. The rows correspond to the number of infections, while the columns correspond to the binary representations of the test outcomes of the first stage of Algorithm 1. Note that a test outcome pattern s is valid for kinfections only when it is possible for the pattern s to occur given k infections—for invalid patterns we use a 0.

D. Proof of Lemma 3

The recursive relation for M is:

$$\boldsymbol{M}[k,s] = \sum_{i=1}^{k} {N_0 \choose i} \boldsymbol{M}[k-i, s_0],$$

where M[0, 0] = 1.

Proof. Note that we divide all the individuals into two categories based on a given pattern s: in the first positive subtree or not, and then count all the cases. Note that there

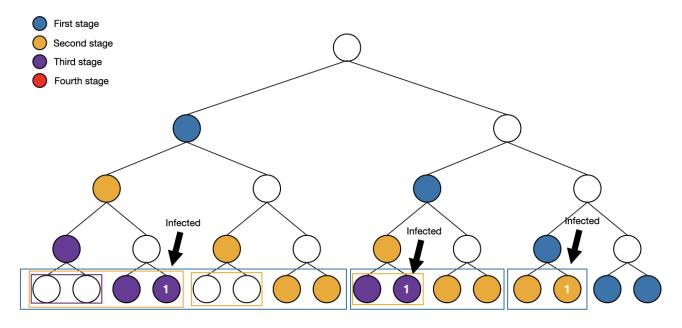


Fig. 4: An illustration of DSA for n = 16. The colored nodes correspond to the pooled tests of each stage.

	0000	0001	0010	0011	0100	0101	0110	0111	1000	1001	1010	1011	1100	1101	1110	1111
0	/ 1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0 \
1	0	1	1	0	2	0	0	0	4	0	0	0	0	0	0	0
2	0	0	0	1	1	2	2	0	6	4	4	0	8	0	0	0
3	0	0	0	0	0	1	1	2	4	6	6	4	16	8	8	0
4	0	0	0	0	0	0	0	1	1	4	4	6	14	16	16	8
5	0	0	0	0	0	0	0	0	0	1	1	4	6	14	14	16
6	0	0	0	0	0	0	0	0	0	0	0	1	1	6	6	14
7	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	6
8	0 /	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1 /

Fig. 5: An example of population size 8.

are three sources of possibilities: the number of infections in the first positive sub-tree, the infectious status in the first positive sub-tree, and the infectious status in the modified patterns and the corresponding number of infections. Given that there are i infections in the first positive sub-tree, there are $\binom{N_0}{i}$ possible infectious status in the first positive sub-tree and $M[k-i,s_0]$ possible infectious status for other leaves. In total, there are $\binom{N_0}{i}M[k-i,s_0]$ possible infectious status for a given i. Furthermore, i has k possibilities. The invalid pattern s for k will get a 0 by the formula. Combining all yields the result.

E. Results for the Probabilistic case

In the probabilistic setting, we range p in [0,1] keeping it identical and independent for each individual, and we average our results over $m = \{500, 1000\}$ instances for each fixed p.

Our results are shown in Figures 6 and 7, and as expected, they are similar to the ones of the combinatorial case.

Note that HGBSA requires the exact knowledge of the number of infected individuals k, which is unknown in the probabilistic setting. For that reason, the input of HGBSA is merely the average number of infections $\hat{k}=pn$.

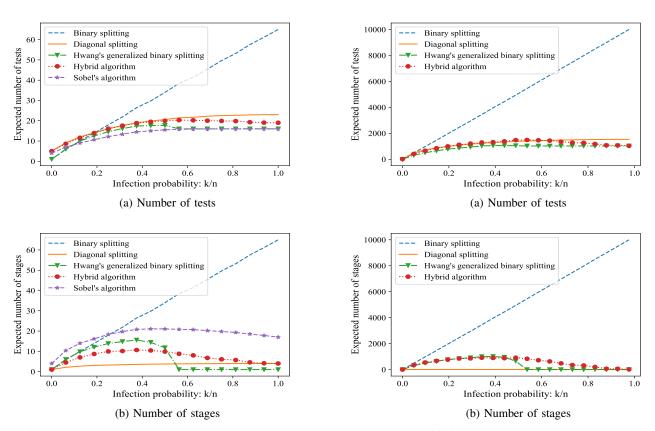


Fig. 6: Probabilistic model with n=16, results averaged over 500 instances.

Fig. 7: Probabilistic model with n=1024, results averaged over 1000 instances.