

Using Wikipedia Editor Information to Build High-performance Recommender Systems

Katsuhiko Hayashi
Hokkaido University

Abstract

Wikipedia has high-quality articles on a variety of topics and has been used in diverse research areas. In this study, a method is presented for using Wikipedia’s editor information to build recommender systems in various domains that outperform content-based systems.

Keywords: recommendation, collaborative filtering, Wikipedia, editor information, user preference

Introduction

Wikipedia is an online encyclopedia that can be edited by anyone, and due to the ease of editing and the large number of editors, there are high-quality articles on a variety of topics (hereafter “entities”). Information obtained from Wikipedia has thus been used in various research fields. Among them, entity similarity estimation is a hot research topic that has many applications such as recommendation systems [Musto et al., 2016] and search engines [Gabrilovich and Markovitch, 2007]. To estimate similarities between entities, it is necessary to extract entity features. A commonly used source for feature extraction is Wikipedia’s content information such as text abstracts and hyperlinks (see Figure 1).

Given that Wikipedia is an encyclopedia, one of its basic policies is that content must be written from a “neutral point of view”, which means that articles are edited by carefully analyzing reliable information sources and eliminating as much editorial bias as possible¹. Unlike critiques and reviews, Wikipedia’s content is free of personal opinions and impressions. In other words, Wikipedia’s content information is limited to superficial attribute information about entities, and is unlikely to reflect the editor’s personal opinions and preferences. Therefore, a drawback of conventional content-based methods is that it is difficult to capture complex similarities between entities inherent in human preferences.

An alternative to content-based methods is collaborative filtering, which is based on user preference information and enables the capture of the complex similarities inherent among entities. It has been developed mainly

¹https://en.wikipedia.org/wiki/Wikipedia:Neutral_point_of_view

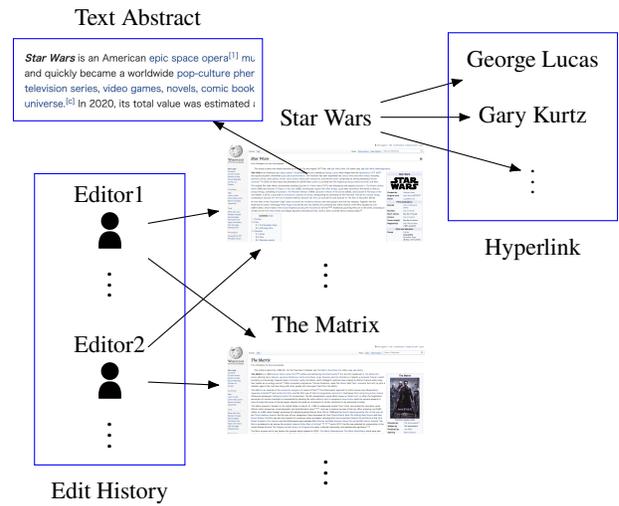


Figure 1: Examples of information found in English Wikipedia. Images were cited from https://en.wikipedia.org/wiki/Star_Wars and https://en.wikipedia.org/wiki/The_Matrix.

in the field of recommendation research. Since building a recommender system on the basis of collaborative filtering requires user profile information such as purchase history, the domains in which it can be applied are limited.

In this paper, We have developed a new collaborative filtering method for estimating similarities between entities in Wikipedia. As shown in Figure 1, Wikipedia keeps a history record of who edited each article, and the proposed method utilizes that information on the editors of articles. Since editors generally edit articles on topics in which they are interested in, we can assume from the viewpoint of collaborative filtering that entities corresponding to articles edited by the same editor are similar to each other. The proposed method is thus be able to estimate complex similarities between entities that are difficult to capture with content-based methods.

We experimentally investigated the effectiveness of the proposed method on three recommendation datasets for movies, music artists, and books. The results show that the proposed method has higher recommendation accuracy than content-based methods using text abstracts, hy-

perlinks, or categories².

Similarity Estimation

We use the EASE [Steck, 2019] model for estimating similarity between entities (i.e. Wikipedia articles). Given N Wikipedia articles (D_1, D_2, \dots, D_N), D_i can be represented as a feature vector $[f_{i1}, f_{i2}, \dots, f_{iM}]^T$ in which $f_{ij} = 1$ if a feature w_j appears in a Wikipedia article D_i and $f_{ij} = 0$ if not³. We define a Wikipedia article matrix:

$$\mathbf{F} = \begin{pmatrix} f_{11} & f_{12} & \cdots & f_{1M} \\ f_{21} & f_{22} & \cdots & f_{2M} \\ \vdots & \vdots & \ddots & \vdots \\ f_{N1} & f_{N2} & \cdots & f_{NM} \end{pmatrix} \in \{0, 1\}^{N \times M}.$$

We can use word n -grams, hyperlinks, or editors as features. To estimate a similarity matrix $\mathbf{B} \in \mathbb{R}^{N \times N}$ with EASE, we formulate the estimation problem as a linear regression formula:

$$\begin{aligned} \hat{\mathbf{B}} &= \arg \min_{\mathbf{B}} \left\{ \|\mathbf{F} - \mathbf{FB}\|_F^2 + \lambda \|\mathbf{B}\|_F^2 \right\} \quad (1) \\ \text{s.t. } \text{diag}(\mathbf{B}) &= \mathbf{0}. \end{aligned}$$

The objective is to obtain a weight (similarity) matrix \mathbf{B} that reconstructs the Wikipedia article matrix \mathbf{F} from \mathbf{FB} by minimizing the squared loss with L2 regularization. However, when $\mathbf{B} = \mathbf{I}$, the minimization of Eq.(1) can be achieved in an obvious way, and so $\text{diag}(\mathbf{B}) = \mathbf{0}$ is imposed as a constraint condition. This constraint means that all diagonal components of \mathbf{B} must be zero.

Experiments

Recommendation Datasets

We used three recommendation datasets for evaluation: (1) MovieLens-20M (ML-20M)⁴, (2) Last.fm hetrec-2011 (Last.fm) [Cantador et al., 2011] and (3) Library-Thing (LT)⁵. In our experiments, we considered an implicit feedback setting, so users did not need to express their tastes explicitly. In this setting, the user’s preference scores were treated as binary values. From the Wikipedia articles that correspond to three types of entities (movies, music artists and books) of the three datasets, we extracted information about the editors of the articles in English Wikipedia, the editors of the articles in multilingual Wikipedia, the English text abstracts, the hyperlinks and the categories. Table 1 summarizes the dataset statistics.

²This paper is an English version of the Japan domestic conference paper [Takeuchi and Hayashi, 2022].

³For f_{ij} , we can also consider the number of times the feature w_j appears in the Wikipedia article D_i .

⁴<https://grouplens.org/datasets/movielens/20m/>

⁵<https://github.com/sisinflab/LinkedDatasets>

Recommendation Evaluation

We evaluated our proposed method on the recommendation task. In the following, we describe the procedure of the recommendation task.

Evaluation Procedure To evaluate the recommender systems, we split each recommendation dataset into history and answer data. The history data was “past preference” profile information of users. The answer data is “expected preference” profile information for the same users as the history data, but the entities preferred by a user in the answer data were completely different from those in the history data. For each recommendation dataset, the users were randomly divided into five groups, and for each group of users, the preference profiles were roughly divided into 80% (history data) and 20% (answer data). The answer data were used for evaluating recommendations predicted by a recommender system.

Results We evaluated recommendation performance using two metrics, Recall@ R and nDCG@ R , where R is the number of recommended entities. Figure 2 shows the results. We reported the mean and standard deviation of each metric for the five split data. Compared with using content-based information, using editor information resulted in better performance for all the datasets.

Contributions and Findings

We summarize our contributions as follows:

- We presented a new method for using Wikipedia editor information to estimate entity (i.e. article) similarity.
- Our method largely outperforms conventional content-based ones on several recommendation datasets.

References

- Iván Cantador, Peter Brusilovsky, and Tsvi Kuflik. Second workshop on information heterogeneity and fusion in recommender systems (hetrec2011). In *Proc. of RecSys Conference*, pages 387–388, 2011.
- Evgeniy Gabrilovich and Shaul Markovitch. Computing semantic relatedness using wikipedia-based explicit semantic analysis. In *Proc. of IJCAI*, pages 1606–1611, 2007.
- Cataldo Musto, Giovanni Semeraro, Marco de Gemmis, and Pasquale Lops. Learning word embeddings from wikipedia for content-based recommender systems. In *Proc. of ECIR*, pages 729–734. Springer, 2016.
- Harald Steck. Embarrassingly shallow autoencoders for sparse data. In *Proc. of WWW Conference*, pages 3251–3257, 2019.

Koki Takeuchi and Katsuhiko Hayashi. Entity similarity estimation by collaborative filtering with wikipedia editor information. *Proceedings of Web Intelligence and Interaction*, 18:43–50, 2022. doi: 10.57413/wii.18.0_43.

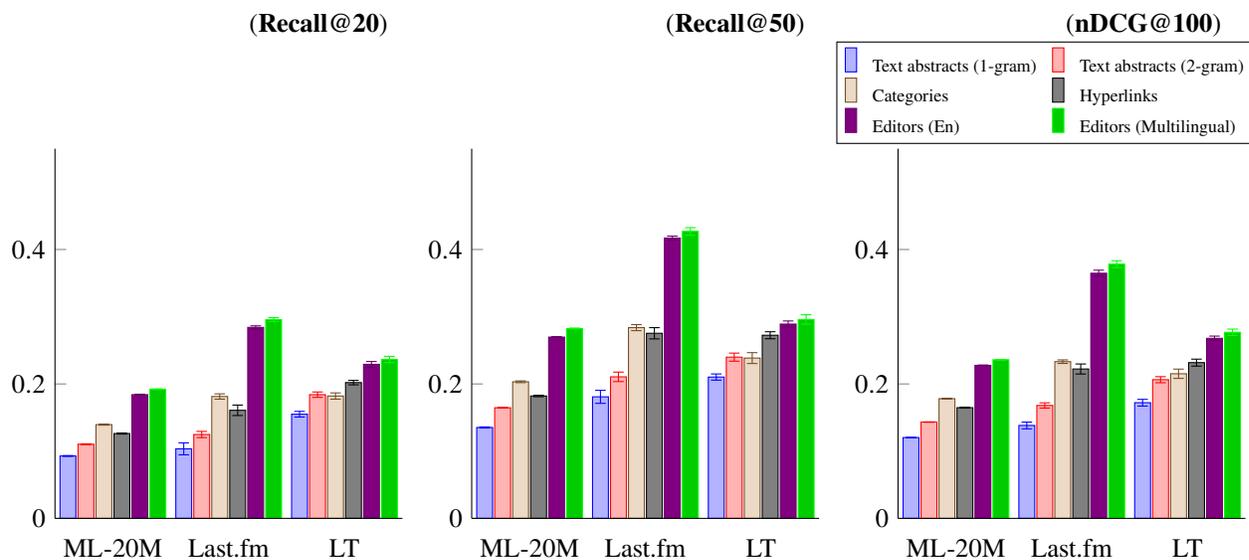


Figure 2: Mean and standard deviation for recommendation performance.

	ML-20M	Last.fm	LT
# of Entities	18,148	9,176	9,545
# of Users	126,596	1,883	7,223
Text abstracts (1-gram)	75,433	57,526	42,635
Text abstracts (2-gram)	631,726	418,278	340,522
Hyperlinks	421,742	379,827	191,635
Categories	31,621	25,788	15,742
Editors (English)	1,762,411	2,287,302	637,015
Editors (Multilingual)	3,182,240	4,435,536	1,048,468

Table 1: Dataset Statistics: The number of features.