

Neural Spectro-polarimetric Fields

Youngchan Kim
kyc618@postech.ac.kr
POSTECH
South Korea

Wonjoon Jin
jinwj1996@postech.ac.kr
POSTECH
South Korea

Sunghyun Cho
s.cho@postech.ac.kr
POSTECH
South Korea

Seung-Hwan Baek
shwbaek@postech.ac.kr
POSTECH
South Korea

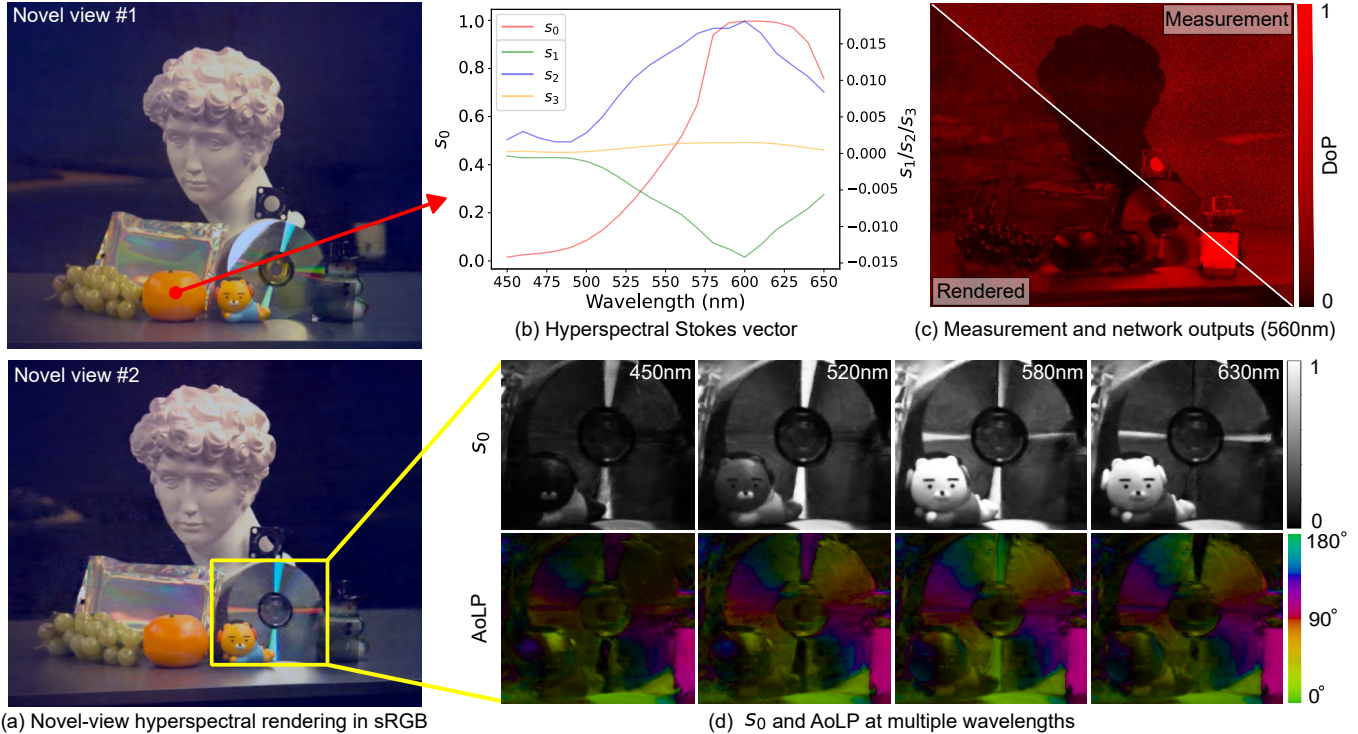


Figure 1: We present neural spectro-polarimetric fields that allow for the rendering of a scene from novel views, not limited to the synthesis of (a) RGB radiance images. We can render (b) hyperspectral Stokes vectors for each individual light ray, thus providing a comprehensive description of its spectro-polarization property. Also, (c) it can inherently reduce noise in low-signal-to-noise ratio spectro-polarimetric measurements, as shown in the degree of polarization (DoP). (d) We further show the analysis of spectro-polarimetric information for the CD that is otherwise invisible to the human eye.

ABSTRACT

Modeling the spatial radiance distribution of light rays in a scene has been extensively explored for applications, including view synthesis. Spectrum and polarization, the wave properties of light, are often neglected due to their integration into three RGB spectral bands and their non-perceptibility to human vision. However, these properties are known to encompass substantial material and geometric information about a scene. Here, we propose to model spectro-polarimetric fields, the spatial Stokes-vector distribution of any light ray at an arbitrary wavelength. We present

Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for third-party components of this work must be honored. For all other uses, contact the owner/author(s).

SA Conference Papers '23, December 12–15, 2023, Sydney, NSW, Australia

© 2023 Copyright held by the owner/author(s).

ACM ISBN 979-8-4007-0315-7/23/12.

<https://doi.org/10.1145/3610548.3618172>

Neural Spectro-polarimetric Fields (NeSpof), a neural representation that models the physically-valid Stokes vector at given continuous variables of position, direction, and wavelength. NeSpof manages inherently noisy raw measurements, showcases memory efficiency, and preserves physically vital signals – factors that are crucial for representing the high-dimensional signal of a spectro-polarimetric field. To validate NeSpof, we introduce the first multi-view hyperspectral-polarimetric image dataset, comprised of both synthetic and real-world scenes. These were captured using our compact hyperspectral-polarimetric imaging system, which has been calibrated for robustness against system imperfections. We demonstrate the capabilities of NeSpof on diverse scenes.

CCS CONCEPTS

• Computing methodologies → Computer graphics; Computer vision representations.

KEYWORDS

View synthesis, hyperspectral imaging, polarimetric imaging

ACM Reference Format:

Youngchan Kim, Wonjoon Jin, Sunghyun Cho, and Seung-Hwan Baek. 2023. Neural Spectro-polarimetric Fields. In *SIGGRAPH Asia 2023 Conference Papers (SA Conference Papers '23)*, December 12–15, 2023, Sydney, NSW, Australia. ACM, New York, NY, USA, 11 pages. <https://doi.org/10.1145/3610548.3618172>

1 INTRODUCTION

Investigating the spatial trichromatic intensity distribution of light rays (position and direction) in a scene as a simplified plenoptic function [Bergen and Adelson 1991] has been extensively explored in various applications such as rendering [Mildenhall et al. 2020], display [Wetzstein et al. 2012], analysis [Mildenhall et al. 2019], and imaging [Kalantari et al. 2016; Levoy et al. 2006]. Spectrum and polarization, which are the wave properties of light, offer complementary information to the spatial distribution by disclosing the material and geometric properties of a scene. Consequently, these properties have been employed in applications such as skin analysis [Zhao et al. 2009], planet imaging in astronomy [Boccaletti et al. 2012], and mine detection [Cheng and Reyes 1995].

With the objective of harnessing multiple dimensions of light concurrently, recent methods have utilized both polarization and spatial dimensions. These have found applications such as 3D reconstruction with a polarized light stage [Ghosh et al. 2011] and multi-view capture with a hand-held polarization camera [Dave et al. 2022; Hwang et al. 2022]. Image segmentation leveraging polarization, spectrum, and spatial dimensions was also demonstrated by Chen et al. [2022].

While efforts have been directed towards applications, there remains a need for efficient and effective representations of high-dimensional light properties due to the curse of dimensionality affecting data size. For instance, tensor representations [Baek and Heide 2021; Chen et al. 2022] have been used to handle partial dimensions of light properties, assigning each light property to a distinct dimension of the tensor. However, such direct modeling of spectrum, polarization, position, and direction can lead to prohibitive memory requirements. Moreover, these representations are prone to measurement noise, which can easily arise due to the cumulative effect of optical filters employed in spectral and polarimetric acquisition.

In this work, we propose to model spectro-polarimetric fields that describe the Stokes vector of a light ray, as a polarimetric representation [Collett 2005; Wilkie and Weidlich 2010], at a position, direction, and wavelength. As a representation for the spectro-polarimetric field, we present neural spectro-polarimetric fields (NeSpof), the first neural representation specifically designed to represent *physically-valid* spectro-polarimetric fields. In addition to the physical plausibility of Stokes vectors, NeSpof handles low-SNR measurements and exhibits a compact memory footprint of 13.6 MB, compared to a tensor-based model that consumes 58 GB (refer to the Supplemental Document). To evaluate NeSpof on real-world scenes, we built a hyperspectral-polarimetric imaging system and its multi-view capture procedure, for which we propose a calibration method to account for the physical imperfections of the

acquisition system. Using the imaging system, we capture and release the first multi-view hyperspectral-polarimetric image datasets. On the dataset, we demonstrate the synthesis capability of NeSpof, taking into account the view, spectrum, and polarization.

Specifically, our main contributions are described as follows:

- We take a first step on capturing, modeling, and rendering spectro-polarimetric fields and demonstrate learning view-spectro-polarimetric variations of real-world objects.
- We develop a physically-valid neural representation, NeSpof.
- We propose the spatially-varying spectro-polarimetric calibration method to compensate the physical imperfections of the experimental prototype.
- We release the first spectro-polarimetric multi-view dataset.

2 RELATED WORK

2.1 Representations of Light Properties

Computational representation of multi-dimensional light properties is a critical consideration across visual computing applications. A prevalent method is the tensor-based approach, where each tensor dimension corresponds to a distinct light property. This approach spans the spatial tensor with two-plane methods and lumigraphs [Gortler et al. 1996; Levoy and Hanrahan 1996; Sitzmann et al. 2019], hyperspectral images [Kim et al. 2012], and multi-dimensional tensors [Baek and Heide 2021; Chen et al. 2022]. However, the tensor representation for position, direction, spectrum, and polarization can impose an excessive memory burden due to the increased dimensionality. Moreover, it is vulnerable to the low SNR of typical hyperspectral-polarimetric measurements.

Recently, coordinate-based neural representations [Mildenhall et al. 2022, 2020; Suhail et al. 2022] and explicit primitives [Kerbl et al. 2023; Zhang et al. 2022] modeling the spatial distribution of RGB light intensity have emerged. Two related neural representations exist in the context of polarization and spatial dimension. PANDORA [Dave et al. 2022] utilizes polarization for robust neural 3D reconstruction of specular surfaces via a polarimetric BRDF model [Baek et al. 2018]. However, the polarimetric BRDF model limits the representational capacity of PANDORA, and it does not directly model Stokes vectors under variable wavelengths. pCON [Peters et al. 2023] represents a polarization image based on singular-value-decomposition via a sinusoid-activation neural network. It does not model the directional dimension and is restricted to trichromatic channels. In this work, we propose NeSpof as a first neural representation for spectro-polarimetric fields.

2.2 Applications using Light Properties

The individual properties of light have been used in various applications. View synthesis and geometry reconstruction often exploit the position and direction of light [Guo et al. 2022; Jin et al. 2005; Liu et al. 2022; Mildenhall et al. 2019, 2020; Penner and Zhang 2017]. The spectral dimension enables accurate detection and segmentation [Aloupogianni et al. 2022; Imamoglu et al. 2018; Trajanovski et al. 2020; Wang et al. 2021] and estimating illumination spectrum [An et al. 2015; Khan et al. 2017; Li et al. 2021]. Polarization provides information for shape reconstruction [Ba et al. 2020; Baek et al. 2018; Ding et al. 2021; Fukao et al. 2021; Kadambi et al. 2015;

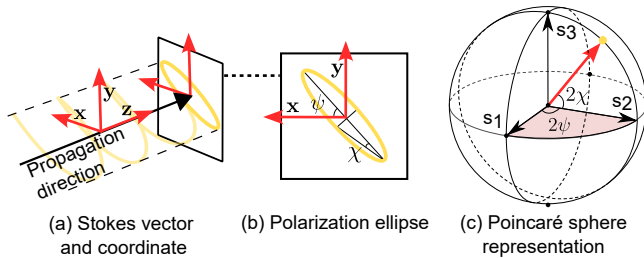


Figure 2: Background on polarization.

Lei et al. 2022; Zou et al. 2020], appearance acquisition [Deschainre et al. 2021; Kondo et al. 2020], reflection removal [Nayar et al. 1997; Wen et al. 2021; Yang et al. 2016], transparent-object segmentation [Kalra et al. 2020; Mei et al. 2022], seeing through scattering [Baek and Heide 2021; Liu et al. 2015; Zhou et al. 2021], and tone mapping [del Molino and Muñoz 2019]. Simultaneously exploiting multiple light properties further enhances these capabilities, such as shape and appearance reconstruction with the spatial and polarimetric dimensions [Baek and Heide 2021; Dave et al. 2022; Riviere et al. 2017]. Spectro-polarimetric analysis has been also used for object recognition [Denes et al. 1998], skin analysis [Zhao et al. 2009], and dehazing [Xia and Liu 2016]. In this work, we demonstrate view-spectrum-polarization synthesis with NeSpof, revealing complex spectro-polarimetric variations of real-world objects at novel views.

2.3 Acquisition of Light Properties

Several methods have been proposed for simultaneously acquiring multiple dimensions of light. The positional and directional dimensions can be acquired using hand-held multi-view capture of images [Davis et al. 2012; Mildenhall et al. 2019, 2020] or multi-view camera arrays [Wilburn et al. 2004, 2005; Yang et al. 2002]. Capturing the positional, directional, and polarimetric dimensions has been practiced with light stages equipped with polarizers [Ghosh et al. 2011], hand-held polarization cameras and flashlights [Hwang et al. 2022], and polarization cameras mounted on goniometers [Dave et al. 2022]. Light-field hyperspectral imaging systems [Cui et al. 2021; Manakov et al. 2013], hyperspectral camera with a rotation stage [Kim et al. 2012], and metalens-based snapshot spectral light-field imaging [Hua et al. 2022] allow for capturing the directional and spectral dimensions. Hyperspectral-polarimetric imaging allows for capturing the spectral and polarimetric dimensions [Altaqui et al. 2021; Bai et al. 2021; Chen et al. 2022; Denes et al. 1998; Fan et al. 2022, 2020; Lv et al. 2020]. To test NeSpof, we implement a scanning-based hyperspectral-polarimetric imaging system and propose calibrating the imperfections of the imaging system. Using the hyperspectral-polarimetric imaging system, we release the first real-world dataset of multi-view hyperspectral-polarimetric images that can be used for training NeSpof and may spur further interest in multi-dimensional visual analysis.

3 BACKGROUND

3.1 Neural Radiance Fields

The plenoptic function $f^P(\cdot)$ is a multi-dimensional function that describes the spatial and temporal distribution of light in a 3D space

by modeling the light intensity L as a function of a 3D position (x, y, z) , viewing direction (θ, ϕ) , wavelength λ , and time τ [Adelson and Wang 1992]: $L = f^P(x, y, z, \theta, \phi, \lambda, \tau)$. Assuming static scenes and constant illumination results in the static plenoptic function: $L = f^P(x, y, z, \theta, \phi, \lambda)$.

Neural radiance field (NeRF) [Mildenhall et al. 2020] represents the simplified plenoptic function and density of a scene as a continuous volumetric field parameterized with an MLP F_{Θ}^{NeRF} as

$$L, \sigma = F_{\Theta}^{\text{NeRF}}(x, y, z, \theta, \phi), \quad (1)$$

where $\mathbf{L} = [L_R, L_G, L_B]^T$ is the RGB radiance at the position (x, y, z) sampled from the direction (θ, ϕ) . σ is the volume density at the position (x, y, z) . Θ is the network weights. Rendering the RGB values of a pixel at the position \mathbf{p} amounts to volumetrically integrating the learned radiance L and density σ .

3.2 Polarization

Stokes Vector and Mueller Matrix. Polarization is a wave property of light that describes the oscillation pattern of the electric field of light [Collett 2005; Wilkie and Weidlich 2010]. The Stokes-Mueller formalism is a mathematical framework that describes the polarization state of light and how it changes. The Stokes vector, denoted by $\mathbf{s} = [s_0, s_1, s_2, s_3]^T$, describes the complete polarization state of light. The four elements of the vector represent different properties of the light. s_0 represents the total radiance of the light. s_1 and s_2 represent the differences in the radiance of linearly-polarized light at $0^\circ/90^\circ$ and $45^\circ/-45^\circ$ respectively. s_3 represents the difference in the radiance of right- and left-circularly polarized light. The Mueller matrix $\mathbf{M} \in \mathbb{R}^{4 \times 4}$ describes the change of the polarization state of a light ray by being multiplied to a Stokes vector \mathbf{s}_{in} : $\mathbf{s}_{\text{out}} = \mathbf{M}\mathbf{s}_{\text{in}}$, where \mathbf{s}_{out} is the output Stokes vector.

Coordinate of a Stokes Vector. A Stokes vector is associated with a coordinate system $\{x, y, z\}$, where z represents the direction of light propagation. The x and y can be chosen arbitrarily as long as they form an orthonormal coordinate system with z , as shown in Figure 2(a). This means that the polarization state of a light ray can be described differently with Stokes vectors with different elements lying at different coordinates.

Polarization Ellipse and Poincaré Sphere. The polarization ellipse describes the projected pattern of the oscillating electric field onto the tangent plane. Figure 2(b) shows the azimuth angle ψ , which is the angle of linear polarization, and the ellipticity χ that determines the ratio between circularity and linearity. The Poincaré sphere, shown in Figure 2(c), depicts polarization in three-dimensional space with the first, second, and third Stokes-vector elements normalized by the total radiance: $\{s_1/s_0, s_2/s_0, s_3/s_0\}$.

Visualization of Stokes Vectors. For visualizing Stokes vectors, we use degree of polarization (DoP), angle of linear polarization (AoLP), type of polarization (ToP), and chirality of polarization (CoP) [Wilkie and Weidlich 2010]. DoP describes the ratio of polarized light radiance compared to the total radiance, AoLP is the angle of the linearly-polarized component with respect to the x axis of the Stokes-vector basis, corresponding to ψ , ToP describes the ratio of linear and circular components corresponding to χ , and CoP

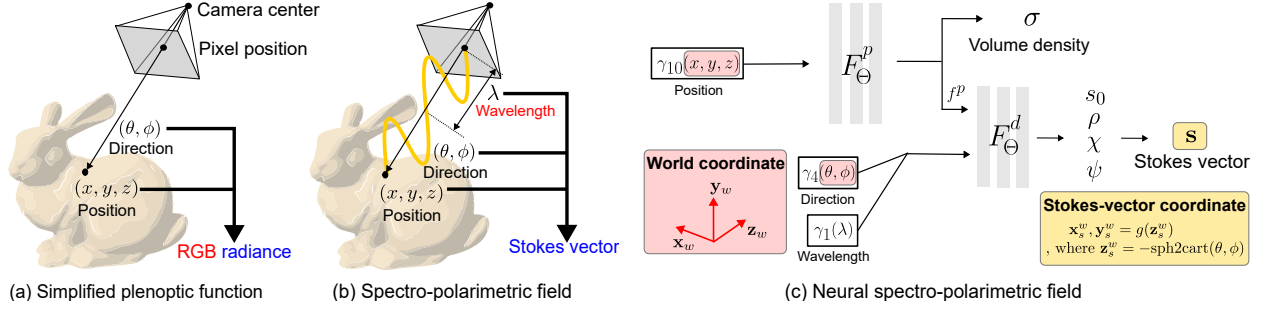


Figure 3: (a) NeRF models a simplified plenoptic function to represent spatially-distributed RGB radiance. (b) The spectro-polarimetric field describes the polarization state and intensity of light as a Stokes vector per each wavelength λ , position x, y, z , and direction θ, ϕ . (c) NeSpoF describes the spectro-polarimetric field, considering the physical validity of Stokes vectors and wavelength as an input variable. See Section 4 for details of NeSpoF.

refers to the handedness of circularly polarized light corresponding to χ .

4 NEURAL SPECTRO-POLARIMETRIC FIELD

Spectro-polarimetric Field. We define spectro-polarimetric field $f(\cdot)$ as a description of the Stokes-vector field at any given position, direction, and wavelength: $\mathbf{s} = f(x, y, z, \theta, \phi, \lambda)$, where \mathbf{s} is the Stokes vector. Unlike the simplified plenoptic function used in NeRF [Mildenhall et al. 2020], the spectro-polarimetric field incorporates wavelength as an input variable and outputs the Stokes vector. See Figure 3.

NeSpoF. We propose modeling the spectro-polarimetric field $f(\cdot)$ using NeSpoF, a neural representation that describes the Stokes vector \mathbf{s} and volumetric density σ for the input variables of position, direction, and wavelength:

$$\mathbf{s}, \sigma = F_{\Theta}(x, y, z, \theta, \phi, \lambda). \quad (2)$$

Using NeSpoF, we can render the Stokes vector $\mathbf{s}_{\text{rendered}}$ from a ray \mathbf{r} emitted from a particular camera pixel at a wavelength λ by applying volumetric rendering as follows:

$$\mathbf{s}_{\text{rendered}}(\mathbf{r}, \lambda) = \int_{t_n}^{t_f} \underbrace{\exp\left(-\int_{t_n}^t \sigma(\mathbf{r}(s)) ds\right)}_{\text{accumulated transmittance}} \underbrace{\sigma(\mathbf{r}(t)) \mathbf{s}(\mathbf{r}(t), \mathbf{d}, \lambda)}_{\text{transmitted Stokes vector}} dt, \quad (3)$$

where t_n and t_f are the near and far bounds. For details on accumulated transmittance and integral form, we refer to the linear differential formulation of volumetric rendering [Kajiya and Von Herzen 1984]. The ray is modeled as $\mathbf{r}(t) = \mathbf{o} + t\mathbf{d}$ with respect to sample t . \mathbf{o} is the center of the camera and \mathbf{d} is the direction vector of the ray.

Note that this linear differential formulation has been previously applied to the radiance of light [Kajiya and Von Herzen 1984]. Here, we instead apply it to Stokes vectors with an assumption that the polarization state of light does not change during transmittance.

Model Design. We design NeSpoF with a positional MLP, F_{Θ}^p , and a spectro-directional MLP, F_{Θ}^d , as shown in Figure 3(c). The positional MLP adopts the original NeRF design. It estimates the volumetric density σ at the position (x, y, z) and extracts the positional

Stokes-vector feature f^p . The positional encoding $\gamma_k(x)$ [Tancik et al. 2020] enables learning high-frequency details of the Stokes-vector distribution with respect to the position:

$$\gamma_k(x) = [x, \sin(2^0 \pi x), \cos(2^0 \pi x), \dots, \sin(2^k \pi x), \cos(2^k \pi x)], \quad (4)$$

where k is a hyperparameter. For position, $k = 10$ is used.

We now turn to model a physically-valid Stokes vector at a wavelength λ using the spectro-directional MLP. The spectro-directional MLP F_{Θ}^d takes the positional feature f^p , directional features, and wavelength features and outputs intermediate polarimetric features. Below, we describe the key factors of spectro-directional MLP.

Wavelength as an Input. We use wavelength λ as an input to the spectro-directional MLP in addition to the direction variables θ and ϕ , unlike NeRF that takes only the direction variables as input and outputs as three RGB radiance values. In this way, we can query the Stokes vector from NeSpoF at an arbitrary wavelength λ , suitable for spectral analysis and measurements of the Stokes vectors. We apply the positional encoding of Equation (4) to the wavelength with the hyperparameter value $k = 1$.

Physically-valid Stokes Vector. It is crucial to ensure that NeSpoF outputs *physically-valid* Stokes vectors. A Stokes vector is physically valid if the following condition is met: $s_0^2 \geq s_1^2 + s_2^2 + s_3^2$ [Collett 2005]. A naïve approach of modeling the output of the spectro-directional MLP as Stokes-vector elements fails to guarantee the physical validity of the output Stokes vector. Hence, we propose to use intermediate polarimetric properties as outputs: X_0, X_1, X_2, X_3 . We then map the values to the total intensity s_0 , DoP ρ , ellipticity χ , and azimuth angle ψ as follows:

$$s_0 = S(X_0), \quad \rho = S(X_1), \quad \chi = X_2, \quad \psi = X_3, \quad (5)$$

where $S(\cdot)$ is the sigmoid activation function that bounds the intensity s_0 and the DoP ρ from zero to one. Note that we do not apply bounding functions to the azimuth angle ψ and the ellipticity χ , which naturally wrap within 2π by sinusoidal functions. We then construct a physically-valid Stokes vector \mathbf{s} as follows:

$$s_1 = s_0 \rho \cos 2\chi \cos 2\psi, s_2 = s_0 \rho \cos 2\chi \sin 2\psi, s_3 = s_0 \rho \sin 2\chi. \quad (6)$$

Coordinate of Output Stokes Vector. NeSpoF models a field of Stokes vectors, which must be associated with a Stokes-vector

coordinate for each light ray. Given the position (x, y, z) and the direction (θ, ϕ) of a light ray defined on the world coordinate system $\{x_w, y_w, z_w\}$, we denote the coordinate system of the output Stokes vector as $\{x_s^w, y_s^w, z_s^w\}$, where z_s^w is aligned with the reversed direction vector corresponding to (θ, ϕ) : $z_s^w = -\text{sph2cart}(\theta, \phi)$. $\text{sph2cart}(\cdot)$ is the conversion function that maps a spherical coordinate to a Cartesian coordinate. In order to ensure that the coordinate system for the Stokes vector, \mathbf{s} , is well-defined, we compute the other two axes x_s^w and y_s^w deterministically to form an orthonormal coordinate system using an analytic method denoted as g [Duff et al. 2017]: $x_s^w, y_s^w = g(z_s^w)$. This rule, also shown in Figure 3(c), for determining the Stokes-vector coordinate enables us to use multi-view hyperspectral images of which Stokes vectors are represented in a local coordinate. Refer to the Supplemental Document for details.

Training with Polarization-weighted Loss. To train NeSpof, we cast rays \mathbf{r} and apply volumetric rendering as in Equation (3) for the Stokes vector \mathbf{s}^λ and density σ , minimizing the difference between the rendered and measured Stokes vectors:

$$\underset{\Theta}{\text{minimize}} \sum_{\mathbf{r} \in \mathcal{R}} \sum_{\lambda} \sum_{i=0}^3 w_i ([s_{\text{meas}}(\mathbf{r}, \lambda)]_i - [s_{\text{rendered}}(\mathbf{r}, \lambda)]_i)^2, \quad (7)$$

where \mathcal{R} is the set of rays in a training batch and $[s]_i$ retrieves the i -th element of the Stokes vector \mathbf{s} . We use the rendered Stokes vector $\mathbf{s}_{\text{rendered}}$ for volumetric rendering of Equation (3). We propose an adaptive weight w_i for the i -th Stokes-vector element to account for the scale differences among the Stokes-vector elements:

$$w_i = \frac{\text{std.dev.}([s_{\text{meas}}(\mathcal{V})]_i)}{\text{std.dev.}([s_{\text{meas}}(\mathcal{V})]_i)}, \quad (8)$$

where $\text{std.dev.}(\cdot)$ is the standard deviation operator. This strategy aims to learn all the Stokes-vector elements evenly considering their relative scales, as small-scale elements may convey physically significant meanings despite their absolute scales. We apply the weight variance regularizer for training [Mildenhall et al. 2022].

5 SPECTRO-POLARIMETRIC IMAGING

To test NeSpof on real-world scenes, we construct an imaging system and propose a calibration method to address the imperfections of the imaging system. Using the imaging system, we capture and release the first real-world multi-view hyperspectral-polarimetric image dataset.

5.1 Imaging

Imaging Setup. Our experimental prototype, shown in Figure 4(a), consists of a monochromatic sensor equipped with a 35 mm lens, a liquid crystal tunable filter (LCTF), and a quarter-wave plate (QWP) mounted on a motorized rotation stage. The LCTF can adjust spectral transmission. We placed a cut-off filter for the IR and UV wavelengths in front of the LCTF.

Image Formation. Assume that light of a wavelength λ' coming from a scene with a Stokes vector $\mathbf{s}(\lambda')$ enters the QWP mounted on a rotation stage, at an angle θ as shown in Figure 4(b). This causes the Stokes vector to change to $\mathbf{Q}(\theta, \lambda')\mathbf{s}(\lambda')$, where $\mathbf{Q}(\theta, \lambda')$ is the Mueller matrix of the QWP when its fast axis is at an angle θ . The light then passes through the LCTF. At each target wavelength

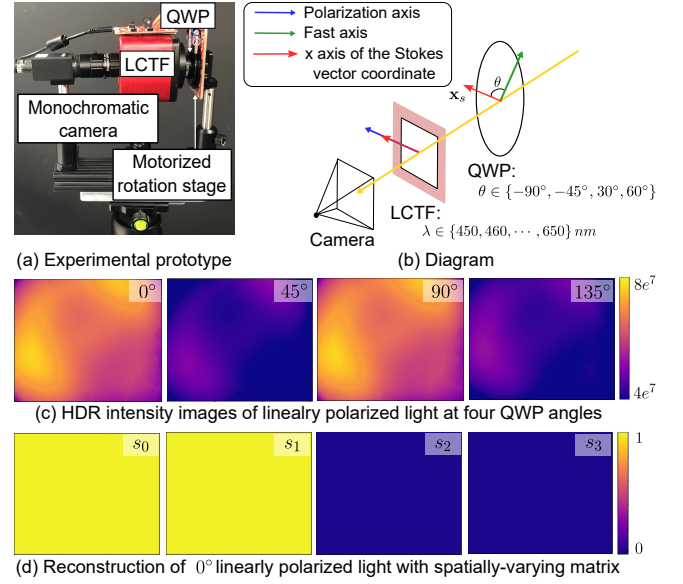


Figure 4: (a) Experimental prototype and (b) schematic diagram. We capture images with the QWP at four different angles at each wavelength. (c) The spatially-varying spectro-polarimetric transmission of the LCTF results in spatial non-uniformity. The images of linearly-polarized uniform light are shown at the four QWP angles. (d) We calibrate such non-uniformity with spatially-varying Mueller matrices, resulting in accurate polarimetric reconstruction of 0° degree linearly-polarized light.

$\lambda \in \{450, 460, \dots, 650\}$ nm, we set the LCTF to maximize its transmission at the target wavelength λ and suppress the transmission at other wavelengths. We model the spectral transmission and polarization change by the LCTF with the first row of the unknown LCTF Mueller matrix as $\mathbf{M}(\lambda'; \lambda) \in \mathbb{R}^{1 \times 4}$. The optical cut-off filter, which has a spectral transmission of $F(\lambda')$, attenuates the radiance, and the monochromatic sensor, whose quantum efficiency is $T(\lambda')$, senses the light intensity. In summary, we describe the image formation as:

$$I^{\lambda, \theta} = \int_{\lambda'} T(\lambda') F(\lambda') \mathbf{M}(\lambda'; \lambda) \mathbf{Q}(\theta, \lambda') \mathbf{s}(\lambda') d\lambda' \quad (9)$$

$$\approx T(\lambda) F(\lambda) \mathbf{M}(\lambda; \lambda) \mathbf{Q}(\theta, \lambda) \mathbf{s}(\lambda), \quad (10)$$

where the approximation in Equation (10) generally holds as the average bandwidth of the LCTF over the visible spectrum is 9.8 nm. We use the factory-calibrated quantum efficiency of the sensor, $T(\lambda)$ and the transmission functions of the cut-off filter, $F(\lambda)$.

Calibration of LCTF Modulation. Even though we designed our imaging system using professional optical devices, the experimental prototype still presents deviation from a commonly-assumed model for the polarization modulation of LCTF, which has often been assumed to be an ideal linear polarizer [Fan et al. 2023]. As shown in Figure 4(c), the captured intensity through our imaging system shows spatially non-uniform spectro-polarimetric variations.

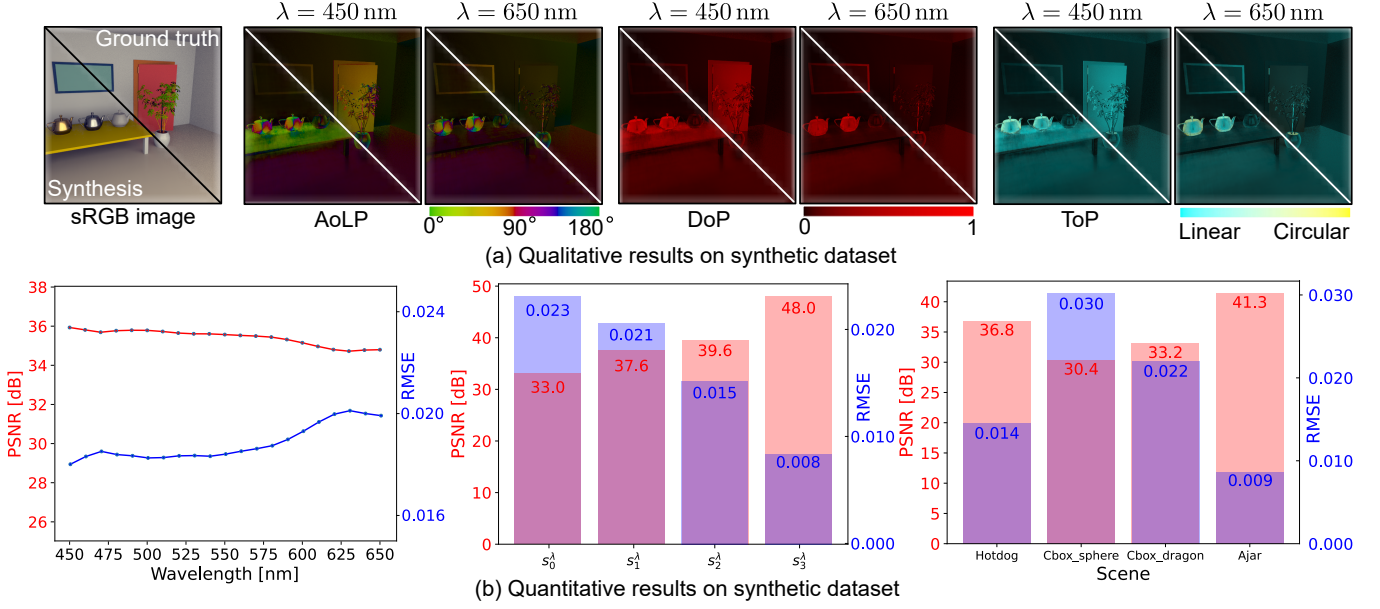


Figure 5: Synthetic evaluation. NeSpoF achieves an accurate synthesis of hyperspectral Stokes vectors at novel views, evidenced in both qualitative and quantitative analysis.

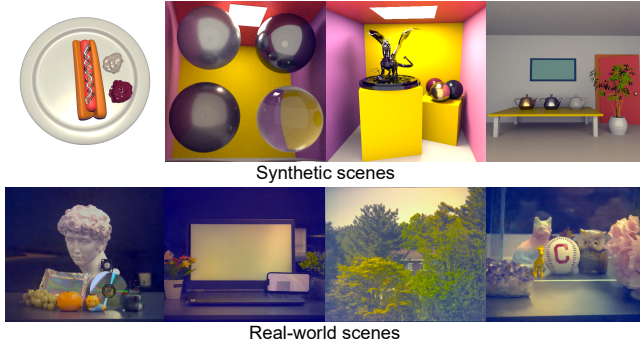


Figure 6: Multi-view hyperspectral polarimetric dataset.

To overcome this problem, we propose to optimize for spatially-varying matrices $\mathbf{M}(\lambda, p; \lambda)$ that act as polarization modulation by the LCTF, where p is a pixel. We capture 16 samples with known Stokes vectors constructed with a LP, a QWP, and a collimated LED light source. We then solve for the matrix \mathbf{M} as follows:

$$\underset{\mathbf{M}(\lambda, p)}{\text{minimize}} \sum_{i=1}^N \sum_{k=1}^K \left(I_{\text{meas}, i}^{\lambda, \theta_k}(p) - T(\lambda)F(\lambda)\mathbf{M}(\lambda, p; \lambda)\mathbf{Q}(\theta_k, \lambda)\mathbf{s}_u \right)^2, \quad (11)$$

where $I_{\text{meas}, i}^{\lambda, \theta_k}(p)$ is the intensity measurement of the i -th sample for the pixel p at the rotation angle θ_k of the QWP. \mathbf{s}_u is the Stokes vector of unpolarized light. We used four uniformly-sampled θ in the $[0, \pi)$ range for this calibration. We refer to the Supplemental Document for its normal-equation formulation.

Stokes-vector Reconstruction. Once the matrix \mathbf{M} is obtained, we can reconstruct the per-pixel Stokes vector \mathbf{s}_{meas} for a wavelength

λ by solving the least-squares problem:

$$\underset{\mathbf{s}_{\text{meas}}(\lambda)}{\text{minimize}} \sum_{k=1}^K \left(I_{\text{meas}}^{\lambda, \theta_k} - c(\lambda)\mathbf{M}(\lambda; \lambda)\mathbf{Q}(\theta_k, \lambda)\mathbf{s}_{\text{meas}}(\lambda) \right)^2, \quad (12)$$

where $c(\lambda) = T(\lambda)F(\lambda)$. We exclude the pixel dependency in the equation for readability. Figure 4(d) shows the results of the calibrated Stokes-vector reconstruction.

5.2 Dataset

Using the experimental prototype, we acquired the first multi-view hyperspectral polarimetric dataset of four real-world scenes. At each camera viewpoint, we capture raw measurements and reconstruct the per-pixel Stokes vector $\mathbf{s}_{\text{meas}}^{\lambda}$ using Equation (12). It takes roughly 10 seconds to capture a hyperspectral-polarimetric image with 21 spectral channels at four QWP angles (-90° , -45° , 30° , and 60°) [Ambirajan and Look Jr 1995]. We then perform local-to-world coordinate conversion to use it for NeSpoF. We obtain the geometric parameters of the multiple viewpoints and the camera intrinsic parameters using a structure-from-motion method, COLMAP [Schönberger and Frahm 2016], for which we use the RGB intensity images obtained by applying the spectrum-to-RGB conversion as well as the gamma correction. To test NeSpoF on clean images without measurement noise, we also render multi-view hyperspectral polarimetric images of four synthetic scenes using Mitsuba3 [Jakob et al. 2022]. We manually assign the multi-spectral polarimetric BRDFs [Baek et al. 2020] to meshes [Bitterli 2016; Mildenhall et al. 2020]. Since only five spectral channels are available (450, 500, 550, 600, and 650 nm) in the BRDF dataset, we fit a fourth-order polynomial function at each rendered pixel along the spectrum. Figure 6 shows the thumbnails of our multi-view

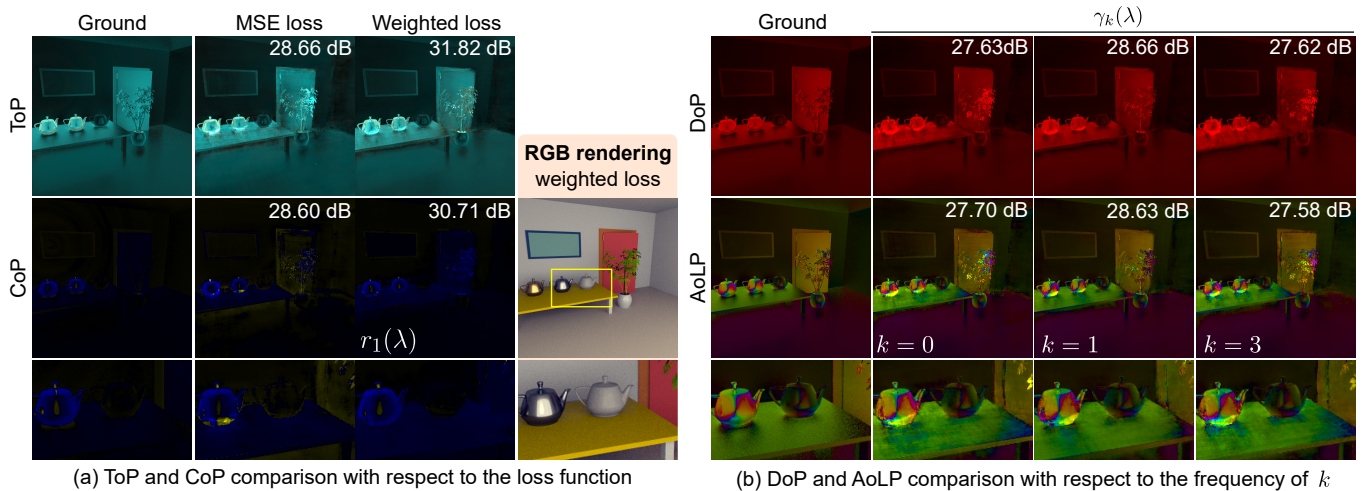


Figure 7: We evaluate the impacts of (a) the utilization of weighted loss and (b) the frequency k of the positional encoding for wavelength. Using the weighted loss and the frequency of $k = 1$ enables better polarimetric reconstruction. We report PSNRs of the estimated ToP and CoP for the former, and DoP and AoLP for the later.

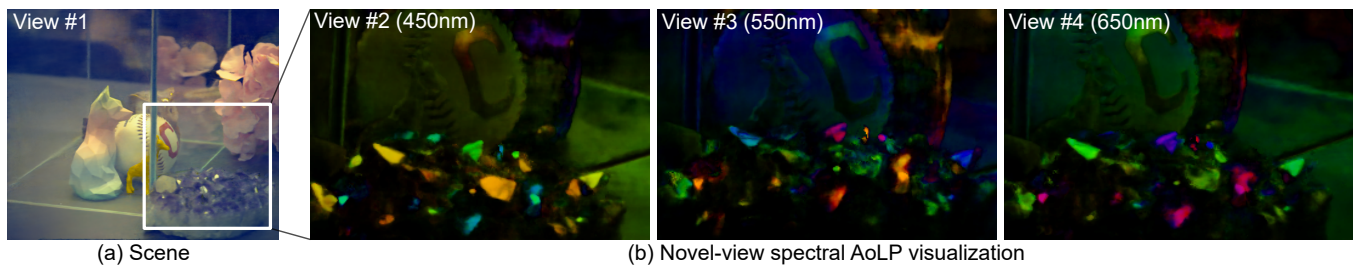


Figure 8: NeSpoF allows for synthesizing view-dependent hyperspectral-polarimetric patterns of the crystal and a baseball.

hyperspectral polarimetric dataset. We refer to the Supplemental Document for more details about the dataset, calibration, and coordinate conversion.

6 ASSESSMENT

6.1 View-spectrum-polarimetric Synthesis

We train NeSpoF for each scene in the dataset and test the capability of NeSpoF on view-spectrum-polarization synthesis.

Synthetic Scenes. We demonstrate the effectiveness of NeSpoF on the synthetic dataset. Figure 5(a) shows the rendered and ground-truth hyperspectral-polarimetric Stokes-vector images. The synthesized results accurately match the ground truth such as visualized in AoLP, DoP, and ToP. Figure 5(b) shows the quantitative results on all test views of the synthetic dataset. In terms of wavelength, NeSpoF obtains PSNR values of 35 dB and an RMSE of 0.020 at 630 nm, with better reconstructions for other wavelengths. For each Stokes-vector element, the radiance component, which usually exhibits the most complex variation, has a PSNR of 33 dB and RMSE of 0.023, while the other elements demonstrate higher PSNRs and lower RMSEs. The scene-dependent quantitative analysis shows a

minimum PSNR of 30.4 dB. Refer to the Supplemental Document for additional synthetic-scene results.

Real-world Scenes. NeSpoF enables modeling complex view-spectro-polarimetric information of real-world scenes. Figure 8 demonstrates NeSpoF on synthesizing the intricate variations of AoLP from the reflections of the crystal and the baseball inside of a glass box. Figure 9 shows two real-world scenes. The first scene consists of a laptop and a mobile phone equipped with a protective film. In front of the mobile phone is a linear polarizer. The laptop display emits clean linearly polarized light whereas the light from the phone display interacts with the stress-affected protective film. The second scene contains a CD demonstrating unique spectro-polarimetric characteristics attributed to diffraction caused by micro-scale surface structures, paired with a doll covered by a linear polarizer. NeSpoF accurately models the resulting complex spectro-polarimetric patterns. Moreover, the regularization capability of NeSpoF can be observed in low SNR regions.

Novel-view Spectral Relighting. Figure 10 demonstrates novel view synthesis by NeSpoF for an outdoor scene under sky lighting. This allows for analysis of the spectro-polarimetric properties of sky light, which is partially linearly polarized, as indicated by high values of s_1 and s_2 . The illumination spectrum of the sky can also be

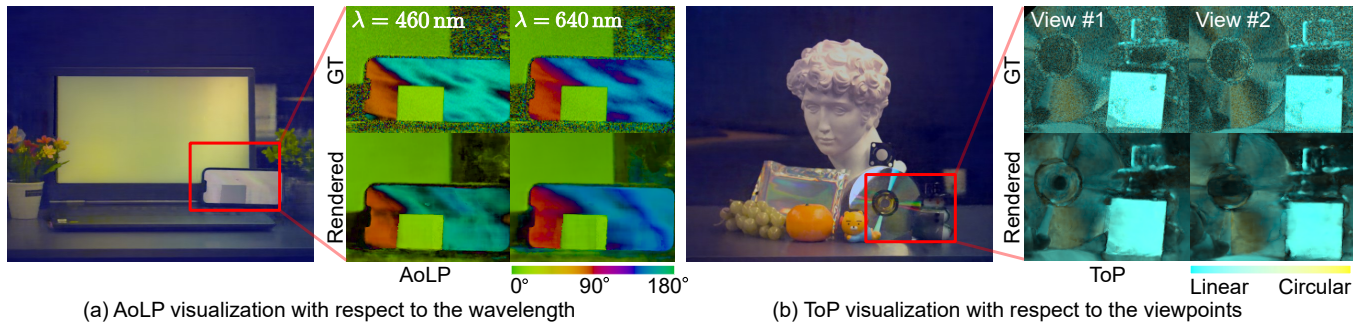


Figure 9: We demonstrate the synthesis of view-spectrum-polarization using NeSpoF in two real-world scenes that exhibit unique view-spectro-polarimetric characteristics, specifically a mobile display covered with stressed protection film, a linear polarizer, and a CD. We visualize AoLP at two different wavelengths from a novel view, and ToP at different views.

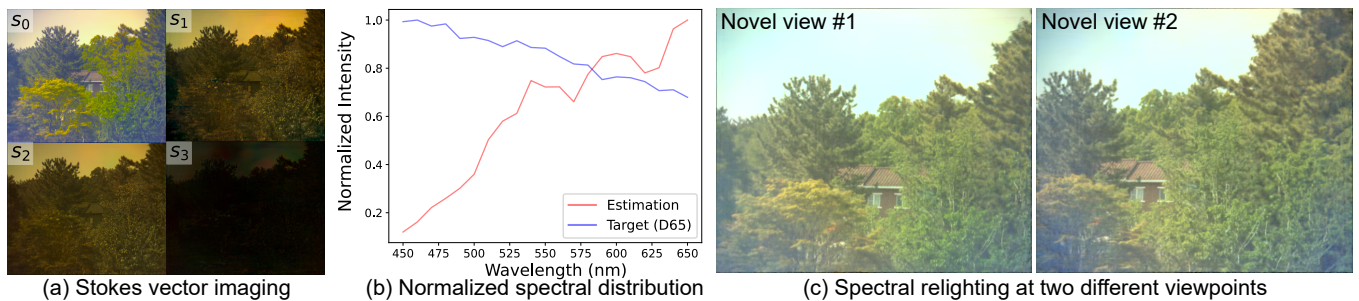


Figure 10: (a) NeSpoF facilitates the rendering of hyperspectral-polarimetric images of an outdoor scene at a novel view, revealing the partially-linear polarization state of skylight. (b) We extract the hyperspectral intensity of the skylight and (c) use it to relight the scene from two novel views under D65 illumination.

extracted, as depicted in Figure 10(b). This enables rendering of the hyperspectral intensity at a novel view and relighting by replacing the original illumination with the target illumination, here CIE D65 illuminant, shown in Figure 10(c).

Diffuse, Specular, Inter-reflection, and Reflection Components. Figure 11 shows the analysis of the unpolarized and polarized hyperspectral intensity with NeSpoF. This enables us to separate not only diffuse and specular components but also more complex light transport, such as the polarized inter-reflection between walls for the synthetic dragon scene. For the real-world scene, it is observed that the diffuse component of the flower is unpolarized, and hence not visible in the specular image. However, its reflection on the glass is clearly visible in the specular image due to the strong polarization caused by Fresnel reflection near a Brewster angle. When rendering the frontal-view specular image of the glass, the strong specular signal of the flower on the glass is not visible, as the imaging geometry deviates from the Brewster-angle configuration.

6.2 Analysis of NeSpoF

Being the first neural model to address the modeling of hyperspectral Stokes fields, we here focus on the analysis of NeSpoF. Comparative studies can be found in the Supplemental Document.

Weight of the Stokes-vector Loss. We test the weight of the loss function w_i for the i -th Stokes vector in Equation (8). Using the

mean-squared-error (MSE) loss with the uniform weights of $w_i = 1$ results in unstable training for the Stokes-vector elements with low values, e.g. the last element $[s]_3$. Figure 7(a) shows that using our weighted loss of Equation (8) allows for accurate reconstruction of the original Stokes vector by balancing the scale difference between the Stokes-vector elements.

Positional Encoding for Wavelength. We test the impact of positional-encoding frequency k of Equation (4) for the input wavelength λ . Figure 7(b) shows that $k = 1$ provides a high-fidelity plenoptic synthesis as visualized in the DoP and AoLP images.

Measurement Noise. The performance of NeSpoF is affected by measurement noise, as shown in rendering artifacts of low-SNR regions in real-world scenes such as the black background in Figure 1. We evaluate the impact of noise on NeSpoF with a synthetic scene with varying noise levels. Figure 12(a) shows that NeSpoF results in a minor PSNR drop of 0.58 dB for the moderate noise level of Gaussian-Poisson noise with a standard deviation of 16. For the excessive noise level of standard deviation 80, the PSNR significantly drops by 7.07 dB in PSNR.

Material Dependency. The complexity of view-dependent spectro-polarimetric variation could vary with material types. In Figure 13, we evaluate NeSpoF on a synthetic scene consisting of multiple spheres with diverse materials. The experiment shows varying PSNRs depending on material types. Developing a material-robust

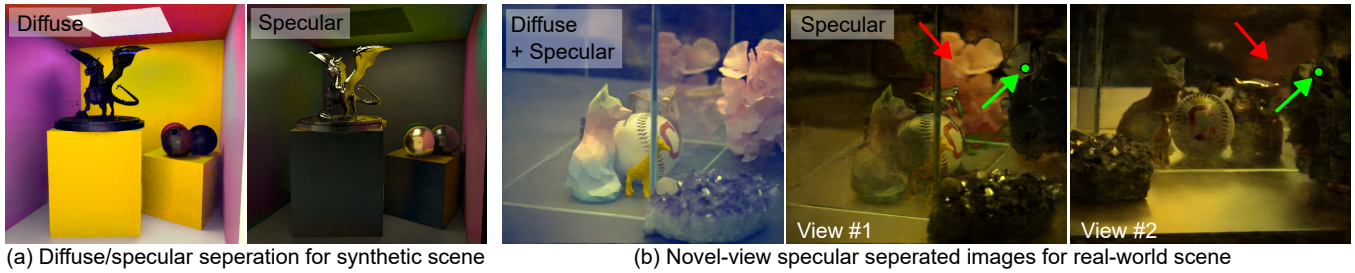


Figure 11: (a) NeSpof enables the separation of unpolarized diffuse and polarized components, which include specular reflections and polarized inter-reflections for the synthetic scene. (b) For the real-world scene, we identify the different polarization states of a flower and its reflection to glass depending on reflection angles.

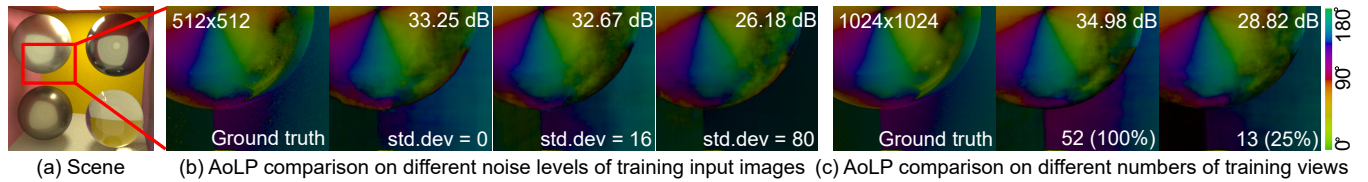


Figure 12: Input images with severe noise and fewer input views lead to performance degradation of NeSpof.

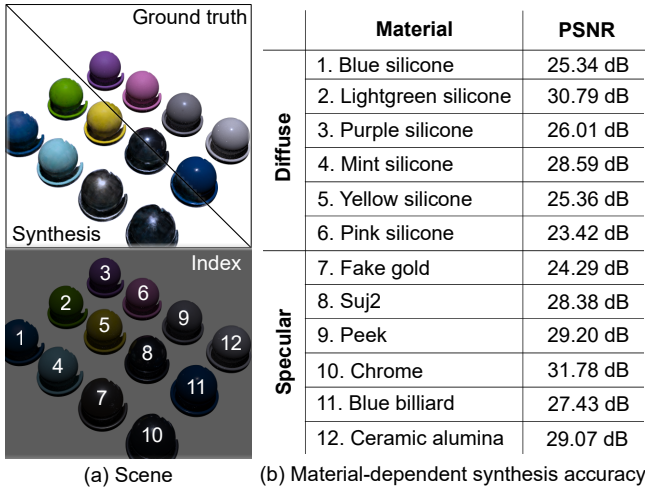


Figure 13: Impact of material appearance on NeSpof. We used 12 materials from the multispectral pBRDF dataset [Baek et al. 2020].

representation for modeling the complex interplay between light and spectro-polarimetric BRDFs of real-world materials [Baek et al. 2020] remains a topic for future work.

Image Resolution. NeSpof can handle high-resolution input images. Figure 12 shows an increase of PSNR by 1.73 dB when using 1024x1024 resolution compared to 512x512 resolution. However, we note that capturing such high-resolution images with a low level of measurement noise could be challenging.

Number of Training Views. The performance of NeSpof depends on the number of training views. Figure 12(b) shows that using

13 and 52 views for training results in the PSNRs of 28.82 dB and 34.98 dB, respectively. Improving NeSpof for fewer views is an important problem, given the difficulty of capturing hyperspectral-polarimetric images at multiple views.

7 DISCUSSION

While NeSpof aims to model additional wave properties of light, spectrum and polarization, NeSpof still interprets light as rays, thus does not encompass phase and amplitude of light [Goodman and Sutton 1996]. Also, NeSpof demands hours of training time and tuning parameters that may benefit from recently-proposed neural representations. On the hardware front, our imaging system requires a lengthy capture time of 10 seconds for a single view. Also, the captured images contain considerable measurement noise due to the low transmission of the employed optical filters. We leave developing a single-shot light-efficient hyperspectral-polarimetric camera as a future direction. Lastly, there is potential for further exploring the applications of NeSpof in uncovering geometry, appearance, and material properties, similar to the progress on the applications of RGB radiance fields.

8 CONCLUSION

We propose NeSpof, the first neural representation specifically designed for physically-valid hyperspectral Stokes-vector fields. Demonstrated across synthetic scenes and real-world scenes captured via a calibrated hyperspectral-polarimetric imager, NeSpof reveals hidden spectro-polarimetric-positional information of the scene outside the confines of human vision. We anticipate that NeSpof spurs further interest in high-dimensional imaging, modeling, and analysis.

ACKNOWLEDGMENTS

This work was partly supported by Korea NRF (RS-2023-00211658, 2022R1A6A1A03052954, 2023R1A2C200494611), Samsung Research Funding Center (SRFCIT1801-52), Samsung Electronics, Korea MOTIE (NTIS1415187366, 20025752), and Korea IITP MSIT (No.2019-0-01906, Artificial Intelligence Graduate School Program-POSTECH).

REFERENCES

- Edward H Adelson and John YA Wang. 1992. Single lens stereo with a plenoptic camera. *IEEE transactions on pattern analysis and machine intelligence* 14, 2 (1992), 99–106.
- Eleni Aloupogianni, Takaya Ichimura, Mei Hamada, Masahiro Ishikawa, Takuo Murakami, Atsushi Sasaki, Koichiro Nakamura, Naoki Kobayashi, and Takashi Obi. 2022. Hyperspectral imaging for tumor segmentation on pigmented skin lesions. *Journal of Biomedical Optics* 27, 10 (2022), 106007.
- Ali Altaqui, Pratik Sen, Harry Schrickx, Jeremy Rech, Jin-Woo Lee, Michael Escuti, Wei You, Bumjoon J Kim, Robert Kolbas, Brendan T O'Connor, et al. 2021. Mantis shrimp-inspired organic photodetector for simultaneous hyperspectral and polarimetric imaging. *Science Advances* 7, 10 (2021), eabe3196.
- Amrit Ambirajan and Dwight C Look Jr. 1995. Optimum angles for a polarimeter: part I. *Optical Engineering* 34, 6 (1995), 1651–1655.
- Dongsheng An, Jinli Suo, Haoqian Wang, and Qionghai Dai. 2015. Illumination estimation from specular highlight in a multi-spectral image. *Optics Express* 23, 13 (2015), 17008–17023.
- Yunhao Ba, Alex Gilbert, Franklin Wang, Jinfang Yang, Rui Chen, Yiqin Wang, Lei Yan, Boxin Shi, and Achuta Kadambi. 2020. Deep shape from polarization. In *European Conference on Computer Vision*. Springer, 554–571.
- Seung-Hwan Baek and Felix Heide. 2021. Polarimetric spatio-temporal light transport probing. *ACM Transactions on Graphics (TOG)* 40, 6 (2021), 1–18.
- Seung-Hwan Baek, Daniel S Jeon, Xin Tong, and Min H Kim. 2018. Simultaneous acquisition of polarimetric SVBRDF and normals. *ACM Trans. Graph.* 37, 6 (2018), 268–1.
- Seung-Hwan Baek, Tizian Zeltner, Hyunjin Ku, Inseung Hwang, Xin Tong, Wenzel Jakob, and Min H Kim. 2020. Image-based acquisition and modeling of polarimetric reflectance. *ACM Trans. Graph.* 39, 4 (2020), 139.
- Caixun Bai, Jianxin Li, Wenfei Zhang, Yixuan Xu, and Yutao Feng. 2021. Static full-Stokes Fourier transform imaging spectropolarimeter capturing spectral, polarization, and spatial characteristics. *Opt. Express* 29, 23 (Nov 2021), 38623–38645. <https://doi.org/10.1364/OE.443350>
- James R Bergen and Edward H Adelson. 1991. The plenoptic function and the elements of early vision. *Computational models of visual processing* 1 (1991), 8.
- Benedikt Bitterli. 2016. Rendering resources. <https://benedikt-bitterli.me/resources/>.
- Anthony Boccaletti, Jean Schneider, Wes Traub, Pierre-Olivier Lagage, Daphne Stam, Raffaele Gratton, John Trauger, Kerri Cahoy, Frans Snik, Pierre Baudoz, et al. 2012. SPICES: spectro-polarimetric imaging and characterization of exoplanetary systems. *Experimental Astronomy* 34, 2 (2012), 355–384.
- Zhengyi Chen, Chunmin Zhang, Tingkui Mu, and Yifan He. 2022. Tensorial multi-view subspace clustering for polarimetric hyperspectral images. *IEEE Transactions on Geoscience and Remote Sensing* (2022).
- Li-Jen Cheng and George F Reyes. 1995. AOTF polarimetric hyperspectral imaging for mine detection. In *Detection Technologies for Mines and Minelike Targets*, Vol. 2496. SPIE, 305–311.
- Edward Collett. 2005. Field guide to polarization. Spie Bellingham, WA.
- Qi Cui, Jongchan Park, Yayao Ma, and Liang Gao. 2021. Snapshot hyperspectral light field tomography. *Optica* 8, 12 (2021), 1552–1558.
- Akshat Dave, Yongyi Zhao, and Ashok Veeraraghavan. 2022. PANDORA: Polarization-Aided Neural Decomposition Of Radiance. *arXiv preprint arXiv:2203.13458* (2022).
- Abe Davis, Marc Levoy, and Fredo Durand. 2012. Unstructured light fields. In *Computer Graphics Forum*, Vol. 31. Wiley Online Library, 305–314.
- Fernando del Molino and Adolfo Muñoz. 2019. Polarization mapping. *Computers & Graphics* 83 (2019), 42–50.
- Louis J Denes, Milton S Gottlieb, Boris Kaminsky, and Daniel F Huber. 1998. Spectropolarimetric imaging for object recognition. In *26th AIPR Workshop: Exploiting New Image Sources and Sensors*, Vol. 3240. SPIE, 8–18.
- Valentin Deschaintre, Yiming Lin, and Abhijeet Ghosh. 2021. Deep polarization imaging for 3D shape and SVBRDF acquisition. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 15567–15576.
- Yuqi Ding, Yu Ji, Mingyuan Zhou, Sing Bing Kang, and Jinwei Ye. 2021. Polarimetric helmholtz stereopsis. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 5037–5046.
- Tom Duff, James Burgess, Per Christensen, Christophe Hery, Andrew Kensler, Max Liani, and Ryusuke Villemin. 2017. Building an orthonormal basis, revisited. *JCGT* 6, 1 (2017).
- Axin Fan, Tingfa Xu, Jianan Li, Geer Teng, Xi Wang, Yuhang Zhang, and Chang Xu. 2023. Compressive full-Stokes polarization and flexible hyperspectral imaging with efficient reconstruction. *Optics and Lasers in Engineering* 160 (2023), 107256.
- Axin Fan, Tingfa Xu, Xu Ma, Jianan Li, Xi Wang, Yuhang Zhang, and Chang Xu. 2022. Four-dimensional compressed spectropolarimetric imaging. *Signal Processing* (2022).
- Axin Fan, Tingfa Xu, Geer Teng, Xi Wang, Yuhang Zhang, and Chenguang Pan. 2020. Hyperspectral polarization-compressed imaging and reconstruction with sparse basis optimized by particle swarm optimization. *Chemometrics and Intelligent Laboratory Systems* 206 (2020), 104163.
- Yoshiki Fukao, Ryo Kawahara, Shohei Nobuhara, and Ko Nishino. 2021. Polarimetric stereo. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 682–690.
- Abhijeet Ghosh, Graham Fyffe, Borom Tunwattanapong, Jay Busch, Xueming Yu, and Paul Debevec. 2011. Multiview face capture using polarized spherical gradient illumination. In *Proceedings of the 2011 SIGGRAPH Asia Conference*. 1–10.
- Joseph W Goodman and P Sutton. 1996. Introduction to Fourier optics. *Quantum and Semiclassical Optics-Journal of the European Optical Society Part B* 8, 5 (1996), 1095.
- Steven J Gortler, Radek Grzeszczuk, Richard Szeliski, and Michael F Cohen. 1996. The lumigraph. In *Proceedings of the 23rd annual conference on Computer graphics and interactive techniques*. 43–54.
- Pengsheng Guo, Miguel Angel Bautista, Alex Colburn, Liang Yang, Daniel Ulbricht, Joshua M Susskind, and Qi Shan. 2022. Fast and explicit neural view synthesis. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision*. 3791–3800.
- Xia Hua, Yujie Wang, Shuming Wang, Xiujuan Zou, You Zhou, Lin Li, Feng Yan, Xun Cao, Shumin Xiao, Din Ping Tsai, et al. 2022. Ultra-compact snapshot spectral light-field imaging. *Nature communications* 13, 1 (2022), 2732.
- Inseung Hwang, Daniel S Jeon, Adolfo Muñoz, Diego Gutierrez, Xin Tong, and Min H Kim. 2022. Sparse ellipsometry: portable acquisition of polarimetric SVBRDF and shape with unstructured flash photography. *ACM Transactions on Graphics (TOG)* 41, 4 (2022), 1–14.
- Nevez Imamoglu, Yu Oishi, Xiaoqiang Zhang, Guanqun Ding, Yuming Fang, Toru Kouyama, and Ryosuke Nakamura. 2018. Hyperspectral image dataset for benchmarking on salient object detection. In *2018 Tenth international conference on quality of multimedia experience (QoMEX)*. IEEE, 1–3.
- Wenzel Jakob, Sébastien Speierer, Nicolas Roussel, Merlin Nimier-David, Delio Vicini, Tizian Zeltner, Baptiste Nicolet, Miguel Crespo, Vincent Leroy, and Ziyi Zhang. 2022. Mitsuba 3 renderer. <https://mitsuba-renderer.org>.
- Hailin Jin, Stefano Soatto, and Anthony J Yezzi. 2005. Multi-view stereo reconstruction of dense shape and complex appearance. *International Journal of Computer Vision* 63, 3 (2005), 175–189.
- Achuta Kadambi, Vage Taamazyan, Boxin Shi, and Ramesh Raskar. 2015. Polarized 3d: High-quality depth sensing with polarization cues. In *Proceedings of the IEEE International Conference on Computer Vision*. 3370–3378.
- James T Kajiya and Brian P Von Herzen. 1984. Ray tracing volume densities. *ACM SIGGRAPH computer graphics* 18, 3 (1984), 165–174.
- Nima Khademi Kalantari, Ting-Chun Wang, and Ravi Ramamoorthi. 2016. Learning-based view synthesis for light field cameras. *ACM Transactions on Graphics (TOG)* 35, 6 (2016), 1–10.
- Agastya Kalra, Vage Taamazyan, Supreeth Krishna Rao, Kartik Venkataraman, Ramesh Raskar, and Achuta Kadambi. 2020. Deep Polarization Cues for Transparent Object Segmentation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*.
- Bernhard Kerbl, Georgios Kopanas, Thomas Leimkuehler, and George Drettakis. 2023. 3D Gaussian Splatting for Real-Time Radiance Field Rendering. *ACM Transactions on Graphics (TOG)* 42, 4 (2023), 1–14.
- Haris Ahmad Khan, Jean-Baptiste Thomas, Jon Yngve Hardeberg, and Olivier Laligant. 2017. Illuminant estimation in multispectral imaging. *JOSA A* 34, 7 (2017), 1085–1098.
- Min H Kim, Todd Alan Harvey, David S Kittle, Holly Rushmeier, Julie Dorsey, Richard O Prum, and David J Brady. 2012. 3D imaging spectroscopy for measuring hyperspectral patterns on solid objects. *ACM Transactions on Graphics (TOG)* 31, 4 (2012), 1–11.
- Yuhi Kondo, Taishi Ono, Legong Sun, Yasutaka Hirasawa, and Jun Murayama. 2020. Accurate polarimetric BRDF for real polarization scene rendering. In *European Conference on Computer Vision*. Springer, 220–236.
- Chenyang Lei, Chenyang Qi, Jiaxin Xie, Na Fan, Vladlen Koltun, and Qifeng Chen. 2022. Shape from polarization for complex scenes in the wild. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 12632–12641.
- Marc Levoy and Pat Hanrahan. 1996. Light field rendering. In *Proceedings of the 23rd annual conference on Computer graphics and interactive techniques*. 31–42.
- Marc Levoy, Ren Ng, Andrew Adams, Matthew Footer, and Mark Horowitz. 2006. Light field microscopy. In *ACM SIGGRAPH 2006 Papers*. 924–934.
- Yuqi Li, Qiang Fu, and Wolfgang Heidrich. 2021. Multispectral illumination estimation using deep unrolling network. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 2672–2681.

- Fei Liu, Lei Cao, Xiaopeng Shao, Pingli Han, and Xiangli Bin. 2015. Polarimetric dehazing utilizing spatial frequency segregation of images. *Applied Optics* 54, 27 (2015), 8116–8122.
- Jiachen Liu, Pan Ji, Nitin Bansal, Changjiang Cai, Qingan Yan, Xiaolei Huang, and Yi Xu. 2022. PlaneMVS: 3D Plane Reconstruction from Multi-View Stereo. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 8665–8675.
- Xiaobo Lv, Yiwei Li, Shuaishuai Zhu, Xinmin Guo, Jianlong Zhang, Jie Lin, and Peng Jin. 2020. Snapshot spectral polarimetric light field imaging using a single detector. *Optics Letters* 45, 23 (2020), 6522–6525.
- Alkhazur Manakov, John Restrepo, Oliver Klehm, Ramon Hegedus, Elmar Eisemann, Hans-Peter Seidel, and Ivo Ihrke. 2013. A reconfigurable camera add-on for high dynamic range, multispectral, polarization, and light-field imaging. *ACM Transactions on Graphics* 32, 4 (2013), 47–1.
- Haiyang Mei, Bo Dong, Wen Dong, Jiayi Yang, Seung-Hwan Baek, Felix Heide, Pieter Peers, Xiaopeng Wei, and Xin Yang. 2022. Glass Segmentation Using Intensity and Spectral Polarization Cues. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 12622–12631.
- Ben Mildenhall, Peter Hedman, Ricardo Martin-Brualla, Pratul P Srinivasan, and Jonathan T Barron. 2022. Nerf in the dark: High dynamic range view synthesis from noisy raw images. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 16190–16199.
- Ben Mildenhall, Pratul P Srinivasan, Rodrigo Ortiz-Cayon, Nima Khademi Kalantari, Ravi Ramamoorthi, Ren Ng, and Abhishek Kar. 2019. Local light field fusion: Practical view synthesis with prescriptive sampling guidelines. *ACM Transactions on Graphics (TOG)* 38, 4 (2019), 1–14.
- Ben Mildenhall, Pratul P Srinivasan, Matthew Tancik, Jonathan T Barron, Ravi Ramamoorthi, and Ren Ng. 2020. Nerf: Representing scenes as neural radiance fields for view synthesis. In *European conference on computer vision*. Springer, 405–421.
- Shree K Nayar, Xi-Sheng Fang, and Terrance Boult. 1997. Separation of reflection components using color and polarization. *International Journal of Computer Vision* 21, 3 (1997), 163–186.
- Eric Penner and Li Zhang. 2017. Soft 3D reconstruction for view synthesis. *ACM Transactions on Graphics (TOG)* 36, 6 (2017), 1–11.
- Henry Peters, Yunhao Ba, and Achuta Kadambi. 2023. pCON: Polarimetric Coordinate Networks for Neural Scene Representations. In *Proc. CVPR*.
- Jérémy Riviere, Ilya Reshetouski, Luka Filipi, and Abhijeet Ghosh. 2017. Polarization imaging reflectometry in the wild. *ACM Transactions on Graphics (TOG)* 36, 6 (2017), 1–14.
- Johannes Lutz Schönberger and Jan-Michael Frahm. 2016. Structure-from-Motion Revisited. In *Conference on Computer Vision and Pattern Recognition (CVPR)*.
- Vincent Sitzmann, Justus Thies, Felix Heide, Matthias Nießner, Gordon Wetzstein, and Michael Zollhofer. 2019. DeepVoxels: Learning Persistent 3D Feature Embeddings. In *Proc. CVPR*.
- Mohammed Suhail, Carlos Esteves, Leonid Sigal, and Ameesh Makadia. 2022. Light Field Neural Rendering. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 8269–8279.
- Matthew Tancik, Pratul Srinivasan, Ben Mildenhall, Sara Fridovich-Keil, Nithin Raghavan, Utkarsh Singhal, Ravi Ramamoorthi, Jonathan Barron, and Ren Ng. 2020. Fourier features let networks learn high frequency functions in low dimensional domains. *Advances in Neural Information Processing Systems* 33 (2020), 7537–7547.
- Stojan Trajanovski, Caifeng Shan, Pim JC Weijtmans, Susan G Brouwer de Koning, and Theo JM Ruers. 2020. Tongue tumor detection in hyperspectral images using deep learning semantic segmentation. *IEEE transactions on biomedical engineering* 68, 4 (2020), 1330–1340.
- Zhixin Wang, Peng Xu, Bohan Liu, Yankun Cao, Zhi Liu, and Zhaojun Liu. 2021. Hyperspectral imaging for underwater object detection. *Sensor Review* 41, 2 (2021), 176–191.
- Sijia Wen, Yinqiang Zheng, and Feng Lu. 2021. Polarization guided specular reflection separation. *IEEE Transactions on Image Processing* 30 (2021), 7280–7291.
- Gordon Wetzstein, Douglas R Lanman, Matthew Waggner Hirsch, and Ramesh Raskar. 2012. Tensor displays: compressive light field synthesis using multilayer displays with directional backlighting. (2012).
- Bennett Wilburn, Neel Joshi, Vaibhav Vaish, Marc Levoy, and Mark Horowitz. 2004. High-speed videography using a dense camera array. In *Proceedings of the 2004 IEEE Computer Society Conference on Computer Vision and Pattern Recognition, 2004. CVPR 2004., Vol. 2. IEEE, II–II*.
- Bennett Wilburn, Neel Joshi, Vaibhav Vaish, Eino-Ville Talvala, Emilio Antunez, Adam Barth, Andrew Adams, Mark Horowitz, and Marc Levoy. 2005. High performance imaging using large camera arrays. In *ACM SIGGRAPH 2005 Papers*. 765–776.
- Alexander Wilkie and Andrea Weidlich. 2010. A standardised polarisation visualisation for images. In *Proceedings of the 26th Spring Conference on Computer Graphics*. 43–50.
- Pu Xia and Xuebin Liu. 2016. Image dehazing technique based on polarimetric spectral analysis. *Optik* 127, 18 (2016), 7350–7358.
- Fanchao Yang, Xingjia Tang, Bingliang Hu, Ruyi Wei, Liang Kong, and Yong Li. 2016. A method of removing reflected highlight on images based on polarimetric imaging. *Journal of Sensors* 2016 (2016).
- Jason C Yang, Matthew Everett, Chris Buehler, and Leonard McMillan. 2002. A real-time distributed light field camera. *Rendering Techniques 2002 (2002)*, 77–86.
- Qiang Zhang, Seung-Hwan Baek, Szymon Rusinkiewicz, and Felix Heide. 2022. Differentiable point-based radiance fields for efficient view synthesis. In *SIGGRAPH Asia 2022 Conference Papers*. 1–12.
- Yongqiang Zhao, Lei Zhang, and Quan Pan. 2009. Spectropolarimetric imaging for pathological analysis of skin. *Applied optics* 48, 10 (2009), D236–D246.
- Chu Zhou, Mingui Teng, Yufei Han, Chao Xu, and Boxin Shi. 2021. Learning to dehaze with polarization. *Advances in Neural Information Processing Systems* 34 (2021), 11487–11500.
- Shihao Zou, Xinxin Zuo, Yiming Qian, Sen Wang, Chi Xu, Minglun Gong, and Li Cheng. 2020. 3d human shape reconstruction from a polarization image. In *European Conference on Computer Vision*. Springer, 351–368.