

Offline Policy Evaluation for Reinforcement Learning with Adaptively Collected Data

Sunil Madhow¹, Dan Qiao¹, Ming Yin¹, and Yu-Xiang Wang¹

¹UC Santa Barbara

Abstract

Developing theoretical guarantees on the sample complexity of offline RL methods is an important step towards making data-hungry RL algorithms practically viable. Currently, most results hinge on unrealistic assumptions about the data distribution – namely that it comprises a set of i.i.d. trajectories collected by a single logging policy. We consider a more general setting where the dataset may have been gathered adaptively. We develop theory for the TMIS Offline Policy Evaluation (OPE) estimator in this generalized setting for tabular MDPs, deriving high-probability, instance-dependent bounds on its estimation error. We also recover minimax-optimal offline learning in the adaptive setting. Finally, we conduct simulations to empirically analyze the behavior of these estimators under adaptive and non-adaptive regimes.

1 Introduction

Offline Reinforcement Learning (RL), which seeks to perform standard RL tasks using a pre-existing dataset of interactions with an MDP, is a key frontier in the effort to make RL methods more widely applicable. The ability to incorporate existing data into RL algorithms is crucial in many promising application domains. In safety-critical areas, such as autonomous driving (Kiran et al., 2020), the randomized exploration that characterizes online algorithms is not ethically tolerable. Even in lower-stakes applications, such as advertising (Cai et al., 2017), naively adopting online algorithms could mean throwing away vast reserves of previously-collected data. The development of efficient offline algorithms promises to broaden RL’s applicability by allowing practitioners to exercise some much needed domain-specific control over the training process.

Given a dataset, \mathcal{D} , of interactions with an MDP \mathcal{M} , two tasks that we may hope to achieve in offline RL are Offline Policy Evaluation (Yin & Wang, 2020) and Offline Learning (Lange et al., 2012). In Offline Policy Evaluation (OPE), we seek to estimate the value of a target policy π under \mathcal{M} . In Offline Learning (OL), the goal is to use \mathcal{D} to find a good policy $\pi \in \Pi$ where Π is some policy class. In this paper, we largely focus on OPE.

The question of how and when it is possible to perform OPE and OL given a specific dataset is the subject of a flourishing research movement (Lange et al., 2012; Raghu et al., 2018; Le et al., 2019; Xie & Jiang, 2021; Duan et al., 2020; Yin & Wang, 2020; Yin et al., 2021; Jin et al., 2021, 2022; ?; Qiao & Wang, 2022b; Zhang et al., 2022). In order for \mathcal{D} to be a rich enough dataset to learn from, it must explore the MDP well. Excellent results have been derived assuming that \mathcal{D} consists of i.i.d. trajectories distributed according to some logging policy μ , where μ has good exploratory properties. However, it is difficult to justify the imposition of these assumptions on our data. Empirically, it is clear that the generation of a usable \mathcal{D} is a significant bottleneck in offline RL. In practice, the gathering of useful datasets is best done by running adaptive exploration algorithms (see, for example, Lambert et al. (2022)’s use of “curiosity”). In the case of self-driving cars, *any* dataset will be rife with adaptivity due to human interventions and the need to iterate policies. If the theory of offline RL is to be relevant in real-world use-cases, it must extend to adaptively collected datasets.

Our object in this paper is to develop a systematic understanding of the role of adaptivity in offline RL. In Section 1.1, we discuss the problems posed by the i.i.d. assumption from a more rigorous perspective. We proceed to introduce a more general setting for OPE, Adaptive OPE (AOPE), where we allow each trajectory to be distributed according to a different logging policy, which may depend on previous data.

In addition to the motivating examples given above, here are some scenarios that AOPE covers but OPE does not:

1. The dataset \mathcal{D} was gathered by humans, and therefore influenced by a number of unobserved factors and historical data. For example, a doctor prescribing medicine may make a determination based on her conversation with the patient and prior experience (Yu et al., 2019).
2. The dataset \mathcal{D} has been gathered by a reward-free exploration algorithm (Jin et al., 2020; Wang et al., 2020; Qiao & Wang, 2022a). This dataset will have excellent exploratory properties, but is very intradependent.

In Section 2.2, we explain how Yin et al. (2021)’s minimax-optimal results for both Uniform OPE and efficient learning lead directly to optimal results for the adaptive case.

In Section 3, we proceed to derive more evocative *instance dependent* bounds on the estimation error $|\hat{v}^\pi - v^\pi|$. By introducing a novel technique for performing concentration in the face of adaptivity, we prove that, with high-probability, $|\hat{v}^\pi - v^\pi|$ is governed by a dominant term of

$$\tilde{O} \left(\sum_{h=1}^H \sum_{s,a} d_h^\pi(s,a) \sqrt{\frac{\text{Var}_{s' \sim P_{h+1}(\cdot|s,a)}[V_{h+1}^\pi(s')] }{n_{h,s,a}}} \right),$$

where $\tilde{O}(\cdot)$ absorbs logarithmic terms and constants, $n_{h,s,a}$ is the visitation number of (s,a) at time step h .

We note that our instance-dependent bounds may significantly outperform the minimax-optimal bound on certain instances, but they fail to recover optimal *worst-case* rates.

In Section 4, we empirically study how adaptivity can improve or degrade the performance of our estimator.

1.1 Related Work

To the best of our knowledge, we are the first to consider OPE for reinforcement learning under adaptive data. However, in the study of bandits and RL, Off-Policy Evaluation has been an area of interest for more than a decade (Dudik et al., 2011; Jiang & Li, 2016; Wang et al., 2017; Thomas & Brunskill, 2016; Yin & Wang, 2020; Yin et al., 2021). In RL, existing work adopts the setting where $\mathcal{D} = \{\tau_i \sim \mu\}$ is a collection of i.i.d. trajectories. In this setting, bounds on the performance of OPE or OL algorithms are given in terms of an exploration parameter, like:

$$d_m = \min_{h,s,a:d_h^\pi(s,a)>0} d_h^\mu(s,a). \quad (1)$$

Estimators that closely match lower bounds on relevant metrics have been established in existing work (Duan et al., 2020; Yin et al., 2021; Xie & Jiang, 2021; Le et al., 2019).

The multi-logger setting, where $\mathcal{D} = \{\tau_i \sim \mu^i\}$ for μ^i statically chosen, is a straightforward generalization of the single-logger setting, and so we refer to this problem as Non-Adaptive OPE (NOPE).

However, the practicability of such bounds has been challenged. Xiao et al. (2022) point out that it is difficult in practice to find a logging policy with a reasonable exploration parameter. In what they consider a more realistic, “tabula rasa” case (where the logging policy is chosen without knowledge of the MDP), they show a sample complexity exponential in H and S to be necessary in offline learning. Current results also fail to address the motivating application of learning from existing, human-generated data, which we would not expect to be identically distributed, or even independent (as the data collected in trajectory j almost certainly influences future policies μ^{j+1}, \dots). Results for OPE with adaptive data would address both of these concerns.

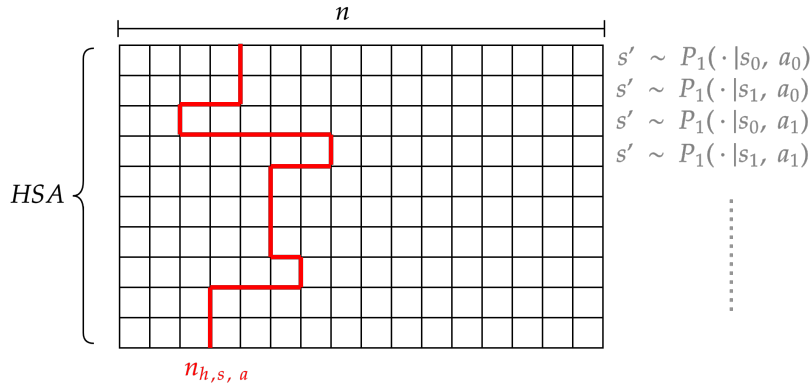


Figure 1: An illustration of the tape view of adaptive data collection. Each row (h, s, a) should be thought to contain n i.i.d. samples from $P_{h+1}(\cdot | s, a)$. The red “frontier” tracks how many samples have, in fact, been used by the logger (this quantity is always bounded by n).

While we do not know of any work that studies OPE with adaptively collected data, Jin et al. (2021) study the problem of Offline Learning with Pessimistic Value Iteration under adaptive data for linear MDPs. Their results do not cover OPE, and are loose when specialized to tabular MDPs. Jin et al. (2022) cover the problem of learning from adaptive data for contextual bandits. The generalization of such results to reinforcement learning is highly nontrivial, and the approach we take to the problem is largely unrelated. For multiarmed bandits, Shin et al. (2019) study how adaptive exploration schemes like optimism can lead to bias in estimated arm values. In their work, they imagine a data-collection model whereby a table is populated with data before any experiments begin. We make use of a similar model, generalized to the RL setting. This work also provides inspiration for our numerical simulations.

1.2 Novel Contributions

We now highlight what in our view are the key contributions of this paper.

In the proof of our high-probability bounds on estimation error, $|\hat{v}^\pi - v^\pi|$, we utilize a novel proof technique for dealing with intradependent datasets. Leveraging the fact that influence of the logger’s adaptivity on the dataset is limited to the quantities $\{n_{h,s,a}\}$, we consider an equivalent data-collection model, defined by a machine with $H \times S \times A$ rolls of tape. Each tape contains n i.i.d. samples from the distribution $P_h(\cdot | s, a)$. When the logger visits (h, s, a) , a corresponding s' is read off the tape, (h, s, a, s') is added to the dataset, and the tape is advanced. This model makes no distinction between trajectories, suppressing their confounding influence while retaining the problem-structure crucial to our estimator. See Figure 1 for an illustration.

One of our goals is to facilitate the importation of results from the non-adaptive case to the adaptive case. The “tape-machine” model yields a prescription for selectively throwing away data in order to burn the adaptivity out of a dataset. This salvages the Martingale structure key to optimal Uniform OPE (Yin et al., 2021), and even allows one to use existing theory to perform optimal OL on the resultant dataset.

2 Preliminaries

2.1 Symbols, notation, and MDP basics.

Let $\Delta(\mathcal{X})$ be the set of all probability distributions over \mathcal{X} , for $|\mathcal{X}| < \infty$. We denote $[H] := \{1, \dots, H\}$.

A Tabular, Finite-Horizon Markov Decision Process (MDP) is a tuple $\mathcal{M} = (\mathcal{S}, \mathcal{A}, r, P, d_1, H)$, where \mathcal{S} is the discrete state space with $S := |\mathcal{S}|$, while \mathcal{A} is the discrete action space with $A := |\mathcal{A}|$. Its dynamics

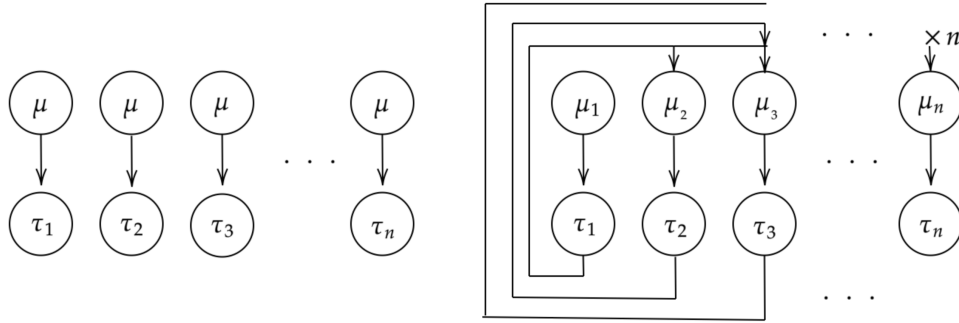


Figure 2: Non-adaptive regime (left) versus adaptive regime (right), depicted as a graphical model. We see that, in the adaptive regime, each policy depends on all previous trajectories. This induces dependence between the trajectories.

are governed by a non-stationary transition kernel, $P = \{P_h : \mathcal{S} \times \mathcal{A} \rightarrow \Delta(\mathcal{S})\}_{h=1}^H$, where $P_h(s'|s, a)$ is the probability of transitioning to state $s' \in \mathcal{S}$ after taking action $a \in \mathcal{A}$ from state $s \in \mathcal{S}$ at time $h \in [H]$. r is a collection of reward functions $\{r_h : \mathcal{S} \times \mathcal{A} \rightarrow [-1, 1]\}_{h=1}^H$. Finally, $d_1 \in \Delta(\mathcal{S})$ is the initial state distribution of the MDP and H is the horizon.

A policy, π , is a collection of maps, $\{\pi_h : \mathcal{S} \rightarrow \Delta(\mathcal{A})\}_{h=1}^H$. Running a policy on an MDP will yield a trajectory $\tau_i \in (\mathcal{S} \times \mathcal{A} \times [-1, 1])^H$. Together, the policy and MDP induce a distribution over trajectories, as well as a Markov Chain with transitions notated as $P_h^\pi(s'|s) := \sum_a P_h(s'|s, a)\pi_h(a|s)$.

In a set of trajectories $\{\tau_i\}_{i=1}^n$, we define $n_{h,s,a}$ to be the number of visitations to (s, a) at timestep h for all h, s, a .

$v^\pi := \mathbb{E}_\pi[\sum_{i=1}^H r_i | s_1 \sim d_1]$ is the value of the policy π , where the expectation is over the π -induced distribution over trajectories. Furthermore, we define for any π the value-function $V_h^\pi(s) := \mathbb{E}_\pi[\sum_{i=h}^H r_i | s_h = s]$ and Q-function $Q_h^\pi(s, a) := \mathbb{E}_\pi[\sum_{i=h}^H r_i | s_h = s, a_h = a]$ for $1 \leq h \leq H$.

$d_h^\pi(s, a)$ is defined to be the probability of (s_h, a_h) occurring at time step h in a trajectory distributed according to policy π .

2.2 Motivation and Problem Setup

Motivated both by the negative result from Xiao et al. (2022) and the exigencies of real-world data, we augment our formulation of the OPE problem to more realistically accommodate intelligent choices of logging-policy. We consider this to be middle ground between the sanguine assumptions on d_m common to Yin et al. (2021); Duan et al. (2020), and the assumption of total ignorance found in Xiao et al. (2022). To this end, this paper studies the following problem:

Definition 2.1 (Adaptive Offline Policy Evaluation (AOPE)). Adaptive Offline Policy Evaluation (AOPE) is Offline Policy Evaluation on $\mathcal{D} = \{\tau_i \sim \mu^i\}_{i=1}^n$, where μ^1, \dots, μ^n are chosen adaptively. That is, μ^i may depend on the trajectories $\tau_1, \dots, \tau_{i-1}$ (Figure 2).

As opposed to vanilla OPE, the AOPE problem formulation allows for the data to have been collected according to a nearly arbitrary logging algorithm. When logging policies can be tuned according to previous trajectories, there is scope for starting from “tabula rasa”, and iteratively refining the logging policy as we learn about the MDP. In other words, the logger can leverage online exploration techniques. Furthermore, by allowing arbitrary statistical dependence on previous trajectories, AOPE addresses the key scenario of learning from intradependent, human-influenced datasets.

The issue of defining an exploration assumption for an adaptive logger is an interesting one. If μ^1, \dots, μ^n were statically chosen,

$$\bar{d}_m := \frac{1}{n} \min_{h,s,a} \sum_{i=1}^n d_h^{\mu^i}(s, a) > 0 \quad (2)$$

would be a good assumption. However, the quantity \bar{d}_m as defined above is now a random variable.

We might assume that its *expectation* is bounded below:

Assumption 2.2 (Failed Exploration Assumption). For $\bar{d}_m > 0$, logging process \mathcal{E} satisfies a \bar{d}_m -*expected*-exploration assumption if

$$\mathbb{E}\left[\frac{1}{n} \min_{h,s,a} \sum_{i=1}^n d_h^{\mu^i}(s, a)\right] > \bar{d}_m$$

We will show by means of a lower bound (Theorem 3.5) that such an assumption does not allow us to derive high-probability bounds on estimation error. We therefore find it most natural to levy our assumptions directly on the number of visitations to each (h, s, a) :

Assumption 2.3 (Exploration Assumption). For $\bar{d}_m > 0$, logging process \mathcal{E} satisfies a (\bar{d}_m, δ) -exploration assumption if, with probability at least $1 - \delta$

$$n_{h,s,a} > n\bar{d}_m$$

In the non-adaptive regime, $n_{h,s,a} \geq n\bar{d}_m/2$ holds for Equation 2's \bar{d}_m by a multiplicative Chernoff bound. This implies that our results hold for the single-logger setting as a special case, ensuring our work is a strict generalization of single-logger theory. Furthermore, this assumption is generally satisfied by reward-free exploration algorithms (Jin et al., 2020; Qiao et al., 2022).

Assumptions on the exploratory property of the logger will not always be necessary. Results that depend on Assumption 2.3 will state it as a hypothesis.

We conclude this section by noting that, under Assumption 2.3, minimax bounds from the non-adaptive OPE setting can be easily recovered for AOPE in the following manner. For any dataset, \mathcal{D} , let $N := \min_{h,s,a} n_{h,s,a}$ be the number of occurrences of the least-observed (s_h, a_h) pair. If we consider a revised dataset, \mathcal{D}' , that keeps only the first N transitions out of (s_h, a_h) for all s_h, a_h , we see that all transitions are now independent conditioned on N . Thus, the problem reduces to a generative-model type setting. In particular, Theorem 3.7 in Yin et al. (2021) implies minimax-optimal offline learning for the adaptive case. However, we do not like throwing data away in this manner, and conjecture that it should not be necessary to do so. It would be preferable to obtain bounds that adapt to the quantities $\{n_{h,s,a}\}_{h,s,a}$ and the features of the MDP. To this end, we explore the extent to which *instance-dependent* bounds on estimation error can be recovered in the adaptive setting.

2.3 Our estimator

We consider the TMIS (“Tabular Marginalized Importance Sampling”) estimator of v^π studied in (Yin & Wang, 2020). This boils down to computing the value of a policy under the approximate MDP defined by $(\mathcal{S}, \mathcal{A}, \hat{P}, \hat{r}, \hat{d}_1)$, with the estimators \hat{P} , \hat{r} and \hat{d}_1 defined below.

That is, if $\mathcal{D} = \{\tau_1, \dots, \tau_n\}$, and $\tau_i = (s_1^i, a_1^i, r_1^i, \dots, s_H^i, a_H^i, r_H^i)$, we use plug-in estimates

$$\hat{P}_h(s'|s, a) = \frac{n_{h,s,a,s'}}{n_{h,s,a}} = \frac{1}{n_{h,s,a}} \sum_i \mathbf{1}_{\{s_h^i=s, a_h^i=a, s_{h+1}^i=s'\}},$$

$$\hat{r}_h(s, a) = \frac{1}{n_{h,s,a}} \sum_{k=1}^n r_h^k \mathbf{1}_{\{s_h^k=s, a_h^k=a\}},$$

subject to these quantities being well-defined ($n_{h,s,a} \neq 0$). If $n_{h,s,a} = 0$, we can define them to be 0.

We also define $\hat{d}_1 := \hat{d}_1^\pi := \frac{1}{n} \sum_{i=1}^n e_{s_1^i}$ to be the plug-in estimate of d_1 computed from \mathcal{D} (where e_j is the j th standard basis vector in \mathbb{R}^S).

We then let:

$$\begin{aligned}\hat{P}_h^\pi(s'|s) &= \sum_a \pi_h(a|s) \hat{P}_h(s'|s, a), \\ \hat{r}_h^\pi(s) &= \sum_a \pi_h(a|s) \hat{r}_h(s, a)\end{aligned}$$

and iteratively compute $\hat{d}_h^\pi := \hat{P}_h^\pi \hat{d}_{h-1}^\pi$ for $h = 1, \dots, H$.

Finally, we form the estimate of value function as

$$\hat{v}^\pi = \sum_{h=1}^H \langle \hat{d}_h^\pi, \hat{r}_h^\pi \rangle.$$

3 Theoretical Results

High-Probability Upper Bounds on Estimation Error

We now turn our attention towards quantifying \hat{v}^π 's performance for AOPE. We first describe a high-probability, uniform error bound in terms of the number of visitations to each (s_h, a_h) tuple.

Theorem 3.1 (High-probability uniform bound on estimation error in AOPE). *Suppose \mathcal{D} is a dataset conforming to AOPE, and \hat{v}^π is formed using this dataset. Then, with probability at least $1 - \delta$, the following holds for all deterministic policies π :*

$$|\hat{v}^\pi - v^\pi| \leq \tilde{O} \left(\sum_{h=1}^H \sum_{s,a} H d_h^\pi(s, a) \sqrt{\frac{S}{n_{h,s,a}}} \right),$$

where $n_{h,s,a}$ is the number of occurrences of (s_h, a_h) in \mathcal{D} and with the convention that $\frac{0}{0} = 0$.

This translates to the following worst-case bound, which underperforms the minimax-optimal bound (over deterministic policies) implied by Yin et al. (2021) by a factor of \sqrt{H} . Note that this result (and those that follow) use a $(\bar{d}_m, \delta/2)$ -exploration assumption (Assumption 2.3).

Corollary 3.2 (High-probability uniform bound on estimation error in AOPE). *Suppose that \mathcal{D} , \hat{v}^π are as in Theorem 3.1. Suppose that, with probability $\geq 1 - \delta/2$, the logging process is such that $n_{h,s,a} \geq n \bar{d}_m$ for all h, s, a . Then with probability $1 - \delta$, we have that*

$$\sup_{\pi} |\hat{v}^\pi - v^\pi| \leq \tilde{O} \left(H^2 \sqrt{\frac{S}{n \bar{d}_m}} \right).$$

We also give a high-probability, instance-dependent, *pointwise* bound. In the pointwise case, we are able to shave off a \sqrt{S} in the asymptotically dominant term.

Theorem 3.3 (Instance-dependent pointwise bound on estimation error in AOPE). *Fix a policy π , suppose \mathcal{D} is a dataset conforming to AOPE, and \hat{v}^π is formed using this dataset. Assume that with probability $\geq 1 - \frac{\delta}{2}$, $n_{h,s,a} \geq n \bar{d}_m$ for all h, s, a , for some $\bar{d}_m > 0$. Then with probability at least $1 - \delta$, we have:*

$$\begin{aligned}|\hat{v}^\pi - v^\pi| &\leq \tilde{O} \left(\frac{H^3 S}{n \bar{d}_m} \right) \\ &+ \tilde{O} \left(\sum_{h=1}^H \sum_{s,a} d_h^\pi(s, a) \sqrt{\frac{\text{Var}_{s' \sim P_{h+1}(\cdot|s,a)}[V_{h+1}^\pi(s')]}{n_{h,s,a}}} \right).\end{aligned}$$

The above translates into the following worst-case bound, which is suboptimal by a factor of \sqrt{H} .

Corollary 3.4 (Worst-case pointwise bound on estimation error in AOPE). *Fix a policy π , suppose \mathcal{D} is a dataset conforming to AOPE, and \hat{v}^π is formed using this dataset. Assume that with probability $\geq 1 - \frac{\delta}{2}$, $n_{h,s,a} \geq n\bar{d}_m$ for all h, s, a , for some $\bar{d}_m > 0$. Then with probability at least $1 - \delta$, we have:*

$$|\hat{v}^\pi - v^\pi| \leq \tilde{O} \left(\sqrt{\frac{H^3}{n\bar{d}_m}} + \frac{H^3 S}{n\bar{d}_m} \right).$$

The form of Theorems 3.1 and 3.3 yield some key insights. For a given task, they explain which regions of the MDP are important by decomposing estimation error along $[H] \times \mathcal{S} \times \mathcal{A}$. For example, $\text{Var}_{s' \sim P_{h+1}(\cdot|s,a)}[V_{h+1}^\pi(s')]$ is a measure of how “pivotal” a transition is – that is, our uncertainty in the effect of the outcome of (h, s, a) on our future reward. $d_h^\pi(s, a)$ is, of course, a measure of how likely the target policy is to visit (h, s, a) . Thus, these results tell us that it is important to design loggers that prioritize data-collection in regions of the MDP that are highly visited by π or highly pivotal.

Though Corollary 3.4 does not recover a minimax-optimal bound on the estimation error, $e^* := \tilde{O} \left(\sqrt{\frac{H^2}{n\bar{d}_m}} \right)$, Theorem 3.3 may be much tighter than e^* for certain MDPs or certain policies. To take an extreme case, Theorem 3.3 shows that error decreases as $O(\frac{1}{n})$ when the MDP is deterministic.

Lower Bound for AOPE

The following information-theoretic lower bound shows that for any learning algorithm, there is an adaptive logging process satisfying Assumption 2.2 such that error is constant with large probability.

Theorem 3.5. *For any learning algorithm L that takes as input a target policy and dataset, and outputs an estimate of the target policy’s value, there exists a instance $I = (M, \pi, \mathcal{E})$ such that when $\mathcal{D} \sim (M, \mathcal{E})$:*

$$\Pr[|L(\pi, \mathcal{D}) - v^\pi| > \frac{1}{2}] > \frac{1}{4}$$

where \mathcal{E} is a logging process satisfying a \bar{d}_m -expected-exploration assumption, M is an MDP, and π is a policy.

This result tells us that assumptions on the expected exploration of an adaptive logger are not strong enough to rule out problematic pathologies. These pathologies inform the definition of Assumption 2.3, which is adopted in several results above.

3.1 Proof sketches

High-probability Results: 3.1, 3.2, 3.3, 3.4

All of our results arise from applying concentration inequalities to functions of our estimates, $\hat{P}, \hat{r}, \hat{d}_0$. However, the first two quantities are formed using a mutually dependent dataset. The martingale structure of $|\hat{v}^\pi - v^\pi|$ used in Yin et al. (2021) is also lost in the adaptive setting, so there is no straightforward way to apply concentration. However, the tape model tells us that for fixed h, s, a and $n_{h,s,a}$, the error admits an expression amenable to concentration. Therefore, by using a covering argument over $\{n_{h,s,a}\}$, we are able to obtain our bounds. Appendix 7 covers these details more carefully.

The proof of Theorem 3.1 follows by a simulation lemma-type expansion of the error, which leads to a dominant term of the form $\sum_h \mathbb{E}_{s_h, a_h \sim \pi, \mathcal{M}}[(\hat{P}_{h+1}(\cdot|s_h, a_h) - P_{h+1}(\cdot|s_h, a_h))^T \hat{V}_{h+1}^\pi]$, and smaller terms governed by \hat{r} and \hat{d}_1 . As mentioned above, we must cover all possible number of occurrences of each (s_h, a_h) across trajectories while applying concentration, leading to the HSA_n term inside the logarithm. The full proof is deferred to Appendix 8.1.

Inspired by Azar et al. (2017), Theorem 3.3 is proved by applying concentration inequalities (with the same covering trick as Theorem 3.1) to $(\hat{P}_{h+1} - P_{h+1})V_{h+1}^\pi$ and $(\hat{P}_{h+1} - P_{h+1})(\hat{V}_{h+1}^\pi - V_{h+1}^\pi)$ separately, instead of

$(\hat{P}_{h+1} - P_{h+1})\hat{V}_{h+1}^\pi$. In order to treat the dominant term, we use Bernstein’s inequality. The residual term scales with $\frac{1}{n} \ll \frac{1}{\sqrt{n}}$, which allows us to use cruder bounds when treating it. To recover the worst-case bound in the corollary, we analyze the variance term with the canonical equality $\sum_h E_\pi[\text{Var}_{s' \sim P_h(\cdot|s,a)}[V_h^\pi(s')]] \leq \text{Var}_\pi[\sum_h r_h] \leq H^2$. The full proof is presented in Appendix 9.

3.2 Lower Bound: Theorem 3.5

The lower bound is obtained by a packing argument over tree-shaped MDPs with an adaptive logger that does good exploration with probability $\frac{1}{2}$ and bad exploration with probability $\frac{1}{2}$. The full proof can be found in Appendix 11.

4 Empirical Results

4.1 Experimental Motivation and Design

Our theoretical results certify that the TMIS estimator achieves low error even with adaptively logged data. However, they leave open some important questions regarding the behavior of TMIS estimation under adaptive data:

1. In multi-arm bandit literature, it has been established (Shin et al., 2019) that optimistic exploration causes negative bias in sample means. Does this behavior emerge in RL as well?
2. Our results hold for arbitrary adaptivity, which may be adversarially chosen. But is it possible that some forms of adaptivity are beneficial? ¹

In this section, we probe these questions empirically. On the way, we validate our theoretical results. As our adaptive logger, we use UCB-VI. We gather data using UCB-VI, and then roll out an independent “Shadow” dataset using the same policies. For details on the data-collection method, see section 12 of the Appendix. As an optimistic algorithm, UCB-VI is well-suited to testing Question 1. Furthermore, as UCB-VI steers the data-collection procedure towards high-value states, it is conceivable that our estimator will benefit from the adaptivity for optimal π . UCB-VI can “react” to unwanted outcomes in trajectory τ_i , where the Shadow dataset cannot.

4.2 Results

We first consider a highly sub-optimal target policy. The lefthand side of Figure 3 shows two curves. Each curve plots the \sqrt{n} -scaled estimation error $\sqrt{n}(\hat{v}^\pi - v^\pi)$ against n , averaged over 10,000 runs of the data-collection process (10,000 runs of UCB-VI and each run’s corresponding shadow dataset). For each n and for each curve, this average is computed with respect to the first $n \leq N$ trajectories in each dataset. Theorem 3.2 tells us that these quantities will live in a band around zero, but does not give us information on their sign.

Plotting the 95% confidence interval around each curve, there appears to be a distinction between the signed behaviors of the estimator for adaptive data vs non-adaptive data, though both confidence intervals cover 0. This suggests that there are measurable differences in the signed behavior of \hat{v}^π when adaptive data is used, even if the logging policies are the same!

The righthand side of Figure 3 plots the same quantities, but considers a high-value target policy instead of a low-value target policy. The curves have switched positions in this plot, but our confidence intervals suggest that this distinction may not be meaningful.

On the whole, it seems that UCB-VI leads to negative bias in our estimates (especially for suboptimal policies), but limitations on the computational resources available to us constrain us to showing weak evidence

¹Note that a negative answer here does not contradict our discourse on the importance of adaptivity in Offline RL, which is that it allows us to choose logging policies more wisely. From a practical point of view, we are making an “unfair” comparison between a realistic dataset, which is the result of earnest exploration of the MDP, and an unrealistic dataset, which we provide with the resultant suite of good exploration policies at the outset.

of this conjecture. We also note that the magnitude of the error is indistinguishable for adaptive and non-adaptive data, giving us hope that tighter instance-dependent AOPE bounds can be obtained. We also note that these simulations act as a good sanity check of our result, by showing that $\sqrt{n}|\hat{v}^\pi - v^\pi|$ does not explode.

In summary, based on these simulations, we posit that AOPE is not inherently more difficult than OPE with non-adaptive data. We find weak evidence of an affirmative answer to the first experimental question that we posed, and no evidence of an affirmative answer to the second.

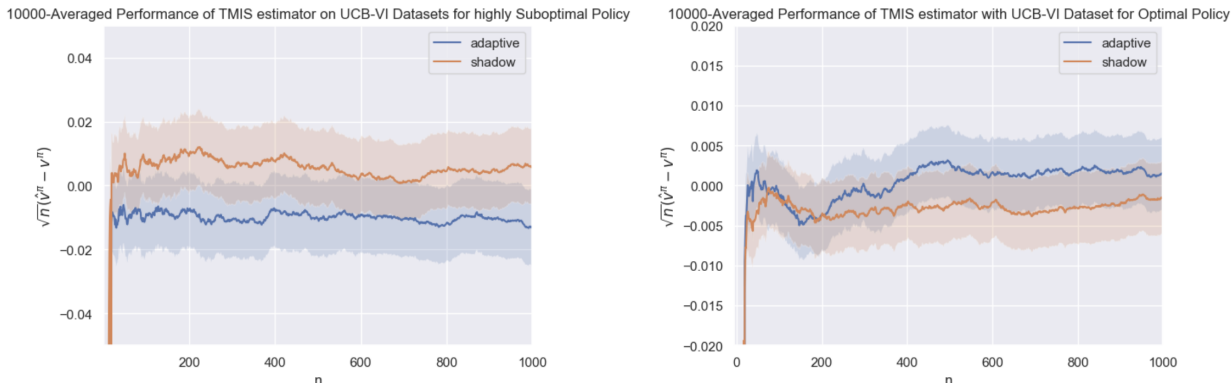


Figure 3: For different π , the blue curves show the average value of $\sqrt{n} \times (\hat{v}^\pi - v^\pi)$, where \hat{v}^π is computed on the first $n \leq N$ trajectories of each of the 10,000 adaptive datasets. The orange curves are computed in the same way, except using the 10,000 shadow datasets. On the lefthand side, π is very suboptimal. On the righthand side, π is optimal. Confidence intervals are 95% Gaussian.

5 Conclusion and Future Work

By divorcing itself from i.i.d. assumptions, offline RL theory can tie its fortunes to those of the broader RL theory community. Provable means of exploring MDPs (Azar et al., 2017; Jin et al., 2020) underscore the benefits of understanding how to learn from adaptive datasets.

In this paper, we have shown instance-dependent bounds on the estimation error of a very natural estimator under adaptively collected data. These bounds reveal the individual contribution of each (h, s, a) to the error, based on fundamental properties of the MDP and target policy. Independently to this, we have noticed that, under reasonable exploration assumptions, minimax-rates from the non-adaptive setting can be directly ported into the adaptive setting. The disconnect between the worst-case bounds implied by our instance-dependent results and the minimax-optimal bound is intriguing. It arises from the existence of a martingale structure across timesteps in non-adaptive data (Yin et al., 2021); this structure disappears in the adaptive regime. Bridging this gap is an interesting avenue for future work, as it would fully allay lingering doubts about the efficiency of adaptive data. Even so, the Martingale argument yields a rather less pithy expression than Theorem 3.3, and so we are not overly bothered by the discrepancy.

Though, at first glance, the form of our worst-case bounds on the sample complexity look like a looser version of those obtained in the iid case, we emphasize that in such results, the d_m term is doing implausibly heavy lifting. Xiao et al. (2022) demonstrates that the optimistic assumption (made by many authors) that $d_m \approx \frac{1}{SA}$ essentially presupposes a huge amount of prior knowledge on the MDP. Realistically, one is hard-pressed to do non-adaptive logging without $d_m \ll \frac{1}{SA}$. On the other hand, in our work, \bar{d}_m represents the realized quality of an adaptive logger’s exploration, which should be good for e.g. reward-free logging. The upshot is that in the setting where we do not have pre-existing knowledge on the MDP, sample-complexity

results for adaptive logging are better. Thus, restricting our attention to practically plausible loggers, our results promise better sample complexity. Orthogonal to such concerns, in virtually any real-world dataset, adaptivity will be present. Thus, our bounds are important even in the pathological cases where they underperform our comparators.

We also began the process of exploring the effects of various types of adaptivity on our estimates. We find that, even controlling for identical logging policies, there are differences in the behavior of the TMIS estimator for OPE and AOPE. Systematically understanding how datasets generated by different exploration algorithms interact with existing OPE estimators is yet more fertile ground for research.

We have confined our attention to the microcosmic space of tabular MDPs. Though generalizing our results to wider classes of MDPs is important future work, the expressions derived here can and should inform data-collection in much more complicated environments. In theoretically clarifying the extent to which OPE methods carry over to the AOPE setting, we hope we have moved towards bridging the large gap that exists between theory and practice in offline RL.

References

- Azar, M. G., Osband, I., and Munos, R. Minimax regret bounds for reinforcement learning. In *International Conference on Machine Learning*, pp. 263–272. PMLR, 2017.
- Cai, H., Ren, K., Zhang, W., Malialis, K., Wang, J., Yu, Y., and Guo, D. Real-time bidding by reinforcement learning in display advertising. In *Proceedings of the Tenth ACM International Conference on Web Search and Data Mining*, pp. 661–670, 2017.
- Dann, C., Lattimore, T., and Brunskill, E. Unifying pac and regret: Uniform pac bounds for episodic reinforcement learning. *Advances in Neural Information Processing Systems*, 30, 2017.
- Duan, Y., Jia, Z., and Wang, M. Minimax-optimal off-policy evaluation with linear function approximation. In *International Conference on Machine Learning*, pp. 2701–2709. PMLR, 2020.
- Dudik, M., Langford, J., and Li, L. Doubly robust policy evaluation and learning, 2011.
- Jiang, N. and Li, L. Doubly robust off-policy value evaluation for reinforcement learning, 2016.
- Jin, C., Krishnamurthy, A., Simchowitz, M., and Yu, T. Reward-free exploration for reinforcement learning. In *International Conference on Machine Learning, ICML 2020*, volume 119, pp. 4870–4879. PMLR, 2020.
- Jin, Y., Yang, Z., and Wang, Z. Is pessimism provably efficient for offline rl? In *International Conference on Machine Learning*, pp. 5084–5096. PMLR, 2021.
- Jin, Y., Ren, Z., Yang, Z., and Wang, Z. Policy learning "without" overlap: Pessimism and generalized empirical bernstein's inequality. *CoRR*, abs/2212.09900, 2022. doi: 10.48550/arXiv.2212.09900. URL <https://doi.org/10.48550/arXiv.2212.09900>.
- Kallus, N., Saito, Y., and Uehara, M. Optimal off-policy evaluation from multiple logging policies, 2020. URL <https://arxiv.org/abs/2010.11002>.
- Kiran, B. R., Sobh, I., Talpaert, V., Mannion, P., Sallab, A. A. A., Yogamani, S., and Pérez, P. Deep reinforcement learning for autonomous driving: A survey, 2020. URL <https://arxiv.org/abs/2002.00444>.
- Lambert, N., Wulfmeier, M., Whitney, W. F., Byravan, A., Bloesch, M., Dasagi, V., Hertweck, T., and Riedmiller, M. A. The challenges of exploration for offline reinforcement learning. *CoRR*, abs/2201.11861, 2022.
- Lange, S., Gabel, T., and Riedmiller, M. Batch reinforcement learning. In *Reinforcement learning*, pp. 45–73. Springer, 2012.

- Le, H. M., Voloshin, C., and Yue, Y. Batch policy learning under constraints. In Chaudhuri, K. and Salakhutdinov, R. (eds.), *International Conference on Machine Learning, ICML 2019*, volume 97, pp. 3703–3712. PMLR, 2019.
- Mou, W., Wainwright, M. J., and Bartlett, P. L. Off-policy estimation of linear functionals: Non-asymptotic theory for semi-parametric efficiency, 2022. URL <https://arxiv.org/abs/2209.13075>.
- Qiao, D. and Wang, Y.-X. Near-optimal deployment efficiency in reward-free reinforcement learning with linear function approximation. *arXiv preprint arXiv:2210.00701*, 2022a.
- Qiao, D. and Wang, Y.-X. Offline reinforcement learning with differential privacy. *arXiv preprint arXiv:2206.00810*, 2022b.
- Qiao, D., Yin, M., Min, M., and Wang, Y.-X. Sample-efficient reinforcement learning with $\log\log(T)$ switching cost. In *International Conference on Machine Learning*, pp. 18031–18061. PMLR, 2022.
- Raghu, A., Komorowski, M., Celi, L. A., Szolovits, P., and Ghassemi, M. Continuous state-space models for optimal sepsis treatment: a deep reinforcement learning approach. In *Machine Learning for Healthcare Conference*, pp. 147–163, 2017.
- Raghu, A., Gottesman, O., Liu, Y., Komorowski, M., Faisal, A., Doshi-Velez, F., and Brunskill, E. Behaviour policy estimation in off-policy policy evaluation: Calibration matters. *CoRR*, abs/1807.01066, 2018. URL <http://arxiv.org/abs/1807.01066>.
- Schmucker, R., Wang, J., Hu, S., and Mitchell, T. M. Assessing the performance of online students – new data, new approaches, improved accuracy, 2021. URL <https://arxiv.org/abs/2109.01753>.
- Shin, J., Ramdas, A., and Rinaldo, A. Are sample means in multi-armed bandits positively or negatively biased? In Wallach, H. M., Larochelle, H., Beygelzimer, A., d’Alché-Buc, F., Fox, E. B., and Garnett, R. (eds.), *Advances in Neural Information Processing Systems 32: Annual Conference on Neural Information Processing Systems 2019, NeurIPS 2019, December 8-14, 2019, Vancouver, BC, Canada*, pp. 7100–7109, 2019.
- Thomas, P. S. and Brunskill, E. Data-efficient off-policy policy evaluation for reinforcement learning, 2016.
- Wang, R., Du, S. S., Yang, L., and Salakhutdinov, R. R. On reward-free reinforcement learning with linear function approximation. *Advances in neural information processing systems*, 33:17816–17826, 2020.
- Wang, Y.-X., Agarwal, A., and Dudik, M. Optimal and adaptive off-policy evaluation in contextual bandits, 2017.
- Xiao, C., Lee, I., Dai, B., Schuurmans, D., and Szepesvari, C. The curse of passive data collection in batch reinforcement learning. In *International Conference on Artificial Intelligence and Statistics*, pp. 8413–8438. PMLR, 2022.
- Xie, T. and Jiang, N. Batch value-function approximation with only realizability. In Meila, M. and Zhang, T. (eds.), *International Conference on Machine Learning, ICML*, volume 139 of *Proceedings of Machine Learning Research*, pp. 11404–11413. PMLR, 2021.
- Xie, T., Ma, Y., and Wang, Y.-X. Towards optimal off-policy evaluation for reinforcement learning with marginalized importance sampling. *Advances in Neural Information Processing Systems*, 32, 2019.
- Yin, M. and Wang, Y.-X. Asymptotically efficient off-policy evaluation for tabular reinforcement learning. In *International Conference on Artificial Intelligence and Statistics*, pp. 3948–3958. PMLR, 2020.
- Yin, M., Bai, Y., and Wang, Y.-X. Near-optimal provable uniform convergence in offline policy evaluation for reinforcement learning. In *International Conference on Artificial Intelligence and Statistics*, pp. 1567–1575. PMLR, 2021.

- Yin, M., Duan, Y., Wang, M., and Wang, Y.-X. Near-optimal offline reinforcement learning with linear representation: Leveraging variance information with pessimism. *arXiv preprint arXiv:2203.05804*, 2022.
- Yu, C., Liu, J., and Nemati, S. Reinforcement learning in healthcare: A survey, 2019. URL <https://arxiv.org/abs/1908.08796>.
- Zhang, R., Zhang, X., Ni, C., and Wang, M. Off-policy fitted q-evaluation with differentiable function approximators: Z-estimation and inference theory. *arXiv preprint arXiv:2202.04970*, 2022.

Appendix

6 Concentration inequalities

Lemma 6.1 (Hoeffding’s Inequality). *Let x_1, \dots, x_n be bounded random variables such that $E[x_i] = 0$ and $|x_i| \leq \xi_i$ with probability 1. Then for any $\epsilon > 0$ we have:*

$$\Pr\left[\left|\frac{1}{n} \sum_{i=1}^n x_i\right| > \epsilon\right] \leq \exp\left\{-2\epsilon^2 n^2 / \sum_{i=1}^n \xi_i^2\right\}.$$

Lemma 6.2 (Bernstein’s Inequality). *Let x_1, \dots, x_n be independent bounded random variables such that $E[x_i] = 0$ and $|x_i| \leq \xi$ with probability 1. Let $\sigma^2 = \frac{1}{n} \sum_{i=1}^n \text{Var}[x_i]$, then with probability $1 - \delta$ we have:*

$$\frac{1}{n} \sum_{i=1}^n x_i \leq \sqrt{\frac{\sigma^2 \log \frac{1}{\delta}}{n}} + \frac{2\xi}{3n} \log \frac{1}{\delta}.$$

Lemma 6.3 (d-dimensional Concentration). *Let z be a discrete random variable taking values in $\{1, \dots, d\}$. Let q be the associated pmf. Assume we have n i.i.d. samples z_1, \dots, z_n , and define \hat{q} by $\hat{q}_j = \frac{1}{n} \sum_{i=1}^n \mathbf{1}_{\{z_i=j\}}$. Then for any $\epsilon > 0$,*

$$\Pr[\|\hat{q} - q\|_1 \geq \sqrt{d}(\frac{1}{\sqrt{n}} + \epsilon)] \leq \exp\{-N\epsilon^2\}.$$

7 The “Tape” View of Adaptivity

The simulation lemma allows us to decompose the error $\hat{v}^\pi - v^\pi$ into error terms corresponding to each possible (h, s, a) -tuple, $E_{h,s,a}$. $E_{h,s,a}$ will be instantiated differently across this paper, but it will always be a (data-independent) function, f , of the observed transitions out of (h, s, a) , $\{s_{h+1}^i\}_{i:s_h^i=s, a_h^i=a}$. We will therefore be interested in the following type of expression:

$$E_{h,s,a} = \frac{1}{n_{h,s,a}} \sum_{i:s_h^i=s, a_h^i=a} f(s_{h+1}^i) - \mathbb{E}[f(s')|s' \sim P_{h+1}(\cdot|s, a)].$$

We want to apply concentration inequalities to each $E_{h,s,a}$. We need to be careful though, because $\{s_{h+1}^i\}_{i=1}^n$ are mutually dependent. The crucial point in bounding $E_{h,s,a}$ is to observe that for fixed $n_{h,s,a}$, $E_{h,s,a}$ is amenable to concentration. More formally, we write:

$$\begin{aligned} E_{h,s,a} &= \sum_{j=1}^n \mathbf{1}_{\{n_{h,s,a}=j\}} \frac{1}{n_{h,s,a}} \sum_{i:s_h^i=s, a_h^i=a} f(s_{h+1}^i) - \mathbb{E}[f(s')|s' \sim P_{h+1}(\cdot|s, a)] \\ &= \sum_{j=1}^n \mathbf{1}_{\{n_{h,s,a}=j\}} \underbrace{\frac{1}{j} \sum_{i=1}^j f(s_{h+1}^{(i)}) - \mathbb{E}[f(s')|s' \sim P_{h+1}(\cdot|s, a)]}_{x_j}. \end{aligned}$$

where (i) re-indexes into trajectories that visit (s_h, a_h) . Now each $f(s_{h+1}^{(i)})$ is independently distributed according to $f(s')$ with $s' \sim P_h(\cdot|s, a)$.

In order to control $E_{h,s,a}$ with probability δ , then, it suffices to control each x_j with probability δ/n . In this way, covering $n_{h,s,a}$ for all h, s, a yields bounds for the adaptive case. Note that in this paper the codomain of f will be either \mathbb{R} or \mathbb{R}^S .

One way to visualize the dependence structure in \mathcal{D} that we have leveraged above is to imagine a machine with a tape for each (h, s, a) . The tape (h, s, a) contains an infinite string of i.i.d draws of $s' \sim P_h(\cdot|s, a)$,

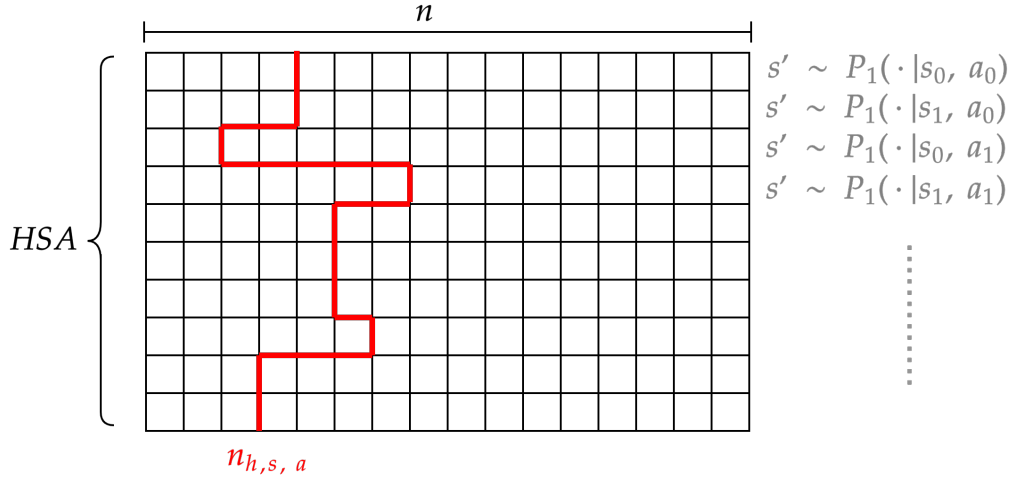


Figure 4: A reproduction of Figure 1. Each row (h, s, a) should be thought to contain n i.i.d. samples from $P_{h+1}(\cdot | s, a)$. The red “frontier” tracks how many samples have, in fact, been used by the logger (this quantity is always bounded by n).

sampled before the logging begins. Every time (h, s, a) is visited by the logging algorithm, the s' read off of the corresponding tape, and the tape is advanced. Thus, a “frontier” is defined by $\{n_{h,s,a}\}_{h,s,a \in H \times S \times A}$ according to the logger’s behavior. But, crucially, for any $n_{h,s,a}$, the transitions sampled off of the tape are i.i.d. This is the observation that justifies the application of concentration inequalities on x_j .

Whenever concentration is applied in this paper, the above covering argument is needed. Henceforth, every concentration argument will implicitly invoke the above covering trick, thus incurring a factor of n within the log term.

8 Preliminaries and Proof of Uniform Bounds on $|\hat{v}^\pi - v^\pi|$

We assume for convenience that r and d_0 (the reward function and the initial distribution) are *known* in Appendices 8.1 and 9. Because the error of \hat{v}^π is dominated by error due to \hat{P} , this assumption changes only constants. For further discussion of this point see Appendix 10.

By the Simulation Lemma (Dann et al., 2017), we have the following representation of the error, $|\hat{v}^\pi - v^\pi|$:

$$|\hat{v}^\pi - v^\pi| \leq \sum_{h=1}^{H-1} |\langle d_h^\pi, (\hat{P}_{h+1} - P_{h+1}) \hat{V}_{h+1}^\pi \rangle| \leq \sum_{h=1}^{H-1} \sum_{s,a} d_h^\pi(s, a) |(\hat{P}_{h+1}(\cdot | s, a) - P_{h+1}(\cdot | s, a))^T \hat{V}_{h+1}^\pi(\cdot)|, \quad (3)$$

where we remind the reader that \hat{P}_t is the estimated transition kernel moving into the t -th timestep, and \hat{V}_t^π is the time- t value function for π under the approximate MDP defined by $\{\hat{P}_t\}_t$. Finally $d_t^\pi \in \mathbb{R}^{S \times A}$ is the marginal distribution of (s_t, a_t) under the true MDP and π . Theorem 3.1 follows quite directly from the above expansion, but we need to cover $n_{h,s,a}$ to take care of the dependence induced by the adaptivity.

In contrast to (Yin & Wang, 2020; Yin et al., 2021), our exploration assumption is levied on $\{n_{h,s,a}\}$ directly, rather than on the exploration parameters of the logging policy/ies (which would not sufficiently characterize the exploratory properties of an adaptive dataset). Thus, for each proof, we take care to budget for $\delta/2$ total failure probability across our concentration arguments – the remaining $\delta/2$ accounts for the failure case where $n_{h,s,a} = 0$ for some h, s, a .

8.1 Proof of Theorem 3.1 and Corollary 3.2

Using the third expression in equation 3, Holder's inequality, and concentration in 1-norm (Lemma 6.3) we have (with probability at least $1 - \delta/2$):

$$\begin{aligned} |\hat{v}^\pi - v^\pi| &\leq \sum_{h=1}^{H-1} \sum_{s,a} d_h^\pi(s,a) \|\hat{P}_{h+1}(\cdot|s,a) - P_{h+1}(\cdot|s,a)\|_1 \|\hat{V}_{h+1}^\pi(\cdot)\|_\infty \\ &\leq \sum_{h=1}^{H-1} \sum_{s,a} d_h^\pi(s,a) H \left(\sqrt{\frac{S \log \frac{HSA n}{\delta}}{n_{h,s,a}}} + \sqrt{\frac{S}{n_{h,s,a}}} \right) \leq 2 \sum_{h=1}^{H-1} \sum_{s,a} d_h^\pi(s,a) H \sqrt{\frac{S \log \frac{HSA n}{\delta}}{n_{h,s,a}}}, \end{aligned}$$

where it must be noted that we have made the near-vacuous assumption that $n \geq e\delta \geq e\delta/HSA$ for which it suffices for n to be at least 3.

Note that all bounding was done independently of the policy π . Therefore this result holds uniformly across all policies.

Corollary 3.2 follows immediately.

9 Proof of Pointwise Bounds on $|\hat{v}^\pi - v^\pi|$

We now derive a slightly more sophisticated pointwise bound on the estimation error. We achieve this by replacing the estimated value function with the true value function in the simulation lemma, and pushing the residual into a lower-order term.

Again, we budget for $\delta/2$ failure probability, which provides for $n_{h,s,a} > 0$ for all h, s, a in our proofs.

9.1 Proof of Theorem 3.3

Again, we start with Equation (3), which we re-express as

$$|\hat{v}^\pi - v^\pi| \leq \sum_{h=1}^{H-1} \sum_{s,a} |d_h^\pi(s,a)| \underbrace{[(\hat{P}_{h+1}(\cdot|s,a) - P_{h+1}(\cdot|s,a))^T V_{h+1}^\pi(\cdot)]}_{(*)} + \underbrace{[(\hat{P}_{h+1}(\cdot|s,a) - P_h(\cdot|s,a))^T (\hat{V}_{h+1}^\pi - V_{h+1}^\pi)(\cdot)]}_{(**)}.$$

9.2 Bounding (*)

For arbitrary h, s, a , notice that

$$\begin{aligned} |(\hat{P}_{h+1}(\cdot|s,a) - P_{h+1}(\cdot|s,a))^T V_{h+1}^\pi(\cdot)| &= \left| \sum_{s'} (\hat{P}_{h+1}(s'|s,a) - P_{h+1}(s'|s,a))^T V_{h+1}^\pi(s') \right| \\ &= \left| \sum_{s'} \left(\frac{1}{n_{h,s,a}} \sum_{i: s_h^i = s, a_h^i = a} \mathbf{1}_{\{s_{h+1}^i = s'\}} - P_{h+1}(s'|s,a) \right) V_{h+1}^\pi(s') \right| \\ &\leq \frac{1}{n_{h,s,a}} \left| \sum_{i: s_h^i = s, a_h^i = a} V_{h+1}^\pi(s_{h+1}^i) - \mathbb{E}_{s' \sim P_{h+1}(\cdot|s,a)} [V_{h+1}^\pi(s')] \right|. \end{aligned}$$

Using the tape-argument from Appendix 7, we apply Bernstein's inequality while covering $n_{h,s,a}$ to get that with probability at least $1 - \delta/4HSA n$:

$$|(\hat{P}_{h+1}(\cdot|s,a) - P_{h+1}(\cdot|s,a))^T V_{h+1}^\pi(\cdot)| \leq \sqrt{\frac{2 \text{Var}[V_{h+1}^\pi(s')|s' \sim P_{h+1}(\cdot|s,a)] \log \frac{4HSA n}{\delta}}{n_{h,s,a}}} + \frac{4H}{3n_{h,s,a}} \log \frac{4HSA n}{\delta}. \quad (4)$$

9.3 Bounding (**)

By Holder's inequality:

$$(**) \leq \|\hat{P}_{h+1}(\cdot|s, a) - P_{h+1}(\cdot|s, a)\|_1 \|(\hat{V}_{h+1}^\pi - V_{h+1}^\pi)(\cdot)\|_\infty$$

The first term above is bounded with the same S -dimensional concentration inequality that we used in 8.1, Lemma 6.3. With probability $1 - \delta/4HSA$, the following holds.

$$\|\hat{P}_{h+1}(\cdot|s, a) - P_{h+1}(\cdot|s, a)\|_1 \leq \sqrt{\frac{S \log \frac{4HSA n}{\delta}}{n_{h,s,a}}} + \sqrt{\frac{S}{n_{h,s,a}}} \leq 2\sqrt{\frac{S \log \frac{4HSA n}{\delta}}{n_{h,s,a}}} \leq 2\sqrt{\frac{S \log \frac{4HSA n}{\delta}}{n\bar{d}_m}} \quad (5)$$

where the final inequality reflects our exploration assumption on the logger. By the union bound, the above holds simultaneously for all h, s, a with probability at least $1 - \delta/4$.

We bound $\|(\hat{V}_{h+1}^\pi - V_{h+1}^\pi)(\cdot)\|_\infty$ using the Simulation Lemma again. We needn't be too careful here, because (**) will decay with $\frac{1}{n} \ll \frac{1}{\sqrt{n}}$, and so be dominated by (*).

Fix h and s , and consider $\hat{V}_h^\pi(s) - V_h^\pi(s)$. Let $q_t^{(\pi, h, s)}(\cdot, \cdot)$ be the marginal visitation under policy π and MDP, whose dynamics are defined by P , but which starts deterministically from (h, s) for $t \geq h$.

$$\begin{aligned} \hat{V}_h^\pi(s) - V_h^\pi(s) &= \sum_{t=h}^{H-1} \langle q_t^{(\pi, h, s)}(\cdot, \cdot), (\hat{P}_{t+1} - P_{t+1})^T \hat{V}_{t+1}^\pi \rangle \leq \sum_{t=h}^{H-1} \|q_t^{(\pi, h, s)}\|_1 \|\hat{P}_{t+1} - P_{t+1}\|_\infty \|\hat{V}_{t+1}^\pi\|_\infty \\ &\leq \sum_{t=h}^{H-1} H \max_{s,a} \{ \|(\hat{P}_{t+1} - P_{t+1})(\cdot|s, a)\|_1 \} \leq 2H^2 \sqrt{\frac{S \log \frac{4HSA n}{\delta}}{n\bar{d}_m}}, \end{aligned}$$

where we have already provided for the control on $\max_{h,s,a} \{ \|\hat{P}_h(\cdot|s, a) - P_h(\cdot|s, a)\|_1 \}$ in equation (5).

Combining the results of this section, we achieve

$$(**) \leq \frac{4H^2 S \log \frac{HSA n}{\delta}}{n\bar{d}_m} \quad (6)$$

Combining the bounds on (*) and (**), we have that with probability at least $1 - \delta/2$:

$$\begin{aligned} |\hat{v}^\pi - v^\pi| &\leq \sum_{h=1}^{H-1} \sum_{s,a} d_h^\pi(s, a) \left(\sqrt{\frac{2\text{Var}[V_{h+1}^\pi(s')|s' \sim P_{h+1}(\cdot|s, a)] \log \frac{4HSA n}{\delta}}{n_{h,s,a}}} + \frac{4H}{3n\bar{d}_m} \log \frac{4HSA n}{\delta} \right) \\ &\quad + \frac{4H^3 S \log \frac{2HSA n}{\delta}}{n\bar{d}_m}. \end{aligned}$$

Hence

$$|\hat{v}^\pi - v^\pi| \leq O\left(\sum_{h=1}^{H-1} \sum_{s,a} d_h^\pi(s, a) \sqrt{\frac{\text{Var}[V_{h+1}^\pi(s')|s' \sim P_{h+1}(\cdot|s, a)] \log \frac{HSA n}{\delta}}{n_{h,s,a}}} + \frac{H^3 S \log \frac{HSA n}{\delta}}{n\bar{d}_m} \right).$$

An application of law of total variance (Azar et al., 2017) leads to corollary 3.4. For proof of this cute fact, see, for example, Lemma 3.4 in Yin & Wang (2020).

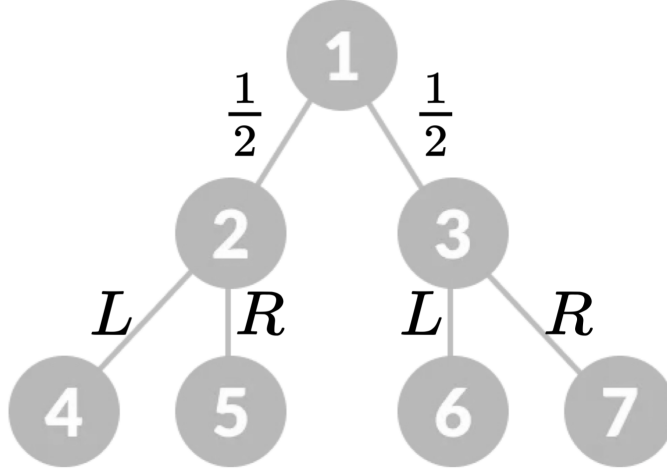


Figure 5: Branching MDP construction used in the lower bound

10 On the justification of considering d_0 and r to be known

In this section, we briefly justify our above assumption that $\hat{r} = r$ and $\hat{d}_0 = d_0$.

If, instead of using the true values d_0 and r , we use \hat{d}_0 and \hat{r} , the simulation lemma yields the following expansion of the error:

$$\hat{v}^\pi - v^\pi = \langle \hat{d}_0 - d_0, \hat{V}_0^\pi \rangle + \sum_{h=1}^{H-1} \mathbb{E}_{s_h, a_h \sim d_h^\pi} [(\hat{P}_{h+1}(\cdot | s_h, a_h) - P_{h+1}(\cdot | s_h, a_h))^T \hat{V}_{h+1}^\pi(\cdot)] + \sum_{h=1}^{H-1} \mathbb{E}_{s_h, a_h \sim d_h^\pi} [\hat{r}_h(s_h, a_h) - r_h(s_h, a_h)].$$

Applying Lemma 6.3 on the first term, we get a control on the form:

$$|\langle \hat{d}_0 - d_0, \hat{V}_0^\pi \rangle| \leq \|\hat{d}_0 - d_0\|_1 \|\hat{V}_0^\pi\|_\infty \leq H(\sqrt{S/n} + \sqrt{\frac{\log \frac{1}{\delta}}{n}}). \quad (7)$$

Furthermore, for all h, s, a , we can control the reward-term by applying Hoeffding's Inequality, a union bound over (h, s, a) , and covering of $n_{h,s,a}$:

$$|\hat{r}_h(s, a) - r_h(s, a)| = \left| \frac{1}{n_{h,s,a}} \sum_{i: s_h^i = s, a_h^i = a} r_h^i - r_h(s, a) \right| \leq \sqrt{\frac{\log \frac{HSA n}{\delta}}{n_{h,s,a}}}. \quad (8)$$

Both (7) and (8) (summed over H) can be absorbed into the bounds of Corollaries 3.1 and 3.3, at the cost of a constant factor.

11 Proof of Lower Bound under Assumption 2.2 (Theorem 3.5)

We consider the family of MDPs with dynamics as shown in Figure 5. These MDPs have action space $\mathcal{A} = \{L, R\}$, $H = 3$, and start deterministically at state 1. From state 1, the MDPs transition to state 2 or state 3 with equal probability regardless of action. From states 2 and 3, the MDPs transition left or the right deterministically according to the action chosen.

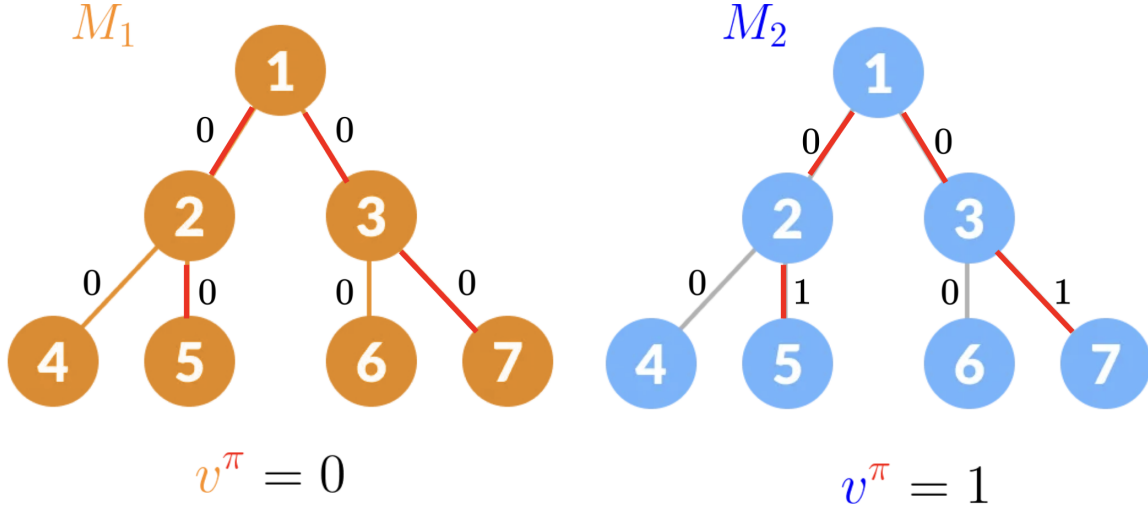


Figure 6: Two ways of equipping the tree system with a reward function

Construction of Hard Instances

We now specify an adaptive logger, \mathcal{E} , for all MDPs with the above transition structure. \mathcal{E} begins with $\mu_h^1 = L$ for all $h \in [H]$. If τ_1 contains state 2, \mathcal{E} chooses $\mu_h^j = L$ for all $h \in [H]$ and $j \in \{2, \dots, n\}$. Otherwise, $\mu_h^j = L$ for all $h \in [H]$ and j even, and $\mu_h^j = R$ for all $h \in [H]$ and all j odd. This construction satisfies Assumption 2.2 with parameter $\bar{d}_m > 0$.

We now consider two MDPs with the same transition structure but with two different reward functions, as shown in Figure 6, resulting in M_1 and M_2 . M_1 deterministically administers reward 0 for all transitions. M_2 deterministically administers reward 1 for transitioning right at the second level, and reward 0 otherwise.

The target policy π always takes action R .

Packing

We will show that no learning algorithm, L , can simultaneously do well on instances $I_1 = (M_1, \mathcal{E}, \pi)$ and $I_2 = (M_2, \mathcal{E}, \pi)$.

Define the event $B_1 := \{|L(\pi, \mathcal{D}) - v^\pi| > \frac{1}{2}\}$ for $\mathcal{D} \sim (M_1, \mathcal{E})$. Similarly, define $B_2 := \{|L(\pi, \mathcal{D}) - v^\pi| > \frac{1}{2}\}$ for $\mathcal{D} \sim (M_2, \mathcal{E})$.

Assume that $\Pr[B_1] < \delta$ (otherwise, L fails on I_1). Letting \mathcal{E}_L be the event that \mathcal{E} goes from state 1 to state 2 in τ_1 , and $\mathcal{E}_R = (\mathcal{E}_L)^c$ We have:

$$\begin{aligned} \delta > \Pr[B_1] &= \Pr[B_1|\mathcal{E}_L] \Pr[\mathcal{E}_L] + \Pr[B_1|\mathcal{E}_R] \Pr[\mathcal{E}_R] = \\ &\Pr[B_1|\mathcal{E}_L] \frac{1}{2} + \Pr[B_1|\mathcal{E}_R] \frac{1}{2} > \Pr[B_1|\mathcal{E}_L] \frac{1}{2} \end{aligned}$$

where the probability is over $\mathcal{D} \sim (M_1, \mathcal{E})$

Thus, conditioned on \mathcal{E}_L , $L(\pi, \mathcal{D}) \in B(0, \frac{1}{2})$ with probability at least $1 - 2\delta$. But note that conditioned on \mathcal{E}_L , the data from M_1 and M_2 look the same. Thus, under data drawn from (M_2, \mathcal{E}) , the same property holds. Thus, we have that $\Pr[B_2|\mathcal{E}_L] > 1 - 2\delta$. This gives:

$$\begin{aligned} \Pr[B_2] &= \Pr[B_2|\mathcal{E}_L] \Pr[\mathcal{E}_L] + \Pr[B_2|\mathcal{E}_R] \Pr[\mathcal{E}_R] = \\ &\Pr[B_2|\mathcal{E}_L] \frac{1}{2} + \Pr[B_2|\mathcal{E}_R] \frac{1}{2} > (1 - 2\delta) \frac{1}{2} = \frac{1}{2} - \delta \end{aligned}$$

where the probability is over $\mathcal{D} \sim (M_2, \mathcal{E})$

Choosing $\delta = \frac{1}{4}$ yields $\Pr[B_2] > \delta$.

This shows that $\Pr_{\mathcal{D} \sim (M_1, \mathcal{E})}[B_1] < \delta \implies \Pr_{\mathcal{D} \sim (M_2, \mathcal{E})}[B_2] > \delta$, and completes the proof of Theorem 3.5.

Remark 11.1. We could prove the same result using trees of depth 1 with deterministic transitions out of the first state, but would then need \mathcal{E} to choose stochastic logging policies. We find the above construction more pleasing, because the randomness in the data-collection process arises only due to the MDP.

12 Data-Collection Model for Empirical Simulations

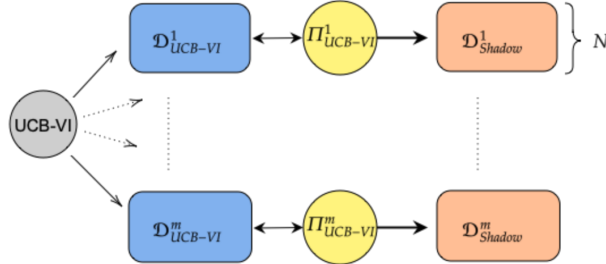


Figure 7: The data collection model for our experiments. We will instantiate $M = 10,000$ and $N = 1000$. Furthermore, note that each row starting from the grey to the orange specifies a process with outputs following some distribution.

In order to generate copious amounts of data, we use a toy MDP with two states, two actions, and nonstationary dynamics and rewards over a time horizon of $H = 5$. We choose as our logging algorithm UCB-VI (Azar et al., 2017). Running this algorithm for N steps yields an adaptive dataset \mathcal{D}_{UCB-VI} generated according to logging policies Π_{UCB-VI} . We then collect a “shadow” dataset, \mathcal{D}_{Shadow} , by rolling out n independent trajectories $\{\tau'_i \sim \mu^i \mid \mu^i \in \Pi_{UCB-VI}\}$. We repeat this whole logging process many times, to generate several adaptive datasets and several shadow datasets, whose estimates we average. We then use this data to evaluate multiple policies.

As an optimism-based algorithm, UCB-VI is a good candidate for the testing of Question 1 above. Under optimism, it is likely that \hat{v}^π is negatively biased (especially for sub-optimal π), because in the event that the value of a state is substantially underestimated, we cease to gather data on that state.

With regards to Question 2: As UCB-VI steers the data-collection procedure towards high-value states, it is conceivable that our estimator will benefit from the adaptivity for optimal π . UCB-VI can “react” to unwanted outcomes in trajectory τ_i , where the Shadow dataset cannot.

13 Multiple Independent Logging Policies

In this section, we present some easy results relating to the Non-adaptive setting $\mathcal{D} \sim (\mu^1, \dots, \mu^n)$ for $\{\mu^i\}$ independent.

We warm up by generalizing Yin & Wang (2020)’s bound on the MSE of \hat{v}^π to NOPE. By following the proof of Theorem 1 in Yin & Wang (2020), and making some mild modifications, we recover a bound of the MSE of \hat{v}^π in the Non-Adaptive OPE setting.

Theorem 13.1. [MSE performance of \hat{v}^π in NOPE setting] Suppose \mathcal{D} is a dataset conforming to NOPE, and \hat{v}^π is formed using this dataset. Let \bar{d}_m be as defined in (2). Let $\tau_s = \max_{h,s,a} \frac{d_h^\pi(s,a)}{\frac{1}{n} \sum_i d_h^{\mu^i}(s,a)}$. Let $\tau_a = \max_{h,s,a} \frac{\pi_h(a|s)}{\frac{1}{n} \sum_i \mu_h^i(a|s)}$. Then if $n > \frac{16 \log n}{\bar{d}_m}$ and $n > \frac{4H\tau_a\tau_s}{\min_{h,s} \max\{d_h^\pi(s), \frac{1}{n} \sum_i d_h^{\mu^i}(s)\}}$, we have:

$$\begin{aligned} \text{MSE}(\hat{v}^\pi) \leq & \tilde{O} \left(\frac{1}{n} \sum_{h,s,a} \frac{d_h^\pi(s)^2 \pi(a|s)^2}{\frac{1}{n} \sum_i d_h^{\mu^i}(s,a)} \psi_{h,s,a} \right) \\ & + O(\tau_a^2 \tau_s H^3 / n^2 \bar{d}_m), \end{aligned}$$

where $\psi_{h,s,a} := \text{Var}[r_h^{(1)} + V_{h+1}^\pi(s_{h+1}^{(1)}) | s_h^{(1)}, a_h^{(1)} = s, a]$.

As a corollary, consider a “quasi-adaptive” data collection process, where each logging-policy, μ^i , is run twice, generating i.i.d. τ_i and τ'_i . Suppose future logging-policies $\mu^{j>i}$ are chosen by some algorithm \mathcal{E} depending on τ_i but not τ'_i . We can use the same \hat{v}^π -estimator to perform OPE with $\mathcal{D}_{shadow} = \{\tau'_i\}$, as long as the estimator doesn't touch $\mathcal{D} = \{\tau_i\}$. If we assume that average exploration is sufficient w.h.p. over the execution of \mathcal{E} , we can bound the MSE in this quasi-adaptive case using Theorem 13.1. Corollary 13.2 below tells us that, in those cases where we have control over the logging process, we can recover attractive, instance-dependent bounds by doubling the sample-complexity.

Corollary 13.2. Let \mathcal{E} be the algorithm described in the paragraph above. Assume that with high probability ($\geq 1 - \delta$), the policies μ^1, \dots, μ^n generated by \mathcal{E} satisfy $\frac{1}{n} \sum_i d_h^{\mu^i}(s,a) \geq \bar{d}_m$ for all $s \in \mathcal{S}$ and $a \in \mathcal{A}$, and for some \bar{d}_m . Then it holds that

$$\text{MSE}(\hat{v}^\pi) \leq (1 - \delta)(*) + H^2\delta,$$

where $(*)$ is the bound on the MSE of the estimator in the non-adaptive case from Theorem 13.1.

13.1 Proof Outlines

Theorem 13.1 is a straightforward generalization of the main result in Yin & Wang (2020). They use a multiplicative Chernoff bound to ensure that $n_{h,s,a} \geq nd_m$ for all h, s, a , with d_m as defined in (1) giving a lower-bound on success probability of $n_{h,s,a}$'s binomial distribution. If we instead use the Chernoff bound for the sum of independent Bernoulli random variables with distinct success probabilities, we achieve $n_{h,s,a} \geq n\bar{d}_m/2$ for all h, s, a with high probability. By following the template for variance-analysis given by Yin & Wang (2020), the desired result can be recovered. Corollary 13.2 follows from Theorem 13.1 paired with the fact that the $\{\tau'_i\}$ are mutually independent conditioned on $\{\mu^i\}$ and the tower rule.