

# A Genetic Algorithm Meta-Heuristic for a Generalized Quadratic Assignment Problem

Mojtaba A. Farahani <sup>a</sup>, Alan McKendall <sup>a\*</sup>

<sup>a</sup> Department of Industrial and Management Systems Engineering, Benjamin M. Statler College of Engineering and Mineral Resource, West Virginia University, Morgantown, WV 26506, United States

\*Corresponding author: Alan.McKendall@mail.wvu.edu

## Abstract

The generalized quadratic assignment problem (GQAP) is one of the hardest problems to solve in the operations research area. The GQAP addressed in this work is defined as the task of minimizing the assignment and transportation costs of assigning a set of facilities to a set of locations. The facilities have different space requirements, and the locations have different space capacities. Multiple facilities can be assigned to each location if the space capacity is not violated. In this work, three instances of GQAP in different situations are presented. Then, a genetic algorithm is developed to solve the GQAP instances. Finally, the local neighborhood search with the steepest descend strategy is constructed and applied to the final solution obtained by the GA, and the final solution is compared with the best solution found by MPL/CPLEX software and reference papers. The results show that the developed GA heuristic is effective for solving the GQAP.

## Keywords

Generalized Quadratic Assignment Problem, Genetic Algorithms, Metaheuristics, Neighborhood Search Techniques

The generalized quadratic assignment problem (GQAP) is one of the hardest problems to solve in the operations research area. The GQAP addressed in this work is defined as the task of minimizing the assignment and transportation costs of assigning a set of facilities to a set of locations. The facilities have different space requirements, and the locations have different space capacities. Multiple facilities can be assigned to each location if the space capacity is not violated. In this work, three instances of GQAP in different situations are presented. Then, a genetic algorithm is developed to solve the GQAP instances. Finally, the local neighborhood search with the steepest descend strategy is constructed and applied to the final solution obtained by the GA, and the final solution is compared with the best solution found by MPL/CPLEX software and reference papers. The results show that the developed GA heuristic is effective for solving the GQAP. The main parts of this work are adopted from IENG 554 lecture notes, [1], and [2]. The supplementary files, MATLAB codes and problem files of this work are available at [https://github.com/tamoraji/GA\\_for\\_GQAP](https://github.com/tamoraji/GA_for_GQAP).

## 1. Problem Definition & Mathematical Model

The generalized quadratic assignment problem (GQAP) assigns a set of machines ( $M$ ) to a set of locations ( $N$  locations) where  $M > N$  such that more than one machine can be assigned to a location based on the machine's requirements and the capacities of the locations while minimizing the sum of the assignment and transportation costs [3].

### 1.1. Non-linear Problem Definition

The number of units of materials transported between machine  $i$  and  $j$  ( $f_{ij}$ ), the distances between locations  $k$  and  $l$  ( $d_{kl}$ ), the space requirement of each machine  $i$  ( $r_i$ ), the capacity of each location  $k$  ( $c_k$ ), the costs of assigning each machine  $i$  to each location  $k$  ( $a_{ik}$ ), and the unit cost per distance unit of transporting materials between each pair of machines  $i$  at location  $k$  and machine  $j$  at location  $l$  ( $c_{ijkl}$ ) are deterministic and known. The non-linear mathematical formulation of the problem will be as follows:

$x_{ik} = 1$ , if machine  $i$  is assigned to location  $k$  and, 0 otherwise

$$\text{Min } Z = \sum_{i=1}^M \sum_{k=1}^N a_{ik} x_{ik} + \sum_{i=1}^M \sum_{j=1}^N \sum_{k=1}^N \sum_{l=1}^M c_{ijkl} f_{ij} d_{kl} x_{ik} x_{jl} \quad (1)$$

$j \neq i \quad l \neq k$

$$\text{Subject to } \sum_{k=1}^N x_{ik} = 1, \text{ for } i = 1, 2, \dots, M \quad (2)$$

$$\sum_{i=1}^M r_i x_{ik} \leq c_k, \text{ for } k = 1, 2, \dots, N \quad (3)$$

$$x_{i,k} = 0 \text{ or } 1, \forall i, k \quad (4)$$

Objective function (1) minimizes the sum of the assignment/installation and material handling costs. Constraint set (2) ensures that each machine is assigned to only one location. Constraint set (3) ensures that the space capacity of each location is not exceeded, and the restrictions on the decision variables are given in (4) [1].

## 1.2. Linear Problem Definition

The objective function in previous section, contain a quadratic term. As a result, the mathematical formulation (1)– (4) is nonlinear and need a nonlinear programming model. As we know, the nonlinear programming techniques does not guarantee an optimal solution and we need to linearize the model to be able use linear programming techniques and reach to an optimal solution. The model is linearized by substituting  $w_{ijkl}$  for the quadratic term  $x_{ik}x_{jl}$ . So, replacing objective function (1) with (1a) we will have:

$$\text{Min } Z = \sum_{i=1}^M \sum_{k=1}^N a_{ik} x_{ik} + \sum_{i=1}^M \sum_{j=1}^N \sum_{k=1}^N \sum_{l=1}^M c_{ijkl} f_{ij} d_{kl} w_{ijkl} \quad (1a)$$

And adding new constraints (5) and (6):

$$(5)$$


$$x_{ik} + x_{jl} - 1 \leq w_{ijkl} \quad \forall i, j \neq i \text{ and } \forall k, l \neq k$$

$$w_{ijkl} \geq 0 \quad \forall i, j \neq i \text{ and } \forall k, l \neq k \quad (6)$$

The linearized model is a mixed integer linear programming model (MILP) for the GQAP. This model will be used in the next section to solve a small GQAP instance using MPL/CPLEX software.

### 1.3. MPL/CPLEX formulation

Figure.1. shows the MPL formulation that has been used in this project solve three different problem instances mathematically using linear programming techniques. M is the number of machines and N is the number of locations, respectively, and the DATA and transportation cost part in the formulation should be substituted based on each problem instance accordingly.

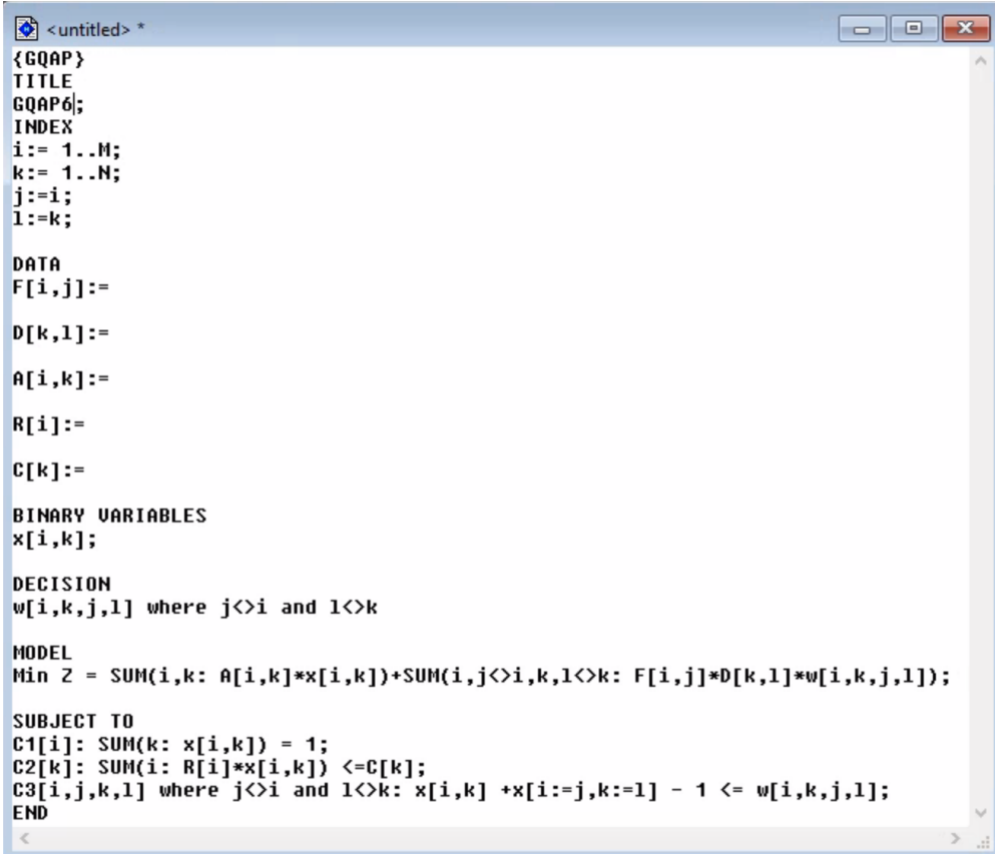

```

<untitled> *
{GQAP}
TITLE
GQAP6;
INDEX
i:= 1..M;
k:= 1..N;
j:=i;
l:=k;

DATA
F[i,j]:=
D[k,l]:=
A[i,k]:=
R[i]:=
C[k]:=

BINARY VARIABLES
x[i,k];

DECISION
w[i,k,j,l] where j<>i and l<>k

MODEL
Min Z = SUM(i,k: A[i,k]*x[i,k])+SUM(i,j<>i,k,l<>k: F[i,j]*D[k,l]*w[i,k,j,l]);

SUBJECT TO
C1[i]: SUM(k: x[i,k]) = 1;
C2[k]: SUM(i: R[i]*x[i,k]) <=C[k];
C3[i,j,k,l] where j<>i and l<>k: x[i,k] +x[i:=j,k:=l] - 1 <= w[i,k,j,l];
END

```

Figure.1: MPL formulation used in this project

## 2. Solving GQAP instances with LP and MPL/CPLEX results

Three different GQAP instances have been used in this project. a small instance, a medium instance, and a large instance. The small instance of a problem is the task of assigning six machines to four locations. The medium instance problem is the task of assigning 20 machines to 15 locations, and the large instance problem is the task of assigning 50 machines to 10 locations. The details of each problem instance are given in the project assignment and will not be discussed here. Here, we will present the results achieved by using the CPLEX solver using MPL/CPLEX software and the linearized mathematical formulation for the GQAP presented before. It should be noted that the software was run on the WVU virtual machine with 16 GB of RAM and an Intel Xeon Platinum 8272CL at 2.6 GHz.

For the small problem instance, the MILP has 370 constraints and 384 variables, which include 24 integers. The optimal solution was found by the software in under a second. The optimal objective function value for this problem is, and the optimal solution is:  $x_{13} = x_{21} = x_{34} = x_{42} = x_{51} = x_{61} = 1$ , and all other decision variables are zero. More specifically, machines 2, 5, and 6 are assigned to location 1. Machines 4, 1, and 3 are assigned to locations 2, 3, and 4, respectively. Figure 2 is the screenshot of the problem solution.

---

MPL Modeling System - Copyright (c) 1988-2012, Maximal Software, Inc.

---

MODEL STATISTICS

Problem name: GQAP6M4L (64-bit)  
Filename: GQAP  
Date: November 15, 2022  
Time: 11:17  
Parsing time: 0.01 sec  
  
Solver name: CPLEX (12.4.0.0)  
Objective value: 17165.000000  
Integer nodes: 0  
Iterations: 149  
Solution time: 0.07 sec  
Result code: 101  
  
Constraints: 370  
Variables: 384  
Integers: 24  
Nonzeros: 1128  
Density: 0.8 %

SOLUTION RESULT

Optimal integer solution found

MIN Z = 17165.0000

Figure. 2: MPL/CLEX result for the small instance problem

For the medium problem instance, the MILP has 79835 Constraints and 80100 variables which include 300 integers. The software ran out of memory after about three hours and 18 minutes and could not reach to the optimal solution and objective function value. The best-found objective function value for this problem is  $Z = 1714264$ . This value will be used as the benchmark for the best-found solution by MPL/CPLEX. Figure. 3 is the screenshot of the problem solution

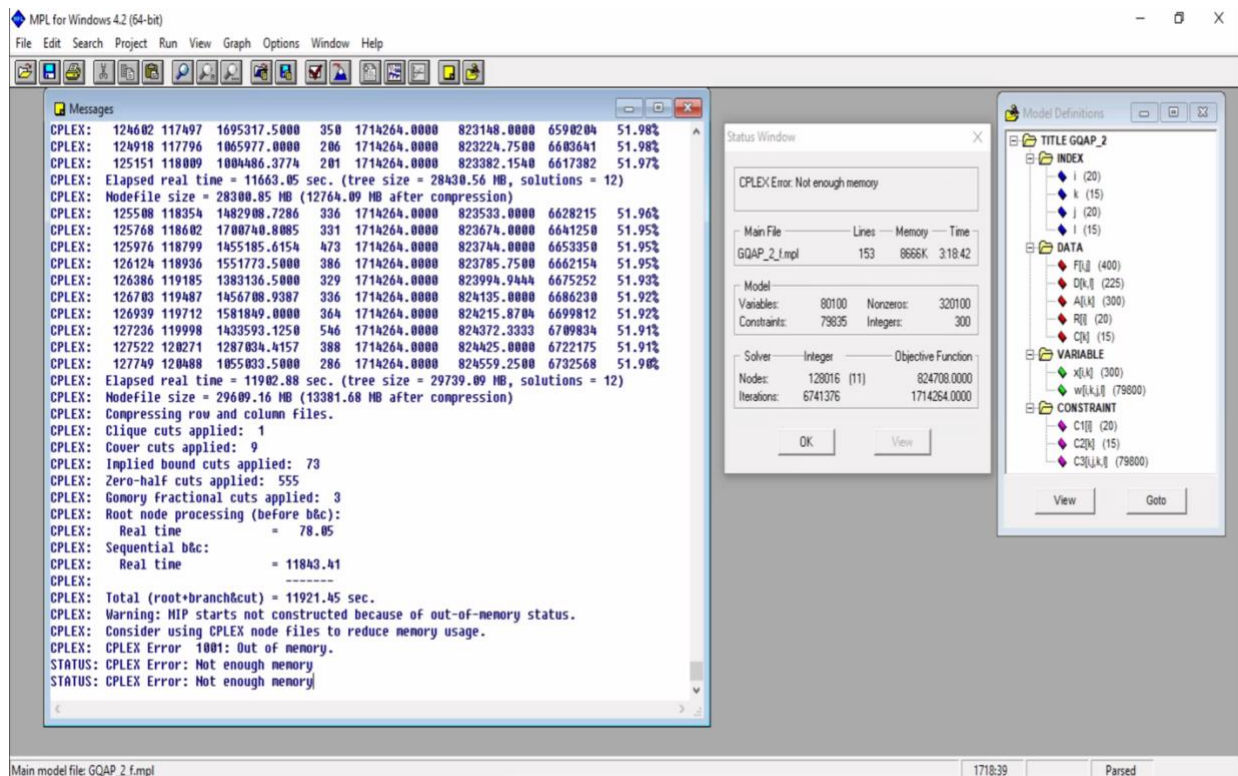


Figure. 3: MPL/CLEX result for the medium instance problem

For the large problem instance, the MILP has 220560 Constraints and 221000 variables which include 500 integers. The virtual machine logged out after about five hours and could not reach to the optimal solution and objective function value. The best-found objective function value for this problem is  $Z = 12878101$ . This value will be used as the benchmark for the best-found solution by MPL/CPLEX. Figure. 4 is the screenshot of the problem solution

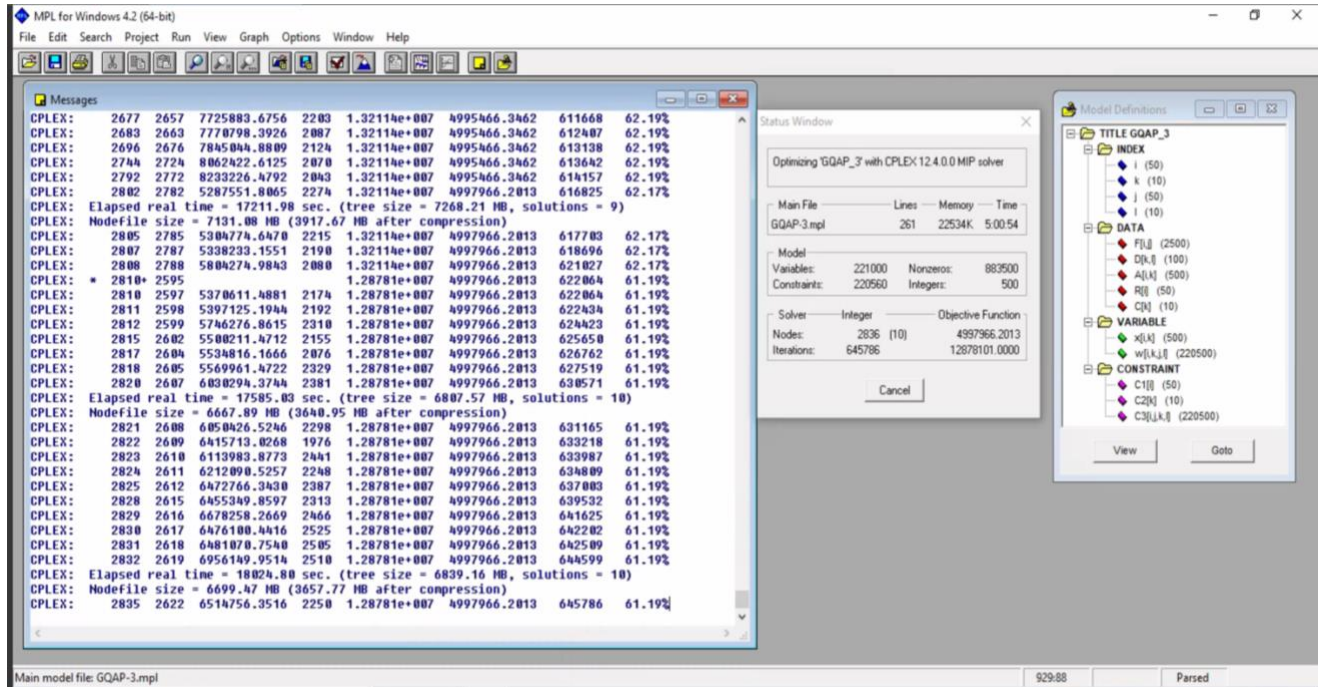


Figure. 4: MPL/CPLEX result for the medium instance problem

### 3. Solving GQAP instances using Genetic Algorithm Metaheuristics

The general framework adopted in this project is presented as Figure 5. The detail of each step will be discussed in subsequent subsections.



Figure. 5: The framework to address the GQAP

#### 3.1. Solution representation

The mathematical model that was defined in Section 1 can only be used to solve small problems in a reasonable amount of time. Thus, heuristic and meta-heuristic algorithms are developed for the GQAP.



As it was shown in [1], it is much more efficient using the COP model, as opposed to the mathematical model, to solve the GQAP. The combinatorial optimization problem (COP) model and the solution representation for our problem are as follows:

$S = (S(1), S(2), \dots, S(M))$  where  $S(i) = k$  means machine  $i$  is assigned to location  $k$

$$\text{Min } TC(S) = \sum_{i=1}^M a_{is(i)} + \sum_{i=1}^M \sum_{\substack{1 \leq j \leq M \\ j \neq i}} c_{ijs(i)s(j)} f_{ij} d_{s(i)s(j)}$$

$$\text{subject to } \sum_{\forall i \text{ s.t. } s(i)=k} r_i \leq C_k \text{ for } k = 1, \dots, N$$

For example, the optimal solution for the small problem instance presented before is represented as  $S = (3, 1, 4, 2, 1, 1)$ . That is,  $s(1) = 3$ ,  $s(2) = 1$ ,  $s(3) = 4$ ,  $s(4) = 2$ ,  $s(5) = 1$ , and  $s(6) = 1$ . More specifically, machines 2, 5, and 6 are assigned to location 1, machine 4 to location 2, machine 1 to location 3, and machine 3 to location 4.

### 3.2. Genetic Algorithm

A genetic algorithm (GA) is an intelligent probabilistic search algorithm that simulates the process of evolution by constructing a population of solutions and applying genetic operators (i.e., crossover and mutation) in each reproduction. Each solution in the population is evaluated according to the objective function and fitness of the solution. Highly fit solutions in the population are given opportunities to reproduce and generate offspring. New offspring solutions are generated, and unfit solutions in the population are replaced. This evaluation-selection-reproduction cycle is repeated until a satisfactory solution is found or a stopping criterion has been met [2]. In this project, I adopted the genetic algorithm proposed by Chu and Beasley [2] with a few minor modifications for GQAP. First, the general steps of the algorithm will be presented, and then each step will be discussed in more detail along with a numerical example from the small problem instance of the project. Figure 6 is the general GA algorithm that has been

used in this project. The details of each step will be discussed subsequently. The MATLAB code snippet of each step and the results of the code for the small instance will be presented.

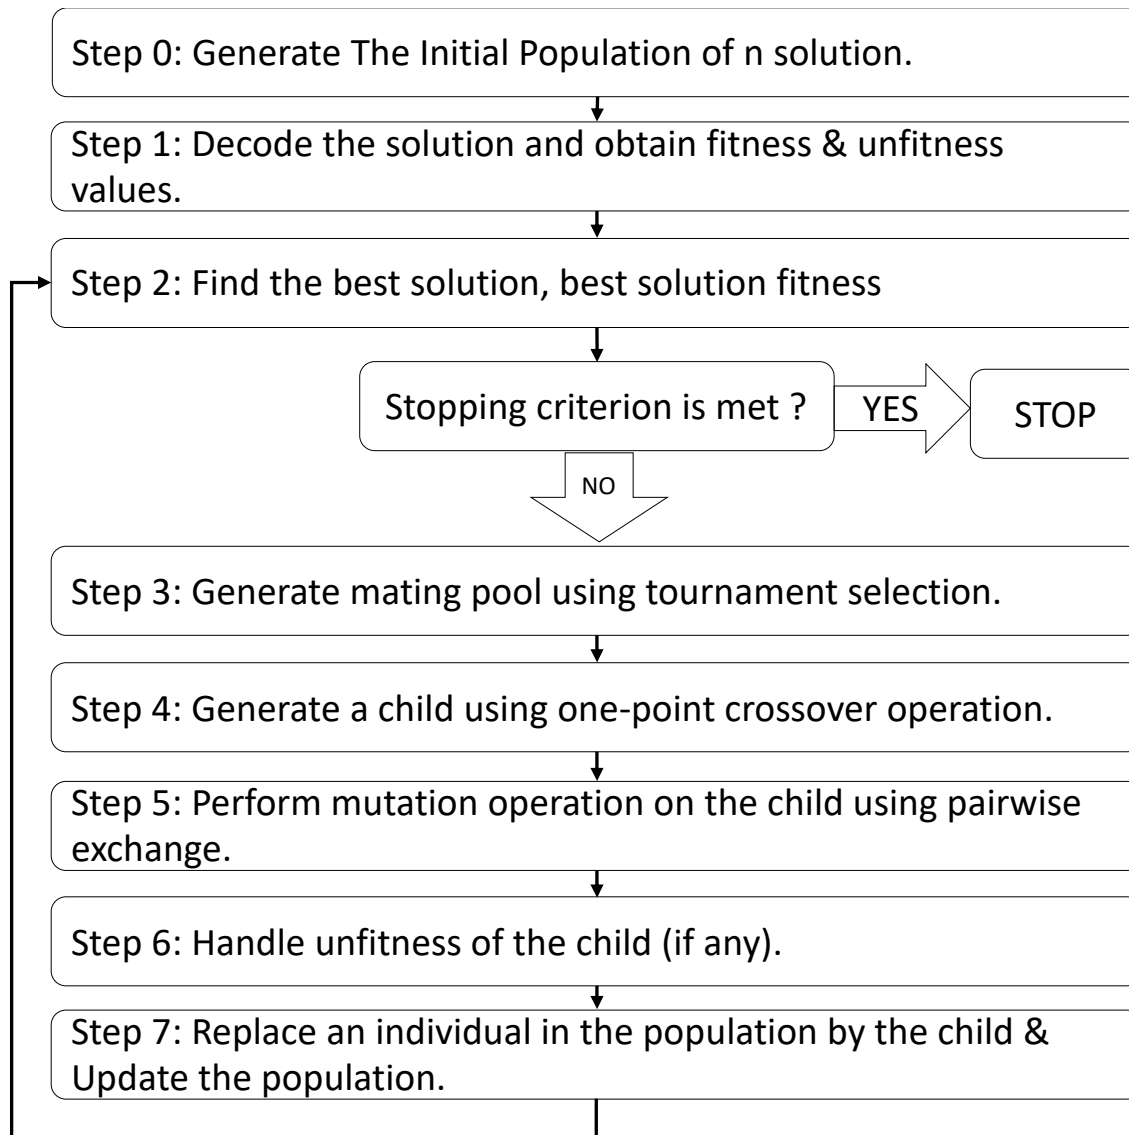


Figure. 6: The GA algorithm flowchart

**Step 0:** In this step, we generate an initial population of  $n$  randomly constructed solutions. Each of the initial solutions is generated by randomly assigning a machine to a random location. Note that the initial solutions may violate the capacity constraint and be infeasible. The number of chromosomes in the initial population is defined by the user.

**Step 1:** In this step, we calculate the fitness and unfitness values of each chromosome in the population. F, D, A, C, and R are the problem input data matrices. The notation is the same as the notation that was defined in the COP model. "costcalc" is the function to calculate the fitness value based on the defined COP model, and "unfitness\_calc" is the function to calculate the unfitness of the solutions. The unfitness of a solution is a measure of infeasibility (in relative terms) as calculated by the formula in [2]. It should be noted that the unfitness value is equal to 0 if the solution is feasible. Figure 7 illustrates the code snippets to calculate these two values.

```
function [extra_cap,unfitness] = unfitness_calc(pop,C,R)
unfitness = zeros(size(pop,1),1);
extra_cap = zeros(size(pop,1),length(C));
for n = 1:size(pop,1)
    for i = 1:length(C)
        found = pop(n,:) == i;
        cap_ext = sum(R(found)) - C(i);
        extra_cap(n,i) = cap_ext;
        unfitness(n) = unfitness(n) + max([cap_ext,0]);
    end
end
end

function cost = costcalc(pop,F,D,A)
cost = zeros(size(pop,1),1);
for n = 1:size(pop,1)
    for i = 1:size(pop,2)
        for j = 1:size(pop,2)
            if j == i
                continue
            end
            cost(n) = cost(n) + F(i,j)*D(pop(n,i),pop(n,j));
        end
    end
    for i = 1:size(pop,2)
        cost(n) = cost(n) + A(i,pop(n,i));
    end
end
end
```

Figure. 7. costcalc and unfitness\_calc functions

Figure. 8. is the code snippet for step 0 and step 1. In Figure 8, "*n\_pop*" is the number of chromosomes in the population (e.g., 5), "*N*" is the number of locations, and "*M*" is the number of machines.

---

```

%% initialization

tic
rng('default')
P0 = randi(N,n_pop,M); % Generate 'n_pop' random solutions
fitness_P0 = costcalc(P0,F, D,A);
[extra_cap_P0,unfitness_P0] = unfitness_calc(P0,C,R);
final_P0 = [P0 int16(fitness_P0) unfitness_P0];
disp(final_P0)

```

---

Figure. 8. step 0 & step 1: generate the initial population

Table 1 shows an example of the initial population constructed by the algorithm in steps 0 and 1.

Table 1. Initial population example for small instance problem

Solution	Fitness	Unfitness
4 4 3 4 4 3	13030	400
2 2 1 1 2 3	18438	120
2 4 4 2 1 4	16340	190
3 2 3 1 3 2	20130	200
4 1 3 4 4 4	18785	280

**Step 2:** The next step is to find the population's best solution and determine its fitness. Since there can be a case where an unfit solution has a lower fitness value than a fit solution, the best solution is chosen only from fit solutions, and the solution that has the minimum fitness value is considered the best solution. If there is no solution with unfitness equal to zero in the population, the solution with the least amount of unfitness is chosen as the best solution. The fitness value for this solution is set to a large number (e.g., 999,999,999). Figure 9 shows the code snippet for this step.

---

```

%% Find the best_sol P0 & initial z_best

found = find(unfitness_P0==0);
if isempty(found)
    [~,ind] = min(unfitness_P0);
    best_sol = P0(ind,:);
    z_best = 9999999;
else
    fitted = final_P0(found,:);
    [~,ind] = min(fitted(:,M+1));
    best_sol = fitted(ind,1:M);
    z_best = fitted(ind,M+1);
end

```

Figure. 9. step 2: find the best solution in current population

**Stopping criterion:** The stopping criterion should be checked before moving on to the next step of the algorithm. We defined a parameter "*K\_iter*" here, which is defined as the number of iterations that a new non-duplicate child is generated, but the best solution was not improved. The stopping criterion is for the algorithm to run for a predefined number of iterations (e.g., "maxiter = 100000") or for *K\_iter* to reach a predefined value. (e.g., 'max\_k=100'). The algorithm goes to step 3 if either of those two criteria is not met. If any of them are met, the algorithm stops and reports the best-found solution and the respected fitness value.

**Step 3:** Select two parent solutions for reproduction. the tournament selection scheme used for this step. Two individuals are chosen randomly from the population. The more fit individual is then allowed into the mating pool. To produce a child, two tournaments are held, each of which produces one parent. Note that the selection criteria do not involve the unfitness value of an individual [2]. Duplicate parents are also not acceptable in the mating pool. Figure 10. shows the code snippet and an example of it for the small problem instance.

```

% Generate the mating pool with the tournament scheme
M_pool = zeros(2,M);
choose = randperm(size(P0,1),2); %Choose 2 random solutions
if fitness_P0(choose(1)) <= fitness_P0(choose(2)) %compare the fitness values
    M_pool(1,:) = P0(choose(1,:));
else
    M_pool(1,:) = P0(choose(2,:));
end
ii=1;
while ii < 2
    choose = randperm(size(P0,1),2); %Choose 2 random solutions
    if fitness_P0(choose(1)) <= fitness_P0(choose(2)) %compare the fitness values
        if P0(choose(1,:)) == M_pool(1,:)
            continue
        end
        M_pool(2,:) = P0(choose(1,:));
        ii = 2;
    else
        if P0(choose(2,:)) == M_pool(1,:)
            continue
        end
        M_pool(2,:) = P0(choose(2,:));
        ii = 2;
    end
    if ~isempty(find(M_pool(2,:), 1))
        break
    end
end
end

```

new generation is:

1	2	3	1	4	1	22273	10
3	1	1	2	4	1	19373	10
2	3	4	1	1	2	19610	20
4	4	2	1	1	3	20400	110
1	1	4	2	4	1	18878	110

Iteration Number:

6

The mating pool is:

3	1	1	2	4	1
2	3	4	1	1	2

Figure. 10: step 3: generating mating pool from the population

In this example, second and third solution randomly chosen for the mating pool.

**Step 4:** Generate a child solution by applying a crossover operator to the selected parents in the mating pool. A simple one-point crossover operator is used for this step, in which a crossover point is randomly selected, and the child solution will consist of the first  $j$  genes taken from the first parent and the remaining  $(1-j)$  genes taken from the second parent, or vice versa, with equal probabilities [2]. Figure 11 shows the code snippet and an example of it for the small problem instance.

```

function C=CX_beasly(pop)

parent1 =pop(1,:);|
parent2 = pop(2,:);

l = length(parent1);
j=randi([1 l-1]);
C1=[parent1(1:j) parent2(j+1:end)];
C2=[parent2(1:j) parent1(j+1:end)];

r = randi([1, 2], 1);
if r==1
    C=C1;
else
    C=C2;
end

end

```

```

M_pool = 2x6
    3    1    1    2    4    1
    2    3    4    1    1    2

child = 1x6
    3    1    4    1    1    2

```

Figure. 11: step 4: one-point crossover operation

In this example, the second position and the first child are randomly chosen as the crossover point and the final child.

**Step 5:** The crossover procedure is followed by a mutation procedure. This mutation procedure involves exchanging elements in two randomly selected genes. It should be noted that mutation will only happen if two exchanged elements are not the same. There might be a case where no mutation happens. Authors in [2] showed that the GA with only the crossover and mutation operators is effective in producing good-quality solutions. Figure 12 shows the code snippet and an example of it for the small problem instance.

```

function mutated = mutation_beasly(child)

mutated = child;
nvar = length(child);

j1=randi([1 nvar-1]);
j2=randi([j1+1 nvar]);

nj1=mutated(j1);
nj2=mutated(j2);

mutated(j1)=nj2;
mutated(j2)=nj1;

if child == mutated
    disp('No Mutation happened')
else
    disp('mutation happened')
end
end

child = 1x6
      3      1      4      1      1      2

mutation happened
mutated_child = 1x6
      3      1      1      1      4      2

```

Figure. 12: step 5: pairwise exchange mutation

In this example, mutation happened and positions 3 and 5 were exchanged.

**Step 6:** In this step, we will handle the unfitness of the generated child using the method introduced in [2]. Please note that this step will only happen for unfit children and will be skipped for those with unfitness equal to zero (i.e., no unfitness). For each location in the solution, if the resource capacity of the location is exceeded (i.e., overused location), then a single randomly selected machine is reassigned from the overused location to the next underused location (in order) that has adequate remaining capacity (if one can be found). The result will be a new child with less or no unfitness. Figure 13 shows the code snippet and an example of it for the small problem instance.



```

function [child, fit_child,unfitness_child] = beasly_unfit(child,C,R,F,D,A,T)
[extra_cap_child,unfitness_child] = unfitness_calc(child,C,R);
if unfitness_child >0
    disp('there are unfitness in solutions')
    over_used_loc = find(extra_cap_child(:)>0);
    under_used_loc = find(extra_cap_child(:)<0);
    num_overused = size(over_used_loc,1);
    for k=1:num_overused
        %find all the m/c's that is assigned to the overused loc
        mc = find(child(:) == over_used_loc(k));
        choose = mc(randperm(numel(mc),1)); %Randomly choose one of them
        if ~isempty(under_used_loc)
            extra = min(extra_cap_child(under_used_loc));
            if -extra<R(choose)
                continue
            else
                inde = find(extra_cap_child==extra,1);
                child(choose) =inde; %assign the m/c to an underused loc
            end
        end
        [extra_cap_child,~] = unfitness_calc(child,C,R);
        under_used_loc = find(extra_cap_child(:)<0);
    end
    fit_child = costcalc_B(child,F,D,A,T);
    [~,unfitness_child]= unfitness_calc(child,C,R);
    disp('The new child is:')
    disp(child)
    disp('the new child unfitness is:')
    disp(unfitness_child)
else
    disp('no unfitness')
    fit_child = costcalc(child,F,D,A,T);
end
end

```

```

mutated_child = 1x6
    3    1    4    1    1    2

there are unfitness in solutions
The new child is:
    3    2    4    1    1    2

the new child unfitness is:
    0

new_child = 1x6
    3    2    4    1    1    2

fit_child = 21265
unfitness_child = 0

```

Figure. 13: step 6: handling unfitness

In this example, there were unfitness in the solution. So, the algorithm changed the assignments somehow and the new child unfitness is zero.

**Step 7:** The child solution will take the place of one chromosome in the population and the new population is generated. In our population replacement strategy, the child replaces the population solution that has the highest unfitness value (i.e., the most unfit solution). If the population consists of all feasible solutions, the solution with the maximum fitness is removed. This replacement plan aids in eliminating infeasible solutions in the population. It should be noted that a duplicate child, which is defined as a solution whose structure is identical to any of the solution structures already in the population, is not permitted to enter the new population because, in that case, the population might end up being made up entirely of identical solutions, which would severely restrict the GA's ability to produce new solutions. Figure 14 shows the code snippet and an example of it for the small problem instance.

```
P1=P0;
check_duplicate = all(ismember(child,P1,'rows')==1);
if check_duplicate
    disp('generated child exist in the solution, duplicate solution')
    continue
else
    %check if there is unfitness in the solution
    check = ~isempty(find(unfitness_P0, 1));
    if check==0
        if unfitness_child==0
            disp('no unfitness remained, exchange the new child with the max fitness')
            [highest_fit, ind] = max(fitness_P0);
            P1(ind,:) = child;
        end
    else
        disp('exchange the new child with max unfitness')
        [highest_unfit, ind] = max(unfitness_P0);
        P1(ind,:) = child;
    end
end
```

```

The new child is:
  2   3   2   1   1   4

the new child unfitness is:
  20

overall fitness of previous generation is:
  9.7298e+04

overall unfitness of previous generation is:
  150

previous generation is:
  1   2   3   1   4   1  22273   10
  3   1   1   2   4   1  19373   10
  2   3   4   1   1   2  19610   20
  3   1   4   2   1   1  17165    0
  1   1   4   2   4   1  18878  110

exchange the new child with max unfitness
new overall fitness is:
  99015

new overall unfitness is
  60

new generation is:
  1   2   3   1   4   1  22273   10
  3   1   1   2   4   1  19373   10
  2   3   4   1   1   2  19610   20
  3   1   4   2   1   1  17165    0
  2   3   2   1   1   4  20595   20

```

Figure. 14: step 7: update the population

In this example, the newly generated child with unfitness equal to 20 substitutes for the solution with unfitness equal to 110, thus reducing the overall unfitness of the population.

Finally, the best-found solution and best-found objective function value are updated, and the algorithm goes back to step 2. Steps 2 to 7 are repeated until one of the previously mentioned stopping criteria is met. The MATLAB output for a few complete iterations is printed in the appendix to check how the algorithm works.

The GA algorithm is followed by applying a local neighborhood search technique with steepest descend improvement strategy. This make sure that the result of the GA is at local (or hopefully global) optima. If the solution is not at the local optima, the local neighborhood search algorithm will generate a new solution at the local optima. Figure 15 shows the code snippet.

```

improvement = 1;
iter = 0;
while improvement
    iter = iter + 1;
    i = 0;
    NBH_child = steep_desc(Best_sol,C,R);
    cost_NBH = costcalc(NBH_child,F,D,A,T);
    [~,unfit_NBH] = unfitness_calc(NBH_child,C,R);
    final = [NBH_child int64(cost_NBH) unfit_NBH];
    found = find(unfit_NBH==0);
    fitted = final(found,:);
    [mincost, minind] = min(fitted(:,M+1));

    if mincost < Z_best
        disp('a better sol found')
        Best_sol = fitted(minind,1:M);
        disp(Best_sol)
        Z_best = mincost;
        disp(Z_best)
    else
        improvement = 0;
    end
end
disp(Best_sol);
disp(Z_best);

```

Figure. 15: local neighborhood search with steepest descend

## 4. Computational Results

In this part, the results of implementing this algorithm on three different problem instances (i.e., small, medium, and large) are presented. The results are compared with the results from solving the same problems with MPL/CPLEX software and the results presented in [1]. A MacBook Pro 2018 with a 2.3 GHz quad-core Intel Core i5 CPU and 8 GB of RAM was used as the hardware, along with MATLAB R2022b software.

In this project's algorithm, there are two main parameters that can affect the quality of the solution and the time to reach that solution. The first parameter is the number of populations to generate and update throughout the algorithm (i.e., the  $n_{pop}$  variable in codes), and the second parameter is the number of iterations that a new non-duplicate child is generated but the best solution was not improved (i.e., the  $max_k$

variable in codes). A design of experiment approach with two factors and three levels for each factor (low, medium, high) is adopted to determine the best parameters for each problem instance. Thus, each experiment includes nine runs of the algorithm with different sets of parameters. Table 2 shows the different parameter settings that have been tested for each problem instance.

Table 2. algorithm parameters

Problem	n_pop	n_pop	n_pop	Max_k (low)	Max_k	Max_k
Instance	(low)	(medium)	(high)		(medium)	(high)
Small	5	10	15	10	40	70
Medium	35	50	75	250	500	700
Large	50	75	100	300	500	700

Due to the random nature of many steps in the algorithm, each experiment was repeated three times for diversification purposes. The best performing result in terms of quality (i.e., percent deviation from the best-found solution) and computational time is chosen for the respected parameter setup. Totally, 27 experiments have been done for each problem instance. The summary of the results is in table 3 and the details are in the appendix section.

Table 3. Computational result summary

Problem	n_pop	Max_k	Time (s)	Z_best_GA	Z_best_C	Z_best_found	%D
Instance							
Small	5	70	12.48	17165	17165	n/a	0%
Medium	50	250	578.91	1471896	1714264	1471896	0%
Large	100	500	2148.0701	11261034	12878101	11217503	0.39%

In table 3, n\_pop and Max\_k are algorithm parameters that gave the best solution in terms of solution quality and computational time. Time is the amount of elapsed time for the algorithm to complete the experiment run in seconds. Z\_best\_GA is the objective function value result of our algorithm after

finishing the GA and local neighborhood search.  $Z_{best\_C}$  is the best-found objective function value using MPL/CPLEX software.  $Z_{best\_found}$  is the best-found objective function value from [1]. And finally, %D is the percent deviation between our solution and  $Z_{best\_found}$ .

The computational result in this project shows that increasing the number of chromosomes in the population doesn't necessarily guarantee better solution. It also shows that the initial randomly generated population may influence the final solution quality.

## **5. Conclusions**

In this project, a modified version of the genetic algorithm developed by [2] was presented and applied to three different instances of the GQAP problem. The results, best-found solutions, and objective function values of the GA are compared with the best-found solutions calculated by solving the problem mathematically with MPL/CPLEX software and other metaheuristics. The results show that the developed GA can produce better results more efficiently and in a fraction of the time compared to MPL/CPLEX software results. And the result is interpretable and can be used to solve real-life problems. It should be noted that the main objective of this project was to implement the GA and receive acceptable results. There is a lot of room for improving the algorithm to perform faster and in a more efficient manner. That can be considered in future works.

## References

- [1] McKendall, A., & Li, C. (2017). A tabu search heuristic for a generalized quadratic assignment problem. *Journal of Industrial and Production Engineering*, 34(3), 221-231.
- [2] Chu, P. C., & Beasley, J. E. (1997). A genetic algorithm for the generalised assignment problem. *Computers & Operations Research*, 24(1), 17-23.
- [3] IENG 554 lecture notes, Fall 2022

## Appendix

Here are MATLAB output of few complete iterations of the algorithm for the small instance problem.

Iteration Number:

6

The mating pool is:

```
3 1 1 2 4 1
2 3 4 1 1 2
```

mutation happened

no unfitness

overall fitness of previous generation is:

1.0053e+05

overall unfitness of previous generation is:

260

previous generation is:

```
1 2 3 1 4 1 22273 10
3 1 1 2 4 1 19373 10
2 3 4 1 1 2 19610 20
4 4 2 1 1 3 20400 110
1 1 4 2 4 1 18878 110
```

exchange the new child with max unfitness

new overall fitness is:

9.7298e+04

new overall unfitness is

150

new generation is:

```
1 2 3 1 4 1 22273 10
3 1 1 2 4 1 19373 10
2 3 4 1 1 2 19610 20
3 1 4 2 1 1 17165 0
1 1 4 2 4 1 18878 110
```

new best sol is:

3 1 4 2 1 1

new Z is:

17165

Iteration Number:

7

The mating pool is:

```
3 1 4 2 1 1
2 3 4 1 1 2
```

mutation happened

there are unfitness in solutions

The new child is:

```
2 3 2 1 1 4
```



the new child unfitness is:

20

overall fitness of previous generation is:

9.7298e+04

overall unfitness of previous generation is:

150

previous generation is:

1	2	3	1	4	1	22273	10
3	1	1	2	4	1	19373	10
2	3	4	1	1	2	19610	20
3	1	4	2	1	1	17165	0
1	1	4	2	4	1	18878	110

exchange the new child with max unfitness

new overall fitness is:

99015

new overall unfitness is

60

new generation is:

1	2	3	1	4	1	22273	10
3	1	1	2	4	1	19373	10
2	3	4	1	1	2	19610	20
3	1	4	2	1	1	17165	0
2	3	2	1	1	4	20595	20

new best sol is:

3 1 4 2 1 1

new Z is:

17165

Iteration Number:

8

The mating pool is:

3	1	4	2	1	1
3	1	1	2	4	1

No Mutation happened

there are unfitness in solutions

The new child is:

3 1 1 2 4 1

the new child unfitness is:

10

overall fitness of previous generation is:

99015

overall unfitness of previous generation is:

60

previous generation is:

1	2	3	1	4	1	22273	10
3	1	1	2	4	1	19373	10
2	3	4	1	1	2	19610	20
3	1	4	2	1	1	17165	0
2	3	2	1	1	4	20595	20

generated child exist in the solution, duplicate solution

The details of experiments are as follow:

	n_pop	max_k	Best_sol	Time (s)	Z_best	Optimal solution	Percent deviation	best from mpl/cplex
small instance run1	5	10	4 1 1 1 3 4	0.39906	9,999,999	17,165	n/a	17,165
	10	10	4 3 1 2 2 1	0.12692	9,999,999	17,165	n/a	17,165
	15	10	3 1 4 2 1 1	14.1555	17,165	17,165	0.00%	17,165
	5	40	3 1 4 2 1 1	13.7919	17,165	17,165	0.00%	17,165
	10	40	3 1 4 2 1 1	15.1179	17,165	17,165	0.00%	17,165
	15	40	3 1 4 2 1 1	14.5252	17,165	17,165	0.00%	17,165
	5	70	3 1 4 2 1 1	12.4843	17,165	17,165	0.00%	17,165
	10	70	3 1 4 2 1 1	13.161	17,165	17,165	0.00%	17,165
	15	70	3 1 4 2 1 1	14.0291	17,165	17,165	0.00%	17,165
small instance run2	n_pop	max_k	Best_sol	Time (s)	Z_best	Optimal solution	Percent deviation	best from mpl/cplex
	5	10	3 1 4 2 1 1	22.3587	17,165	17,165	0.00%	17,165
	10	10	3 1 4 2 1 1	15.5395	17,165	17,165	0.00%	17,165
	15	10	3 1 1 4 1 2	0.19471	9,999,999	17,165	n/a	17,165
	5	40	3 1 1 4 1 2	18.7781	17,165	17,165	0.00%	17,165
	10	40	3 1 1 4 1 2	19.0438	17,165	17,165	0.00%	17,165
	15	40	3 1 1 4 1 2	9.8093	17,165	17,165	0.00%	17,165
	5	70	3 1 1 4 1 2	8.1287	17,165	17,165	0.00%	17,165
	10	70	3 1 1 4 1 2	8.543	17,165	17,165	0.00%	17,165
15	70	3 1 1 4 1 2	15.5099	17,165	17,165	0.00%	17,165	
small instance run2	n_pop	max_k	Best_sol	Time (s)	Z_best	Optimal solution	Percent deviation	best from mpl/cplex
	5	10	3 1 4 2 1 1	19.671	17,165	17,165	0.00%	17,165
	10	10	4 1 1 3 2 2	0.071745	9,999,999	17,165	n/a	17,165
	15	10	3 1 4 2 1 1	18.3361	17,165	17,165	0.00%	17,165
	5	40	3 1 4 2 1 1	14.8265	17,165	17,165	0.00%	17,165
	10	40	3 1 4 2 1 1	15.0293	17,165	17,165	0.00%	17,165
	15	40	3 1 4 2 1 1	14.9304	17,165	17,165	0.00%	17,165
	5	70	3 1 4 2 1 1	15.0286	17,165	17,165	0.00%	17,165
	10	70	3 1 4 2 1 1	15.4842	17,165	17,165	0.00%	17,165
15	70	3 1 4 2 1 1	14.8255	17,165	17,165	0.00%	17,165	

	n_pop	max_k	Best_sol	Time (s)	Z_best	Z_best after steep	Optimal solution	Percent deviation	best from mpl/cplex
medium instance run1	35	250	1 13 13 9 13 9 13 13 9 13 5 13 9 14 3 5 8 5 1 3	710.4471	1,590,241	1,577,883	1,471,896	7.20%	1,714,264
	50	250	1 13 13 9 5 5 13 6 6 5 10 13 9 6 10 5 13 5 1 9	885.8834	1,640,973	1,528,964	1,471,896	3.88%	1,714,264
	75	250	2 6 10 15 10 5 2 2 6 10 2 6 10 6 10 5 2 5 1 10	1074.7386	1,471,896	1,471,896	1,471,896	0.00%	1,714,264
	35	500	1 13 13 12 5 5 13 13 1 1 13 1 1 12 9 5 8 5 9 9	502.5842	1628247	1,597,754	1,471,896	8.55%	1,714,264
	50	500	1 13 13 15 13 5 13 13 9 13 9 13 9 6 9 5 8 5 1 9	596.1952	1,517,741	1,517,741	1,471,896	3.11%	1,714,264
	75	500	2 6 10 15 10 5 2 2 6 10 2 6 10 6 10 5 2 5 1 10	983.9566	1,471,896	1,471,896	1,471,896	0.00%	1,714,264
	35	700	1 13 13 12 5 9 13 6 1 5 5 13 1 6 9 5 13 5 9 3	454.9406	1,669,290	1,594,282	1,471,896	8.31%	1,714,264
	50	700	2 6 10 1 5 5 2 2 6 10 2 10 10 6 10 5 2 5 10 11	801.3054	1,555,036	1,500,497	1,471,896	1.94%	1,714,264
	75	700	2 6 10 1 5 5 2 6 6 10 10 10 10 2 2 5 8 5 6 10	1109.7561	1,584,395	1,584,395	1,471,896	7.64%	1,714,264
medium instance run2	n_pop	max_k	Best_sol	Time (s)	Z_best	Z_best after steep	Optimal solution	Percent deviation	best from mpl/cplex
	35	250	1 9 13 12 13 5 13 13 1 1 11 1 1 12 3 9 13 5 5 9	508.9023	1,727,122	1,681,000	1,471,896	14.21%	1,714,264
	50	250	2 11 10 12 5 5 2 2 1 10 2 10 10 12 10 10 2 5 1 11	598.2446	1,728,962	1,506,593	1,471,896	2.36%	1,714,264
	75	250	2 6 10 1 10 5 2 2 6 10 2 6 10 6 10 5 2 5 10 9	684.0644	1,533,373	1,500,497	1,471,896	1.94%	1,714,264
	35	500	2 6 3 1 10 5 2 2 6 10 2 10 10 6 10 5 2 5 10 3	569.3753	1,623,531	1,623,531	1,471,896	10.30%	1,714,264
	50	500	13 13 13 1 3 9 3 4 13 5 4 13 9 5 10 5 13 5 9 3	644.602	1,747,772	1,654,298	1,471,896	12.39%	1,714,264
	75	500	2 6 10 15 10 5 2 2 6 10 2 6 10 6 10 5 2 5 1 10	741.2125	1,471,896	1,471,896	1,471,896	0.00%	1,714,264
	35	700	13 13 9 12 13 5 13 13 1 1 13 13 9 5 9 9 8 5 1 3	589.2322	1,558,316	1,514,852	1,471,896	2.92%	1,714,264
	50	700	1 13 13 12 13 9 13 6 1 1 5 1 1 6 9 5 8 5 13 9	636.1666	1,618,967	1,568,709	1,471,896	6.58%	1,714,264
75	700	2 11 10 12 5 5 2 2 1 10 2 1 1 11 2 5 8 5 10 10	647.8656	1,734,110	1,511,402	1,471,896	2.68%	1,714,264	
medium instance run3	n_pop	max_k	Best_sol	Time (s)	Z_best	Z_best after steep	Optimal solution	Percent deviation	best from mpl/cplex
	35	250	1 13 13 15 5 5 13 6 6 5 4 13 9 6 9 5 13 5 1 9	431.5769	1,528,964	1,528,964	1,471,896	3.88%	1,714,264
	50	250	2 6 10 15 10 5 2 2 6 10 2 6 10 6 10 5 2 5 1 10	578.9126	1,471,896	1,471,896	1,471,896	0.00%	1,714,264
	75	250	2 11 10 12 5 5 2 2 1 10 2 1 1 11 2 5 8 5 10 10	743.9031	1,734,110	1,511,402	1,471,896	2.68%	1,714,264
	35	500	13 13 9 15 3 9 3 13 9 10 10 13 10 5 10 5 13 5 9 3	497.8013	1,749,712	1,648,016	1,471,896	11.97%	1,714,264
	50	500	2 6 10 1 5 5 2 2 6 10 2 10 10 6 10 5 2 5 10 10	640.9521	1,555,036	1,500,497	1,471,896	1.94%	1,714,264
	75	500	1 13 9 15 13 9 13 13 9 13 13 13 9 5 9 5 8 5 1 3	1054.9346	1,497,245	1,497,245	1,471,896	1.72%	1,714,264
	35	700	2 11 10 1 5 5 2 6 6 10 2 10 10 6 10 5 2 5 10 3	559.0019	1,618,153	1,597,729	1,471,896	8.55%	1,714,264
	50	700	1 13 9 15 13 9 13 13 9 13 13 13 9 5 9 5 8 5 1 3	472.4605	1,497,245	1,497,245	1,471,896	1.72%	1,714,264
75	700	1 13 13 15 13 5 13 13 9 13 9 13 9 6 9 5 8 5 1 9	941.5869	1,517,741	1,517,741	1,471,896	3.11%	1,714,264	

	n_pop	max_k	Best_sol	Time (s)	Z_best	Z_best after steep	Optimal solution	Percent deviation	best from mpl/cplex
large instance run1	50	500	4 7 2 9 4	1330.793	11,330,290	11,330,290	11,217,503	1.01%	12,878,101
	75	500	6 7 2 2 4	1965.7089	11,670,235	11,670,235	11,217,503	4.04%	12,878,101
	100	500	4 7 2 9 4 3	1707.5355	11,719,641	11,571,085	11,217,503	3.15%	12,878,101
	50	700	6 7 2 9 4	791.9466	11,283,388	11,283,388	11,217,503	0.59%	12,878,101
	75	700	6 7 2 9 4	1237.4738	11,578,460	11,549,256	11,217,503	2.96%	12,878,101
	100	700	6 7 3 2 1 3	1555.2493	12,020,532	11,672,510	11,217,503	4.06%	12,878,101
	50	300	6 7 2 3 1	1293.3772	11,724,203	11,724,203	11,217,503	4.52%	12,878,101
	75	300	6 7 3 9 1	2390.7043	11,668,947	11,668,947	11,217,503	4.02%	12,878,101
large instance run2	100	300	4 7 2 9 4 3	3278.8803	11,878,414	11,462,982	11,217,503	2.19%	12,878,101
	n_pop	max_k	Best_sol	Time (s)	Z_best	Z_best after steep	Optimal solution	Percent deviation	best from mpl/cplex
	50	500	6 7 2 9 4	707.1405	11,603,906	11,603,906	11,217,503	3.44%	12,878,101
	75	500	5 7 2 9 4	1268.8264	11,479,174	11,471,626	11,217,503	2.27%	12,878,101
	100	500	4 7 2 9 4	2148.0701	11,261,034	11,261,034	11,217,503	0.39%	12,878,101
	50	700	4 7 2 9 4 7	971.4338	11,953,262	11,566,424	11,217,503	3.11%	12,878,101
	75	700	4 7 2 9 4	1725.4551	11,583,934	11,555,758	11,217,503	3.02%	12,878,101
	100	700	6 7 2 9 1	2487.14	11,606,157	11,606,157	11,217,503	3.46%	12,878,101
large instance run2	50	300	4 7 2 9 4	1432.7039	11,294,559	11,294,559	11,217,503	0.69%	12,878,101
	75	300	6 7 2 9 9	2664.752	11,455,622	11,403,051	11,217,503	1.65%	12,878,101
	100	300	4 7 2 9 4	3822.363	11,501,651	11,401,757	11,217,503	1.64%	12,878,101
	50	500	4 7 2 9 4 3	1286.9387	11,745,193	11547388	11,217,503	2.94%	12,878,101
	75	500	4 7 2 9 4 3	1060.8528	11,673,681	11,361,707	11,217,503	1.29%	12,878,101
	100	500	4 7 2 9 9	2354.2488	11,771,191	11,644,161	11,217,503	3.80%	12,878,101
	50	700	5 7 2 9 9	1019.8932	11,388,729	11,388,729	11,217,503	1.53%	12,878,101
	75	700	4 7 2 9 4	1427.2514	11,407,952	11,401,757	11,217,503	1.64%	12,878,101
large instance run2	100	700	6 7 2 9 4	2133.735	11,688,436	11688436	11,217,503	4.20%	12,878,101
	50	300	4 7 2 10 4	775.6446	11,397,978	11,397,978	11,217,503	1.61%	12,878,101
	75	300	4 3 2 4 4 3	2162.0918	11,958,708	11,545,493	11,217,503	2.92%	12,878,101
	100	300	4 7 2 9 4	2625.6873	11,657,609	11,644,121	11,217,503	3.80%	12,878,101

Figure. 16: computational results detail