

Imitator Learning: Achieve Out-of-the-Box Imitation Ability in Variable Environments

Xiong-Hui Chen^{*1,2}, Junyin Ye^{*1,2}, Hang Zhao^{*3,2}, Yi-Chen Li^{1,2}, Haoran Shi², Yu-Yan Xu², Zhihao Ye^{1,2}, Si-Hang Yang^{1,2}, Anqi Huang^{4,2}, Kai Xu³, Zongzhang Zhang¹, and Yang Yu^{†1,2}

¹National Key Laboratory for Novel Software Technology, Nanjing University, China

²Polixir.ai

³School of Computer Science, National University of Defense Technology, China

⁴Nanjing University of Science and Technology, China

Abstract

Imitation learning (IL) enables agents to mimic expert behaviors. Most previous IL techniques focus on precisely imitating one policy through mass demonstrations. However, in many applications, what humans require is the ability to perform various tasks directly through a few demonstrations of corresponding tasks, where *the agent would meet many unexpected changes when deployed*. In this scenario, the agent is expected to not only imitate the demonstration but also adapt to unforeseen environmental changes. This motivates us to propose a new topic called imitator learning (ItoL), which aims to derive an imitator module that can *on-the-fly* reconstruct the imitation policies based on very *limited* expert demonstrations for different unseen tasks, without any extra adjustment. In this work, we focus on imitator learning based on only one expert demonstration. To solve ItoL, we propose Demo-Attention Actor-Critic (DAAC), which integrates IL into a reinforcement-learning paradigm that can regularize policies' behaviors in unexpected situations. Besides, for autonomous imitation policy building, we design a demonstration-based attention architecture for imitator policy that can effectively output imitated actions by adaptively tracing the suitable states in demonstrations. We develop a new navigation benchmark and a robot environment for ItoL and show that DAAC outperforms previous imitation methods *with large margins* both on seen and unseen tasks.

1 Introduction

Humans can learn skills by imitating others. This has inspired researchers to propose imitation learning (IL), which enables intelligent agents to learn new tasks from demonstrations [Ng and Russell, 2000, Ross and Bagnell, 2010]. Advanced IL techniques have made great progress in imitating behavior policies in complex tasks through mass demonstrations, without relying on reward signals [Garg et al., 2021, Kostrikov et al., 2020, Yin et al., 2022] as standard reinforcement learning (RL) does [Sutton and Barto, 2018]. However, in many applications, what humans require is performing various tasks out of the box through very limited demonstrations of corresponding tasks, where there are many unexpected changes when deployed. In this scenario, the agent is expected to not only imitate the demonstration but also adapt to unforeseen environmental changes. For autonomous vehicles, we would like the vehicle to park in different parking lots directly [Ahn et al., 2022, Kümmerle et al., 2009] by presenting a human navigation trajectory, where the agent should handle the unexpected human being when imitating the parking trajectories; For robot manipulation, we aim for a robot arm to perform a variety of tasks directly [Dance et al., 2021, Yu et al.,

^{*}Equal contribution. Email: {chenxh, yejy}@lamda.nju.edu.cn and {alex.hang.zhao}@gmail.com

[†]Corresponding author. Email: yuy@nju.edu.cn

2019] by just giving the corresponding correct operation demonstrations, where the agent should handle unexpected disturbances too.

Based on these observations, in this work, we propose a new topic called **Imitator Learning (ItoL)**. In ItoL, we require the agent to accomplish various tasks that require the same intrinsic skills, e.g., a navigation agent to reach different targets in different terrains, and a robot-arm agent to perform various manipulation tasks. The aim of ItoL is to derive an imitator module that can reconstruct task-specific policies out of the box based on very limited corresponding expert demonstrations. More precisely, in ItoL, although we might have many pre-collected demonstrations and simulators for training, when deployed, the expert demonstrations are expensive, so the demonstrations for imitating should be *very limited*, leading a large number of states without referable expert actions for standard IL; Besides, for user experience, it should not have any additional adjustment phases in the process of deployment, i.e., the agent should have the *out-of-the-box imitation ability*, i.e., it can reconstruct imitation policies with respect to the given demonstrations without further fine-tuning.

In this work, we focus on ItoL based on only one single expert demonstration and propose a practical solution for ItoL called *Demo-Attention Actor-Critic (DAAC)*. To enable the agent to take reasonable actions in the states unvisited in demonstrations, we design an effective imitator reward and employ it into a context-based meta-RL framework [Rakelly et al., 2019] for imitation, where the imitator policy takes actions conditioned on demonstrations as the task context. The imitator policy interacts with the environment and maximizes the long-term imitator rewards on all tasks based on the corresponding demonstrations. Thanks to the trial-and-error learning mechanism of RL, the imitator policy can explore and optimize itself to generally follow expert demonstrations even when facing unexpected situations. However, just taking demonstrations as the context vector is inefficient in utilizing the full knowledge beyond the demonstration trajectories, as demonstrations not only tell the agent which task to accomplish but also the way to accomplish it. To efficiently build the imitation policy with respect to the given demonstrations, we propose a demonstration-based attention (DA) architecture for the imitator-policy network construction. Instead of taking demonstration as a free context vector, we utilize the attention mechanism [Vaswani et al., 2017] to stimulate the imitator policy to learn to accomplish tasks by tracing the states in demonstration trajectories. In particular, actions are taken based on the expert actions of the best-matching expert states, which is computed by the attention score between the current state and the states in demonstrations. We argue that DA implicitly regularizes the policy behavior by formalizing the data-processing pipeline with the attention mechanism so that it significantly improves the efficiency of learning to imitate from input demonstrations and the generalization ability to unseen demonstrations.

In the experiments, we build a demo-navigation benchmark for ItoL, which is a navigation task under different complex mazes without global map information. The results indicate that our proposed algorithm, DAAC, significantly outperforms existing baselines on both training performance and generalization to new demonstrations and new maps. We also deploy DAAC to more complex robotic manipulation tasks, where it maintains a clear advantage over baseline methods that struggle to achieve success in these challenging environments. Besides, we provide evidence that the proposed algorithm has the potential to achieve further performance improvements by scaling up either the dataset size or the number of parameters.

2 Problem Formulation of Imitator Learning

In this section, we first give notations, descriptions, and the formal definition of imitator learning (ItoL) in Sec. 2.1, then we discuss topic based on only one demonstration in Sec. 2.2.

2.1 Imitator Learning

In ItoL, we would like to derive a generalized imitator policy that can accomplish any unseen tasks through very limited expert demonstrations without further fine-tuning. For imitator policy training, we have pre-collected expert demonstrations from different tasks, along with the corresponding simulator for interacting. For imitator deployment, given any unseen task, we require the imitator policy to use *only one* demonstration

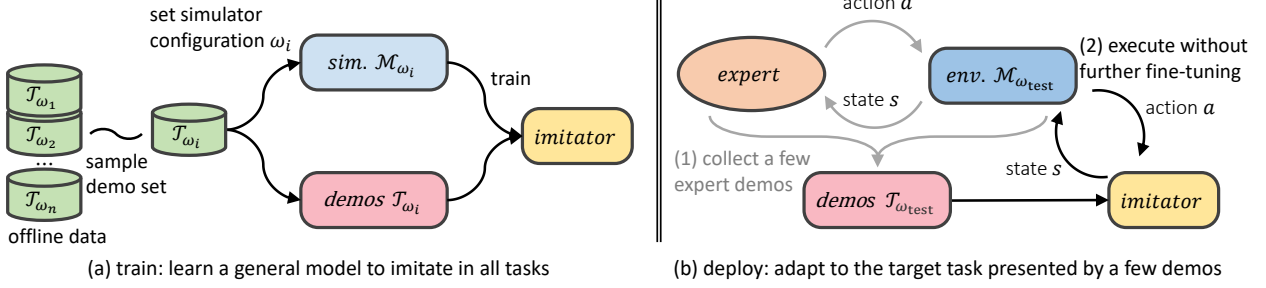


Figure 1: The paradigm of imitator learning. During the training process, an offline dataset with numerous expert demonstration sets $\{\mathcal{T}_{\omega_i}\}$ are provided, each of which can accomplish tasks \mathcal{M}_{ω} parameterized by ω . The imitator policy is asked to reconstruct the expert policies for each task \mathcal{M}_{ω_i} based on the corresponding demonstrations \mathcal{T}_{ω_i} . During deployment, experts interact in environments $\mathcal{M}_{\omega_{test}}$ and collect a few demonstrations $\mathcal{T}_{\omega_{test}}$ to mimic the experts without fine-tuning. Here we use “sim.”, “env.”, and “demos” as the abbreviation of simulator, environment, and demonstrations respectively.

to accomplish the task without further costly fine-tuning. Now we give the paradigm of ItorLin Fig. 1 and formal definition of ItorL in the following:

Markov Decision Process: We consider ItorL in a Markov Decision Process (MDP) [Sutton and Barto, 2018] \mathcal{M} defined by a tuple $(\mathcal{S}, \mathcal{A}, T, R, d_0, \gamma)$, where \mathcal{S} and \mathcal{A} denote the state and action spaces, $T : \mathcal{S} \times \mathcal{A} \rightarrow P(\mathcal{S})$ describes a (stochastic) transition process, $R : \mathcal{S} \times \mathcal{A} \rightarrow \mathbb{R}$ is a bounded reward function, $d_0 \in P(\mathcal{S})$ is the initial state, and $\gamma \in (0, 1]$ denotes the discount factor. Here $P(X)$ denotes probability distributions over a set X . A policy $\pi : \mathcal{S} \rightarrow P(\mathcal{A})$ induces a Markov chain over the states based on \mathcal{M} . We use $\tau := \{s_0, a_0, \dots, s_t, a_t\}$ to denote a trajectory, i.e., a sequence of state-action pairs for one episode of the Markov chain, where $s_i \in \mathcal{S}$ and $a_i \in \mathcal{A}$ are the state and action at timestep i .

Task: We formulate the concept “task” by parameterizing MDPs as $\mathcal{M}_{\omega} := (\mathcal{S}, \mathcal{A}, T_{\omega}, R_{\omega}, d_0, \gamma)$, where ω is the parameter of the MDP \mathcal{M}_{ω} in space Ω . We assume that different MDPs share the same state and action spaces, initial state distribution, and discount factor. The difference on T_{ω} and R_{ω} can be defined by ω .

Reward Function R_{ω} : We only have the simplest reward function R_{ω} which can only indicate the ending of trajectories, e.g., c for accomplishing the task, 0 for failure, and $-c$ for dead.

Unexpected Changes Modeling: We formulate the unexpected changes from the period of demonstration collection to the agent execution into the stochasticity of T_{ω} : between the two periods, the task parameters ω are shared, but the agent will reach unforeseen states because of the stochasticity. For example, in autonomous parking tasks, between the collection and execution periods, the agent is asked to park in the same parking lots (modeled by ω), but pedestrians would occur randomly when the agent interacts with the environment (modeled by the stochasticity of T_{ω}).

Expert Demonstration: We use τ_{ω} to denote an expert demonstration that can accomplish the task in \mathcal{M}_{ω} . We assume that the demonstration should be one of the trajectories that can accomplish the corresponding task. We denote $\mathcal{T}_{\omega} := \{\tau_{\omega}^{(0)}, \tau_{\omega}^{(1)}, \dots\}$ as an expert demonstration set in \mathcal{M}_{ω} .

Imitator Learning: Now we formulate ItorL as follows. In ItorL, we would like to derive a generalized imitation policy $\Pi(a|s, \mathcal{T}_{\omega})$ which can accomplish the task in \mathcal{M}_{ω} for any $\omega \in \Omega$, where \mathcal{T}_{ω} is an expert demonstration set for \mathcal{M}_{ω} . For imitator policy training, we have pre-collected expert demonstrations $\{\mathcal{T}_{\omega}\}$ from different \mathcal{M}_{ω} , along with the corresponding simulator of \mathcal{M}_{ω} for interacting. For imitator deployment, given any $\omega_{test} \in \Omega$, we require the imitator policy to use a few demonstrations $\mathcal{T}_{\omega_{test}}$ for $\Pi(a|s, \mathcal{T}_{\omega_{test}})$ to accomplish the task in $\mathcal{M}_{\omega_{test}}$ without further fine-tuning.

Core Differences between Standard IL and ItorL: In standard IL and their variant settings [Arora et al., 2020, Ross and Bagnell, 2010, Finn et al., 2017a,b, Li et al., 2021, Yu et al., 2018], we do not assume the quality of the behavior policy to be imitated, and the reward function to complete the task R_{ω} is also unnecessary. These techniques are just asked to reconstruct any possible policies in the collected dataset. In ItorL, we require that the policy to conduct the demonstrations should be an expert that can complete the tasks defined

by R_ω and the simulators of the tasks are accessible. In the following, we will show that ItorL is possible to achieve imitation with a smaller number of trajectories, e.g. only a single demonstration, than standard IL setting because the interaction with simulators is allowed and we can stimulate the imitator policy to imitate the target policies via improving the performance in R_ω .

2.2 Imitator Learning Based on Only One Demonstration

In this work, we focus on ItorL based on a single demonstration. This section will formulate the conditions that make topic feasible based on a single demonstration.

A fundamental problem of ItorL is how can we use a single demonstration to reconstruct any expert policy, as it is inevitable that there are a large number of states without referable expert actions for imitation? Without further assumptions on the task-parameter space Ω , it is easy to construct some ill-posed problems that it is impossible for a unified $\Pi(a|s, \mathcal{T}_\omega)$ to reconstruct all of the expert policies unless \mathcal{T} covers the full state-action space. However, in many applications, it is unnecessary for Π to imitate policies for any task. In the following, we give one practical task set $\mathbb{M} := \{\mathcal{M}_\omega \mid \omega \in \Omega\}$, that enables ItorL through *only one* demonstration. The full discussion is in App. A.

Definition 2.1 (τ_Ω -tracebackable MDP set). For an MDP set $\mathbb{M} := \{\mathcal{M}_\omega \mid \omega \in \Omega\}$, if there exists a unified goal-conditioned policy $\beta(a|s, g)$, $\forall \mathcal{M}_\omega \in \mathbb{M}$, for any τ_ω , we have $\forall s_i \in \tau_\omega$ or $\forall s_0 \in R(d_0)$, $\exists g_j \in \tau_\omega$, $\beta(a|s, g_j)$ can reach g_j from $s = s_i$ within finite timesteps, where $R(X)$ is the state set in X , i and j denote the timestep of states in τ and $j > i$, then \mathbb{M} is a τ_Ω -tracebackable MDP set.

Proposition 2.2 (1-demo imitator availability). If $\mathbb{M} := \{\mathcal{M}_\omega \mid \omega \in \Omega\}$ is a τ_Ω -tracebackable MDP set, there exists at least a unified imitator policy $\Pi(a|s, \mathcal{T}_\omega)$ that can accomplish any task in \mathbb{M} only given one corresponding demonstration, i.e., $|\mathcal{T}_\omega| = 1$.

Fig. 2 gives a vehicle navigation illustration for the proposition, where all tasks in \mathbb{M} ask the vehicle to reach some locations based on its coordinates and local views. We first consider a simple case in which the initial state is deterministic and is the same as the first state in τ_ω . In this case, even if a truck might be parked unexpectedly (states unvisited in the demonstrations), relying on the local-view information, for any τ_ω , we have a unified goal-conditioned policy $\beta(a|s, g)$, i.e., closing to some of the successor expert states without collision, that can drive the vehicle to be close to the locations in τ_ω . With policy β , there exists at least a unified imitator policy $\Pi(a|s, \mathcal{T}_\omega)$ that can accomplish any task in \mathbb{M} only given one corresponding demonstration: repeatedly traces a reachable successor state $g_j \in \tau_\omega$ and uses β to guide the agent until reaching the ending state.

However, how to build the imitator policies from data is challenging, e.g., it is hard to make a goal-conditioned policy β act through directly imitating τ_ω , and it is also complex to select suitable target states $g \in \tau_\omega$ to push forward the agent through β . In the next section, we will handle the above problem by interacting with the environment \mathcal{M}_ω for policy training.

3 Demo-Attention Actor-Critic for Imitator Learning

In this section, we first introduce a basic context-based meta-RL framework adopted for solving ItorL in Sec. 3.1. To enable the agent to efficiently utilize the knowledge beyond the demonstrations, we give a novel network architecture for the actor and critic in Sec. 3.2. Finally, we integrate the meta-RL framework with the new network architecture to our final solution, which is in Sec. 3.3.

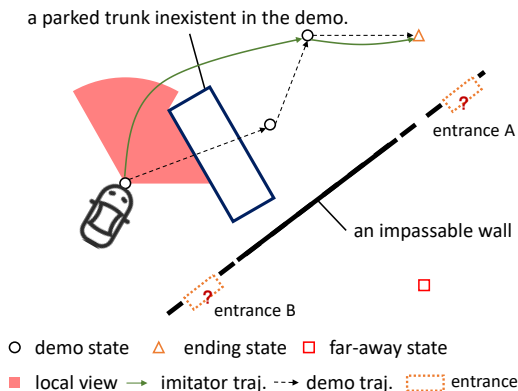


Figure 2: A vehicle navigation example. “traj.” is the abbreviation of “trajectory”.

Algorithm 1 Context-based Meta-RL framework for ItorL

Input: A task set $\mathbb{M}_{\text{train}}$, and a demonstration set $\{\mathcal{T}_{\omega_i}\}$ for each task $\mathcal{M}_{\omega_i} \in \mathbb{M}_{\text{train}}$

Process:

- 1: Initialize a task-information extractor ϕ , context-based policy π , and a replay buffer \mathcal{B}
 - 2: **for** 1, 2, 3, ... **do**
 - 3: Sample a task \mathcal{M}_{ω} from the sampling strategy $P(\mathbb{M}_{\text{train}})$
 - 4: Infer the demonstration representation $z = \phi(\mathcal{T}_{\omega})$
 - 5: **for** $j = 1, 2, 3, \dots, H$ **do**
 - 6: Sample an action $a_j \sim \pi(a|s_j, z)$
 - 7: Rollout one step $s_{j+1} \sim \mathcal{M}_{\omega}(s|s_j, a_j)$, get the reward $r_j = R_{\omega}(s_j, a_j)$
 - 8: Add $(s_j, a_j, r_j, s_{j+1}, \mathcal{T}_{\omega})$ to \mathcal{B}
 - 9: **end for**
 - 10: Use SAC [Haarnoja et al., 2018] to update ϕ and π with batch samples from \mathcal{B}
 - 11: **end for**
-

3.1 Context-based Meta-RL Framework for Imitator Learning

Since the demonstrations are assumed to be conducted by experts who can achieve tasks defined by R_{ω} , we consider handling ItorL through context-based meta-RL techniques [Chen et al., 2021, OpenAI et al., 2019, Rakelly et al., 2019], where the pseudocode of the framework is in Alg. 1. In context-based meta-RL framework, the imitator policy Π can be decomposed into a context-based policy π and a task-information extractor ϕ , i.e., $\Pi := \pi(a|s, \phi(\mathcal{T}_{\omega}))$. ϕ takes \mathcal{T}_{ω} as inputs, aiming to extract the representation of the task ω via latent variables $z \in \mathcal{Z}$. The context-based policy π takes the states and the extracted latent variables as inputs, aiming to make adaptive decisions for each task. Specifically, for each task in \mathcal{M}_{ω} , we infer the task presentation via $z = \phi(\mathcal{T})$, then infer the action via $a \sim \pi(a|s, z)$. A standard objective [Duan et al., 2017, OpenAI et al., 2019] for learning the optimal extractor ϕ^* and policy π^* is:

$$\max_{\phi, \pi} \mathbb{E}_{\mathcal{M}_{\omega} \sim P(\mathbb{M}_{\text{train}})} \left[\mathbb{E}_{\mathcal{M}_{\omega}, \phi, \pi} \left[\sum_{i=0}^{\infty} \gamma^i R_{\omega}(s_i, a_i) \right] \right],$$

where $\mathbb{M}_{\text{train}}$ is the training task set, $P(\mathbb{M}_{\text{train}})$ is a sampling strategy for task \mathcal{M}_{ω} generating, and $\mathbb{E}_{\mathcal{M}_{\omega}, \phi, \pi}$ is the expectation over trajectory $\{s_0, a_0, s_1, a_1, \dots\}$ sampled from \mathcal{M}_{ω} with ϕ and π . The context-aware policy π is trained to take the optimal actions *in all the tasks sampled from $P(\mathbb{M}_{\text{train}})$* . The key to taking optimal actions in all tasks is that the parameters of ϕ will be updated through the policy gradients [Sutton and Barto, 2018] backpropagated from π . Thus, if the optimal actions are in conflict among different \mathcal{M} , the policy gradient will guide the extractor in distinguishing the representations among \mathcal{T} until all the optimal actions under the inferred contexts have no conflict [Chen et al., 2021]. Thus *if the task set $\mathbb{M}_{\text{train}}$ cover the task space Ω , we can claim that, when deployed, the optimal policy $\Pi^* := \pi^*(a|s, \phi^*(\mathcal{T}_{\omega}))$ can take correct actions as in the training set.*

To generalize over unseen tasks, ϕ necessitates exposure to a sufficiently diverse task set \mathbb{M} spanning the parameter space. However, it is almost impractical to construct a task set $\mathbb{M}_{\text{train}}$ to cover the task space Ω . The generalization ability relies on the interpolation capabilities of neural networks. Previous studies also show that the behavior of ϕ to unseen tasks might be unstable without further constraints or regularization [Nagabandi et al., 2019, Wang et al., 2020]. In the following, we will propose a new architecture for actors and critics to regularize the policy behavior.

3.2 Demonstration-based Attention Architecture

As mentioned before, the behavior of ϕ to unseen tasks might be unstable [Luo et al., 2022, Wang et al., 2020]. Previous studies often handle the problem by adding extra losses/constraints to regularize the context representation [Dasari and Gupta, 2021]. Besides, we also observe that just regarding demonstrations as context vectors are inefficient in fully mining the knowledge implied in these data efficiently, e.g., the demonstration sequence not only tells the agent which task to accomplish but the way to accomplish the

task, finally hurting the efficiency of the algorithm to find the optimal Π^* .

Based on the above observations, in this study, instead of utilizing auxiliary losses as in prior works, we implicitly constrain the “context representation” via the network architecture itself, i.e., the demonstration-based attention (DA) architecture. The architecture is based on the prior that, for any unobserved task in the τ_Ω -tracebackable MDP set, imitator actions can be taken in two general decision-making phases, which will be discussed below. The DA architecture stimulates the policy to make decisions following the general decision-making phases.

Inspired by Prop. 2.2, we build the DA architecture based on this intuition: *For imitation, the first step is to find a target state from the demonstration, which has high similarity with the current state. Then the second step is taking action based on the expert action corresponding to the target state.* In particular, utilizing the attention mechanism [Vaswani et al., 2017], DA uses the following two major phases to mimic the above process: (1) **Phase 1: determine the state to follow.** Attention weighting is a module in standard attention architecture [Vaswani et al., 2017], which outputs the similarity weights of the items in the key vector \mathbf{k} compared with the query vector \mathbf{q} . Specifically, one popular implementation is $\mathbf{w} = \text{softmax}(\mathbf{q}\mathbf{k}^\top / \sqrt{d_k})$, where d_k is the feature dimension of \mathbf{k} , and $\mathbf{q}\mathbf{k}^\top$ is to compute the dot products of the query with the keys in all timesteps. The dot-product operation of \mathbf{k} and \mathbf{q} makes states with higher similarity output a larger attention weight. We utilize this architecture and let the representation of expert states be \mathbf{k} and the visited state representation be \mathbf{q} , to regularize the policy and determine the expert state to follow before decision-making; (2) **Phase 2: determine the action to take.** The attention weighting is followed by a point-wise multiplication to compute v'' , i.e., $v'' = \sum_i v_i w_i$. Each value vector \mathbf{v} is a presentation of the corresponding expert action. The point-wise multiplication applies the attention weight w_i to the representation of action a_i^e for each timestep i to compute a_j . The critic is built with the same method, which is shown in App. D.

We use DA architecture to fulfill the roles of both ϕ and π together to stimulate the policy to make decisions based on the discrepancy between the current state and the states in the demonstration. The above data-processing pipeline inner the policy network implicitly regularizes the policy to take actions based on the expert action with attention weights so that it can improve the efficiency of learning to imitate from input demonstrations and the generalization ability to unseen demonstrations. We would like to point out a limitation that the DA architecture will also hurt the decision-making ability when the current state is too distant from any expert state: the attention mechanism would fail to match any state, degrading the architecture to mere guesswork. However, through our experiments, we found that the attention mechanism can easily consolidate actions from several locally similar states of the expert to produce the correct action, which can be seen in App. F. Thus we leave the techniques to improve the decision-making abilities in faraway states as the future work.

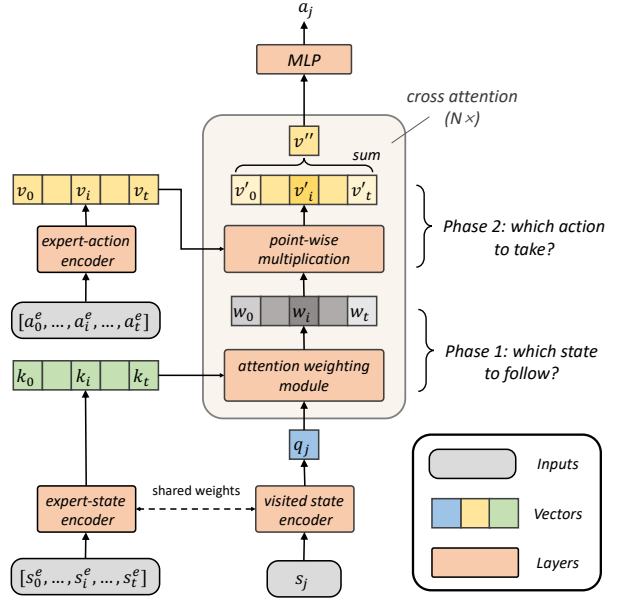


Figure 3: The DA architecture for the actor. $[s_0^e, \dots, s_t^e]$ denote expert states and $[a_0^e, \dots, a_t^e]$ the expert action list. s_j is the visited state of the actor at timestep j . We use q , k , and v to denote the query, key, and value vectors of an attention module. $N \times$ denotes an N -layer cross-attention module, which takes the output v'' of the last layer as the input q_j of the next layer.

3.3 Demo-Attention Actor-Critic

We summarize our practical solution for ItorL as *Demo-Attention Actor-Critic* (DAAC). DAAC follows the context-based meta-RL framework in Alg. 1, where the imitator policy uses DA architecture as an integrated implementation of context-based policy π and task-information extractor ϕ .

Besides, for further regularizing the policy’s behavior in states unvisited in demonstrations, we embed the imitation process to RL with a general stationary imitator reward derived from a single demonstration, which enables policy learning by imitating the input demonstration instead of from scratch by ending rewards. Inspired by Ciosek [2022], which has shown that IL can be done by RL with a constructed stationary reward, we heuristically design an ItorL reward R_{Itor} to embed the imitation process into the RL in a similar way. We leave the full discussion in App. B. In summary, we construct an imitator reward function:

$$R_{\text{Itor}}(s, a) := 1 - \min \left\{ \underbrace{d(\bar{s}, s)^2}_{\text{distance to state } \bar{s}} + \underbrace{d(\bar{a}, a)^2 / \exp(d(\bar{s}, s)^2)}_{\text{weighted distance to action } \bar{a}}, \eta \right\} + \alpha R_{\omega}(s, a), \quad (1)$$

where \bar{s}, \bar{a} is the nearest expert state-action pair: $(\bar{s}, \bar{a}) = \arg \min_{(s', a') \in \mathcal{T}} d(s, s')^2$. The selected action \bar{a} corresponds to the action associated with state \bar{s} in the transition pair. η is a hyperparameter that clips the distance penalty calculated based on the too-far state pairs into a fixed constant, and α is a rescale coefficient. $d(\cdot, \cdot)$ measures the distance between two inputs, and it can be customized differently for different tasks, which is L2 distance in this work. Finally, we take the standard soft actor-critic algorithm [Haarnoja et al., 2018] for policy learning in DAAC. More implementation details of DAAC are in App. D and the algorithm is listed in Alg. 2.

4 Related Work

We introduce IL algorithms that can achieve out-of-the-box imitation in the following and leave the complete related work in Appendix, including IL (Sec. C.1), meta-IL, including few-shot IL and one-shot IL (Sec. C.2), the combination of IL and RL (Sec. C.3), and context-based meta-RL (Sec. C.4). One branch to achieve out-of-the-box imitation is context-based policy models [Duan et al., 2017, Dasari and Gupta, 2021, Mandi et al., 2022], such as Transformer [Vaswani et al., 2017], that accept demonstrations as input. The core is to extract representations of demonstrations through the powerful fitting ability of neural networks, then use behavior cloning (BC) [Pomerleau, 1991, Ross and Bagnell, 2010] to reconstruct the imitation policy for each expert. However, since the demonstration for imitation is limited, the inevitable prediction errors on unexpected environmental changes and its compounding errors [Ross et al., 2011] will hurt the capacities of these methods, especially in generalizing to new tasks [Mandi et al., 2022]. Our method also utilizes a context-based policy to achieve the out-of-the-box imitation ability. However, we integrate the IL process into RL, which allows the agent to interact with the environments. The process enables us to regularize the behavior of the imitator policy in the states unvisited in demonstrations. Our method utilizes context-based meta-RL (CbMRL) framework [Dance et al., 2021, OpenAI et al., 2019, Rakelly et al., 2019] to handle ItorL. Demonstration-conditioned RL (DCRL) [Dance et al., 2021] is a CbMRL algorithm similar to ours, which takes sub-optimal demonstrations as the context for Transformer-based policy and seeks to further improve demonstrations’ performance via RL. A similar idea [Yeh et al., 2022] is adopted to solve unseen compound robot tasks that contain multiple stages by retrieving from demonstrations. Instead of taking demonstration as the base for policy improvement, ItorL aims at fully utilizing the demonstrations to reconstruct the expert policies for each task, which is essentially an imitation task.

5 Experiment

In the experiment, we build a demo-navigation benchmark for ItorL, which is a navigation task under different complex mazes without global map information¹. We introduce this benchmark in Sec. 5.1 followed by our experiment setup in Sec. 5.2. In Sec. 5.3, we evaluate our method from various perspectives, including training performance, generalization ability to unseen demonstrations, and unexpected situations.

¹code: <https://github.com/xionghuichen/imitator-learning-via-DAAC>

Table 1: Success rate comparisons on demo-navigation tasks. The agent needs to imitate demos seen during the training, new demos from seen maps, and demos collected on new maps, namely denoted as “seen”, “new_demo”, and “new_map” in this table. Our experiment uses 3 random seeds and we **bold** the best scores for each task.

Map Type	Single-Map				Multi-Map						
Obstacle Type	Non-Obstacle		Obstacle		Non-Obstacle			Obstacle			
Demonstrations	seen	new_demo	seen	new_demo	seen	new_demo	new_map	seen	new_demo	new_map	
Coord	DAAC	1.00±0.00	0.94±0.03	0.81±0.02	0.76±0.02	0.92±0.02	0.87±0.04	0.86±0.02	0.77±0.03	0.77±0.03	0.73±0.02
	DCRL	0.99±0.01	0.93±0.01	0.78±0.03	0.74±0.03	0.44±0.03	0.32±0.02	0.31±0.00	0.51±0.01	0.50±0.02	0.46±0.02
	TRANS-BC	0.43±0.09	0.16±0.10	0.14±0.10	0.04±0.02	0.50±0.07	0.29±0.05	0.30±0.07	0.32±0.05	0.22±0.03	0.21±0.04
	CbMRL	0.98±0.00	0.76±0.02	0.66±0.01	0.44±0.02	0.28±0.02	0.29±0.03	0.26±0.03	0.37±0.03	0.32±0.03	0.33±0.02
NoCoord	DAAC	0.51±0.19	0.71±0.06	0.46±0.06	0.58±0.04	0.83±0.03	0.63±0.01	0.54±0.05	0.50±0.02	0.45±0.02	0.40±0.03
	DCRL	0.24±0.03	0.01±0.01	0.15±0.01	0.00±0.00	0.15±0.06	0.05±0.02	0.04±0.02	0.11±0.02	0.03±0.02	0.05±0.02
	TRANS-BC	0.06±0.02	0.00±0.00	0.02±0.02	0.00±0.00	0.06±0.04	0.01±0.01	0.02±0.01	0.02±0.03	0.03±0.02	0.01±0.01
	CbMRL	0.15±0.06	0.02±0.01	0.09±0.02	0.01±0.00	0.14±0.01	0.03±0.01	0.02±0.01	0.10±0.02	0.05±0.02	0.06±0.01

We then verify the effects of the DA architecture and proposed imitator reward in Sec. 5.4. In Sec. 5.5, we show that the proposed algorithm has the potential to achieve further performance improvements by scaling up either the dataset size or the number of parameters. Finally, we provide experimental results on more complex tasks in Sec. 5.6.

5.1 Benchmark for Imitator Ability in Unseen Situations

We use a simple environment to construct a *challenging* benchmark for ItoRL, which is called the demo-navigation (DN) benchmark. In DN, we control a point agent from a start position to a target position in a maze, based on some expert demonstrations that can reach the target positions. The maze and target position can be changed between episodes. The agent can observe its l -step-length local views, while its current coordinate is optionally provided. In our experiment, the local view is calculated using 8 rays, each within 5 step length. This agent *does not capture the global map information*. Without utilizing the demonstrations, it is impossible, under the given state space, to find routes to the target positions for all maps. Besides, for each episode, the map will randomly generate some rectangular obstacles on the way to the target. These obstacles might not exist when the expert generates the demonstrations. Thus the agent cannot exploit the demonstration, i.e., repeat the actions in the demonstration without considering the current situation, to reach the target. We give an example of DN in Fig. 4. In the visualization, the start position is represented by a blue point, the target position by a green point, and the current agent position by a red point with red dashed lines representing the local views. Walls are indicated by black lines and obstacles by brown rectangles, which are not accessible to the agent. The gray points correspond to states in an expert demonstration. The details are in App. E.

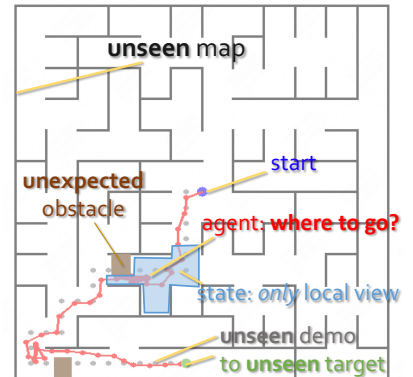


Figure 4: Illustration of the demo-navigation benchmark, where the red line is run by DAAC.

5.2 Experiment Setup

Tasks Our primary focus is whether the policies exhibit out-of-the-box imitation capabilities beyond the demonstrations observed during the training. In our study, we create eight tasks within DN by varying three factors: (1) single-map versus multi-map navigation; (2) the presence or absence of obstacles; and (3) whether agent coordinates are provided. For each task, we gather demonstrations targeting different points. To validate the generalization capabilities, we withhold a portion of *new demonstrations* in each map for testing. Moreover, in the multi-map settings, we separately create *new maps* to collect demonstrations and evaluate the trained policies. More details are in App. E.

Baselines We compare DAAC with three main context-based learning approaches which also take demonstrations as inputs: (1) DCRL [Dance et al., 2021] embeds demonstrations with Transformer and trains policies with task-specific rewards for further improving the expert behavior via RL; (2) TRANS-BC [Dasari

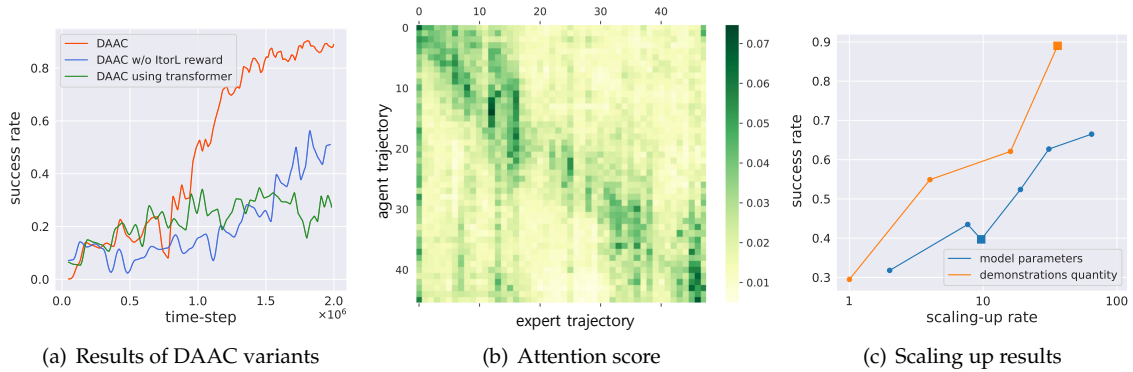


Figure 5: (a) Learning curves of DAAC variants; (b) The attention score map. The vertical axis represents the agent’s trajectory, and the horizontal axis represents the expert’s trajectory. The deeper the color in a row, the more attention the agent pays to the corresponding expert state. (c) The asymptotic performance of DAAC under different demonstration quantities and model parameters, where each unit in the x-axis denotes 60 demonstrations and 0.6 million parameters respectively. Please note that the x-axis is on a logarithmic scale. The *square markers* in the figure represent the performance of the default DAAC parameters we adopted.

and Gupta, 2021] uses Transformer to extract representations from demonstrations and adopts BC for policy reconstruction. The auxiliary tasks for TRANS-BC like inverse dynamics loss on randomized image observation are removed since the state space in our tasks is low-dimensional with clear implications. (3) CbMRL [OpenAI et al., 2019, Peng et al., 2018] trains policies only with environment rewards. The demonstrations are simply embedded with a multi-layer GRU [Cho et al., 2014], which is the standard implementation of the framework in Alg. 1. All methods are trained for the same duration with the same parameter quantity to ensure fairness.

5.3 Out-of-the-Box Imitation Ability in Unseen Situations

We summarize all experimental results in Tab. 1. It’s evident that DAAC dominates all tasks *with a large margin*, demonstrating its superior out-of-the-box imitation ability compared to existing baselines across all tasks. In the absence of coordinates, especially in multi-map scenarios, the performance of DAAC is not particularly ideal (considering a generalization success rate below 60% as the standard). This aligns with our expectations that, without coordinates, local views in a single trajectory cannot provide enough information for imitation, i.e., Prop 2.2 is violated: In this case, any map may contain an arbitrary number of states with the same local views but different actual positions, making it difficult for the policy to distinguish them and make the correct decisions. This resembles a partially observable MDP, and we leave further investigation as future work.

On the other hand, we can see that both DCRL and CbMRL methods demonstrate a certain degree of imitation ability, which also confirms our claims in Sec. 3.1 that the context-based meta-RL framework can, in principle, handle ItoL. However, standard context-based policy architectures cannot fully utilize the demo information and are therefore not efficient enough. Although the Transformer-based DCRL overall performs better than the RNN-based CbMRL, both of them are less effective than our DA structure which is designed for ItoL scenarios. Finally, we find that the worst-performing method among all is TRANS-BC. Although this method also employs a Transformer, it fails to achieve satisfactory generalization in any task. This is because the demonstrations provided in our tasks are extremely limited. Solely relying on the BC framework without incorporating RL for environment interactions like other approaches makes it challenging to guarantee appropriate action outputs in unseen states.

5.4 Effects of the DA Architecture and the Reward Function

We conduct ablation studies about the DA architecture and our ItoL reward on multi-map imitation tasks without obstacles and with coordinates provided. We construct two variants of DAAC: (1) DAAC using Transformer, where the actor and critic in DAAC are replaced with standard Transformer; (2) DAAC w/o ItoL reward, where DAAC just learns with the ending reward R_ω . We test the trained policies directly on new maps and provide the learning curves in Fig. 5(a), we can observe that removing the imitator reward

Table 2: Success rate comparisons. The robot needs to imitate seen demonstrations and new demonstrations. The multi-task setting collects demonstrations equally from each manipulation task. We **bold** the best scores for each task.

Domain	Complex Manipulation								Complex Control Space			
Tasks	Grasping		Stacking		Collecting		Multi-Task		Reacher		Pusher	
Demonstrations	seen	new_demo	seen	new_demo	seen	new_demo	seen	new_demo	seen	new_demo	seen	new_demo
DAAC	0.98	0.84	0.77	0.84	0.99	0.61	0.89	0.45	0.98	0.95	0.96	0.94
DCRL	0.30	0.70	0.00	0.00	0.00	0.00	0.05	0.02	0.65	0.50	0.89	0.87
TRANS-BC	0.28	0.20	0.00	0.02	0.17	0.06	0.10	0.02	0.63	0.59	0.20	0.08
CbMRL	0.71	0.49	0.00	0.00	0.00	0.00	0.04	0.00	0.90	0.87	0.91	0.85

and replacing DA with Transformer results in a significant reduction in learning efficiency. Similar ablation results on robot manipulation tasks can be found in App. G. We also give detailed ablation studies ablation about the reward function, which is in App. G. The performance of DAAC using Transformer declines, indicating that without our DA architecture, the agent cannot fully utilize the demonstration information.

To further verify that DA stimulates the agent making decisions based on the discrepancy between the current state and the states in demonstrations, we visualize attention scores during the decision-making process in Fig. 5(b), which are products of the vectors of keys in demonstrations and the query of current states. Since the agent trajectory is similar to the expert trajectory, higher attention values mainly concentrate on the diagonal demonstrating that the agent actively matches expert states based on the matched state for decision making. More visualizations are provided in App. I.

5.5 The Potential for Further Performance Improvement when Scaling Up

Inspired by the recent advances in large language models [OpenAI, 2023, Wei et al., 2022, Zhou et al., 2023], we investigate the potential for out-of-the-box imitation ability improvement when scaling up. In particular, we train DAAC policies with varying quantities of demonstrations and model parameters in multi-map imitation tasks involving obstacles. We test demonstration quantities in the coordinates-provided setting and model parameters in the no-coordinate setting and then verify the policies on new maps. We visualize experimental results in Fig. 5(c) and observe a log-linear increment of our model’s performance with an increase in either data volume or model parameters. Particularly in the non-coordinate setting, increasing the model parameters leads to an around $2\times$ improvement in performance compared to the results shown in Tab. 1. These results provide strong evidence of the potential for performance improvement when scaling up the DAAC, and we plan to investigate further in future work.

5.6 Apply DAAC to Complex Tasks

We deploy our DAAC method on robot tasks, including **Complex Manipulation**: The robot needs to imitate types of robotics tasks like object grasping, object stacking, object collecting, and mixed tasks in *clutter* environments, and **Complex Control Space**: We test the methods in the Reacher and Pusher environments [Towers et al., 2023]. These environments feature variables diverse, including location, velocity, angular velocity, and so on, which exhibit substantial differences in magnitudes across dimensions. The details of the environments are in App. E.

We compare DAAC with its baselines and summarize the results in Tab. 2. Our method outperforms all baselines both on seen and new demonstrations, demonstrating that it is competent on more complex tasks. Note that, our method is the only one that can imitate all types of manipulation demonstrations and achieve satisfactory performance. Our method outperforms the baselines with high task completion rates, demonstrating its robustness in complex observation spaces.

6 Discussion and Future Work

We proposed a new topic, imitator learning (ItoL), which derives an imitator module to reconstruct task-specific policies out-of-the-box based on single expert demonstrations. We formulate the problem and propose a practical solution, *Demo-Attention Actor-Critic* (DAAC). We apply DAAC to both demo-navigation tasks and complex robot manipulation tasks, which shows that DAAC outperforms previous IL methods with large margins both on training and unseen-tasks testing.

We believe that ItoL is a novel and challenging topic for the IL community, and there might be many interesting ItoL applications in autonomous vehicles and robotics. The scaling-up experiments in Sec. 5.5

also demonstrate the potential of DAAC in solving larger-scale problems, which we will investigate in our future work. Currently, the limitations of DAAC include: (1) in without-coordinates scenarios, which imply a “POMDP” problem, DAAC is not particularly ideal; (2) the inference’s compute resource requirement intrinsically increases as the number of demonstrations grows because of the self-attention mechanism; and (3) the imitator ability in far-away states.

References

- J. Ahn, M. Kim, and J. Park. Vision-based autonomous driving for unstructured environments using imitation learning. *arXiv preprint arXiv:2202.10002*, 2022.
- S. Arora, S. Du, S. Kakade, Y. Luo, and N. Saunshi. Provable representation learning for imitation learning via bi-level optimization. In *International Conference on Machine Learning*, pages 367–376, 2020.
- J. Chen, B. Yuan, and M. Tomizuka. Deep imitation learning for autonomous driving in generic urban scenarios with enhanced safety. In *International Conference on Intelligent Robots and Systems*, pages 2884–2890, 2019.
- X. Chen, Y. Yu, Q. Li, F. Luo, Z. T. Qin, W. Shang, and J. Ye. Offline model-based adaptable policy learning. In *Advances in Neural Information Processing Systems*, pages 8432–8443, 2021.
- K. Cho, B. van Merriënboer, D. Bahdanau, and Y. Bengio. On the properties of neural machine translation: Encoder-decoder approaches. In *Workshop on Syntax, Semantics and Structure in Statistical Translation*, pages 103–111, 2014.
- K. Ciosek. Imitation learning by reinforcement learning. In *International Conference on Learning Representations*, 2022.
- C. R. Dance, J. Perez, and T. Cachet. Demonstration-conditioned reinforcement learning for few-shot imitation. In *International Conference on Machine Learning*, pages 2376–2387, 2021.
- S. Dasari and A. Gupta. Transformers for one-shot visual imitation. In *Conference on Robot Learning*, pages 2071–2084, 2021.
- Y. Duan, M. Andrychowicz, B. Stadie, O. Jonathan Ho, J. Schneider, I. Sutskever, P. Abbeel, and W. Zaremba. One-shot imitation learning. *Advances in Neural Information Processing Systems*, pages 1087–1098, 2017.
- C. Finn, P. Abbeel, and S. Levine. Model-agnostic meta-learning for fast adaptation of deep networks. In *International Conference on Machine Learning*, pages 1126–1135, 2017a.
- C. Finn, T. Yu, T. Zhang, P. Abbeel, and S. Levine. One-shot visual imitation learning via meta-learning. *Conference on Robot Learning*, pages 357–368, 2017b.
- C. Florensa, D. Held, X. Geng, and P. Abbeel. Automatic goal generation for reinforcement learning agents. In *International Conference on Machine Learning*, pages 1514–1523, 2018.
- S. Fujimoto and S. S. Gu. A minimalist approach to offline reinforcement learning. In *Advances in Neural Information Processing Systems*, pages 20132–20145, 2021.
- S. Fujimoto, H. Hoof, and D. Meger. Addressing function approximation error in actor-critic methods. In *International Conference on Machine Learning*, pages 1587–1596, 2018.
- D. Garg, S. Chakraborty, C. Cundy, J. Song, and S. Ermon. IQ-Learn: Inverse soft-Q learning for imitation. In *Advances in Neural Information Processing Systems*, pages 4028–4039, 2021.

- T. Haarnoja, A. Zhou, P. Abbeel, and S. Levine. Soft actor-critic: Off-policy maximum entropy deep reinforcement learning with a stochastic actor. In *International Conference on Machine Learning*, pages 1856–1865, 2018.
- T. Hester, M. Vecerík, O. Pietquin, M. Lanctot, T. Schaul, B. Piot, D. Horgan, J. Quan, A. Sendonaris, I. Osband, G. Dulac-Arnold, J. P. Agapiou, J. Z. Leibo, and A. Gruslys. Deep q-learning from demonstrations. In *AAAI Conference on Artificial Intelligence*, pages 3223–3230, 2018.
- I. Kostrikov, O. Nachum, and J. Tompson. Imitation learning via off-policy distribution matching. In *International Conference on Learning Representations*, 2020.
- R. Kümmerle, D. Hähnel, D. Dolgov, S. Thrun, and W. Burgard. Autonomous driving in a multi-level parking structure. In *International Conference on Robotics and Automation*, pages 3395–3400, 2009.
- J. Li, T. Lu, X. Cao, Y. Cai, and S. Wang. Meta-imitation learning by watching video demonstrations. In *International Conference on Learning Representations*, 2021.
- F. Luo, S. Jiang, Y. Yu, Z. Zhang, and Y. Zhang. Adapt to environment sudden changes by learning a context sensitive policy. In *AAAI Conference on Artificial Intelligence*, pages 7637–7646, 2022.
- Z. Mandi, F. Liu, K. Lee, and P. Abbeel. Towards more generalizable one-shot visual imitation learning. In *International Conference on Robotics and Automation*, pages 2434–2444, 2022.
- T. Miki, J. Lee, J. Hwangbo, L. Wellhausen, V. Koltun, and M. Hutter. Learning robust perceptive locomotion for quadrupedal robots in the wild. *Science Robotics*, 2022.
- A. Nagabandi, I. Clavera, S. Liu, R. S. Fearing, P. Abbeel, S. Levine, and C. Finn. Learning to adapt in dynamic, real-world environments through meta-reinforcement learning. In *International Conference on Learning Representations*, 2019.
- S. Nair, S. Savarese, and C. Finn. Goal-aware prediction: Learning to model what matters. In *International Conference on Machine Learning*, pages 7207–7219, 2020.
- A. Y. Ng and S. Russell. Algorithms for inverse reinforcement learning. In *International Conference on Machine Learning*, pages 663–670, 2000.
- OpenAI. GPT-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023.
- OpenAI, I. Akkaya, M. Andrychowicz, M. Chociej, M. Litwin, B. McGrew, A. Petron, A. Paino, M. Plappert, G. Powell, R. Ribas, J. Schneider, N. Tezak, J. Tworek, P. Welinder, L. Weng, Q. Yuan, W. Zaremba, and L. Zhang. Solving Rubik’s cube with a robot hand. *arXiv preprint arXiv:1910.07113*, 2019.
- Y. Pan, C. Cheng, K. Saigol, K. Lee, X. Yan, E. A. Theodorou, and B. Boots. Agile autonomous driving using end-to-end deep imitation learning. In *Robotics: Science and Systems*, 2018.
- X. B. Peng, M. Andrychowicz, W. Zaremba, and P. Abbeel. Sim-to-Real transfer of robotic control with dynamics randomization. In *International Conference on Robotics and Automation*, pages 1–8, 2018.
- D. Pomerleau. Efficient training of artificial neural networks for autonomous navigation. *Neural Computation*, pages 88–97, 1991.
- A. Rajeswaran, V. Kumar, A. Gupta, G. Vezzani, J. Schulman, E. Todorov, and S. Levine. Learning complex dexterous manipulation with deep reinforcement learning and demonstrations. In *Robotics: Science and Systems*, 2018.
- K. Rakelly, A. Zhou, C. Finn, S. Levine, and D. Quillen. Efficient off-policy meta-reinforcement learning via probabilistic context variables. In *International Conference on Machine Learning*, pages 5331–5340, 2019.

- S. Ross and D. Bagnell. Efficient reductions for imitation learning. In *International Conference on Artificial Intelligence and Statistics*, pages 661–668, 2010.
- S. Ross, G. J. Gordon, and D. Bagnell. A reduction of imitation learning and structured prediction to no-regret online learning. In *International Conference on Artificial Intelligence and Statistics*, pages 627–635, 2011.
- R. S. Sutton and A. G. Barto. *Reinforcement Learning: An Introduction (Second Edition)*. MIT Press, 2018.
- M. Towers, J. K. Terry, A. Kwiatkowski, J. U. Balis, G. d. Cola, T. Deleu, M. Goulão, A. Kallinteris, A. KG, M. Krimmel, R. Perez-Vicente, A. Pierré, S. Schulhoff, J. J. Tai, A. T. J. Shen, and O. G. Younis. Gymnasium, 2023. URL <https://zenodo.org/record/8127025>.
- A. Vaswani, N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A. N. Gomez, L. Kaiser, and I. Polosukhin. Attention is all you need. In *Advances in Neural Information Processing Systems*, pages 5998–6008, 2017.
- K. Wang, B. Kang, J. Shao, and J. Feng. Improving generalization in reinforcement learning with mixture regularization. In *Advances in Neural Information Processing Systems*, pages 7968–7978, 2020.
- J. Wei, Y. Tay, R. Bommasani, C. Raffel, B. Zoph, S. Borgeaud, D. Yogatama, M. Bosma, D. Zhou, D. Metzler, E. H. Chi, T. Hashimoto, O. Vinyals, P. Liang, J. Dean, and W. Fedus. Emergent abilities of large language models. *arXiv preprint arXiv:2206.07682*, 2022.
- F. Xie, A. Chowdhury, M. C. D. P. Kaluza, L. Zhao, L. L. S. Wong, and R. Yu. Deep imitation learning for bimanual robotic manipulation. In *Advances in Neural Information Processing Systems*, pages 2327–2337, 2020.
- J. Yeh, C. Chung, H. Su, Y. Chen, and W. H. Hsu. Stage conscious attention network (SCAN): A demonstration-conditioned policy for few-shot imitation. In *AAAI Conference on Artificial Intelligence*, pages 8866–8873, 2022.
- Z. Yin, W. Ye, Q. Chen, and Y. Gao. Planning for sample efficient imitation learning. *arXiv preprint arXiv:2210.09598*, 2022.
- T. Yu, C. Finn, A. Xie, S. Dasari, T. Zhang, P. Abbeel, and S. Levine. One-shot imitation from observing humans via domain-adaptive meta-learning. *arXiv preprint arXiv:1802.01557wa*, 2018.
- T. Yu, D. Quillen, Z. He, R. Julian, K. Hausman, C. Finn, and S. Levine. Meta-world: A benchmark and evaluation for multi-task and meta reinforcement learning. *arXiv preprint arXiv:1910.10897*, 2019.
- C. Zhou, Q. Li, C. Li, J. Yu, Y. Liu, G. Wang, K. Zhang, C. Ji, Q. Yan, L. He, H. Peng, J. Li, J. Wu, Z. Liu, P. Xie, C. Xiong, J. Pei, P. S. Yu, and L. Sun. A comprehensive survey on pretrained foundation models: A history from BERT to ChatGPT. *arXiv preprint arXiv:2302.09419*, 2023.

Appendix

Table of Contents

A	Demonstration Quantity Requirements for Imitator Learning	15
B	ItorL Reward from Demonstrations	16
C	Related Work	17
C.1	Imitation Learning	17
C.2	Meta-Imitation Learning	17
C.3	Combination of Imitation Learning and Reinforcement Learning	18
C.4	Context-based Meta Reinforcement Learning	18
D	Implementation Details	19
D.1	Achitecture Details	19
D.2	Training Details	21
E	Environment Description	22
E.1	Demo-Navigation Environment	22
E.2	Demo-Manipulation Environment	22
E.3	Pusher and Reacher Environment	23
F	The Robustness on the Faraway States	25
G	More Ablation study results	25
H	Learning Curves	25
I	Visualization	29
J	Comparisons of Trajectories of DAAC Trained by Different Rewards	29
K	The Details of the Scaling Up Experiments	32
L	More Examples of DAAC Trajectories	34
L.1	DAAC Trajectories in Maze Environments	34
L.2	DAAC Trajectories in Robot Manipulation Environments	37
M	Societal Impact	37

A Demonstration Quantity Requirements for Imitator Learning

Without further assumptions on task space Ω , it is always easy to construct ill-posed problems that it is impossible for a unified imitator policy $\Pi(a|s, \mathcal{T}_\omega)$ to reconstruct all of the expert policies unless the expert demonstration set \mathcal{T} does cover the whole state-action space. However, in many applications, it is unnecessary for Π to imitate policies for any \mathcal{M} . Here we give one practical task set that enables imitator learning (ItorL) through only one demonstration.

Definition A.1 (τ_Ω -tracebackable MDP set). For an MDP set $\mathbb{M} := \{\mathcal{M}_\omega \mid \omega \in \Omega\}$, if there exists a unified goal-conditioned policy $\beta(a|s, g)$, $\forall \mathcal{M}_\omega \in \mathbb{M}$, for any τ_ω , we have $\forall s_i \in \tau_\omega$ or $\forall s_0 \in R(d_0)$, $\exists g_j \in \tau_\omega$, $\beta(a|s, g_j)$ can reach g_j from $s = s_i$ within finite timesteps, where $R(X)$ is the state set in X , i and j denote the timestep of states in τ and $j > i$, then \mathbb{M} is a τ_Ω -tracebackable MDP set.

τ_Ω -tracebackable MDP set depicts the similarity of the tasks in \mathbb{M} through the demand of the policy $\beta(a|s, g)$. It means that although the transition process and the initial distribution are stochastic and different among \mathbb{M} , there exists a goal-conditioned policy β that for any \mathcal{M}_ω , we can guide the agent turn back to some states in the demonstrations. For example, different navigation tasks will have similar decisions in similar traffic conditions even in different terrains. Thus even if the vehicle has to veer off the demonstrations for handling some unexpected situations, it usually can turn back after some timesteps.

Based on the definition, we give an \mathbb{M} formulation that can find a unified imitator policy Π from one demonstration.

Proposition A.2 (1-demo imitator availability). *If $\mathbb{M} := \{\mathcal{M}_\omega \mid \omega \in \Omega\}$ is a τ_Ω -tracebackable MDP set, there exists at least a unified imitator policy $\Pi(a|s, \mathcal{T}_\omega)$ that can accomplish any task in \mathbb{M} only given one corresponding demonstration, i.e., $|\mathcal{T}_\omega| = 1$.*

Proof. Since R_ω in \mathcal{M}_ω is an ending reward function of trajectories, given any expert demonstration τ_ω , we know:

$$R_\omega(s, a) = \begin{cases} c, & s = s_t \\ 0, & (s, a) \in \tau_\omega \text{ and } s \neq s_t \\ \text{unknown} & \text{otherwise} \end{cases}$$

that is, any policy can accomplish the task in \mathcal{M}_ω if it can reach the last state s_t of τ_ω , where c is the reward for accomplishing the task.

Since $\mathbb{M} := \{\mathcal{M}_\omega \mid \omega \in \Omega\}$ is a τ_Ω -tracebackable MDP set, there exists a unified goal-conditioned policy $\beta(a|s, g)$, $\forall \mathcal{M}_\omega \in \mathbb{M}$, for any τ_ω which can accomplish the task in \mathcal{M}_ω , we have $\forall s_i \in \tau_\omega$ or $\forall s_0 \in R(d_0)$, $\exists g_j \in \tau_\omega$, $\beta(a|s, g_j)$ can reach g_j from $s = s_i$ within finite timesteps, where $R(X)$ is the state set in X , i and j denote the timestep of states in τ and $j > i$. We can construct a unified imitator policy by (1) searching a $g_j \in \tau_\omega$ that can be reached by $\beta(a|s, g_j)$ from current state s_i within finite timesteps, where $j > i$; (2) executing $\beta(a|s, g_j)$ until reaching g_j ; (3) repeat (1) and (2) to the end. When deployed, for any \mathcal{M}_ω , in the beginning, $s_0 \sim d_0$, thus the agent will reach one of the state $s_i \in \tau_\omega$ after finite timesteps, where $i > 0$. Since $s_i \in \tau_\omega$, following $\beta(a|s, g_j)$, the agent will arrive another state $s_j \in \tau_\omega$. The process will be repeated until the agent reaches the last state s_t . Once $R_\omega(s_t, \cdot) = c$, the task is accomplished. \square

Although we focus on 1-demo imitator availability, note that the 1-demo imitator availability can be extended to the “ n -demo” case by extending τ_Ω -tracebackable MDP set to “ \mathcal{T}_Ω -tracebackable MDP set”.

Fig. 2 gives a vehicle navigation illustration for the proposition, where all tasks in \mathbb{M} ask the vehicle to reach some locations based on its coordinates and local views. We first consider a simple case in which the initial state is deterministic and is the same as the first state in τ_ω . In this case, even if a truck might be parked unexpectedly (states unvisited in the demonstrations), relying on the local-view information, for any τ_ω , we have a unified goal-conditioned policy $\beta(a|s, g)$, i.e., closing to some of the successor expert states without collision, that can drive the vehicle to be close to the locations in τ_ω . With policy β , there exists at least a unified imitator policy $\Pi(a|s, \mathcal{T}_\omega)$ that can accomplish any task in \mathbb{M} only given one corresponding demonstration: repeatedly traces a reachable successor state $g_j \in \tau_\omega$ and uses β to guide the agent until reaching the ending state.

In the following, we consider a counter-example where the agent state can be put to untracebackable states, e.g., the square point in Fig. 2, for some unforeseen reasons. In this case, if the local view is limited and cannot reach the location of entrances and the entrance might exist *either* in A or B, it is impossible to construct a unified goal-conditioned policy $\beta(a|s, g)$ since in the square point, the correct way to trace back to the demonstrations is agnostic (can be in left or right).

Note that the trace-backable property relies on the information we have from the states, e.g., with global map information in the state space, the unified goal-conditioned policy can be constructed by planning a trajectory in the map then the above task set is trace-backable.

B ItorL Reward from Demonstrations

A theoretical analysis in Ciosek [2022] shows that, for deterministic experts, IL can be done by RL with a constructed stationary reward: $R_{\text{int}}(s, a) = \mathbb{I}[(s, a) \in \mathcal{T}]$, where $\mathbb{I}[\cdot]$ denotes the indicator function and \mathcal{T} is the expert demonstration. In practice, the constructed reward function:

$$R_{\text{IL}}(s, a) = 1 - \min_{(s', a') \in \mathcal{T}} d_{\ell_2}((s, a), (s', a'))^2, \quad (2)$$

which is a practical imitation reward R_{int} that can also imitate the experts in several benchmark tasks. Here $d_{\ell_2}(\cdot, \cdot)$ denotes the ℓ_2 distance of two normalized vectors.

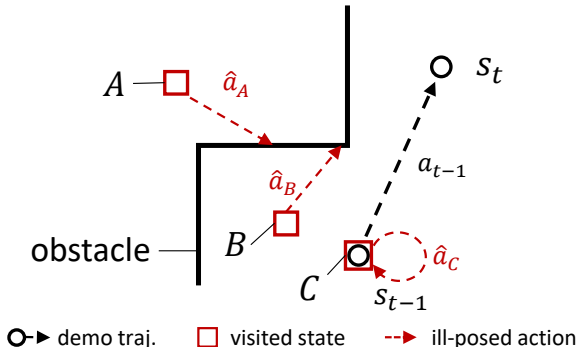


Figure 6: Illustration of the ill-posedness of R_{IL} . A, B, and C denote states, and red dashed arrows (\hat{a}_A , \hat{a}_B , and \hat{a}_C) denote the corresponding ill-posed sub-optimal actions to earn more the cumulative R_{IL} rewards. The agent fails on hitting the obstacle. s_t is the last state, also the target state for task completion.

Inspired by this, we propose to construct a stationary imitator reward R_{Itor} to embed IL into the RL process, i.e., replacing the reward function R_ω in Alg. 1 (Line 7) with R_{Itor} . First, we observe that R_{IL} and R_{int} can reconstruct the expert policy only when we have a diverse enough dataset \mathcal{T} which covers the state-action space. When only with limited demonstrations, the reward function will be ill-posed in three aspects. We depict that based on the illustration in Fig. 6: (1) A state: if the minimum-distance tuple in Eq. 2 is far away from the visited state, e.g., (s_{t-1}, a_{t-1}) in Fig. 6, the action that reduces the ℓ_2 -norm between the next state and s_{t-1} might ignore the impassable terrains between states and finally hit the obstacle; (2) B state: even if the action to reduce the ℓ_2 -norm between the next state of B and s_{t-1} is correct to go back to the demonstration, to reduce the ℓ_2 -norm between actions a_{t-1} and the current action at the same time, the derived action might be biased by a_{t-1} and finally lead to an unsafe state; (3) C state: even if the state perfectly matches the one in the demonstration, the agent still has the potential to stay where it is until it reaches the maximum episode length, as R_{IL} might be greater than 0. To handle the above problems, we

construct a new imitator reward function $R_{\text{Itor}}(s, a)$ via:

$$R_{\text{Itor}}(s, a) := 1 - \min \left\{ d(\bar{s}, s)^2 + \frac{d(\bar{a}, a)^2}{\exp(d(\bar{s}, s)^2)}, \eta \right\} + \alpha R_{\omega}(s, a), \quad (3)$$

where $(\bar{s}, \bar{a}) = \arg \min_{(s', a') \in \mathcal{T}} d(s, s')^2$, η is a hyperparameter that clips the distance penalty calculated based on the too-far state pairs into a fixed constant, $\alpha = 1/(c(1 - \gamma))$ is a rescale coefficient, and c is the reward for accomplishing the task defined in R_{ω} .

$R_{\text{Itor}}(s, a)$ uses a clipping term η to make the imitation rewards based on the too-far state pairs invalidated to avoid the potential misleading (to handle the “A-state” case). A reweighting item $1/\exp(d(\bar{s}, s)^2)$ is used for the action’s distance computation to adaptively adjust the weight of rewards on action matching. This is a heuristic reweighting term to avoid the agent overly penalizing for not strictly following the expert action when its current state is far from the demonstration states and chooses to turn back (to handle the “B-state” case). The necessity of the reweighting term stems from its pivotal role in preventing undesired behaviors in situations where the agent strictly adheres to the demonstrated actions due to state bias. By incorporating the reweighting term, we ensure that the agent does not blindly follow the demonstrations, thereby reducing the risk of unintended consequences. α rescales the ending rewards, which makes the discount on delay to get the ending reward larger than the bonus of repeatedly collecting the immediate rewards, i.e., $\alpha c > 1 - \epsilon + \gamma \alpha c$, where ϵ denotes a larger-than-zero penalty contributed by the second item in Eq. 1 (to handle the “C-state” case).

Note that although we give several tricks to make R_{Itor} give reasonable rewards in the state-action space, it is still inevitable to output ill-posed rewards in some corner cases. Hence, the ending reward is essential, as it helps the agent focus more on task completion rather than repeatedly collecting R_{IL} rewards. The large coefficient α on the task-specific reward R_{ω} makes the policies always focus on completing the tasks rather than repeatedly collecting R_{IL} rewards. In this situation, R_{Itor} just serves as a crucial signal by providing a dense reward, enabling the agent to closely follow the demonstrations and accomplish tasks effectively during the early stages. We leave a theoretical-grounded reward function design as future work.

C Related Work

C.1 Imitation Learning

Imitation learning (IL) focuses on training a policy with action labels from expert demonstrations. There are two mainstream approaches for IL, namely behavior cloning (BC) [Pomerleau, 1991, Ross and Bagnell, 2010] and inverse reinforcement learning (IRL) [Ng and Russell, 2000]. The former BC converts IL into a supervised paradigm by minimizing the action probability discrepancy with Kullback Leibler (KL) divergence between the actions of the imitating policy and the demonstration actions. The latter IRL fashion learns the hidden reward function behind the expert policy to avoid the impact of compounding errors.

Since IL can learn directly from already collected data, it is widely adopted by complex domains like game playing [Ross and Bagnell, 2010], autonomous driving [Chen et al., 2019, Pan et al., 2018], and robot manipulation [Xie et al., 2020]. Although achieving impressive performances, we observe that in many applications, what humans require is the ability to perform many different tasks out of the box, through very limited demonstrations of corresponding tasks, instead of imitating from scratch based on a mass of demonstrations. Adapting the trained policy to unseen tasks is beyond the capability of pure IL, which is designed for single-task learning.

C.2 Meta-Imitation Learning

Meta-IL includes few-shot meta-IL and one-shot meta-IL. Few-shot meta-IL aims to get a generalizable policy that can complete new tasks with only a few expert trajectories. The mainstream solutions utilize model-agnostic meta-learning (MAML) [Finn et al., 2017a] to learn initial task parameters and fine-tune them via a few steps of gradient descent to satisfy new task needs [Finn et al., 2017b, Li et al., 2021, Yu

et al., 2018]. However, these approaches need extra computation infrastructure for gradient update and determining a suitable amount of fine-tuning steps before deployment [Finn et al., 2017a]. One-shot meta-IL achieves generalizable imitation through context-based policy models [Dasari and Gupta, 2021, Duan et al., 2017, Mandi et al., 2022], such as Transformer [Vaswani et al., 2017], that take demonstrations as input. The core idea is to extract representations of demonstrations through these powerful fitting abilities of neural networks, then use BC to reconstruct the imitation policy. However, the demonstrations for imitation are limited, the inevitable prediction errors on unseen states and the compounding errors of BC [Ross et al., 2011] hurt the capacities of these methods, especially in generalizing to new tasks [Mandi et al., 2022]. Different from one-shot IL, In ItorL setting, we argue that the interactions with simulators are allowed, so that we have more potential ways to handle the generalization ability with less demonstration. Our ItorL method also utilizes a context-based model to achieve the out-of-the-box imitation ability. Instead of using BC, we integrate IL into the RL process, which allows the agent to interact with the environment. This approach can regularize the policy behavior when facing states unvisited in demonstrations.

The main differences between the Meta-IL approach and our approach are primarily in two aspects: (1) **no need for fine-tuning**: Our objective is to create an imitator policy, $\Pi(a|s, \mathcal{T}_\omega)$, informed solely by a pre-collected expert demonstration set, without requiring any fine-tuning. During deployment, this policy simply takes in the relevant demonstration τ_ω to generate the appropriate action for any given state. In contrast, most few-shot IL techniques, like MAML [Finn et al., 2017a], necessitate fine-tuning for the target task. (2) **imitation with single demonstration**: Our deployment only requires a single trajectory for imitation. While some algorithms might achieve imitation without fine-tuning using transformer architectures, both MAML and Transformer-BC [Dasari and Gupta, 2021] necessitate a substantial volume of trajectories for target adaptation during deployment. Our ability to achieve imitation with even fewer trajectories comes from our interaction with simulators, enabling the implicit learning of cross-task general imitation behavior.

C.3 Combination of Imitation Learning and Reinforcement Learning

We are not the first study to combine IL and RL. Previous studies have combined these for different purposes: Hester et al. [2018] leverage small sets of demonstrations for deep q-learning which massively accelerates the learning process. Rajeswaran et al. [2018] use demonstrations to reduce the sample complexity of learning dexterous manipulation policy and enable natural and robust robot movement. Fujimoto and Gu [2021] add BC to the online RL algorithm TD3 [Fujimoto et al., 2018] for advanced offline RL performance. Our method extends the ideas of combining IL and RL to handle a new problem: a multi-policy imitation problem based on limited demonstrations.

C.4 Context-based Meta Reinforcement Learning

Besides IL, context-based policy models are also widely used in meta-RL. Building a representative context enables a single agent of learning meta-skills and identifying new tasks. Goal-conditioned RL Florensa et al. [2018], Nair et al. [2020] is the most direct way to build a context-based meta-policy, which scales a single agent to a diverse set of tasks by informing the agent of the explicit goal contexts, e.g., the target to go or the object to pick. The demonstrations can be regarded as an informative “goal” for IL tasks. The demonstration sequence not only tells the agent which task to accomplish but also the way to accomplish it.

Some other works collect interaction trajectories from the environment for understanding the task identity. Chen et al. [2021], Luo et al. [2022], Nagabandi et al. [2019], OpenAI et al. [2019], Peng et al. [2018] use an end-to-end architecture for environment-parameter representation and adaptable policy learning. A recurrent neural network is introduced for environment-parameter representation, then the context-aware policy takes actions based on the outputs of RNN and the current states. Rakelly et al. [2019] share the same end-to-end architecture and design a new neural network to represent the probabilistic latent contexts of the environment parameters. Instead of collecting trajectories from the environment for identifying the task, we mine the information from the static expert trajectories to identify the expert policy which can accomplish the task.

Demonstration-conditioned RL (DCRL) [Dance et al., 2021] takes sub-optimal demonstrations as input and seeks to further improve demonstration behavior via RL. [Yeh et al., 2022] adopt a similar idea to solve unseen compound robot tasks that contain multiple stages by retrieving from demonstrations. Instead of taking demonstration as the base for policy improvement, ItorL aims to fully utilize the demonstrations to imitate the expert policy for each task.

D Implementation Details

D.1 Architecture Details

We give the demonstration-based attention architecture for the critic in Fig. 7, and related hyper-parameters of the architecture in Tab. 3.

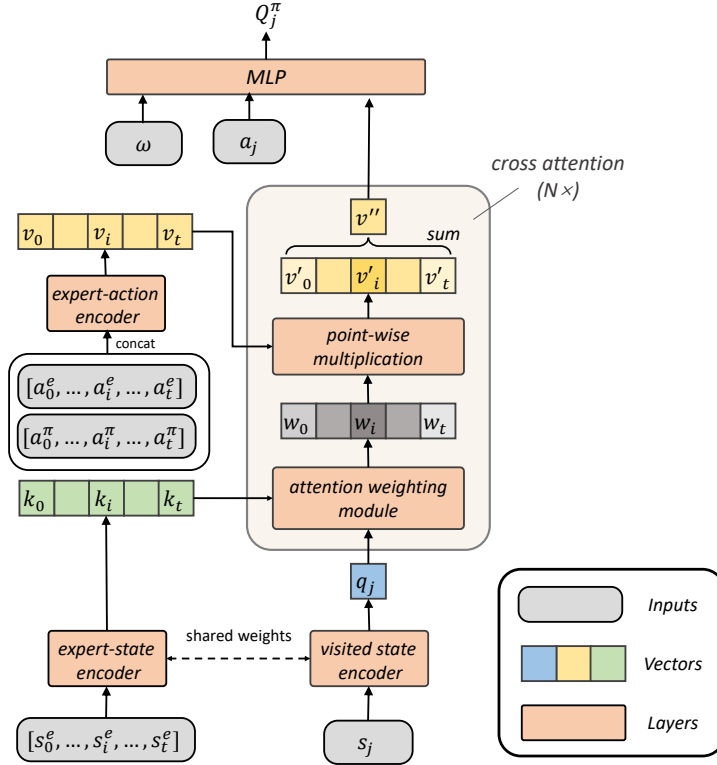


Figure 7: The architecture of demonstration-based attention for the critic. $[s_0^e, \dots, s_i^e, \dots, s_t^e]$ and $[a_0^e, \dots, a_i^e, \dots, a_t^e]$ denote state and action list in an expert demonstration. $a_0^\pi, \dots, a_i^\pi, \dots, a_t^\pi$ denote the output action of current actor Π on $s_0^e, \dots, s_i^e, \dots, s_t^e$ respectively. a_j is the output action of Π on s_j . s_j is the visited state of the actor at timestep j . Inspired by OpenAI et al. [2019], Miki et al. [2022], we feed the task parameter ω to the critic for Q value prediction. It is valid because the critic will not be used when deployed, and ω gives important information for value inference. We use q, k, v to denote the query, key, and value vectors of an attention module. $N \times$ denote a N -layer cross-attention module, which take the output v'' of the last layer as the input q_j of the next layer.

where $(\bar{s}, \bar{a}) = \arg \min_{(s', a') \in \mathcal{T}} d_{l_2}(s, s')^2$, η is a hyperparameter that clips the distance penalty calculated based on the too-far state pairs into a fixed constant, $\alpha = 1/(c(1 - \gamma))$ is a rescale coefficient, and c is the reward for accomplishing the task defined in R_ω .

Table 3: DAAC Hyper-parameters.

Parameter	Value
learning rate (λ)	$5 \cdot 10^{-5}$
discount (γ)	0.99
replay buffer size	10^5
number of hidden units per layer	256
number of samples per minibatch	256
optimizer	RMSprop
<i>Actor</i>	
encoder layer number (K)	3
cross-attention layer number (N)	6
embedding dimension	128
<i>Critic</i>	
encoder layer number (K)	4
cross-attention layer number (N)	4
embedding dimension	128
<i>ItorL Rewards for Demo-Navigation</i>	
rescale coefficient (α)	100
penalty threshold (η)	2
<i>ItorL Rewards for Robot Manipulation</i>	
rescale coefficient (α)	200
penalty threshold (η)	2

In DA architecture, we introduce three encoders for expert actions, expert states, and visited states respectively, where the encoders of expert states and visited states share the same weights. The detailed architecture is shown in Fig. 8.

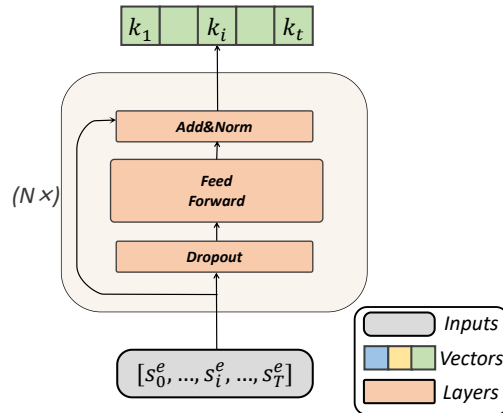


Figure 8: The encoder architecture employed in the DA model. As an example, we consider the input sequence $[s_0^e, \dots, s_i^e, \dots, s_T^e]$. However, it is worth noting that this architecture can also accommodate $[a_0^e, \dots, a_i^e, \dots, a_T^e]$ and $[a_0^\pi, \dots, a_i^\pi, \dots, a_T^\pi]$ as inputs. The encoder leverages the Transformer backbone, which incorporates three layers: dropout, feedforward, and add&norm. These layers are organized using the residual connection mechanism. The input sequence passes through N stacked blocks, converting it into key vectors.

D.2 Training Details

Algorithm 2 Demo-Attention Actor-Critic for ItorL

Input: A task set $\mathbb{M}_{\text{train}}$, and a demonstration set $\{\mathcal{T}_{\omega_i}\}$ for each task $\mathcal{M}_{\omega_i} \in \mathbb{M}_{\text{train}}$

Process:

- 1: Initialize Actor π_ϕ , Critic Q_θ and a replay buffer \mathcal{B}
 - 2: **for** 1, 2, 3, ... **do**
 - 3: Sample a task \mathcal{M}_ω from the sampling strategy $P(\mathbb{M}_{\text{train}})$
 - 4: Get the *single* expert trajectory τ_ω since $|\mathcal{T}_\omega| = 1$
 - 5: **for** $j = 1, 2, 3, \dots, H$ **do**
 - 6: Sample an action $a_j \sim \pi_\phi(a|s_j; \tau_\omega)$
 - 7: Rollout one step $s_{j+1} \sim \mathcal{M}_\omega(s|s_j, a_j)$, get the reward $r_j = R_{\text{Itor}}(s_j, a_j)$
 - 8: Add $(s_j, a_j, r_j, s_{j+1}, \tau_\omega)$ to \mathcal{B}
 - 9: **end for**
 - 10: **for** each update step **do**
 - 11: update Critic $\theta \leftarrow \theta - \lambda \nabla J_Q(\theta)$
 - 12: update Actor $\phi \leftarrow \phi - \lambda \nabla J_\pi(\phi)$
 - 13: **end for**
 - 14: **end for**
-

We use the SAC [Haarnoja et al., 2018] algorithm to update the DA-actor and DA-critic. The goal of SAC also maximizes the expected entropy return beyond the objective of a standard RL agent which maximizes the expected sum of rewards:

$$J(\pi) = \sum_{t=0}^T \mathbb{E}_{(s_t, a_t) \sim \rho_\pi} [r(s_t, a_t) + \alpha \mathcal{H}(\pi(\cdot | s_t))], \quad (4)$$

where $\mathcal{H}(\pi(\cdot | s_t))$ is the entropy value of the policy distribution. For learning the maximum entropy, a policy alternates between policy evaluation and policy improvement. For policy evaluation of a fixed policy, we can obtain its soft state value function by iteratively applying the Bellman update:

$$V(s_t) = \mathbb{E}_{a_t \sim \pi} [Q(s_t, a_t; \tau_\omega) - \alpha \log \pi(a_t | s_t; \tau_\omega)]. \quad (5)$$

And we can execute critic update through collected buffer data and the objective:

$$J_Q(\theta) = \mathbb{E}_{(s_t, a_t, \tau_\omega) \sim \mathcal{D}} \left[\frac{1}{2} (Q_\theta(s_t, a_t; \tau_\omega) - \hat{Q}(s_t, a_t))^2 \right], \quad (6)$$

with

$$\hat{Q}(s_t, a_t) = r_t + \gamma \mathbb{E}_{s_{t+1} \sim p} [V(s_{t+1})], \quad (7)$$

And we can execute policy improvement through collected buffer data and the objective:

$$J_\pi(\phi) = \mathbb{E}_{s_t \sim \mathcal{D}} \text{DKL} \left(\pi_\phi(\cdot | s_t; \tau_\omega) \parallel \frac{\exp(Q_\theta(s_t, \cdot; \tau_\omega))}{Z_\theta(s_t)} \right), \quad (8)$$

where the partition function $Z_\theta(s_t)$ normalizes the distribution. We adopt one policy (actor) network, two Q-networks (critic), and two target Q-networks for SAC training. Each network consists of one demonstration-based attention module for task-information extraction and projects the task embedding into actions.

For learning robust policies, we randomly choose a state from the given demonstration as a start and add a disturbance of $0.1 \times N(0, 1)$ to this state coordinate. We maintain a separate buffer for each demonstration and gather a batch of training data from 5 different buffers. To accelerate the training process, we also add demonstration data which takes 20% of the batch size for joint training. For fair comparisons, all the baselines we compared followed the above setting. The detailed hyper-parameters used for our ItorL method training are summarized in Tab. 3.

E Environment Description

E.1 Demo-Navigation Environment

We include details of our two-dimensional maze environment for navigation tasks, where the maze layout takes a size of 24×24 . The maze is generated by randomly traversing all the cells in a Depth-First manner with path width 2. The path in the maze is connected, thereby our environment is τ_Ω -tracebackable and 1-demo imitator available, which satisfies our ItoL needs. We fixed the starting point as the center of the map. The expert trajectories can also be obtained by a Depth-First search. We can formulate this environment as Markov Decision Process, which can be presented as a tuple $(\mathcal{S}, \mathcal{A}, T, R)$.

State space \mathcal{S} : The maze state consists of the (x, y) coordinate and the local view of the agent along 8 different directions with an equal interval $\pi/4$. For the simplest task where coordinates are provided and no obstacles exist, the local view length l is set to 1.5; otherwise 5 for observing the surrounding environment changes.

Action space \mathcal{A} : The agent is able to take action (Δ_x, Δ_y) which are continuous values in the range of $[-1, 1]$.

Transition function T : When applied with the action (Δ_x, Δ_y) at the coordinate (x, y) , the agent translates itself to the $(x + \Delta_x, y + \Delta_y)$ coordinate. Some obstacles, which have lengths in the range of $[1.1, 1.3]$ and widths of 1.35, may appear in the demonstration path. The obstacle will be generated with a fixed probability $p = 0.1$ for each demonstration step and with a maximum number of 4. Once hits the wall or the obstacles, the agent will be dead and the trajectory will be terminated.

Reward function R_ω : We only have a simple reward function R_ω which indicates the ending of trajectories, e.g., c for reaching the target goal, 0 for failure in 50 timesteps, and $-c$ for dead, where ω is the goals we set.

Due to the unavailability of the global map, the agent is expected to follow the demonstration and reconstruct the expert’s behavior to reach the goal, as illustrated in Fig. 9(a). Beyond this, some unexpected obstacles may occur, which results in that strictly following the demonstration no longer working, as shown in Fig. 9(b). The agent is expected to learn robust policies that can bypass obstacles and finish the task, based on imitating the given demonstration.

For single-map scenarios, we randomly choose 90% of all demonstrations (290 demos for each map) for training while the left is for evaluation. For multi-map imitation, we generate 240 different maps and only select a small number of 10 training demonstrations from each map. We treat the remaining *new demonstrations* to verify generalization. Besides, we also create 10 *new maps* separately to verify whether the agent trained on the multi-map scenarios works.

E.2 Demo-Manipulation Environment

We introduce details of our robot manipulation environment to verify the imitation ability of our method across different tasks. This environment consists of three types of robotics manipulations, namely object grasping, object stacking, and object collecting. We provide illustrations in Fig. 10, where the workspace is a $50 \text{ cm} \times 70 \text{ cm}$ area. To collect demonstrations, we instruct the robot to execute predefined primitives in sequence. For instance, grasping a single object comprises three primitives: 1) moving the gripper to the object; 2) closing the gripper; 3) moving the gripper to the target. We present the Markov formalization of this environment in the following.

State space \mathcal{S} : The robot manipulation state includes the absolute position of the robot gripper, the absolute positions of the objects, and the relative positions of the gripper fingers.

Action space \mathcal{A} : The agent is able to take action $(\Delta_x, \Delta_y, \Delta_z, \Delta_c)$, each of which is continuous value in the range of $[-1, 1]$. The first three dimensions indicate the desired increment in the gripper position at the next timestep, while the last dimension controls the positions of the gripper fingers.

Transition function T : When applied with the action $(\Delta_x, \Delta_y, \Delta_z)$ at the coordinate (x, y, z) , the robot gripper moves to the new coordinate $(x + \Delta_x, y + \Delta_y, z + \Delta_z)$. If $\Delta_c > 0$, the gripper opens; otherwise, it closes. The task is considered failed if any object falls off the desk.

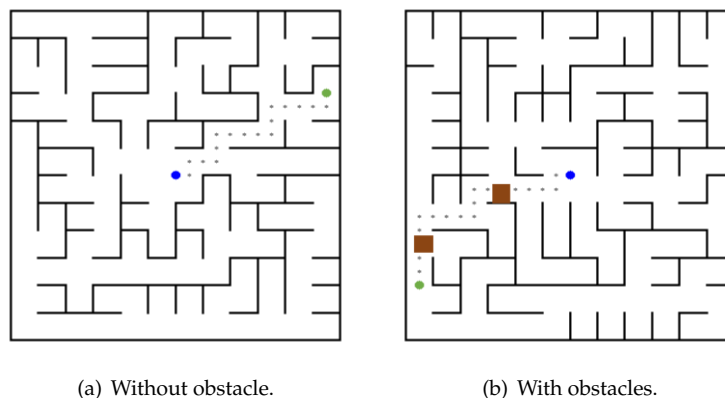


Figure 9: Fig. 9(a) shows a demonstration sample on a map without obstacle, where we fix the start position as the center of the map (colored in blue), while the agent is expected to reach the specified goal colored in green. The agent should follow the expert trajectory to achieve the goal due to the unavailability of the global map. Fig. 9(b) shows a demonstration sample on a map with obstacles. Here strictly imitating the expert trajectory cannot well handle unexpected situations, e.g., the agent is blocked by obstacles when it follows the given demonstration. Beyond pure imitation, the agent should also explore the environment to learn robust policies.

Reward function R : Similar to the demo-navigation environment, our reward function R is simple and only indicates the end of trajectories. That is, we use c to indicate task accomplishment, $-c$ for failure, and 0 for all other situations. The criteria for accomplishing each task differs. In the object grasping task, the robot needs to grasp the target object without colliding with other objects. In the object stacking task, the robot must stack three blocks together, which are initially placed anywhere on the workspace. Lastly, in the object collecting task, the robot needs to collect all objects scattered over the desk and place them in a specified area.

We generate 300 demonstrations for each task, of which 60 are used for training and the remaining 240 are for testing. To verify the imitation ability of our method across multiple manipulation tasks, we generate 100 demonstrations for each of the three tasks. We randomly select 20 demonstrations from each task for training and leave 240 new demonstrations for the test.

E.3 Pusher and Reacher Environment

For the pusher task, the state comprises the positions and velocities of the robot’s joints (a total of 7), as well as the position of the robot tip arm and the manipulated object. The agent accomplishes the task by taking actions that modify the rotation of each joint and drive the robot to push the object to the specified position. The specific contents of the state space and action space are provided in the following:

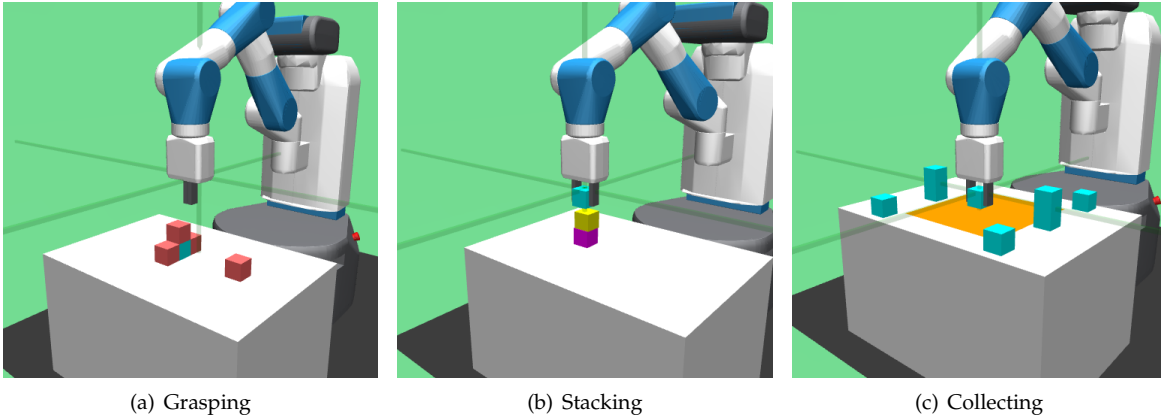


Figure 10: Various tasks of robot manipulation. (a): Grasp the blocked target object (cyan). (b): Stack the objects. (c): Collect the objects scattered over the desk together to the specified area (yellow).

Table 4: Details of Pusher observation space.

Num	Observation	Min	Max	Name	Joint	Unit
0	Rotation of the panning the shoulder	-Inf	Inf	r_shoulder_pan_joint	hinge	angle (rad)
1	Rotation of the shoulder lifting joint	-Inf	Inf	r_shoulder_lift_joint	hinge	angle (rad)
2	Rotation of the shoulder rolling joint	-Inf	Inf	r_upper_arm_roll_joint	hinge	angle (rad)
3	Rotation of hinge joint that flexed the elbow	-Inf	Inf	r_elbow_flex_joint	hinge	angle (rad)
4	Rotation of hinge that rolls the forearm	-Inf	Inf	r_forearm_roll_joint	hinge	angle (rad)
5	Rotation of flexing the wrist	-Inf	Inf	r_wrist_flex_joint	hinge	angle (rad)
6	Rotation of rolling the wrist	-Inf	Inf	r_wrist_roll_joint	hinge	angle (rad)
7	Rotational velocity of the panning the shoulder	-Inf	Inf	r_shoulder_pan_joint	hinge	angular velocity (rad/s)
8	Rotational velocity of the shoulder lifting joint	-Inf	Inf	r_shoulder_lift_joint	hinge	angular velocity (rad/s)
9	Rotational velocity of the shoulder rolling joint	-Inf	Inf	r_upper_arm_roll_joint	hinge	angular velocity (rad/s)
10	Rotational velocity of hinge joint that flexed elbow	-Inf	Inf	r_elbow_flex_joint	hinge	angular velocity (rad/s)
11	Rotational velocity of hinge that rolls the forearm	-Inf	Inf	r_forearm_roll_joint	hinge	angular velocity (rad/s)
12	Rotational velocity of flexing the wrist	-Inf	Inf	r_wrist_flex_joint	hinge	angular velocity (rad/s)
13	Rotational velocity of rolling the wrist	-Inf	Inf	r_wrist_roll_joint	hinge	angular velocity (rad/s)
14	x-coordinate of the fingertip of the pusher	-Inf	Inf	tips_arm	slide	position (m)
15	y-coordinate of the fingertip of the pusher	-Inf	Inf	tips_arm	slide	position (m)
16	z-coordinate of the fingertip of the pusher	-Inf	Inf	tips_arm	slide	position (m)
17	x-coordinate of the object to be moved	-Inf	Inf	object (obj_slidex)	slide	position (m)
18	y-coordinate of the object to be moved	-Inf	Inf	object (obj_slidey)	slide	position (m)
19	z-coordinate of the object to be moved	-Inf	Inf	object	cylinder	position (m)

Table 5: Details of Reacher observation space.

Num	Action	Control Min	Control Max	Name	Joint	Unit
0	Rotation of the panning the shoulder	-2	2	r_shoulder_pan_joint	hinge	torque (N m)
1	Rotation of the shoulder lifting joint	-2	2	r_shoulder_lift_joint	hinge	torque (N m)
2	Rotation of the shoulder rolling joint	-2	2	r_upper_arm_roll_joint	hinge	torque (N m)
3	Rotation of hinge joint that flexed elbow	-2	2	r_elbow_flex_joint	hinge	torque (N m)
4	Rotation of hinge that rolls the forearm	-2	2	r_forearm_roll_joint	hinge	torque (N m)
5	Rotation of flexing the wrist	-2	2	r_wrist_flex_joint	hinge	torque (N m)
6	Rotation of rolling the wrist	-2	2	r_wrist_roll_joint	hinge	torque (N m)

F The Robustness on the Faraway States

In general ItorL scenarios, the algorithm might face challenges when the state is significantly distant. We conducted an offset-range test in the maze benchmark to verify the robustness of DAAC in faraway states. In particular, we use a DAAC policy trained in the setting of multi-map navigation without obstacles and with coordinates provided. When deploying the policy, we generate 100 unseen maps and add positional offsets sampled from a uniform distribution to the initial states. We average the success rate under different ranges of offsets in Fig. 11.

In the maze environment, it’s noteworthy that an offset range of initial states larger than could potentially make the agent be separated from the expert trajectory by a wall, which violates the property of 1-demo imitator availability. Correspondingly, the results show that the policy sustains a respectable success rate within an offset of 2.4. After that, expanding the range leads to a nearly linear decrease in success rate. The experiment demonstrated the agent’s success in devising a well-performed policy for the scope of tasks with 1-demo imitator availability.

Similar results can also be found in other experiments in which there is no exact match between the current and target state in these scenarios.

- In maze settings with obstacles (Fig. 24, 25, 28, and 29), we have observed the agent’s remarkable ability to adaptively adjust its behavior when encountering obstacles.
- In robot manipulation tasks (Fig. 30-35), we present a showcase of the robotic arm’s proficiency in following a trajectory while optimizing its operational efficiency. Moreover, in the corresponding video, which records rollouts generated by the DAAC policy, we can observe the simultaneous activation of multiple expert states through attention mechanisms when an exact match between the current state and the target state is lacking. The video can be found in the [public link](#).

In conclusion, within the scope of the problem we would like to solve, the faraway states issue isn’t prominently observable, which is because even if not perfectly aligned with the current state, still exhibits certain relevant information.

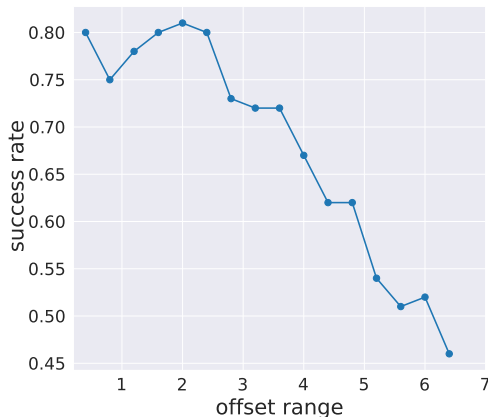


Figure 11: Illustration of DAAC in offset-range test. The X-axis is the offset range on the initial states, while the Y-axis shows the corresponding success rate of DAAC under this offset.

G More Ablation study results

We have conducted an ablation study considering reward design in maze and complex robot manipulation tasks. In particular, for clipping term η in R_{Itor} , we set η as infinite value (DAAC-w/o clip), the results can be found in Fig. 12 and Fig. 13. The results show that directly removing the clipping function of η , which enhances the probabilities of ill-posedness led by the L2 distance, e.g., a wall obstructing the path between two states will have a small L2 distance, reduces the sample efficiency of DAAC, but the asymptotic performance is still similar, which demonstrates the robustness of DAAC to the ill-posedness of the L2 distance.

H Learning Curves

We list the learning curves in this section. Fig. 14, Fig. 15, and Fig. 16 show the learning curves in eight different navigation tasks respectively. Fig. 17 shows the BC loss of TRANS-BC, which is the mean squared

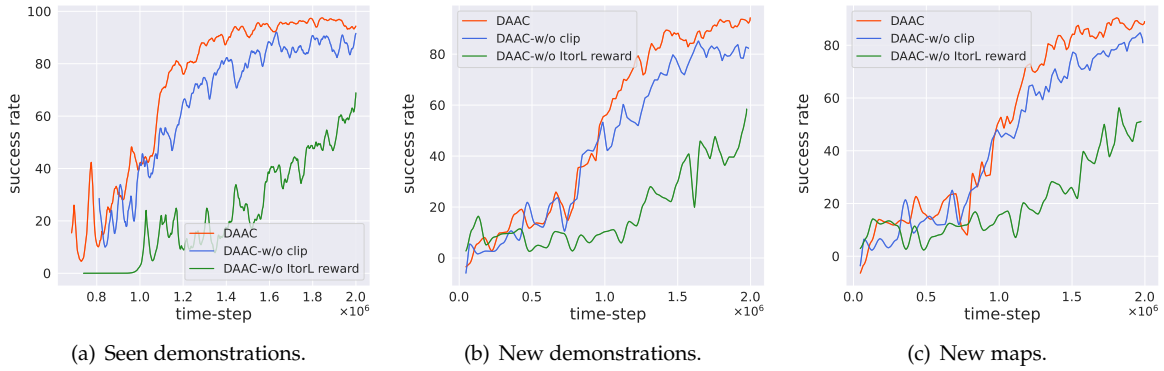


Figure 12: Learning curves of agents with varying reward settings in the demo-navigation benchmark. The task is the Multi-map imitation without obstacles and with coordinates.

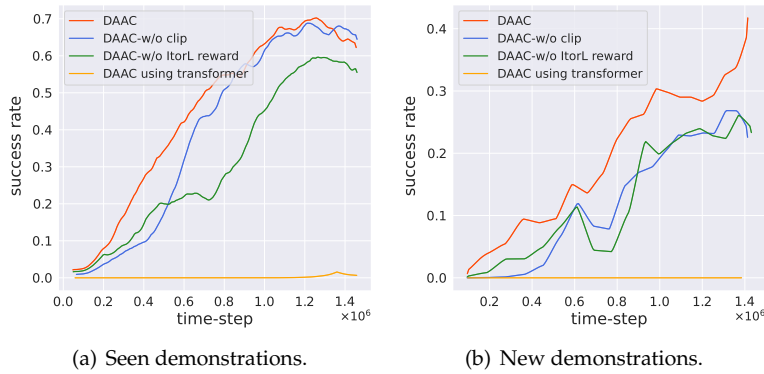


Figure 13: Learning curves of agents with varying training settings in the demo-manipulation environment. Note that the task is the Multi-task imitation which learns Grasping, Stacking, and Collecting simultaneously.

error (MSE) loss between expert actions and agent actions. To ensure conciseness in our description, we employ the following abbreviations: “SM” for Single-Map, “MM” for Multi-Map, “Ob” for scenes with obstacles, “Non-Ob” for scenes without obstacles, “Co” for scenes with coordinates and “Non-Co” for scenes without coordinates.

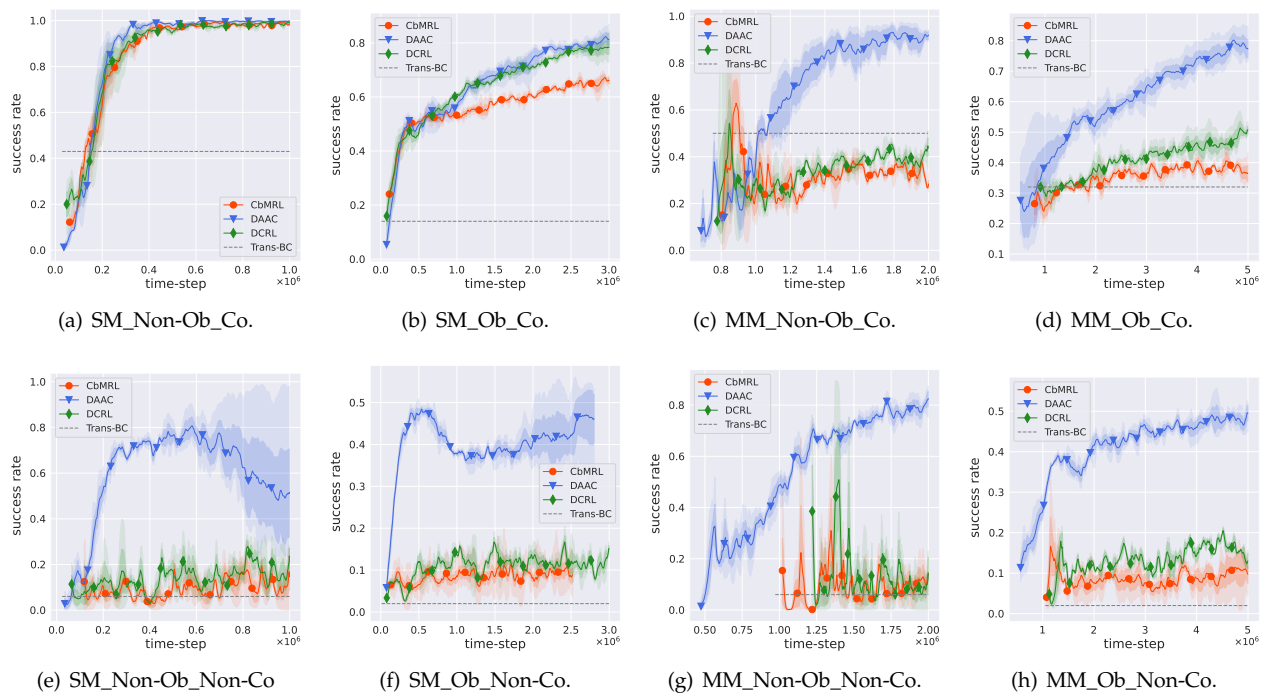


Figure 14: Learning curves on demonstrations seen during the training.

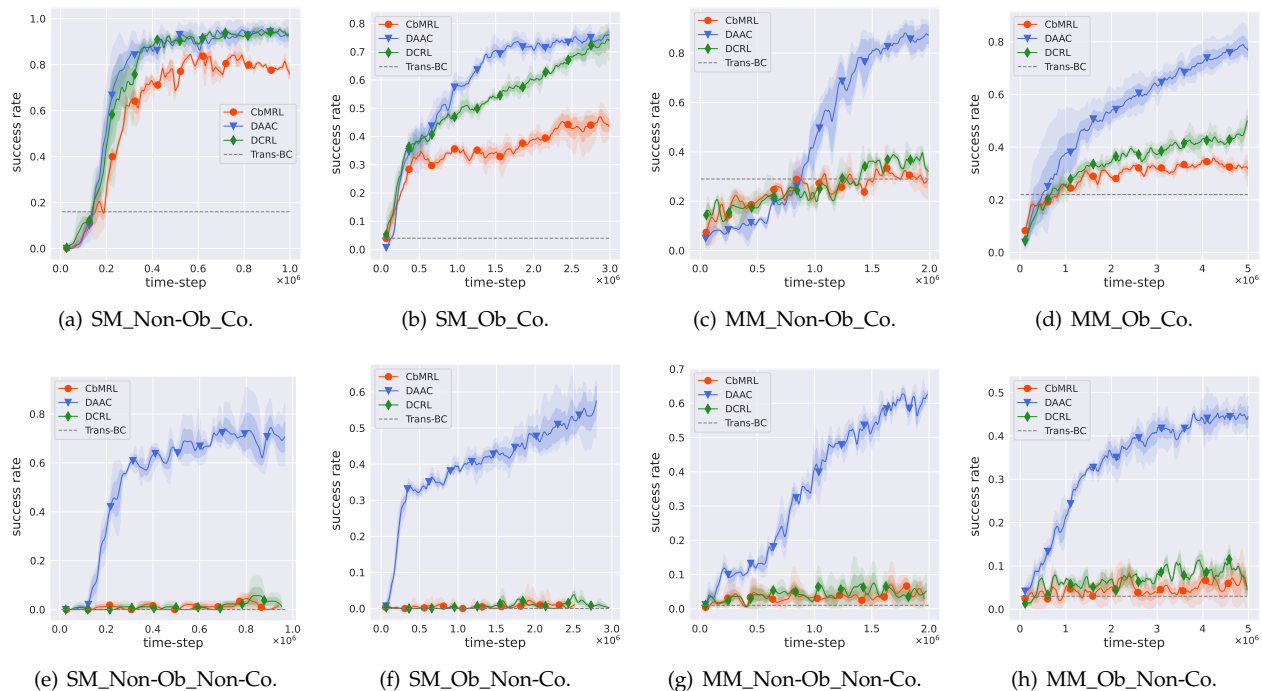


Figure 15: Learning curves on new demonstrations from seen maps.

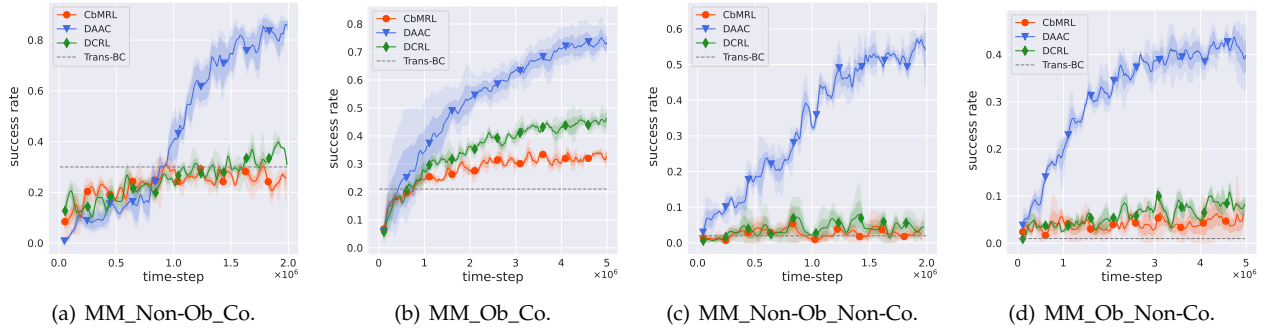


Figure 16: Learning curves on demonstrations collected from new maps.

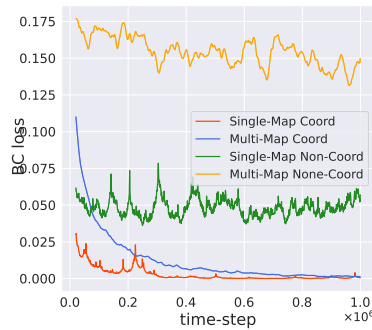


Figure 17: BC Loss of TRANS-BC. Note that both scenes with obstacles and tasks without obstacles use the same set of offline demonstrations, thus there are a total of four curves representing eight tasks.

I Visualization

In Fig. 18, we give more visualizations. In these tasks, the agent knows its coordinate and is required to imitate demonstrations collected on new maps without obstacles.

J Comparisons of Trajectories of DAAC Trained by Different Rewards

In Fig. 19, we provide visualized comparisons of trajectories of DAAC trained with our ItoL reward and without. In the tasks, the agent knows its coordinate and is required to imitate demonstrations collected on new maps without obstacles. Through random sampling of multiple tasks, we have observed that in specific scenarios, intelligent agents without ItoL reward tend to encounter wall collisions or deviate from the correct path, resulting in being lost. This behavior can potentially arise from their inclination to take shortcuts as a means to expedite reaching the goal.



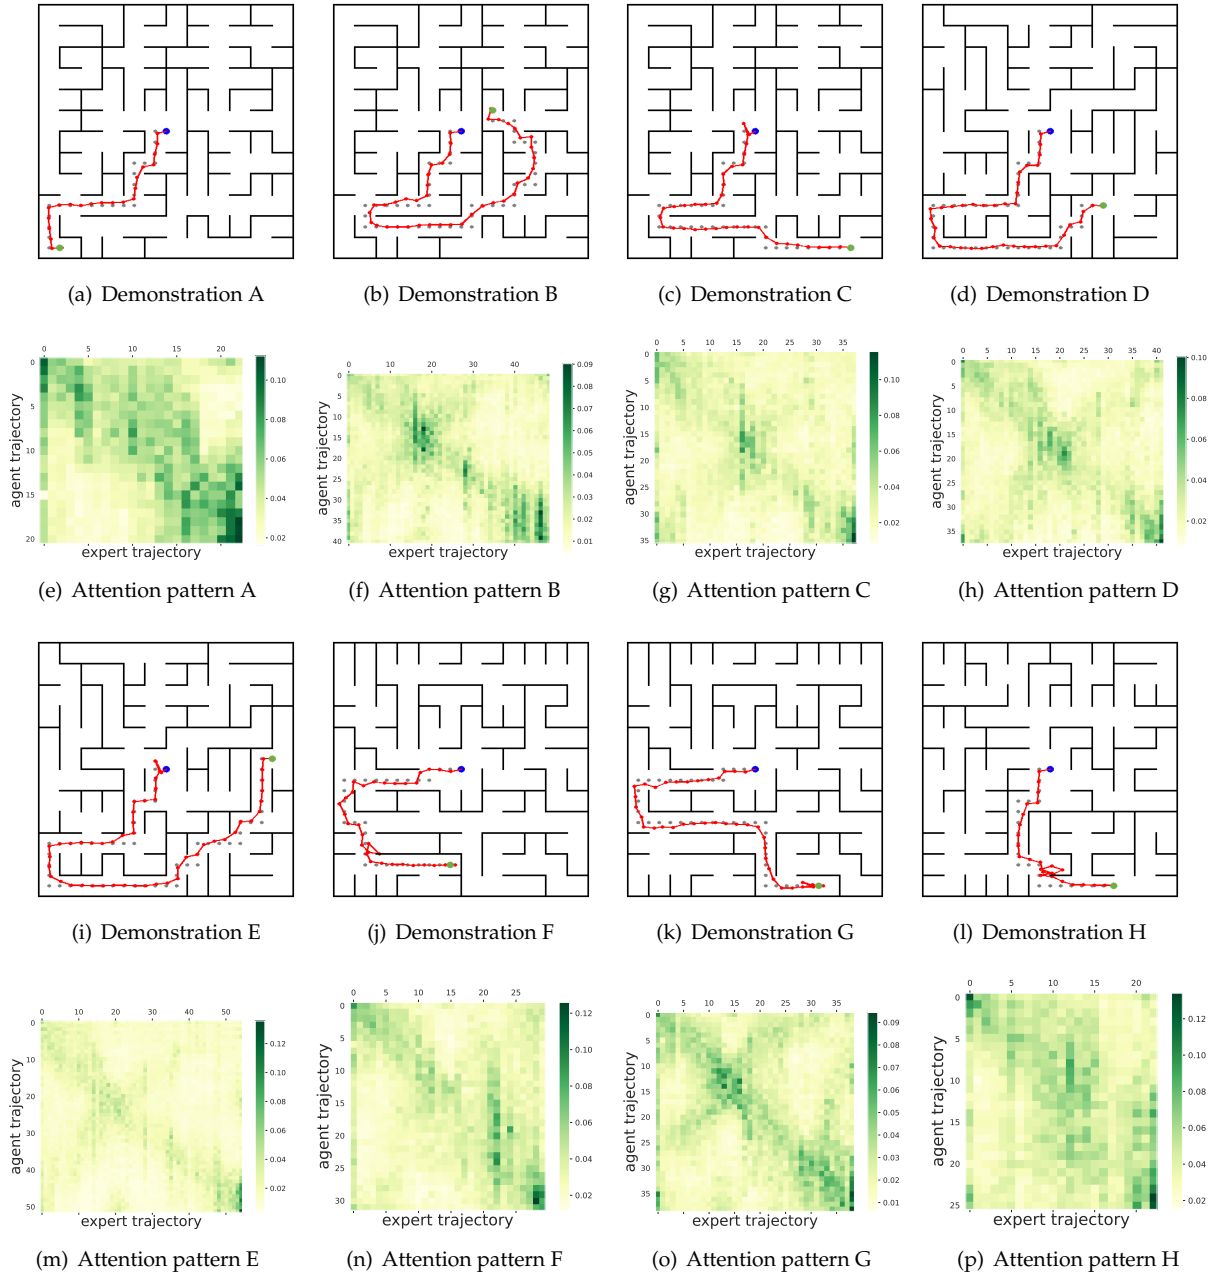



Figure 18: Illustrations of attention patterns in DAAC. In Fig.(e)-(h) and Fig.(m)-(p), the vertical axis of the attention score map corresponds to the trajectory of the agent, while the horizontal axis represents the trajectory of the expert. The intensity of color within a row indicates the level of attention allocated by the agent to the corresponding expert state. The imitator agent actively aligns with expert states by leveraging the matched state for decision-making, *with higher attention values predominantly concentrated along the diagonal.*

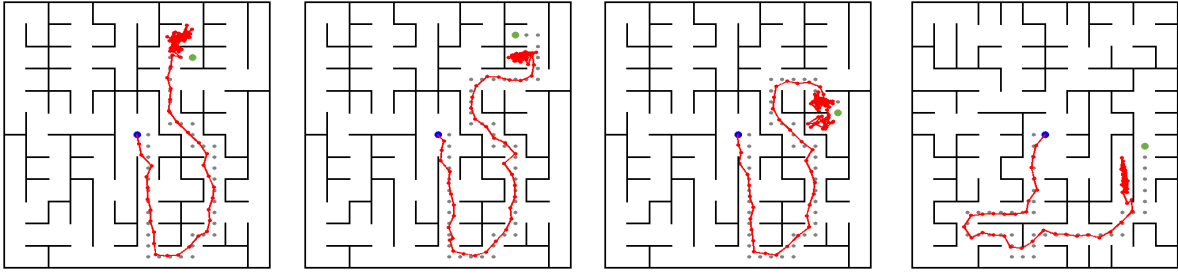


(a) Sample 1 (w/o ItorL reward) (b) Sample 2 (w/o ItorL reward) (c) Sample 3 (w/o ItorL reward) (d) Sample 4 (w/o ItorL reward)

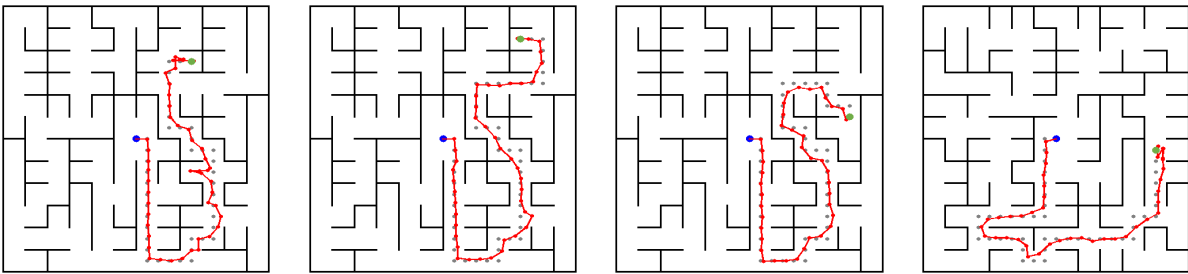

(e) Sample 1 (ItorL reward) (f) Sample 2 (ItorL reward) (g) Sample 3 (ItorL reward) (h) Sample 4 (ItorL reward)

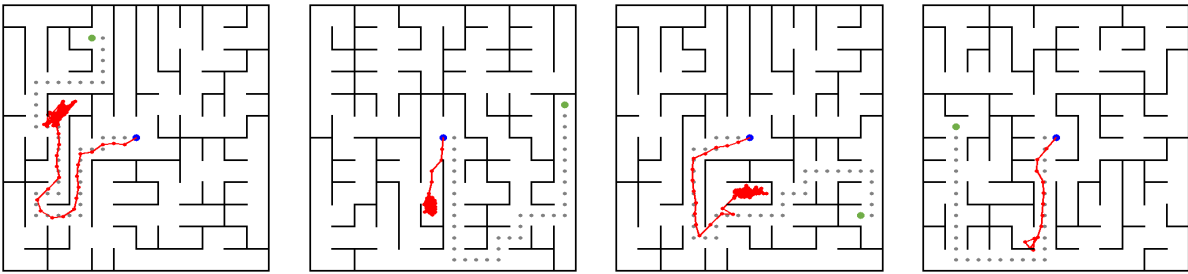

(i) Sample 5 (w/o ItorL reward) (j) Sample 6 (w/o ItorL reward) (k) Sample 7 (w/o ItorL reward) (l) Sample 8 (w/o ItorL reward)

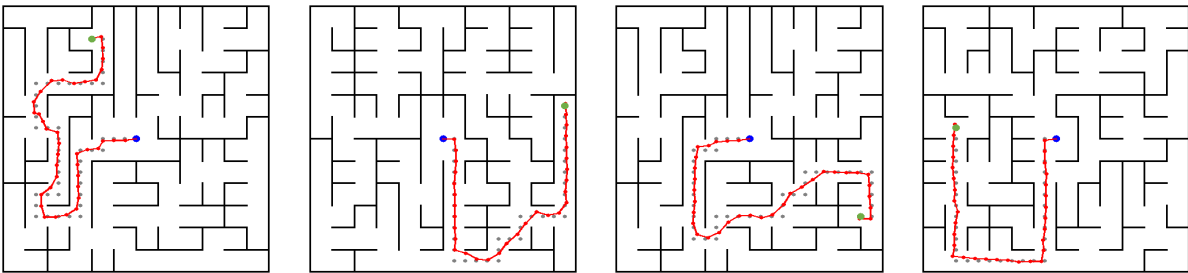

(m) Sample 5 (ItorL reward) (n) Sample 6 (ItorL reward) (o) Sample 7 (ItorL reward) (p) Sample 8 (ItorL reward)

Figure 19: comparisons of trajectories of DAAC trained with or without the ItorL reward.

K The Details of the Scaling Up Experiments

Experiments on Different Demonstration Quantity To investigate the influence of demonstration quantity on model performance, we conducted experiments with four varying quantity settings: 60, 240, 960, and 2160. The results are in Fig. 20. We observed that fewer data leads to quicker initial learning speed and rapid performance improvement. However, a bottleneck emerges when aiming for generalization performance. As demonstration quantity increases, the learning task becomes more difficult, resulting in slower initial learning. Nonetheless, the final model exhibits notably superior performance on new demos and new maps compared to experiments conducted with fewer data.

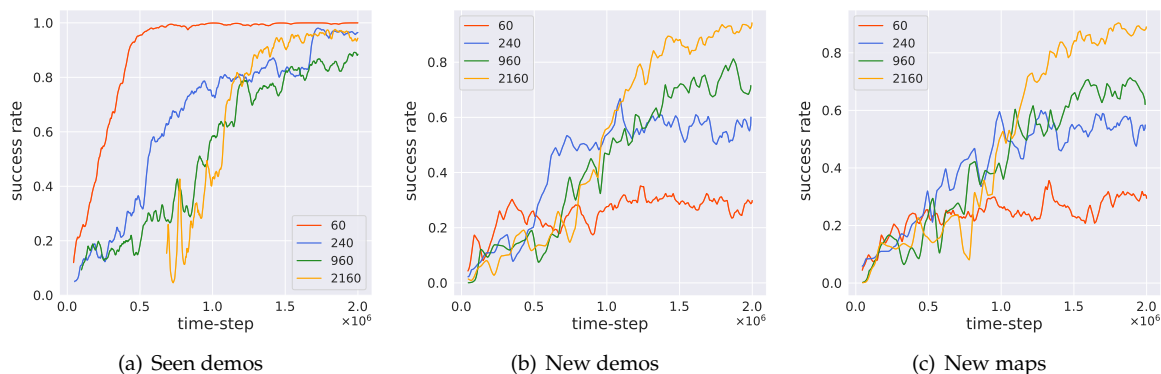


Figure 20: Learning curves of agents with varying demonstration quantity. Note that the task is the Multi-map imitation without obstacles and with coordinates.

Experiments on Different Model Parameters In this experiment, We focused on tuning d_{model} , nhead, $L_{encoder}$ and $L_{decoder}$ for both actor and critic to construct DAAC variants with different model parameters, where d_{model} represents the desired number of features in the encoder/decoder inputs, nhead denotes the number of heads in the multi-head attention mechanism, $L_{encoder}$ represents the number of sub-encoder layers within the encoder, and $L_{decoder}$ refers to the number of sub-decoder layers within the decoder. The details of parameters selection are in Tab. 6, and the learning curves are in Fig. 21.



Figure 21: Learning curves of agents with varying model sizes. Note that the task is the Multi-map imitation with obstacles and without coordinates.

Table 6: Architecture hyperparameters for DAAC variants with different model parameters.

Total Parameters	Actor					Critic				
	d_{model}	nheads	$L_{encoder}$	$L_{decoder}$	parameters	d_{model}	nheads	$L_{encoder}$	$L_{decoder}$	parameters
0.6M	64	16	3	3	0.4M	64	16	2	2	0.2M
1.9M	64	32	3	6	0.6M	128	16	4	4	1.3M
2.3M	96	32	3	6	1.0M	128	16	4	4	1.3M
2.9M	128	64	3	6	1.6M	128	16	4	4	1.3M
5.7M	192	16	3	6	3.1M	192	16	4	4	2.6M
9.3M	256	16	3	6	5.1M	256	16	4	4	4.2M
19.4M	384	16	3	6	10.7M	384	16	4	4	8.7M

L More Examples of DAAC Trajectories

L.1 DAAC Trajectories in Maze Environments

In Fig. 22-29, we show the trajectories generated by DAAC agents in all of the tasks.

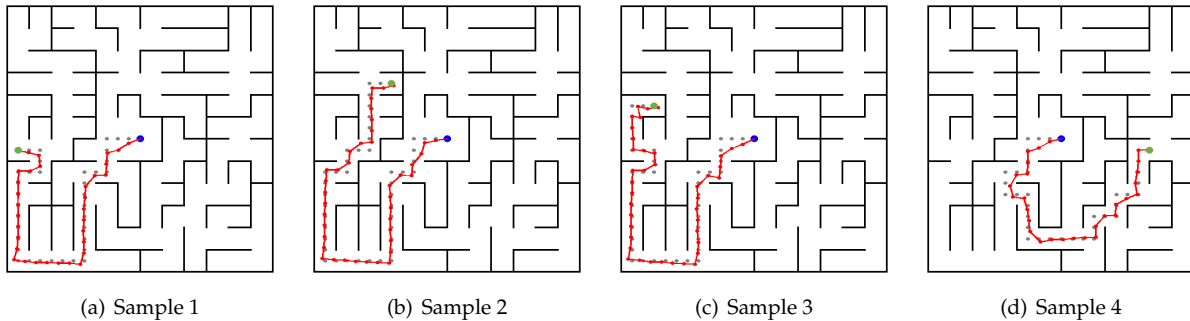


Figure 22: Illustration of trajectories generated by DAAC agents where the agents are trained on the single-map setting without obstacles and with coordinates provided.

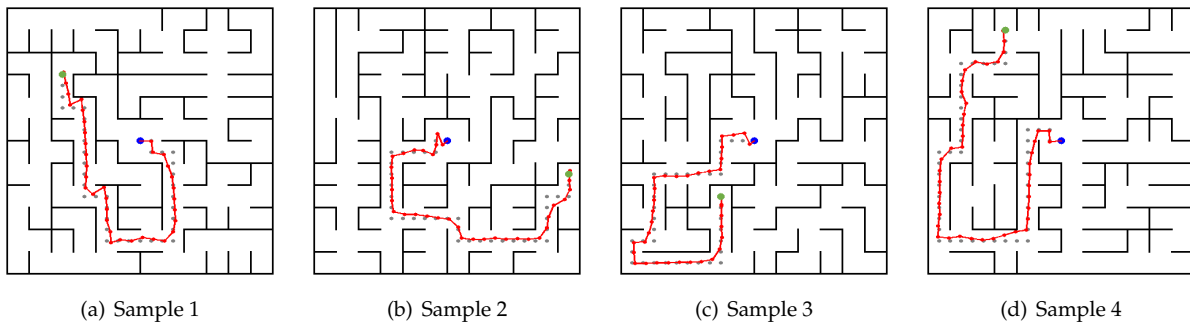


Figure 23: Illustration of trajectories generated by DAAC agents where the agents are trained on the multi-map setting without obstacles and with coordinates provided.

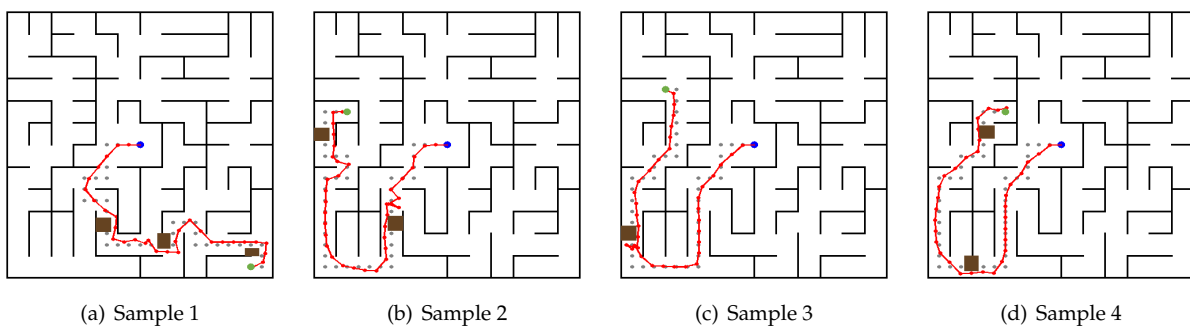


Figure 24: Illustration of trajectories generated by DAAC agents where the agents are trained on the single-map setting with obstacles and with coordinates provided.

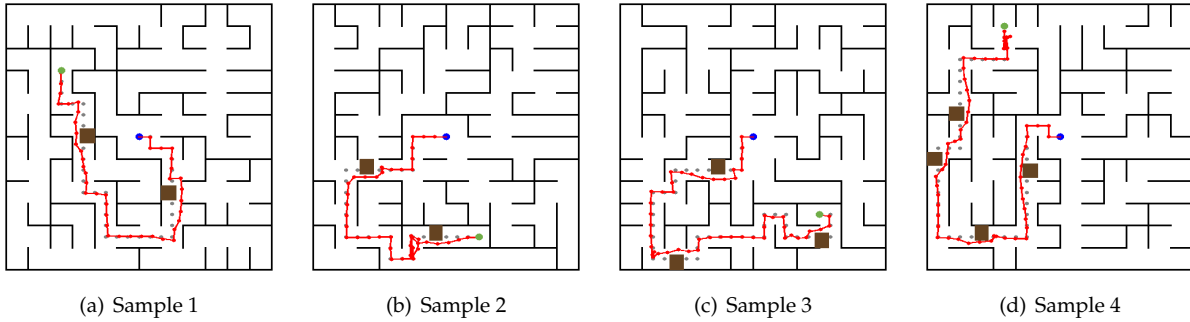


Figure 25: Illustration of trajectories generated by DAAC agents where the agents are trained on the multi-map setting with obstacles and with coordinates provided.

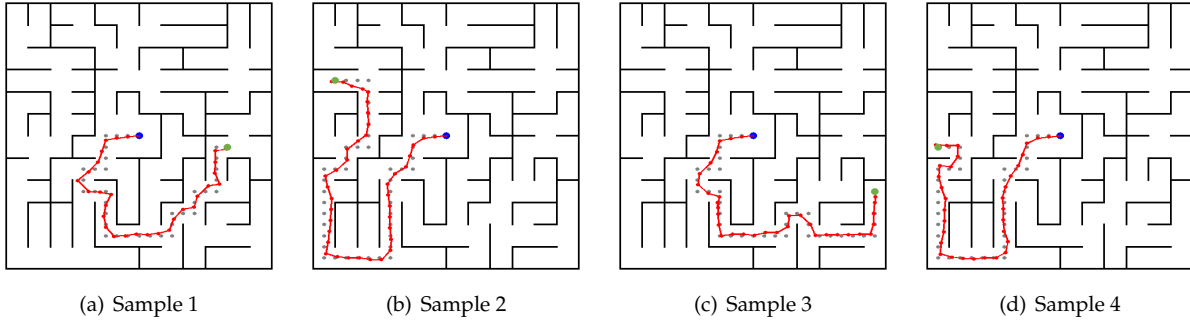


Figure 26: Illustration of trajectories generated by DAAC agents where the agents are trained on the single-map setting without obstacles and without coordinates provided.

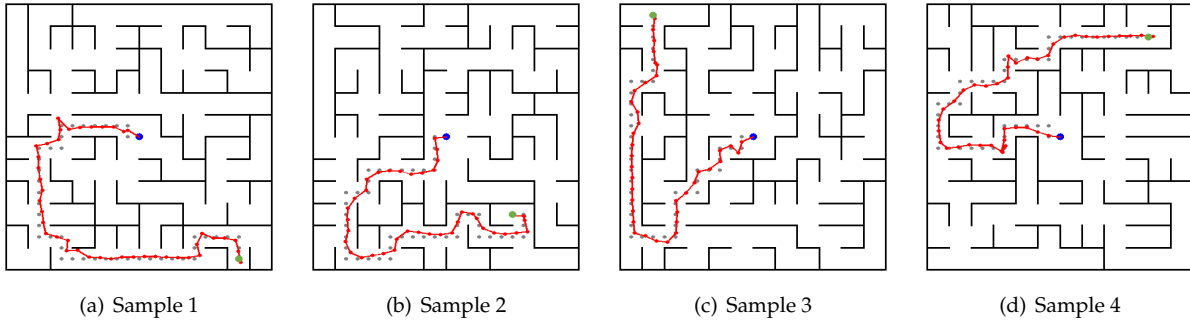


Figure 27: Illustration of trajectories generated by DAAC agents where the agents are trained on the multi-map setting without obstacles and without coordinates provided.

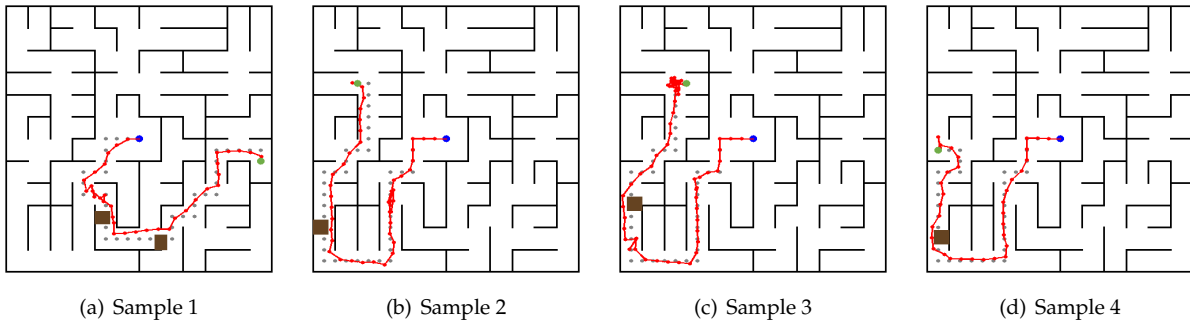


Figure 28: Illustration of trajectories generated by DAAC agents where the agents are trained on the single-map setting with obstacles and without coordinates provided.

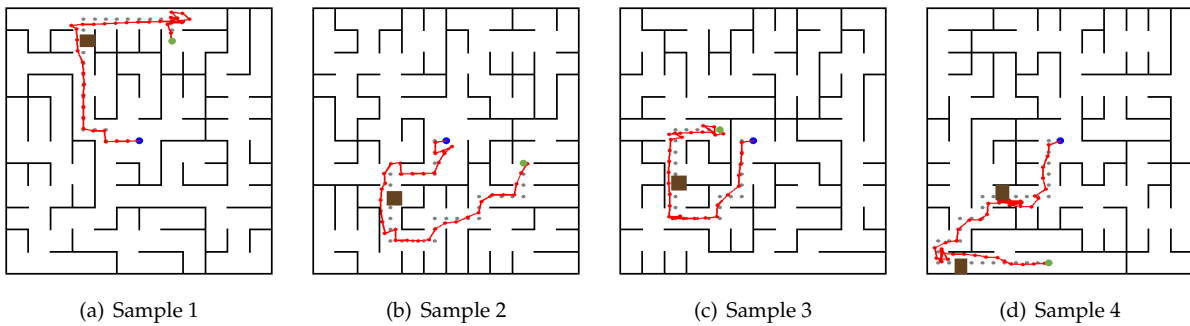


Figure 29: Illustration of trajectories generated by DAAC agents where the agents are trained on the multi-map setting with obstacles and without coordinates provided.

L.2 DAAC Trajectories in Robot Manipulation Environments

In Fig. 30-35, we show the trajectories generated by DAAC agents in all of the tasks. In all of the figures, the red line represents the **expert demonstrations** collected by sequentially executing predefined heuristic primitives, *the lighter the latter*. The blue dots are event points denoting the **agent trajectory**, *the lighter the latter*. The event points generated by our method always distribute around the demonstration trajectories, which demonstrates that the agent actively matches expert states for decision making. **Besides, we recorded the corresponding videos in the public link.**

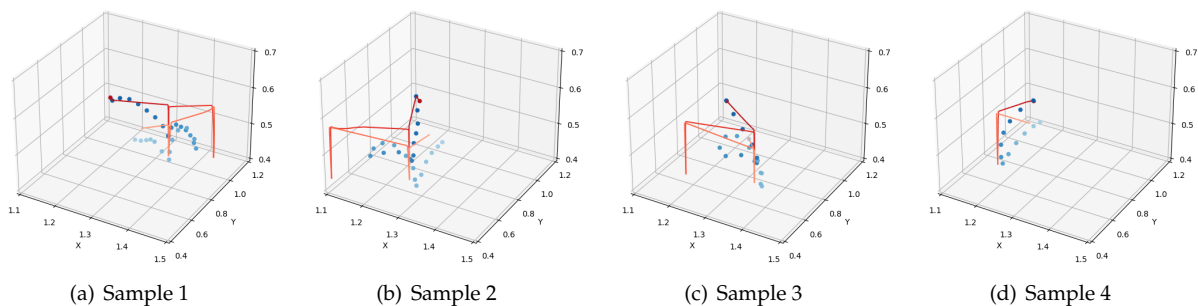


Figure 30: Illustration of trajectories generated by DAAC agents and corresponding demonstrations in object-grasping tasks. The agents are trained on object-grasping tasks and tested with unseen object-grasping demonstrations. The robot needs to grasp the target object without colliding with other objects.

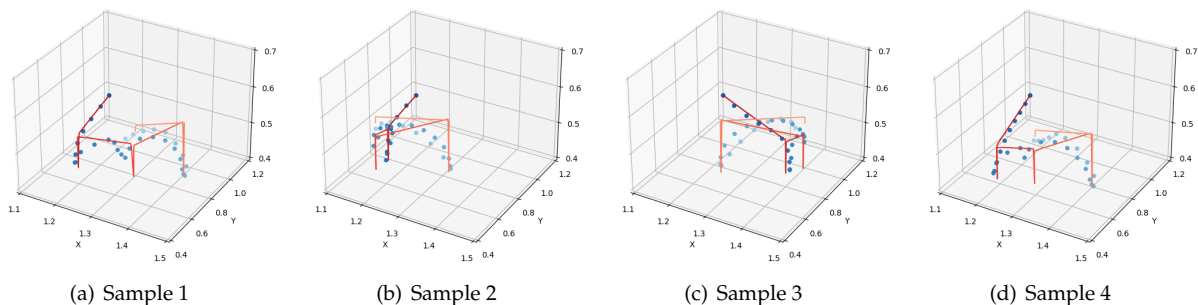


Figure 31: (a)-(d) Robot manipulation trajectories generated by DAAC agents. The agents are trained on object-stacking tasks and tested with unseen object-stacking demonstrations. The robot needs to stack three initially placed objects together.

M Societal Impact

This work studies a new topic called imitator learning (ItorL), which aims to derive an imitator module that can *on-the-fly* reconstruct the imitation policies based on very *limited* expert demonstrations for different unseen tasks, without any extra adjustment. ItorL enables imitation in many real-world application applications where humans require is performing various tasks out of the box, through very limited demonstrations of corresponding tasks. For example, for autonomous vehicles, we would like the vehicle to park in different parking lots directly [Ahn et al., 2022, Kümmerle et al., 2009] by presenting a human navigation trajectory; for robot manipulation, we aim for a robot arm to perform a variety of tasks directly [Dance et al., 2021, Yu et al., 2019] by just giving the corresponding correct operation demonstrations. Nonetheless, it is important

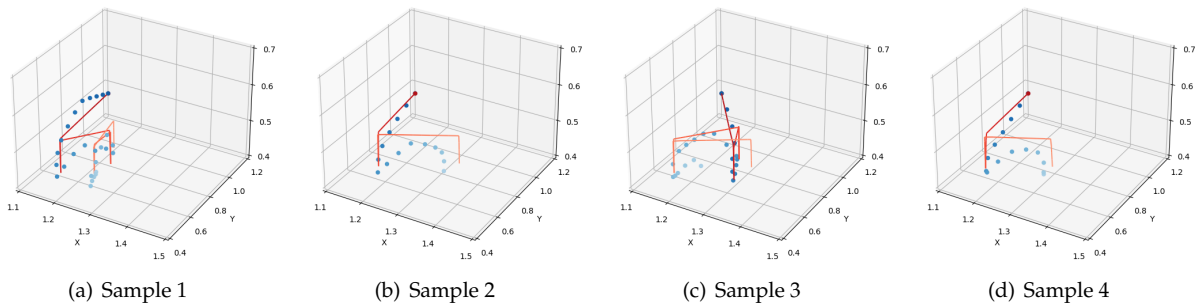


Figure 32: Illustration of trajectories generated by DAAC agents and corresponding demonstrations in object-collecting tasks. The agents are trained on object-collecting tasks and tested with unseen object-collecting demonstrations. The robot needs to collect all objects scattered over the desk and place them in the specified area (yellow).

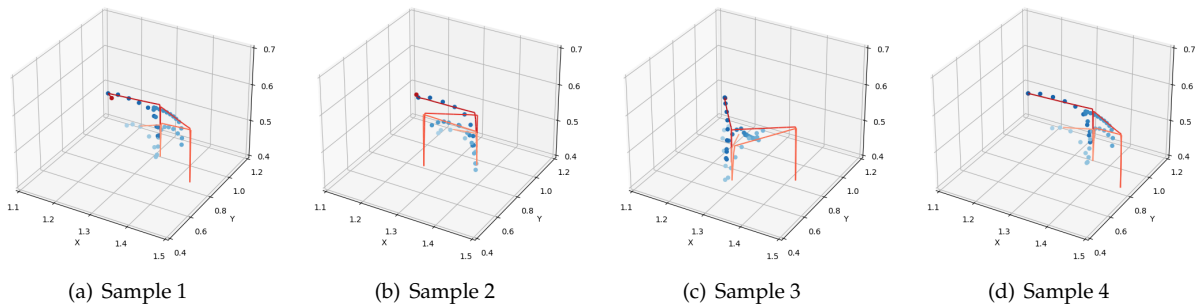


Figure 33: Illustration of trajectories generated by DAAC agents trained to imitate three types of manipulation tasks simultaneously. The agents are tested with unseen object-grasping demonstrations.

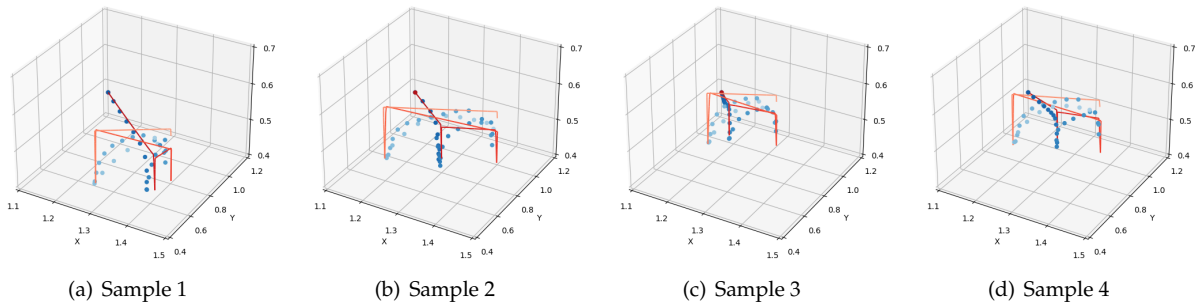


Figure 34: Illustration of trajectories generated by DAAC agents trained to imitate three types of manipulation tasks simultaneously. The agents are tested with unseen object-stacking demonstrations.

to consider the ethical implications of deploying these RL agents in real-world settings. Ensuring that these systems maintain transparency and accountability is of paramount importance.

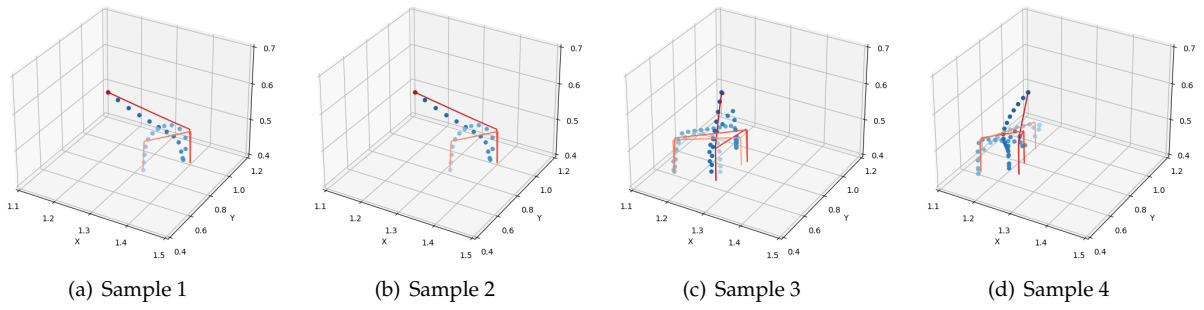


Figure 35: Illustration of trajectories generated by DAAC agents trained to imitate three types of manipulation tasks simultaneously. The agents are tested with unseen object-collecting demonstrations.