

A Cryptographic Perspective on the Verifiability of Quantum Advantage

Nai-Hui Chia¹ *, Honghao Fu² **, Fang Song³ ***, and Penghui Yao^{4,5} †

¹ Rice University, USA

² Massachusetts Institute of Technology, USA

³ Portland State University, USA

⁴ Nanjing University, China

⁵ Hefei National Laboratory, China

Abstract. In recent years, achieving verifiable quantum advantage on a NISQ device has emerged as an important open problem in quantum information. The sampling-based quantum advantages are not known to have efficient verification methods. This paper investigates the verification of quantum advantage from a cryptographic perspective. We establish a strong connection between the verifiability of quantum advantage and cryptographic and complexity primitives, including efficiently samplable, statistically far but computationally indistinguishable pairs of (mixed) quantum states (EFI), pseudorandom states (PRS), and variants of minimum circuit size problems (MCSP). Specifically, we prove that a) a sampling-based quantum advantage is either verifiable or can be used to build EFI and even PRS and b) polynomial-time algorithms for a variant of MCSP would imply efficient verification of quantum advantages.

Our work shows that the quest for verifiable quantum advantages may lead to applications of quantum cryptography, and the construction of quantum primitives can provide new insights into the verifiability of quantum advantages.

1 Introduction

Quantum advantage experiments aim to demonstrate tasks that quantum computers outperform classical computers. In recent years, random circuit sampling (RCS) [BIS⁺18] and Boson sampling [AA13] emerge as promising proposals since they can be implemented on a NISQ (Noisy Intermediate-Scale Quantum) device and admit *provably* complexity-theoretical evidence for the hardness on classical computers [AC17]. Besides these two desirable criteria for a quantum advantage experiment, another critical criterion is the ability to *verify* the outcomes from such experiments, preferably by an efficient classical computer. Verification for RCS and Boson sampling both turn out to be challenging. At present, it remains open to demonstrate a quantum advantage experiment that satisfies all three of these criteria (see Fig. 1 for a summary).

* Email: nc67@rice.edu

** Email: honghaof@mit.edu

*** Email: fang.song@pdx.edu

† Email: phyao1985@gmail.com

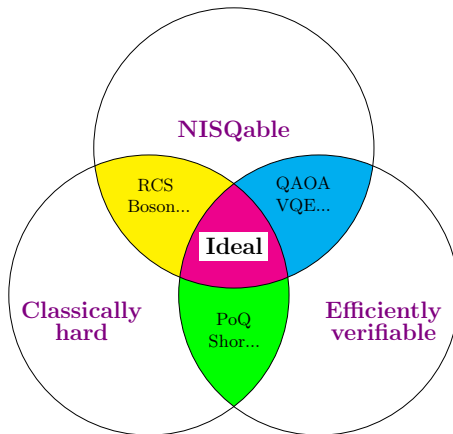


Fig. 1. Scott Aaronson’s categorization of quantum advantage proposals. Random circuit sampling [BIS⁺18] and Boson sampling [AA13] are NISQable and Classically hard. Cryptographic proof of quantumness (PoQ) [BCQ22,KMVCY22] and Shor’s algorithm [Sho99] are classically hard and efficiently verifiable. QAOA [FGG14] and VQE [PMS⁺14] are NISQable and efficiently verifiable.

About the verifiability of RCS, the linear cross-entropy benchmarking (XEB) is first proposed as a verification method [BIS⁺18]. However, XEB is sample efficient but not computationally efficient, and it can be spoofed [GKC⁺21,PZ22]. More generally, a work by Hangleiter et. al [HKEG19] cast a further shadow on their verifiability. They show that if the target distribution anticentralizes, certifying closeness to the target distribution requires exponentially many samples, which covers RCS, Boson sampling and IQP sampling. This result rules out efficient verification for the known quantum advantage experiments based on sampling.

What about general quantum sampling experiments? How do we determine if such an experiment has an efficient verification method? In [FGP22], the verification task is modelled as a game between a quantum party and a classical challenger, which we will discuss more later. However, they can only show the limitations of the verification methods that calculate the empirical average of some scoring functions of individual samples in this model.

1.1 Our results

In this paper, we investigate the verifiability of sampling-based quantum advantage experiments via a *cryptographic* perspective. To this end, we first put forth formal definitions of verifiability. Subsequently, we study the implication of the hardness of a variant of the minimal circuit size problem (MCSP) on verifiability. Furthermore, we establish the connection between verifiability and fundamental quantum cryptographic primitives: EFI (efficiently generated, statistically far, and computationally indistinguishable states) and PRS (pseudorandom states). Lastly, we generalize verifiable quantum advantage to capture the verifiability of interactive proof of quantumness. We hope that our work will advance the understanding of the verifiability of quantum advantage experiments and provide insights into the development of future quantum advantage experiments.

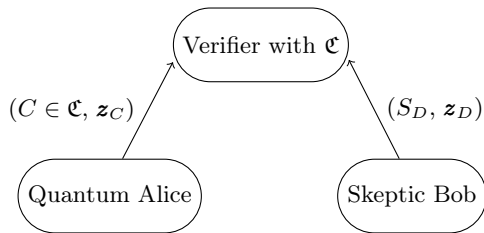


Fig. 2. Verification process for RCS: The verifier publishes a circuit family \mathfrak{C} . Then Alice sends back $C \in \mathfrak{C}$ and samples \mathbf{z}_C obtained from measuring $C|0^n\rangle$, and Bob sends back the description of the sampler \mathcal{S}_D for his classically samplable spoofing distribution D , along with samples \mathbf{z}_D .

The model of the verification process is depicted in Fig. 2. It consists of three parties: Alice (a quantum advocate and experiment designer), Bob (a quantum skeptic) and a verifier⁶. Alice runs the quantum experiment and sends transcripts of her experiment, including the setup of the experiment apparatus and outcomes, to the verifier. Bob, as a challenger, proposes a classically samplable distribution that is indistinguishable from Alice’s distribution, and sends the description of his sampling algorithm along with samples of his distribution to the verifier. The verifier’s goal is to distinguish Alice and Bob’s samples, so in the rest of the paper we also call him the distinguisher. The distinguisher takes all the information from Alice and Bob as input. In the case of RCS, Alice sends out her random circuit C and her measurement outcome on $C|0^n\rangle$. Bob proposes a spoofing algorithm and sends the description of the algorithm along with his samples to the distinguisher.

Definition 1 (Verifiable quantum advantage (Informal)). *Let \mathfrak{C} be a set of polynomial-sized quantum circuits on n qubits. We say the experiment that samples a $C \in \mathfrak{C}$ and repeatedly measures the output state in the computational basis achieves verifiable quantum advantage if for all classical polynomial-time samplable distribution \mathcal{D} whose sampler is \mathcal{S}_D , there exists a classical polynomial time distinguisher \mathcal{A} such that*

$$\mathbb{E}_{C \leftarrow \mathfrak{C}} |\Pr[\mathcal{A}(C, \mathcal{S}_D, \mathbf{z}_C) = 1] - \Pr[\mathcal{A}_D(C, \mathcal{S}_D, \mathbf{z}_D) = 1]| \geq 1/\text{poly}(n),$$

where \mathbf{z}_C is a polynomial-sized set of samples generated from measuring $C|0^n\rangle$ in the computational basis, and \mathbf{z}_D is a set of samples drawn from \mathcal{D} .

We give several VQA examples to demonstrate the expressiveness of our verifiability definition, such as Fourier sampling (e.g., based on Shor’s algorithm and Simon’s problem). Note that our distinguisher is more general than the ones used in the experiments [BIS⁺18] and studied in [FGP22]. Their distinguishers are agnostic about how the classical samples are sampled, score each sample individually, and make their decisions based on the average of the scores. As pointed out in [FGP22], if the distinguisher knows the spoofing algorithm of XEB proposed in [PZ22], the distinguisher can distinguish the spoofing samples from the quantum samples. Hence, we define verifiable quantum advantage with respect to such a more general distinguisher.

Minimum circuit size problem (MCSP) vs. VQA. We aim to identify the computational hardness of verifying quantum advantages. One potential approach is finding a problem for which

⁶ We came up with this model unaware of the two-party game proposed in [FGP22], albeit the two models share some similarities.

the existence of efficient algorithms would lead to efficient verification, which is similar to the connections between Meta-complexity problems and cryptography.

Meta-complexity problems, which ask to identify specific complexity measures (e.g., circuit complexity) of given Boolean functions, is a fundamental topic in complexity theory. It is worth noting that efficient algorithms for these problems imply that one-way functions do not exist [KC00,RR94]. Chia et al. [CCZZ21] investigated quantum minimum circuit size problems (MCSP) by considering the hardness of identifying quantum circuit complexity of functions, states, and unitary matrices. They showed that the existence of efficient algorithms leads to efficient algorithms for breaking all pseudorandom state schemes and post-quantum one-way functions.

Inspired by the connections between meta-complexity problems and cryptography, we introduce a variant of meta-complexity problems called the *minimum circuit size problems for samples* (SampMCSP), which asks the minimum size of classical samplers that can generate samples indistinguishable from the given samples. This problem is analogous to the state minimum circuit size problem introduced in [CCZZ21], which asks to identify the quantum circuit complexity of given quantum states. We demonstrate that if SampMCSP can be solved in polynomial time, then a class of quantum advantage experiments can be verified efficiently.

EFI vs. VQA. Next, we study the relationships between verifiability and the quantum cryptographic primitive EFI. EFI is a fundamental quantum cryptographic primitive, which is equivalent to quantum commitment schemes, quantum oblivious transfer, quantum multi-party computation and others [BCQ23]. Note that, classically, one-way functions are necessary but might not be sufficient to build these applications.

We show that a type of *duality* exists between EFI and verifiable quantum advantage, when we consider classically-secure EFI pairs, i.e., whose computational indistinguishability holds only against classical algorithms.

Theorem 1 (Informal). *If the quantum advantage of a quantum experiment is verifiable, then the output states do not form an EFI pair with any quantum state that encodes a classical samplable distribution.*

Theorem 2 (Informal). *If the average of output states of a quantum experiment is statistically far from any quantum state that encodes a classically samplable distribution and the output states do not form a classically secure EFI with any classical polynomial-time samplable distribution, then the experiment is verifiable.*

If we allow verifying quantum advantage by a quantum computer, we obtain a similar duality between quantum-secure EFIs and quantum verifiability. We think that this model with quantum verifiers is also worth exploring and is discussed more in Section 7.

These results provide necessary and sufficient conditions for verifiability based on whether the quantum circuit family can form an EFI pair with a classical polynomial-time samplable distribution, respectively. To the best of our knowledge, all existing EFI pairs satisfy such a property, i.e., one of the EFI generators can be simulated by classical polynomial-time algorithms.

Pseudorandom states (PRS) vs. VQA. A set of states is a PRS if a random state in this set is computationally indistinguishable from a Haar random state [JLS18]. PRS is an essential quantum cryptographic primitive that can be used to build other primitives, including one-time digital signature and EFI. Moreover, the existence of PRS implies the existence of EFI, and thus the

aforementioned applications that are equivalent to EFI can also be constructed from PRS. Moreover, there is evidence showing that the existence of PRS is a weaker assumption than the existence of one-way functions [Kre21].

Intuitively, if the output states of a quantum advantage experiment are pseudorandom, the measurement output distribution should be indistinguishable from the measurement output distribution of Haar random states. Moreover, the measurement output distribution of Haar random states can be approximated by a classical distribution, so this quantum advantage experiment doesn't achieve verifiability. However, in the definition of PRS, the distinguisher is unaware of the preparation circuit of the given state, but the distinguisher in a quantum advantage experiment is. Hence, we can only prove this result for a subclass of PRS, called classically unidentifiable PRS, which intuitively says that when distinguishing samples from measuring different states, knowing the circuit doesn't help. Many existing PRS constructions, such as the random phase states and binary phase states [JLS18,BS19], are classically unidentifiable.

Theorem 3 (Informal). *If the quantum advantage of a quantum sampling algorithm is verifiable, then the output states are not classically unidentifiable PRS.*

The motivation behind Theorem 3 is that RCS is proposed as a candidate construction of PRS [KQST23]. If the output states of random circuits are classically unidentifiable, Theorem 3 gives us a proof that RCS experiments are unverifiable. Note that [HKEG19] shows the distribution induced by measuring a random circuit is indistinguishable from some classical distribution, which doesn't imply RCS is not VQA according to Definition 1. Conversely, Theorem 3 also tells us that if some construction of PRS fails, it is possible to use this construction for verifiable quantum advantage. This is a win-win situation.

What about interactive quantum advantage experiments? So far, we have focused on sampling-based quantum advantage experiments. There are interactive verifiable quantum advantage proposals called proof of quantumness (PoQ) [BCM⁺21,BKV20,KMCSV22]. These PoQs achieve verifiability, but one obstacle in implementing these protocols is maintaining coherence during the interactions.

Hence, we generalize Definition 1 to capture the strength of both Definition 1 and the verifiability of PoQ. In the generalized definition, the trusted party is the *designated verifier*, who generates public parameters and a private verification key. After getting all the samples, the designated verifier uses the verification key to distinguish Alice's quantum samples from Bob's samples. We call this *Designated verifiable quantum advantage* or DVQA.

Under this definition, the trusted verifier is offline, so Alice doesn't need to interact with the trusted verifier and can generate the samples on her own as in Definition 1. Moreover, it is possible to compile existing PoQ to satisfy the new definition. For example: Assuming a random oracle, the interactive protocol of [BCM⁺21] fits this definition. The function keys and trapdoors of their protocol are the public parameters and private verification keys here. Then, the classical or quantum prover can run the operations of the verifier in the original protocol locally by querying the random oracle for the challenges. In the end, the prover sends all the generated transcripts to the distinguisher \mathcal{A} , who uses the verification key to distinguish the transcripts. In the compiled protocol, the verifier is offline as in Definition 1, and the verifiability of the original PoQ is preserved.

Implications. We offer a few perspectives.

- For a quantum advocate (experiment designer): The study of quantum cryptography can provide new insights into designing a verifiable quantum advantage experiment. For example, one possible route indicated by Theorem 2 is to start with a classically insecure EFI, and then apply some amplification technique to dilate the statistical distance to obtain the strong quantum advantage while remaining classically insecure.
- For a quantum skeptic: A spoofing strategy can be found through the lens of quantum cryptography. Theorem 1 says that the spoofing distribution can be a distribution that forms an EFI pair with most of the output states. Theorem 3 says that if the output states of an experiment are classically unidentifiable PRS, the uniform distribution suffices.
- For a quantum cryptographer: The quest for verifiability of quantum advantages might lead to quantum cryptographic applications. Theorem 2 implies that if an experiment is not verifiable, then it will form a classical-secure EFI with a classical polynomial-time samplable distribution. Since Theorem 2 can be lifted against quantum adversaries, it is possible to build standard EFI and the primitives based on EFI from a quantumly unverifiable experiment.

In summary, our results show connections between the verifiability of quantum advantages and the quantum cryptographic primitives. It is worth noting that computational tasks demonstrating quantum advantages on near-term quantum devices might not directly result in useful applications; however, our results show that the quest for quantum advantages and their verifiability can provide new insights and methods to build fundamental quantum cryptographic primitives.

1.2 Open problems

As this is only an initial attempt at studying the relationship between the verifiability of quantum advantage experiments and quantum cryptographic primitives, there are many open problems. We list some of them here.

Random circuits, PRS, and EFI. Are the output states of random circuits PRS, or even classically unidentifiable PRS? Similarly, can we use random circuits to construct EFI? There is evidence that the output states of random circuits are PRS. For example, it is known that polynomial-sized random circuits are approximate poly-designs [BHH16], which indicates that output states of random circuits are highly indistinguishable from Haar random states. Also, it is possible to build an EFI by pairing random circuits and other sufficiently random samplers while ensuring the two output states are statistically far.

Quantum cryptography on NISQ devices. If the output states of random circuits are not PRS, can we still construct PRS using less structured NISQ circuits with a fixed architecture? The known constructions of PRS [JLS18,BS19,BS20,BFG⁺22] all require structured circuits, although some of them only require shallow circuits. If the NISQ device can construct classically *identifiable* PRS, our result cannot rule out the possibility of verifiable quantum advantage on NISQ devices. Similarly, it is interesting to know whether one can use NISQ devices to construct EFI.

The effect of noise. It is known that efficient sampling from the output distribution of a noisy random quantum circuit can be done classically [AGL⁺23]. What would be the implication of this result on PRS? If the output states of *noiseless* random circuits are PRS, will noisy circuits still output PRS? Intuitively, noise will lead to mixed states, which might affect the security of PRS since a Haar random state is a pure state. Along this line, would it be possible to change the definition of PRS to be indistinguishable from “noisy Haar random states?” while keeping all

the applications of the original PRS? Likewise, we are wondering whether noise would impact the construction of EFI. Note that EFI must be two computationally indistinguishable and statistically far mixed states. Thus, noise could even make the states more indistinguishable. On the other hand, if the noise is too large, the two states might be statistically close.

DVQA: reduced trusted setup and generic compiler. Our current transformation of existing PoQ protocols to a DVQA experiment is proven in the random oracle model. Can we replace the random oracle with a suitable family of hash functions such as correlation intractable hash [CCR16]? Ideally, can one design a generic compiler that converts any PoQ protocol directly to a DVQA system?

Complete characterization of verifiability. In this work, we identify several basic conditions that give useful characterizations of verifiable quantum advantage. It would be fruitful to find other characterizations of verifiable quantum advantage and investigate their applications in quantum information and cryptography.

Organization. We define the quantum primitives in Section 2. We formally define verifiable quantum advantage and discuss its connection to a variant of MCSP in Section 3. In Section 4, we explore the relationship between verifiability and EFI, and in Section 5 we show the relationship between verifiability and PRS. Then we define and discuss DVQA in Section 6. Finally, in Section 7, we lift verifiability to against quantum distinguishers and explore its relation with EFI.

Acknowledgement. We thank Yunchao Liu for the helpful discussions. NHC was supported by NSF award FET-2243659, Google Scholar Award, and DOE award DE-SC0024301. HF was supported by the US National Science Foundation QLCI program (grant OMA-2016245). FS was supported in part by the US National Science Foundation grants CCF-2042414, CCF-2054758 (CAREER) and CCF-2224131. PY was supported in part by the National Natural Science Foundation of China (Grant No. 62332009, 61972191), and the Innovation Program for Quantum Science and Technology (Grant No. 2021ZD0302900).

2 Quantum cryptographic primitives

Definition 2 (EFI pairs [BCQ23]). An EFI pair generator is a quantum algorithm $G : (b, 1^\lambda) \mapsto \rho_b$ that on inputs $b \in \{0, 1\}$ and security parameter λ , outputs a quantum state ρ_b , such that the following conditions hold.

1. G runs in quantum polynomial time.
2. ρ_0 and ρ_1 are statistically distinguishable, i.e., $\frac{1}{2} \|\rho_0 - \rho_1\|_1 \geq 1/\text{poly}(\lambda)$.
3. ρ_0 and ρ_1 are computationally indistinguishable, i.e., for all quantum poly-time algorithm \mathcal{A} , $|\Pr[\mathcal{A}(\rho_0) = 1] - \Pr[\mathcal{A}(\rho_1) = 1]| \leq \text{negl}(\lambda)$.

There are a few other special cases that are worth noting.

- (EFID) When all objects are specialized to their classical counterparts, we recover the classical primitive of EFID pairs [Gol90]. Namely, G is a poly-time classical algorithm which produces samples from one of two distributions D_b , and the distinguisher \mathcal{A} is an arbitrary classical poly-time algorithm. We can view $\rho_b := \sum_i D_b(i) |i\rangle\langle i|$ as a (mixed) state encoding D_b .
- (Quantum-secure EFID) If the indistinguishability of EFID holds against poly-time *quantum* distinguishers and other objects remain classical; we call it a quantum-secure EFID.

- (Classical-secure EFI or quantum-generated EFID) If the indistinguishability of EFI is only required to hold against poly-time *classical* distinguishers, we call it a classical-secure EFI. This can also be viewed as a EFID but the generating algorithm G is permitted to be a quantum algorithm, and D_b corresponds to measuring ρ_b in the computational basis. Hence we can alternatively call it a quantum-generated EFID.
- (Quantum-secure quantum-generated EFID (qq-EFID)) This is EFI where ρ_b is restricted encoding a classical distribution D_b . Clearly any qq-EFID is immediately an EFI by definition; on the other hand, any EFI readily implies an qq-EFID by letting D_b be the distribution induced by measuring ρ_b .

Definition 3 (Pseudorandom states (PRS) [JLS18]). Let λ be the security parameter. Let \mathcal{H} be a Hilbert space and \mathcal{K} a key space, both parameterized by λ . A keyed family of quantum states $\{\phi_k \in \mathcal{S}(\mathcal{H})\}_{k \in \mathcal{K}}$ is pseudorandom if the following hold:

1. (Efficient generation). There is a polynomial-time quantum algorithm G that generates state $|\phi_k\rangle$ on input k . That is, for all $k \in \mathcal{K}$, $G(k) = |\phi_k\rangle$.
2. (Pseudorandomness). Any polynomially many copies of $|\phi_k\rangle$ with the same random $k \leftarrow \mathcal{K}$ is computationally indistinguishable from the same number of copies of a Haar random state. More precisely, for any efficient quantum algorithm \mathcal{A} and any $m \in \text{poly}(\lambda)$,

$$\left| \Pr_{k \leftarrow \mathcal{K}}[\mathcal{A}(|\phi_k\rangle^{\otimes m}) = 1] - \Pr_{\phi \leftarrow \mu}[\mathcal{A}(|\phi\rangle^{\otimes m}) = 1] \right| \leq \text{negl}(\lambda),$$

where μ is the Haar measure on $\mathcal{S}(\mathcal{H})$.

Verifiability of PRS Let $|\psi\rangle$ be a state generated from StateGen. Given the corresponding key k and $|\psi\rangle^{\text{poly}(m)}$, one can verify that $|\psi\rangle$ is generated from StateGen(k) via swap test. It is worth noting that this verification procedure requires implementing the swap test for quantum states.

Definition 4 (Classically unidentifiable state family). Let λ be the security parameter. Let $\Phi := \{|\phi_k\rangle\}_{k \in \mathcal{K}}$ be a family of efficiently generatable states, i.e., there exists efficient C_k such that $|\phi_k\rangle = C_k|0^n\rangle$. We call Φ classically unidentifiable if for any efficient classical algorithm A , any $i \neq j$, and any polynomial $m = \text{poly}(\lambda)$

$$|\Pr[A(C_i, \mathbf{z}_i) = 1] - \Pr[A(C_j, \mathbf{z}_j) = 1]| \leq \text{negl}(\lambda),$$

where $\mathbf{z}_i := (z_i^1, \dots, z_i^m)$ are the outcomes by measuring $|\phi_i\rangle^{\otimes m}$ in the computational basis.

Remark 1. The random phase state family $\{|\phi_k\rangle\}$ proposed in [JLS18] below is an example of classically unidentifiable PRS,

$$|\phi_k\rangle = \frac{1}{\sqrt{N}} \sum_{x \in [N]} \omega_N^{f_k(x)} |x\rangle,$$

where $N = 2^n$ and $\{f_k : [N] \rightarrow [N] \mid k \in \mathcal{K}\}$ is a quantum-secure pseudorandom function. This is because when measured in the computational basis, $|\phi_k\rangle$ always induce the uniform distribution. Similarly the special case of binary phases [BS19], i.e., $|\phi_k\rangle = \frac{1}{\sqrt{N}} \sum_{x \in \{0,1\}^n} (-1)^{f_k(x)} |x\rangle$ is also a classically unidentifiable PRS.

3 Verifiable quantum advantages

Definition 5 (Verifiable quantum advantages ((s, t, ϵ)-VQA)). Let λ be the security parameter. Let \mathfrak{C} be a family of polynomial-size quantum circuits on n qubits, where $n = \text{poly}(\lambda)$. For any $C \in \mathfrak{C}$, let D_C be the distribution induced by measuring $C|0^n\rangle$ in the computational basis.

We call \mathfrak{C} a family of (s, t, ϵ) verifiable quantum advantage (VQA), if for all distribution D samplable by a time- s classical algorithm, it holds that for a uniformly random C drawn from \mathfrak{C} , there exists a time- t **classical** algorithm \mathcal{A} that ϵ -distinguishes D_C from D , namely

$$\mathbb{E}_{C \leftarrow \mathfrak{C}} |\Pr[\mathcal{A}(C, \mathcal{S}_D, \mathbf{z}_C) = 1] - \Pr[\mathcal{A}(C, \mathcal{S}_D, \mathbf{z}_D) = 1]| \geq \epsilon,$$

where \mathcal{S}_D is the description of a time- s classical sampler for D , \mathbf{z}_C and \mathbf{z}_D are sets of up to t samples drawn from D_C and D respectively.

This work focuses on the case where $s, t = \text{poly}(\lambda)$ and $\epsilon = 1/\text{poly}(\lambda)$. I.e., we ask whether a classical polynomial-time verifier \mathcal{A} can distinguish the quantum samples from the classical samples with noticeable probability. However, one can also consider verifiers with different powers by choosing the proper parameters.

The distinguishers considered in the literature of quantum advantage experiments are weaker than ours because their distinguishers are agnostic of the sampler of the classical distribution. Hence, we give an alternative definition of verifiable quantum advantage below.

Definition 6 (Universally verifiable quantum advantages ((s, t, ϵ)-UVQA)). Let λ be the security parameter. Let \mathfrak{C} be a family of polynomial-size quantum circuits on n qubits, where $n = \text{poly}(\lambda)$. For any $C \in \mathfrak{C}$, let D_C be the distribution induced by measuring $C|0^n\rangle$ in the computational basis.

We call \mathfrak{C} a family of (s, t, ϵ) universally verifiable quantum advantage (UVQA), if for all distribution D samplable by a time- s classical algorithm, it holds that for a uniformly random C drawn from \mathfrak{C} , there exists a time- t **classical** algorithm \mathcal{A} that ϵ -distinguishes D_C from D , namely

$$\mathbb{E}_{C \leftarrow \mathfrak{C}} |\Pr[\mathcal{A}(C, \mathbf{z}_C) = 1] - \Pr[\mathcal{A}(C, \mathbf{z}_D) = 1]| \geq \epsilon,$$

where \mathbf{z}_C and \mathbf{z}_D are sets of up to t samples drawn from D_C and D respectively.

Comparing the two definitions, it is easy to see that for the same set of parameters, if \mathfrak{C} is UVQA, it is also VQA, and if it is not VQA, it is not UVQA either.

Discussion on quantum advantages. It is worth stressing that the condition in Definition 5 encapsulates *quantum advantage* and *verifiability* simultaneously. In particular, it implies that any classically time- s samplable distribution is statistically ϵ -far from D_C on average, i.e.,

$$\mathbb{E}_{C \leftarrow \mathfrak{C}} \|D_C - D\|_1 \geq \epsilon. \tag{1}$$

Another type of advantage is sometimes useful too, and it is conjectured to hold in many quantum supremacy proposals. Let $D_{\mathfrak{C}}$ be the distribution of first sampling $C \leftarrow \mathfrak{C}$ uniformly at random and then measuring $C|0^n\rangle$ in the computational basis. We call it *strong* (s, ϵ) -quantum advantage if for any classically time- s samplable distribution D ,

$$\|D_{\mathfrak{C}} - D\|_1 \geq \epsilon. \tag{2}$$

For example, the hardness result of RCS intuitively says that the distribution obtained from measuring a random circuit is statistically far from any classical polynomial-time samplable distribution under some conditions.

Alternatively let $\mathfrak{C} = \{C_k\}$ and define mixed states

$$\rho_{\mathfrak{C}} := \text{Tr}_A \left(\frac{1}{|\mathfrak{C}|} \sum_k |k\rangle\langle k|_A \otimes C_k |0^n\rangle\langle 0^n| C_k^\dagger \right),$$

$$\rho_D := \sum_i D(i) |i\rangle\langle i|.$$

The strong quantum advantage condition (eq. (2)) can then be equivalently expressed as

$$\|\rho_{\mathfrak{C}} - \rho_D\|_1 \geq \varepsilon. \quad (3)$$

3.1 Example: Verifiable quantum advantage

Here, we introduce some sampling problems that satisfy the definition of verifiable quantum advantage.

VQA from quantum Fourier sampling.

Definition 7 (Simon’s problem). *Let $f : \{0, 1\}^n \rightarrow \{0, 1\}^m$ be a 2-to-1 function with the promise that there exists $s \in \{0, 1\}^n$ such that $f(x) = f(x \oplus s)$ for all $x \in \{0, 1\}^n$. Given oracle access to f , find s .*

It is well-known that there exists a quantum polynomial time algorithm solving Simon’s problem, and classical algorithms must use superpolynomially many queries [Sim97].

Theorem 4. *Let \mathcal{F} be the set of all Simon’s functions. Then, relative to \mathcal{F} , there exists a quantum circuit family $\mathfrak{C}^{\mathcal{F}}$ that is UVQA.*

Proof. First, we use Simon’s algorithm to form the quantum circuit family $\mathfrak{C}^{\mathcal{F}}$ as follows: Given a random Simon’s function f with hidden shift $s \in \{0, 1\}^n$, the quantum circuit C^f implements the Simon’s algorithm to obtain the quantum state ρ_f . Note that when measuring ρ_f in the computational basis, one will obtain a random x for which $x \cdot s = 0$. Hence, our circuit family is defined as $\mathfrak{C}^{\mathcal{F}} := \{C^f : f \in \mathcal{F}\}$.

Our distinguisher \mathcal{A}^f is as follows: On inputs C^f and sufficiently many samples x_0, \dots, x_m , \mathcal{A}^f runs Gaussian elimination (the classical post-processing in Simon’s algorithm) to identify s and then check if s is the hidden shift of f .

Obviously, samples generated from measuring C^f in the computational basis will be accepted by \mathcal{A}^f with high probability. On the other hand, no efficient classical algorithms can generate samples accepted by \mathcal{A}^f with noticeable probability; this follows from the fact that no polynomial-time classical algorithm can solve Simon’s problem with noticeable probability.

Following a similar idea, we can obtain the following corollary by considering Shor’s algorithm for the Factoring problem.

Corollary 1. *Assuming factoring is hard for any classical polynomial-time algorithm. Then, there exists a quantum circuit family that is UVQA.*

Note that neither $\mathfrak{C}^{\mathcal{F}}$ nor Shor’s algorithm can be implemented on NISQ devices.

Cross-entropy benchmark (XEB). In the cross-entropy benchmark (XEB) [BIS⁺18], given the description of a random quantum circuit C , the quantum machine prepares multiple samples $x_1, \dots, x_k \in \{0, 1\}^n$ accordingly, the verifier tests whether $F_{XEB} = \frac{\sum_{i=1}^k \langle 0^n | C | x_i \rangle}{k}$ is close to $2/2^n$ or close to $1/2^n$. If F_{XEB} is close to $2/2^n$, then the samples are prepared from a quantum machine. If F_{XEB} is close to $1/2^n$, the samples are prepared by some classical machines.

Suppose that RCS has quantum advantages as described in eq. (1), under the linear cross-entropy quantum threshold assumption (XQUATH) [AG20], then RCS is a (s, t, ε) -UVQA with $s = \text{poly}(n)$, $t = \omega(\text{poly}(n))$ and ε a constant. The reason that t is superpolynomial in n is that a classical machine requires time a superpolynomial in n to compute $|\langle x | C | 0^n \rangle|^2$.

Similarly, Boson [AA13] and instantaneous quantum polynomial (IQP) [SB08] sampling experiments are all UVQA with verification time a superpolynomial in λ if the experiments have achieved quantum advantages described in eq. (1). In a recent work [BCJ23], the authors give evidence that IQP sampling is UVQA under a new conjecture.

3.2 An universal efficient verifier from meta-complexity problems

Here, we introduce variants of a meta-complexity problem for which the existence of an efficient algorithm would imply a universal polynomial-time verifier for the following class of quantum advantages.

Definition 8 (Sample Efficient Verifiable Quantum Advantage (SE-VQA)). *The definition is the same as (s, t, ε) -VQA except that the number of samples is at most $\text{poly}(\lambda)$.*

Definition 9 (Minimum Circuit Size Problems for Samples (SampMCSP)). *Let λ be the security parameter. Let D be a distribution over n -bit strings and $t(\cdot)$ be any function where $n = \text{poly}(\lambda)$. Given polynomially many samples z_1, \dots, z_ℓ from D , $t(\cdot)$ and $s(\cdot)$, the problem is to decide whether there exists a classical time- $s(n)$ sampler $\mathcal{S}_{D'}$ such that $\mathcal{S}_{D'}$ can sample from a distribution D' such that D and D' are indistinguishable for any $t(n)$ -time classical algorithm \mathcal{A} with polynomially many samples:*

$$\left| \Pr_{z_1, \dots, z_\ell \sim D} [\mathcal{A}(z_1, \dots, z_\ell, \mathcal{S}_D, \mathcal{S}_{D'}) = 1] - \Pr_{z_1, \dots, z_\ell \sim D'} [\mathcal{A}(z_1, \dots, z_\ell, \mathcal{S}_D, \mathcal{S}_{D'}) = 1] \right| \leq \text{negl}(n),$$

where \mathcal{S}_D is a sampler of D .

Definition 10 (Oblivious Minimum Circuit Size Problems for Samples (ObSampMCSP)). *The definition is the same as above except that the distinguisher doesn't take the description of $\mathcal{S}_{D'}$ as input.*

Both ObSampMCSP and SampMCSP are computable. A trivial algorithm is as follows: Given samples $z_1, \dots, z_{\text{poly}(n)}$, $s(\cdot)$, and $t(\cdot)$, the algorithm tries all $s(n)$ -time samplers and $t(n)$ -time distinguished.

The following theorems show that the existence of efficient classical algorithms for ObSampMCSP and SampMCSP will imply that all experiments that are SE-VQA or SE-UVQA, i.e., the advantage can be verified using $\text{poly}(n)$ samples, can be verified in classical polynomial time. In other words, algorithms for these two problems provide *universal* procedures to efficiently verify SE-VQA or SE-UVQA.

Theorem 5. *If SampMCSP with $(s(\cdot), t(\cdot))$ can be solved in classical polynomial time, then an (s, t, ϵ) -SE-VQA experiment is an $(s, \text{poly}(n), \epsilon + \text{negl}(n))$ -VQA.*

Proof. Suppose that \mathcal{A} is a classical polynomial-time algorithm for SampMCSP. Let $z_1, \dots, z_{\text{poly}(n)}$ be the samples generated from the experiment, C be the description of the quantum circuit, and \mathcal{S}_D be the description of the classical cheating sampler. Then, we can construct a polynomial-time algorithm \mathcal{A}' to identify whether $z_1, \dots, z_{\text{poly}(n)}$ are generated from C as follows: \mathcal{A}' on inputs $(C, \mathcal{S}_D, z_1, \dots, z_{\text{poly}(n)})$, applies \mathcal{A} on $(z_1, \dots, z_{\text{poly}(n)})$ and $s = |\mathcal{S}_D|$ where $|\mathcal{S}_D|$ is the circuit size of \mathcal{S}_D . If \mathcal{A} outputs 1 (i.e., there exists a classical circuit with size at most s), \mathcal{A}' outputs 0 (i.e., the samples are not from C); otherwise, \mathcal{A}' outputs 1.

Obviously, \mathcal{A}' runs in classical polynomial time if \mathcal{A} is a classical polynomial-time algorithm.

For correctness, since that quantum circuit family \mathfrak{C} is SE-VQA, no efficient classical sampler can generate polynomially many samples that are $t(n)$ -indistinguishable from C chosen randomly from \mathfrak{C} by definition. Therefore, if $(z_1, \dots, z_{\text{poly}(n)})$ are generated from C , \mathcal{A} outputs 0 with a probability that is at least $1 - \text{negl}(n)$. On the other hand, if $(z_1, \dots, z_{\text{poly}(n)})$ are generated from \mathcal{S}_D , there exist classical samplers with size at most $|\mathcal{S}_D|$ generating samples indistinguishable from D . Therefore, \mathcal{A} outputs 1, and \mathcal{A}' knows that the samples are not from C . This completes the proof.

The following corollary follows the same argument.

Corollary 2. *If ObSampMCSP can be solved in classical polynomial time, then an (s, t, ϵ) -SE-UVQA is also $(s, \text{poly}(n), \epsilon + \text{negl}(n))$ -UVQA.*

4 Verifiability and EFI

Definition 11 (Classically samplable state ρ_D). *Let $\mathcal{D} = \{p_1, \dots, p_{2^n}\}$ be some distributions over $\{0, 1\}^n$ for which there exists a PPT algorithm that can efficiently sample from \mathcal{D} . We define $\rho_D = \sum_{x \in \{0, 1\}^n} p_x |x\rangle\langle x|$.*

Definition 12 (Extended circuit set \mathfrak{C}^* of \mathfrak{C}). *Let \mathfrak{C} be a set of n -qubit polynomial-size quantum circuits. We define a set of $2n$ -qubit polynomial-size quantum circuits \mathfrak{C}^* as follows: Without loss of generality, for each $C \in \mathfrak{C}$, if $C|0^n\rangle = \sum_{x \in \{0, 1\}^n} \alpha_{i,x} |x\rangle$, then $C^*|0^n\rangle_A |0^n\rangle_B = \sum_{x \in \{0, 1\}^n} \alpha_{i,x} |x\rangle_A |x\rangle_B$.*

Theorem 6. *Let λ be the security parameter. Let \mathfrak{C} be a set of n -qubit polynomial-size quantum circuits, where $n = \text{poly}(\lambda)$, and \mathfrak{C}^* be its extended circuit set as defined in Definition 12. Suppose \mathfrak{C} is VQA. Set $\rho_C := \text{Tr}_B(C^*|0^{2n}\rangle\langle 0^{2n}|_{AB}(C^*)^\dagger)$ for any $C \in \mathfrak{C}^*$ and*

$$G = \{C \in \mathfrak{C}^* : \exists \text{ classically samplable state } \rho_D \text{ s.t. } \rho_C \text{ and } \rho_D \text{ form an EFI pair}\}.$$

It holds that $|G| \leq (1 - 1/\text{poly}(\lambda))|\mathfrak{C}^|$ for some polynomial.*

Proof. Let (C_0, C_1) be a pair of EFI generators and ρ_0 and ρ_1 be the corresponding output states. We show that if there exists an algorithm \mathcal{A} such that $|\Pr[\mathcal{A}(\rho_0^{\otimes t(n)}) = 1] - \Pr[\mathcal{A}(\rho_1^{\otimes t(n)}) = 1]| > \text{negl}(n)$ for any polynomial $t(\cdot)$, then \mathcal{A} can break the EFI pair (C_0, C_1) .

We prove this by a hybrid argument. Let $H_i = \rho_0^{\otimes i} \otimes \rho_1^{\otimes (t-i)}$ for which $H_0 = \rho_0^{\otimes t}$ and $H_t = \rho_1^{\otimes t}$. Since \mathcal{A} can distinguish H_0 from H_t , there must exist an i^* for which \mathcal{A} can distinguish H_{i^*} from H_{i^*+1} . Then, we can construct a distinguisher \mathcal{A}' to distinguish ρ_0 from ρ_1 as follows: a) \mathcal{A}' first

chooses an i uniformly randomly, b) \mathcal{A}' prepares the state $\rho_0^{\otimes i} \otimes \rho \otimes \rho_1^{\otimes t-i-1}$, where ρ is the input state of the EFI game, c) and then \mathcal{A}' runs \mathcal{A} on $\rho_0^{\otimes i} \otimes \rho \otimes \rho_1^{\otimes t-i-1}$. Note that $\rho_0^{\otimes i} \otimes \rho \otimes \rho_1^{\otimes t-i-1}$ is H_i when $\rho = \rho_0$ and is H_{i+1} otherwise. The probability that \mathcal{A}' succeeds is noticeable since \mathcal{A}' chooses $i = i^*$ with probability $1/t$ in a) and \mathcal{A} distinguishes H_i from H_{i+1} with noticeable probability if $i = i^*$. This completes the proof.

Given the above result, we can prove the theorem by contradiction. Suppose that \mathfrak{C} is VQA. Notice that the distribution induced by measuring $C|0^n\rangle$ in the computational basis is the same as that induced by measuring ρ_C in the computational basis. Then, for all classically samplable distributions \mathcal{D}' , there must exist a PPT algorithm \mathcal{A} such that

$$\mathbb{E}_{C \leftarrow \mathfrak{C}} \left| \Pr_{\mathbf{z}_C \leftarrow \rho_C} [\mathcal{A}(C, \mathcal{S}_{\mathcal{D}'}, \mathbf{z}_C) = 1] - \Pr_{\mathbf{z}_{\mathcal{D}'} \leftarrow \mathcal{D}'} [\mathcal{A}(C, \mathcal{S}_{\mathcal{D}'}, \mathbf{z}_{\mathcal{D}'}) = 1] \right| \geq \frac{1}{\text{poly}(n)},$$

where $\mathcal{S}_{\mathcal{D}'}$ is the description of the classical sampler and \mathbf{z}_C and $\mathbf{z}_{\mathcal{D}'}$ are polynomially many samples from measuring ρ_C and from \mathcal{D}' respectively.

Now, one can use the algorithm \mathcal{A} to build another algorithm \mathcal{A}' distinguishing ρ_C and ρ_D as follows: On inputs C^* , \mathcal{S}_D , and polynomially many copies of ρ which is either ρ_C or ρ_D , the algorithm first measures all copies of ρ in computational basis; we denote the measurement outcomes as \mathbf{z} . Then, \mathcal{A}' applies \mathcal{A} on inputs C^* , \mathcal{S}_D , and \mathbf{z} and outputs whatever \mathcal{A} outputs.

For the correctness, since \mathcal{A} can identify whether the samples \mathbf{z} are measurement outcomes of ρ_C or \mathcal{S}_D with $1/\text{poly}(\lambda)$ advantages random over C and the measurement outcomes, there must be at least $1/\text{poly}(n)$ fraction of C 's for which \mathcal{A}' can distinguish ρ_C from ρ_D with $1/\text{poly}(n)$ advantages. It is obvious that \mathcal{A}' is efficient since it only needs to measure $\text{poly}(n)$ copies of ρ in the computational basis and applies \mathcal{A} on the outcomes.

Next, we define another mixed state obtained from \mathfrak{C} .

Definition 13. Let $\mathfrak{C} = \{C_1, \dots, C_N\}$ be a set of n -qubit polynomial-size quantum circuits. We define $\rho_{\mathfrak{C}}$ as follows: Let C^* be the $(n + \log N)$ -qubit circuit such that $C^*|k\rangle_A|0^n\rangle_B = |k\rangle_C|0^n\rangle$. $\rho_{\mathfrak{C}} = \text{Tr}_A(C^* (\frac{1}{N} \sum_k |k\rangle\langle k|_A \otimes |0^n\rangle\langle 0^n|_B) (C^*)^\dagger)$. We define $D_{\mathfrak{C}}$ as measuring $\rho_{\mathfrak{C}}$ in the computational basis.

Theorem 7. Let $\mathfrak{C} = \{C_1, \dots, C_N\}$ be a set of n -qubit polynomial-size quantum circuits. If \mathfrak{C} achieves strong quantum advantage (eq. (2)) and there is no classical polynomial-time samplable distribution D such that $\rho_{\mathfrak{C}}$ and ρ_D forms a classical secure EFI pair, then \mathfrak{C} is VQA.

Proof. Both $\rho_{\mathfrak{C}}$ and ρ_D are efficiently preparable following the conditions of the theorem. Suppose \mathfrak{C} is not VQA. The condition of the theorem also implies that there exists a classical polynomial-time samplable distribution D such that $\|\rho_{\mathfrak{C}} - \rho_D\| \geq 1/\text{poly}(\lambda)$ but D_C cannot be distinguished from D for most $C_i \in \mathfrak{C}$.

If $\rho_{\mathfrak{C}}$ and ρ_D do not form a classical secure EFI pair, there exists an algorithm that can distinguish between one sample from measuring $\rho_{\mathfrak{C}}$ and one sample of D . We can construct a distinguisher \mathcal{A}' for one sample from the circuit sampling experiment with \mathfrak{C} and one sample from D . \mathcal{A}' simply ignores the inputs C_i and \mathcal{S}_D , runs \mathcal{A} on the samples, and outputs what \mathcal{A} outputs. The advantage

of the algorithm \mathcal{A}' in distinguishing the sample z_{C_i} of the circuit C_i from the sample z_D of D is

$$\begin{aligned}
& \mathbb{E}_{C_i \in \mathfrak{C}} |\Pr[\mathcal{A}'(C_i, \mathcal{S}_D, z_{C_i}) = 0] - \Pr[\mathcal{A}'(C_i, \mathcal{S}_D, z_D) = 0]| \\
& \geq \mathbb{E}_{C_i \in \mathfrak{C}} (\Pr[\mathcal{A}'(C_i, \mathcal{S}_D, z_{C_i}) = 0] - \Pr[\mathcal{A}'(C_i, \mathcal{S}_D, z_D) = 0]) \\
& = \mathbb{E}_{C_i \in \mathfrak{C}} (\Pr[\mathcal{A}(z_{C_i}) = 0] - \Pr[\mathcal{A}(z_D) = 0]) \\
& = \mathbb{E}_{C_i \in \mathfrak{C}} (\Pr[\mathcal{A}(z_{C_i}) = 0]) - \Pr[\mathcal{A}(z_D) = 0] \\
& = |\Pr[\mathcal{A}(z_{\mathfrak{C}}) = 0] - \Pr[\mathcal{A}(z_D) = 0]| \\
& \geq 1/\text{poly}(\lambda).
\end{aligned}$$

The sample $z_{\mathfrak{C}}$ is obtained from measuring a random circuit C_i . Notice that

$$\langle x | \rho_{\mathfrak{C}} | x \rangle = \frac{1}{N} \sum_{k=1}^N |\langle x | C_k | 0^n \rangle|^2.$$

Hence $z_{\mathfrak{C}}$ follows the same distribution of measuring $\rho_{\mathfrak{C}}$ and the last inequality follows the distinguishability of \mathcal{A} . The second last equality follows the observation that when averaged over $C_i \in \mathfrak{C}$, the distribution of z_{C_i} is the same as that of $z_{\mathfrak{C}}$. Because \mathcal{A}' has a noticeable distinguishability, it contradicts \mathfrak{C} is not VQA.

5 Verifiability and PRS

Theorem 8. *Let λ be the security parameter and $n = \text{poly}(\lambda)$. Let $\mathfrak{C} = \{C_1, \dots, C_N\}$ be a set of n -qubit polynomial-sized quantum circuits. If RCS with \mathfrak{C} is VQA, then the set of states $\{C_1|0^n\rangle, \dots, C_N|0^n\rangle\}$ is not a classically unidentifiable PRS.*

Proof. For an arbitrary distribution D , we let $\mathbf{z}_D := \{\mathbf{z}_D^1, \dots, \mathbf{z}_D^m\}$ be m i.i.d. samples from D , where $m = \text{poly}(\lambda)$. For any $k \in [N]$, let $\mathbf{z}_k = \{\mathbf{z}_k^1, \dots, \mathbf{z}_k^m\}$ be samples generated from measuring $|\psi_k\rangle^{\otimes m}$ with $|\psi_k\rangle = C_k|0^n\rangle$ in the computational basis. We will describe a distribution D , which is efficiently samplable by a classical algorithm denoted by \mathcal{S}_D , such that for polynomial-time distinguisher \mathcal{A} and a uniformly random $k \leftarrow [N]$,

$$|\Pr[\mathcal{A}(C_k, \mathcal{S}_D, \mathbf{z}_k) = 1] - \Pr[\mathcal{A}(C_k, \mathcal{S}_D, \mathbf{z}_D) = 1]| \leq \text{negl}(\lambda). \quad (4)$$

1. Since the set of states $\{C_1|0^n\rangle, \dots, C_N|0^n\rangle\}$ is a classically unidentifiable PRS and \mathcal{S}_D is independent of the circuits and samples, for any $j \neq k$ and any PPT algorithm \mathcal{A} , we can apply Definition 4 to $\mathcal{A}(\cdot, \mathcal{S}_D, \cdot)$ to get

$$|\Pr[\mathcal{A}(C_k, \mathcal{S}_D, \mathbf{z}_k) = 1] - \Pr[\mathcal{A}(C_k, \mathcal{S}_D, \mathbf{z}_j) = 1]| < \text{negl}(\lambda).$$

2. Let \mathbf{z}_μ be samples by measuring $|\phi\rangle^{\otimes m}$ in the computational basis where $|\phi\rangle \leftarrow \mu$ is a Haar random state. Since $\{|\psi_k\rangle = C_k|0\rangle\}_{k \in [N]}$ is a PRS family, it holds that for a uniformly random $k \leftarrow [N]$ and any $j \neq k$

$$|\Pr[\mathcal{A}(C_k, \mathcal{S}_D, \mathbf{z}_j) = 1] - \Pr[\mathcal{A}(C_k, \mathcal{S}_D, \mathbf{z}_\mu) = 1]| < \text{negl}(\lambda).$$

Otherwise, since C_k and \mathcal{S}_D are independent of the samples, $\mathcal{A}(C_k, \mathcal{S}_D, \cdot)$ can be used to build a distinguisher between PRS and Haar random states.

3. The distribution D is the uniform distribution on $\{0, 1\}^n$, and the sampler \mathcal{S}_D simply uniformly samples m distinct samples \mathbf{z}_D^i 's from $\{0, 1\}^n$. By Lemma 2, $\{\mathbf{z}_\mu^i\}_{1 \leq i \leq m}$ collide with probability $1 - \text{negl}(\lambda)$. By the unitary invariance of the Haar measure, the distribution of $\{\mathbf{z}_\mu^i\}_{1 \leq i \leq m}$ conditioning on no collision is uniform. Thus, the output of \mathcal{S}_D is $\text{negl}(\lambda)$ -close to \mathbf{z}_μ with probability $1 - \text{negl}(\lambda)$. Thus, for all $k \in [N]$ and any PPT algorithm \mathcal{A}

$$|\Pr[\mathcal{A}(C_k, \mathcal{S}_D, \mathbf{z}_D) = 1] - \Pr[\mathcal{A}(C_k, \mathcal{S}_D, \mathbf{z}_\mu) = 1]| \leq \text{negl}(\lambda).$$

This theorem follows from chaining all the steps by the triangle inequality.

Set $\Delta = \{v \in \mathbb{R}^{2^n} : v_i \geq 0, \sum_i v_i = 1\}$ be the set of all probability distributions on $\{0, 1\}^n$. Let $(\mathbf{g}_x)_{x \in \{0, 1\}^n}$ and $(\mathbf{h}_x)_{x \in \{0, 1\}^n}$ be two sequences of i.i.d. random variables drawn from $N(0, 1)$. Set $\mathbf{G} = \sum_x \mathbf{g}_x^2$ and $\mathbf{H} = \sum_x \mathbf{h}_x^2$. Notice that \mathbf{G} and \mathbf{H} follow the chi-squared distribution of degree 2^n , denoted by χ_{2^n} . Define the random variable \mathbf{p} such that for all $x \in \{0, 1\}^n$

$$\mathbf{p}(x) = \frac{\mathbf{g}_x^2 + \mathbf{h}_x^2}{\mathbf{G} + \mathbf{H}}, \quad (5)$$

which induces a probability distribution over Δ . It is well known that \mathbf{p} is the output distribution when measuring n -qubit Haar random states on the computational basis [BS20].

Lemma 1 ([LM00, comment below Lemma 1]). *For $n \geq 1$, let \mathbf{r} be a random variable distributed according to the chi-squared distribution χ_n . Then for every $x > 0$, we have*

$$\Pr[n - 2\sqrt{nx} \leq \mathbf{r}^2 \leq n + 2\sqrt{nx} + 2x] \geq 1 - 2e^{-x}.$$

Lemma 2. *Given the security parameter λ , $n = \text{poly}(\lambda)$, $m = \text{poly}(n)$, let ν be a distribution drawn from \mathbf{p} . With probability $1 - \text{negl}(\lambda)$, the following holds.*

Let $\mathbf{z} = (\mathbf{z}_1, \dots, \mathbf{z}_m)$ be m i.i.d. samples drawn from ν . Then

$$\Pr[\exists i \neq j : \mathbf{z}_i = \mathbf{z}_j] \leq 50m^2 2^{-n}$$

Proof. Let ν be a distribution drawn from \mathbf{p} defined in (5). Notice that $\nu_x \sim (\mathbf{g}_x^2 + \mathbf{h}_x^2)/(\mathbf{G} + \mathbf{H})$. Then the probability that samples drawn according to ν have a collision is

$$\Pr_\nu[\exists i \neq j \in [m] \text{ s.t. } \mathbf{z}_i = \mathbf{z}_j] \leq m^2 \sum_x \nu(x)^2.$$

Let \mathcal{E} be the event that $\mathbf{G} \geq 2^n - 4\sqrt{2^n n}$ and $\mathbf{H} \geq 2^n - 4\sqrt{2^n n}$. By Lemma 1,

$$\Pr[\mathcal{E}] \geq 1 - 4e^{-n}. \quad (6)$$

Then we have

$$\begin{aligned}
& \mathbb{E}_\nu[\Pr[\exists i \neq j \text{ s.t. } \mathbf{z}_i = \mathbf{z}_j]] \\
& \leq m^2 \mathbb{E}_\nu \left[\sum_x \frac{(\mathbf{g}_x^2 + \mathbf{h}_x^2)^2}{(\mathbf{G} + \mathbf{H})^2} \right] \\
& = m^2 \mathbb{E}_\nu \left[\sum_x \frac{(\mathbf{g}_x^2 + \mathbf{h}_x^2)^2}{(\mathbf{G} + \mathbf{H})^2} \mid \mathcal{E} \right] \cdot \Pr[\mathcal{E}] + m^2 \mathbb{E}_\nu \left[\sum_x \frac{(\mathbf{g}_x^2 + \mathbf{h}_x^2)^2}{(\mathbf{G} + \mathbf{H})^2} \mid \neg \mathcal{E} \right] \cdot \Pr[\neg \mathcal{E}] \\
& \leq m^2 \mathbb{E}_\nu \left[\frac{\sum_x (\mathbf{g}_x^2 + \mathbf{h}_x^2)^2}{(2^n - 4\sqrt{2^n n})^2} \mid \mathcal{E} \right] \cdot \Pr[\mathcal{E}] + m^2 \Pr[\neg \mathcal{E}] \\
& \leq \frac{m^2}{2^{2n-2}} \mathbb{E}_\nu \left[\sum_x (\mathbf{g}_x^2 + \mathbf{h}_x^2)^2 \right] + 4m^2 2^{-n} \\
& = \frac{8m^2 2^n}{2^{2n-2}} + 4m^2 2^{-n} \leq 50m^2 2^{-n},
\end{aligned}$$

where in the second inequality we use

$$\sum_x (\mathbf{g}_x^2 + \mathbf{h}_x^2)^2 \leq (\mathbf{G} + \mathbf{H})^2$$

to bound $\mathbb{E}_\nu \left[\sum_x \frac{(\mathbf{g}_x^2 + \mathbf{h}_x^2)^2}{(\mathbf{G} + \mathbf{H})^2} \mid \neg \mathcal{E} \right] \leq 1$. By the Markov inequality,

$$\Pr \left[\Pr[\exists i \neq j \text{ s.t. } \mathbf{z}_i = \mathbf{z}_j] \leq 50m^2 2^{-n/2} \right] \geq 1 - 2^{-n/2}.$$

Then the lemma follows from that $n = \text{poly}(\lambda)$, $m = \text{poly}(n)$.

6 Designated verifiability

Another type of verifiable quantum advantage experiments involve interactions between a trusted verifier and a computationally bounded quantum or classical prover, which is not covered by Definition 5. Such experiments are called *proof of quantumness* (PoQ).

Definition 14 (Proof of quantumness ((s, t, ε)-PoQ)). *Let λ be the security parameter. We say a protocol between a classical verifier V and a prover P is an (s, t, ε)-PoQ, if there exists a quantum time- s prover P_Q such that for all time- t classical prover P_C , it holds that*

$$\Pr[\langle V, P_Q \rangle = 1] - \Pr[\langle V, P_C \rangle = 1] \geq \varepsilon,$$

where $\langle V, P_Q \rangle$ and $\langle V, P_C \rangle$ denote the decision of V after interacting with P_Q and P_C respectively.

Some PoQ protocols have been proposed in [BCM⁺21, KMCVY22, BKVV20]. It would be an intriguing feature if the trusted party in PoQ could be offline just as in Definition 5. This motivates our definition of VQA with a setup stage, where a trusted party initializes a VQA experiment with some public parameter as well as a verification key that is issued to a designated verifier. Quantum provers can then work offline.

Definition 15 (Designated verifiable quantum advantages ((s, t, ε)-DVQA)). Let λ be the security parameter. Consider an experiment E specified by (Setup, P) where

- $(\text{pp}, \text{vk}) \leftarrow \text{Setup}(1^\lambda)$: a classical time-poly(λ) algorithm that outputs a public parameter pp and a verification key vk ,
- $z \leftarrow P(\text{pp})$: a quantum time-poly(λ) algorithm that outputs a transcript z on input pp .

We denote a classical simulation algorithm of E by Sim .

We say E is (s, t, ε) -designated verifiable quantum advantage (DVQA), if there exists some polynomial q of λ such that for all time- t classical simulator Sim , there exists a classical time- s algorithms $\mathcal{A}(\text{pp}, \text{vk}, P, \text{Sim}, \mathbf{z}) \in \{0, 1\}$ that on input pp , vk , the description of P , the description of Sim , and $q(\lambda)$ transcripts generated by either P or Sim , outputs a bit, such that

$$\mathbb{E}_{(\text{pp}, \text{vk}) \leftarrow \text{Setup}(1^\lambda)} |\Pr[\mathcal{A}(\text{pp}, \text{vk}, P, \text{Sim}, \mathbf{z}_P) = 1] - \Pr[\mathcal{A}(\text{pp}, \text{vk}, P, \text{Sim}, \mathbf{z}_{\text{Sim}}) = 1]| \geq \varepsilon,$$

where \mathbf{z}_P is generated by running $P(\text{pp})$ $q(\lambda)$ times independently, and \mathbf{z}_{Sim} is generated by Sim .

It is called designated VQA because only the designated distinguisher \mathcal{A} can get the verification key vk . When not explicitly mentioned, $s = t = \text{poly}(\lambda)$ and $\varepsilon = 1/\text{poly}(\lambda)$.

Assuming a random oracle, the PoQ of [BCM⁺21] can be made non-interactive and satisfies Definition 15 [ACGH20]. More specifically, the trusted party first generates multiple function keys along with their trapdoors. The function keys are published as pp and the trapdoors are kept as vk . When the prover gets pp , the prover follows the steps of the original protocol of [BCM⁺21] on each function key, except that the challenge is generated by querying the random oracle. In the end, the trusted party collects all the transcripts, runs the verifier's check of [BCM⁺21] on each transcript, and accepts if all of them are correct. It is easy to see that in the new protocol, the trusted party doesn't need to stay online when the prover is generating the transcripts.

Theorem 9. Assuming (classical) RO and LWE, there exists a DVQA experiment.

Moreover, Definition 5 can be viewed as a special case of Definition 15: The public parameter is the circuit family \mathfrak{C} . There is no vk . The prover P runs a random $C \in \mathfrak{C}$ on $|0^n\rangle$ and measures the qubits in the computational basis. The simulator runs \mathcal{S}_D to generate samples.

7 Verifying quantum advantage by a quantum verifier

7.1 Defining quantum verifiable quantum advantages

One lesson in recent developments of quantum advantage experiments is that classically verifying the results can be challenging. Can we employ quantum computers to help with the verification? This might sound circular, but we think that it is a viable route worth exploring. When we advance beyond the NISQ era, quantum advantage experiments may be repurposed as benchmarking for quantum computers, and checking the benchmarking metrics will be done by other quantum computers.

In fact, we argue that it is already relevant in the NISQ era. A classical verifier could already benefit dramatically when equipped with limited quantum computing capacity, especially if we mindfully tailor our experiment design to this setting. For example, interactive protocols for proving quantumness were known relatively early as long as a verifier can prepare some simple single-qubit

states [BFK09, ABE10]; whereas constructing a protocol with a purely classical verifier had been notoriously challenging and was only resolved recently in Mahadev’s breakthrough result [Mah22]. To put it in a real-world context, people are investigating whether RCS results can be verified quantumly [HE23, Section V.C]. Hence, two non-colluding parties (e.g., Google vs. IBM) could verify the other party’s results, with the help of their respective NISQ device.

Hence, we extend our definitions and formalize verifiable quantum advantage in the presence of quantum verifiers (QVQA). On the technical side, quantum verification enables a smoother duality between EFI and QVQA, as shown in Section 7.2.

Definition 16 (Quantum-verifiable quantum advantages $((s, t, \epsilon)$ -QVQA)). *Let λ be the security parameter. Let \mathfrak{C} be a family of polynomial-size quantum circuits on n qubits. For any $C \in \mathfrak{C}$ let D_C be the distribution induced by measuring $C|0^n\rangle$ in the computational basis.*

*We call \mathfrak{C} a family of (s, t, ϵ) quantum-verifiable quantum advantage (QVQA), if for all distribution D samplable by a time- s classical algorithm, it holds that for a uniformly random C drawn from \mathfrak{C} , there exists a time- t **quantum** algorithm \mathcal{A} that ϵ -distinguishes D_C from D , namely*

$$\mathbb{E}_{C \leftarrow \mathfrak{C}} |\Pr[\mathcal{A}(C, \mathcal{S}_D, \mathbf{z}_C) = 1] - \Pr[\mathcal{A}(C, \mathcal{S}_D, \mathbf{z}_D) = 1]| \geq \epsilon,$$

where \mathcal{S}_D is the description of a time- s classical sampler for D , \mathbf{z}_C and \mathbf{z}_D are sets of up to t samples drawn from D_C and D respectively.

Definition 17 (Universally quantum-verifiable quantum advantages $((s, t, \epsilon)$ -UQVQA)).

Let λ be the security parameter. Let \mathfrak{C} be a family of polynomial-size quantum circuits on n qubits. For any $C \in \mathfrak{C}$ let D_C be the distribution induced by measuring $C|0^n\rangle$ in the computational basis.

*We call \mathfrak{C} a family of (s, t, ϵ) **universally** quantum-verifiable quantum advantage (UQVQA), if for all distribution D samplable by a time- s classical algorithm, there exists a time- t quantum algorithm \mathcal{A} , such that for a uniformly random C drawn from \mathfrak{C} , \mathcal{A} ϵ -distinguishes D_C from D , namely*

$$\mathbb{E}_{C \leftarrow \mathfrak{C}} |\Pr[\mathcal{A}(C, \mathbf{z}_C) = 1] - \Pr[\mathcal{A}(C, \mathbf{z}_D) = 1]| \geq \epsilon,$$

where \mathbf{z}_C and \mathbf{z}_D are sets of up to t samples drawn from D_C and D respectively.

We are typically concerned with the efficient regime where we consider all poly-time samplable classical distributions, poly-time distinguisher \mathcal{A} and inverse-poly noticeable advantage, i.e., $s = \text{poly}(\lambda)$, $t = \text{poly}(\lambda)$, and $\epsilon = \frac{1}{\text{poly}(\lambda)}$. We will simply call \mathfrak{C} a QVQA (resp. UQVQA) if the conditions in Definition 16 (resp. Definition 17) are satisfied in this setting.

We define (s, t, ϵ) -SE-QVQA and (s, t, ϵ) -SE-UQVQA following the definitions of SE-VQA and SE-UVQA. Briefly, they are the same as QVQA and UQVQA except that the number of samples is restricted to $\text{poly}(n)$. Then, we can show that efficient quantum algorithms for SampMCSP and ObSampMCSP can lead to polynomial-time quantum verification of SE-VQA and SE-UVQA following proofs similar to Theorem 5 as following corollaries.

Corollary 3. *If SampMCSP with $(s(\cdot), t(\cdot))$ can be solved in quantum polynomial time, then an (s, t, ϵ) -SE-QVQA experiment is an $(s, \text{poly}(n), \epsilon + \text{negl}(n))$ -QVQA.*

Corollary 4. *If ObSampMCSP can be solved in quantum polynomial time, then an (s, t, ϵ) -SE-UQVQA is also $(s, \text{poly}(n), \epsilon + \text{negl}(n))$ -UQVQA.*

Finally, we also describe an analogue of Definition 15 with a designated quantum verifier.

Definition 18 (Designated quantum verifiable quantum advantages ((s, t, ε)-DQVQA)).
Let λ be the security parameter. Consider an experiment E specified by (Setup, P) where

- $(\text{pp}, \text{vk}) \leftarrow \text{Setup}(1^\lambda)$: a classical $\text{poly}(\lambda)$ -time algorithm that outputs a public parameter pp and a verification key vk ,
- $z \leftarrow P(\text{pp})$: a quantum $\text{poly}(\lambda)$ -time algorithm that outputs a transcript z on input pp .

We denote a classical simulation algorithm of E by Sim .

We say E is (s, t, ε) -designated quantum verifiable quantum advantage (DQVQA), if there exists some polynomial q such that for all time- t classical simulator Sim , there exists a quantum time- s algorithms $\mathcal{A}(\text{pp}, \text{vk}, P, \text{Sim}, \mathbf{z}) \in \{0, 1\}$ such that

$$\mathbb{E}_{(\text{pp}, \text{vk}) \leftarrow \text{Setup}(1^\lambda)} |\Pr[\mathcal{A}(\text{pp}, \text{vk}, P, \text{Sim}, \mathbf{z}_P) = 1] - \Pr[\mathcal{A}(\text{pp}, \text{vk}, P, \text{Sim}, \mathbf{z}_{\text{Sim}}) = 1]| \geq \varepsilon,$$

where \mathbf{z}_P is generated by running $P(\text{pp})$ $q(\lambda)$ times independently, and \mathbf{z}_{Sim} is generated by Sim .

7.2 Duality between EFI and QVQA

For any n -qubit unitary circuit C , define another $2n$ -qubit unitary circuit $\hat{C} := \text{CNOT}(C \otimes \mathbf{1})$, where $\text{CNOT} : |x\rangle|y\rangle \mapsto |x\rangle|x \oplus y\rangle$ is the generalized CNOT gate on n -qubit. We define

$$\rho_C := \text{Tr}_B(\hat{C}|0^{2n}\rangle\langle 0^{2n}|_{AB}\hat{C}^\dagger),$$

which is equivalent to a quantum state encoding the distribution induced by measuring $C|0^n\rangle$ under the computational basis.

Theorem 10. Let $\mathfrak{C} = \{C_k\}$ be a family of n -qubit poly-size quantum circuits. If for a $(1 - \text{negl}(\lambda))$ fraction of $C \in \mathfrak{C}$, there exists a classically poly-time samplable distribution D such that ρ_C and ρ_D form an EFI pair. Then, \mathfrak{C} is not a QVQA family.

Proof. The proof is similar to that of Theorem 6. Suppose for contradiction that \mathfrak{C} is a QVQA family. Then for any classical D , there is an quantum poly-time \mathcal{A} , such that

$$\mathbb{E}_{C \leftarrow \mathfrak{C}} |\Pr[\mathcal{A}(C, \mathcal{S}_D, \mathbf{z}_C) = 1] - \Pr[\mathcal{A}(C, \mathcal{S}_D, \mathbf{z}_D) = 1]| \geq \varepsilon,$$

for some $\varepsilon \geq \frac{1}{\text{poly}(\lambda)}$ using $m = \text{poly}(\lambda)$ samples. For any $i \in [m]$, we define

$$\begin{aligned} \mathbf{z}(i) &:= (\mathbf{z}_C^1, \dots, \mathbf{z}_D^i, \mathbf{z}_D^{i+1}, \dots, \mathbf{z}_D^m), \\ \mathbf{z}(i+1) &:= (\mathbf{z}_C^1, \dots, \mathbf{z}_C^i, \mathbf{z}_D^{i+1}, \dots, \mathbf{z}_D^m). \end{aligned}$$

Then by a hybrid argument, there must exist an i^* such that

$$\mathbb{E}_{C \leftarrow \mathfrak{C}} |\Pr[\mathcal{A}(C, \mathcal{S}_D, \mathbf{z}(i^*)) = 1] - \Pr[\mathcal{A}(C, \mathcal{S}_D, \mathbf{z}(i^* + 1)) = 1]| \geq \varepsilon/m.$$

We then construct \mathcal{A}' to distinguish ρ_C and ρ_D efficiently. On an input state $\rho \in \{\rho_C, \rho_D\}$ and index i^* ⁷, \mathcal{A}' constructs a state σ ,

$$\sigma := (\rho_C^1, \dots, \rho_C^{i^*-1}, \rho, \rho_D^{i^*+1}, \dots, \rho_D^m).$$

Observe that $\sigma = \mathbf{z}(i^* + 1)$ if $\rho = \rho_C$ and $\sigma = \mathbf{z}(i^*)$ if $\rho = \rho_D$. \mathcal{A}' then runs A on σ together with C, \mathcal{S}_D (described by the EFI generator G) and outputs what A outputs. We can see that

$$\begin{aligned} & \mathbb{E}_{C \leftarrow \mathfrak{C}} |\Pr[\mathcal{A}'(\rho_C) = 1] - \Pr[\mathcal{A}'(\rho_D) = 1]| \\ &= \mathbb{E}_{C \leftarrow \mathfrak{C}} |\Pr[\mathcal{A}(C, \mathcal{S}_D, \mathbf{z}(i^* + 1)) = 1] - \Pr[\mathcal{A}(C, \mathcal{S}_D, \mathbf{z}(i^*)) = 1]| \\ &\geq \varepsilon/m. \end{aligned}$$

This implies that there must exist a $1/\text{poly}(\lambda)$ fraction of $C \in \mathfrak{C}$ such that \mathcal{A}' successfully tells apart with inverse-poly probability. This shows a contradiction.

We remark that since ρ_C and ρ_D are both mixed states encoding classical distributions, the premise in the statement can be weakened to **qq-EFID**.

Theorem 11. *Let $\mathfrak{C} = \{C_k\}$ be a family of n -qubit poly-size quantum circuits. If \mathfrak{C} admits strong quantum advantage (eq. (2)) but \mathfrak{C} is not a QVQA family (Definition 16), then EFI exists.*

Proof. This proof is similar to that of Theorem 7. Since \mathfrak{C} admits a strong quantum advantage, it means that for any classical distribution D , $\|\rho_{\mathfrak{C}} - \rho_D\|_1 \geq \varepsilon$, where

$$\begin{aligned} \rho_{\mathfrak{C}} &:= \text{Tr}_A \left(\frac{1}{|\mathfrak{C}|} \sum_k |k\rangle\langle k|_A \otimes C_k |0^n\rangle\langle 0^n| C_k^\dagger \right), \\ \rho_D &:= \sum_i D(i) |i\rangle\langle i|. \end{aligned}$$

On the other hand, because \mathfrak{C} is not a QVQA family, there must exist a classical distribution D and such that for all quantum poly-time algorithm \mathcal{A} ,

$$\mathbb{E}_{C \leftarrow \mathfrak{C}} |\Pr[\mathcal{A}(C, \mathcal{S}_D, \mathbf{z}_C) = 1] - \Pr[\mathcal{A}(C, \mathcal{S}_D, \mathbf{z}_D) = 1]| \leq \text{neg}(\lambda),$$

where \mathcal{S}_D is an efficient sampler for D . Observe that \mathbf{z}_C is identical to multiple copies of $\rho_{\mathfrak{C}}$, and \mathbf{z}_D is identical to multiple copies of ρ_D . Therefore we construct a generator G such that:

$$G(0) := \rho_{\mathfrak{C}}, \quad G(1) := \rho_D = \sum_i D(i) |i\rangle\langle i|.$$

We can show that G gives an EFI pair. First of all, G is efficiently computable because $G(0)$ amounts to sample a random C_k , and $G(1)$ can simply run the efficient sampler \mathcal{S}_D . Then by the strong quantum advantage premise, $\|\rho_{\mathfrak{C}} - \rho_D\| \geq \varepsilon$. Finally, $\rho_{\mathfrak{C}}$ and ρ_D are quantum computationally

⁷ We assume i^* is given to \mathcal{A}' as a non-uniform advice. Alternatively, \mathcal{A}' can randomly guess i^* with, which only reduces the success probability by an inverse-poly factor $1/m$.

indistinguishable because for any quantum poly-time \mathcal{A} , it holds that

$$\begin{aligned}
& |\Pr[\mathcal{A}(G, \rho_{\mathcal{C}}) = 1] - \Pr[\mathcal{A}(G, \rho_D) = 1]| \\
&= \left| \mathbb{E}_{C_k \leftarrow \mathcal{C}} \Pr[\mathcal{A}(G, \rho_{\mathcal{C}}) = 1] - \Pr[\mathcal{A}(G, \rho_D) = 1] \right| \\
&\leq \mathbb{E}_{C_k \leftarrow \mathcal{C}} |\Pr[\mathcal{A}(G, \rho_{\mathcal{C}}) = 1] - \Pr[\mathcal{A}(G, \rho_D) = 1]| \\
&= \mathbb{E}_{C_k \leftarrow \mathcal{C}} |\Pr[\mathcal{A}(C_k, \mathcal{S}_D, \mathbf{z}_{C_k}) = 1] - \Pr[\mathcal{A}(C_k, \mathcal{S}_D, \mathbf{z}_D) = 1]| \\
&\leq \text{negl}(\lambda),
\end{aligned}$$

which completes the proof.

References

- AA13. Scott Aaronson and Alex Arkhipov. The computational complexity of linear optics. *Theory OF Computing*, 9(4):143–252, 2013.
- ABE10. Dorit Aharonov, Michael Ben-Or, and Elad Eban. Interactive proofs for quantum computations. In Andrew Chi-Chih Yao, editor, *Innovations in Computer Science - ICS 2010*, pages 453–469. Tsinghua University Press, 2010.
- AC17. Scott Aaronson and Lijie Chen. Complexity-theoretic foundations of quantum supremacy experiments. In *Proceedings of the 32nd Computational Complexity Conference, CCC '17*, Dagstuhl, DEU, 2017. Schloss Dagstuhl–Leibniz-Zentrum fuer Informatik.
- ACGH20. Gorjan Alagic, Andrew M Childs, Alex B Grilo, and Shih-Han Hung. Non-interactive classical verification of quantum computation. In *Theory of Cryptography Conference*, pages 153–180. Springer, 2020.
- AG20. Scott Aaronson and Sam Gunn. On the classical hardness of spoofing linear cross-entropy benchmarking. *Theory OF Computing*, 16(11):1–8, 2020.
- AGL⁺23. Dorit Aharonov, Xun Gao, Zeph Landau, Yunchao Liu, and Umesh Vazirani. A polynomial-time classical algorithm for noisy random circuit sampling. In *Proceedings of the 55th Annual ACM Symposium on Theory of Computing*, pages 945–957, 2023.
- BCJ23. Michael J Bremner, Bin Cheng, and Zhengfeng Ji. IQP sampling and verifiable quantum advantage: Stabilizer scheme and classical security. *arXiv preprint arXiv:2308.07152*, 2023.
- BCM⁺21. Zvika Brakerski, Paul Christiano, Urmila Mahadev, Umesh Vazirani, and Thomas Vidick. A cryptographic test of quantumness and certifiable randomness from a single quantum device. *Journal of the ACM (JACM)*, 68(5):1–47, 2021.
- BCQ22. Zvika Brakerski, Ran Canetti, and Luowen Qian. On the computational hardness needed for quantum cryptography. *arXiv preprint arXiv:2209.04101*, 2022.
- BCQ23. Zvika Brakerski, Ran Canetti, and Luowen Qian. On the Computational Hardness Needed for Quantum Cryptography. In *14th Innovations in Theoretical Computer Science Conference – ITCS 2023*, volume 251 of *Leibniz International Proceedings in Informatics (LIPIcs)*, pages 24:1–24:21. Schloss Dagstuhl – Leibniz-Zentrum für Informatik, 2023.
- BFG⁺22. Adam Bouland, Bill Fefferman, Soumik Ghosh, Umesh Vazirani, and Zixin Zhou. Quantum pseudoentanglement. *arXiv preprint arXiv:2211.00747*, 2022.
- BFK09. Anne Broadbent, Joseph Fitzsimons, and Elham Kashefi. Universal blind quantum computation. In *50th annual IEEE symposium on foundations of computer science – FOCS 2009*, pages 517–526. IEEE, 2009.
- BHH16. Fernando GSL Brandao, Aram W Harrow, and Michał Horodecki. Local random quantum circuits are approximate polynomial-designs. *Communications in Mathematical Physics*, 346:397–434, 2016.

- BIS⁺18. Sergio Boixo, Sergei V Isakov, Vadim N Smelyanskiy, Ryan Babbush, Nan Ding, Zhang Jiang, Michael J Bremner, John M Martinis, and Hartmut Neven. Characterizing quantum supremacy in near-term devices. *Nature Physics*, 14(6):595–600, 2018.
- BKVV20. Zvika Brakerski, Venkata Koppula, Umesh Vazirani, and Thomas Vidick. Simpler proofs of quantumness. *arXiv preprint arXiv:2005.04826*, 2020.
- BS19. Zvika Brakerski and Omri Shmueli. (pseudo) random quantum states with binary phase. In *Theory of Cryptography Conference*, pages 229–250. Springer, 2019.
- BS20. Zvika Brakerski and Omri Shmueli. Scalable pseudorandom quantum states. In *Advances in Cryptology – CRYPTO 2020*, pages 417–440. Springer, 2020.
- CCR16. Ran Canetti, Yilei Chen, and Leonid Reyzin. On the correlation intractability of obfuscated pseudorandom functions. In *Theory of Cryptography: 13th International Conference, TCC 2016-A, Tel Aviv, Israel, January 10-13, 2016, Proceedings, Part I 13*, pages 389–415. Springer, 2016.
- CCZZ21. Nai-Hui Chia, Chi-Ning Chou, Jiayu Zhang, and Ruizhe Zhang. Quantum meets the minimum circuit size problem. *arXiv preprint arXiv:2108.03171*, 2021.
- FGG14. Edward Farhi, Jeffrey Goldstone, and Sam Gutmann. A quantum approximate optimization algorithm. *arXiv preprint arXiv:1411.4028*, 2014.
- FGP22. Daniel Stilck França and Raul Garcia-Patron. A game of quantum advantage: linking verification and simulation. *Quantum*, 6:753, 2022.
- GKC⁺21. Xun Gao, Marcin Kalinowski, Chi-Ning Chou, Mikhail D Lukin, Boaz Barak, and Soonwon Choi. Limitations of linear cross-entropy as a measure for quantum advantage. *arXiv preprint arXiv:2112.01657*, 2021.
- Gol90. Oded Goldreich. A note on computational indistinguishability. *Information Processing Letters*, 34(6):277–281, 1990.
- HE23. Dominik Hangleiter and Jens Eisert. Computational advantage of quantum random sampling. *Reviews of Modern Physics*, 95(3):035001, 2023.
- HKEG19. Dominik Hangleiter, Martin Kliesch, Jens Eisert, and Christian Gogolin. Sample complexity of device-independently certified “quantum supremacy”. *Physical review letters*, 122(21):210502, 2019.
- JLS18. Zhengfeng Ji, Yi-Kai Liu, and Fang Song. Pseudorandom quantum states. In *Advances in Cryptology – CRYPTO 2018*, pages 126–152. Springer, 2018.
- KC00. Valentine Kabanets and Jin-Yi Cai. Circuit minimization problem. In *Proceedings of the thirty-second annual ACM symposium on Theory of computing*, pages 73–79, 2000.
- KMCSVY22. Gregory D Kahanamoku-Meyer, Soonwon Choi, Umesh V Vazirani, and Norman Y Yao. Classically verifiable quantum advantage from a computational bell test. *Nature Physics*, 18(8):918–924, 2022.
- KQST23. William Kretschmer, Luowen Qian, Makrand Sinha, and Avishay Tal. Quantum cryptography in algorithmica. In *Proceedings of the 55th Annual ACM Symposium on Theory of Computing*, pages 1589–1602, 2023.
- Kre21. William Kretschmer. Quantum pseudorandomness and classical complexity. *arXiv preprint arXiv:2103.09320*, 2021.
- LM00. B. Laurent and P. Massart. Adaptive estimation of a quadratic functional by model selection. *The Annals of Statistics*, 28(5):1302 – 1338, 2000.
- Mah22. Urmila Mahadev. Classical verification of quantum computations. *SIAM J. Comput.*, 51(4):1172–1229, 2022. Extended abstract appeared in FOCS 2018.
- PMS⁺14. Alberto Peruzzo, Jarrod McClean, Peter Shadbolt, Man-Hong Yung, Xiao-Qi Zhou, Peter J Love, Alán Aspuru-Guzik, and Jeremy L O’Brien. A variational eigenvalue solver on a photonic quantum processor. *Nature communications*, 5(1):4213, 2014.
- PZ22. Feng Pan and Pan Zhang. Simulation of quantum circuits using the big-batch tensor network method. *Physical Review Letters*, 128(3):030501, 2022.

- RR94. Alexander A Razborov and Steven Rudich. Natural proofs. In *Proceedings of the twenty-sixth annual ACM symposium on Theory of computing*, pages 204–213, 1994.
- SB08. Dan Shepherd and Michael J Bremner. Instantaneous quantum computation. *arXiv preprint arXiv:0809.0847*, 2008.
- Sho99. Peter W Shor. Polynomial-time algorithms for prime factorization and discrete logarithms on a quantum computer. *SIAM review*, 41(2):303–332, 1999.
- Sim97. Daniel R Simon. On the power of quantum computation. *SIAM journal on computing*, 26(5):1474–1483, 1997.