

Echocardiogram Foundation Model - Application

1: Estimating Ejection Fraction

Adil Dahlan^{1,2*†}, Cyril Zakka^{2*†}, Abhinav Kumar³, Laura Tang⁴,
Rohan Shad⁵, Robyn Fong², William Hiesinger^{2*}

¹School of Medicine, University College Dublin.

²Department of Cardiothoracic Surgery, Stanford Medicine.

³Department of Computer Science, Stanford University.

⁴Temerty School of Medicine, University of Toronto.

⁵Division of Cardiovascular Surgery, Penn Medicine.

*Corresponding author(s). E-mail(s): adahlan@stanford.edu;
czakka@stanford.edu; willhies@stanford.edu;

†These authors contributed equally to this work.

Abstract

Cardiovascular diseases stand as the primary global cause of mortality. Among the various imaging techniques available for visualising the heart and evaluating its function, echocardiograms emerge as the preferred choice due to their safety and low cost. Quantifying cardiac function based on echocardiograms is very laborious, time-consuming and subject to high interoperator variability. In this work, we introduce EchoAI, an echocardiogram foundation model, that is trained using self-supervised learning (SSL) on 1.5 million echocardiograms. We evaluate our approach by fine-tuning EchoAI to estimate the ejection fraction achieving a mean absolute percentage error of 9.40%. This level of accuracy aligns with the performance of expert sonographers.

1 Introduction

The global burden of cardiovascular disease (CVD) has nearly doubled between 1990-2020 and is responsible for more than 20% of all deaths in the United States [1]. With a recent uptick in mortality rates in the last decade, current trends predict that nearly half of US adults are expected to have CVD by 2035[2]. Yet, despite the

overall prevalence of heart disease, there exists well-established disparities in access to quality care and disease outcomes among the various genders, races, socioeconomic, and geographical groups affected. At the root of these inequalities, are unrecognized, and therefore untreated risk factors for heart disease, stemming from problems with provider bias, insurance coverage, access to care, and infrastructure [3].

To alleviate some of the threats posed by these social determinants of health, there has been a rich line of works exploring the use of artificial intelligence (AI) in cardiovascular medicine [4–6]. At the forefront of these advances, applications of AI in echocardiography are uniquely-suited to narrow the gap in CV-related care, by enabling the safe and cost-effective assessment of cardiac anatomy and function in real-time, without some of the shortcomings traditionally associated with this imaging technique, such as inter-observer variability and artifacts [7, 8]. However, despite matching and sometimes even exceeding human experts in a variety of clinically-relevant tasks, these models have struggled to make headway in clinical adoption, due to key issues stemming from their lack of transparency and reliability [9–12].

Most modern machine learning algorithms are characterized by the complex interplay of millions of artificial neurons, making it almost impossible to identify the underlying reasoning behind their predictions [13]. By extension, it is not uncommon for these models to rely on medically irrelevant features and spurious correlations in their training data, leading to dangerously poor performances when deployed across hospitals, despite strong baselines in the lab [14–17]. These models have also been found to be especially susceptible to mismatches between their training data and the data on which they are deployed, as a result of changes in patient demographics or data collection procedures [18–20]. Failing to monitor and correct for these shifts can significantly degrade model performance and perpetuate their biases [21]. Lastly, these standard models are severely limited in terms of their downstream applicability, and only learn a narrow subset of visual concepts required to solve their specified task [22]. In turn, this limits their clinical deployment, making it difficult to update or adapt them to new clinical diagnoses or other related tasks, without incurring significant cost and effort [23].

As it stands, there exists a desperate need to overcome the shortcomings surrounding the transparency and reliability of current AI solutions. In a system that prides itself on evidence-based care, current approaches only serve to further erode the trust in automated medical decision-making processes and fail to fulfil their promise to narrow existing healthcare disparities.

Video Vision Transformer (ViViT) models currently stand as the state-of-the-art for achieving optimal performance across a range of video-related tasks [24, 25]. However, these models exhibit a high demand for data and are prone to overfitting, even when trained on datasets exceeding one million inputs [26]. This poses a significant challenge in the context of medical applications, where there is a shortage of labelled data. Adopting ViViT architectures in the medical domain becomes particularly challenging due to the limited availability of appropriately annotated datasets.

To mitigate the challenge of overfitting in medicine, various self-supervised learning (SSL) techniques have been developed [27, 27–31]. In 2022, Feichtenhofer et al. [32] addressed this concern by developing the masked autoencoding (MAE) technique

specifically for ViViT models. The MAE pretraining approach involves masking 90% of the input video pixels and training the model to predict the original video.

Echocardiography stands out as the preferred imaging technique for evaluating both the structure and function of the heart. Developing a foundational ViViT model specifically trained for echocardiograms holds the potential to not only boost overall model performance but also reduce the dependency on extensive labelled datasets for various downstream tasks.

In this work, we introduce EchoAI, a foundation model for echocardiograms. We train EchoAI on a comprehensive dataset comprising 1.5 million echocardiograms. This training dataset encompasses a diverse range of adult and paediatric echocardiograms, including various types and views sourced from both public and Stanford-private datasets. We further fine-tune EchoAI on the EchoNet Dynamic dataset ([33]) to estimate the ejection fraction (EF). Remarkably, Without any task-specific modifications, EchoAI demonstrates an impressive capability to estimate the ejection fraction, achieving a mean absolute error of 4.34 (9.40%). This performance is noteworthy, especially considering the inherent challenges in ejection fraction estimation. Notably, the inter-user variability for this task is typically 13.5% [34]. Furthermore, the process of calculating the ejection fraction involves the intricate steps of detecting individual heartbeats and manually segmenting the left ventricle at both end diastole and systole for each heartbeat, making it a highly time-consuming task.

2 Previous Work

Over the past decade, several AI models have been developed for cardiac imaging including classifying echocardiogram views [35], diagnosing atrial fibrillation [36], detecting valvular dysfunction [37, 38], detecting cardiac amyloidosis [39], predicting post-operative right ventricular failure [9], screening for cardiac contractile dysfunction [40, 41], predicting and diagnosing heart failure [42, 43], detecting atrial septal defect, dilated cardiomyopathy, hypertrophic cardiomyopathy, prior myocardial infarction [44]. However, these rely on supervised learning techniques that require huge amounts of labelled data. Weak supervised applications have also been developed, such as for classifying aortic valve malformations using cardiac MRI [45]

Several self-supervised learning applications in medicine have emerged over the past few years, including training foundation models for ECG recordings interpretation [46], medical image segmentation [47–49], medical image classification [50, 51], image quality enhancement and denoising [52, 53]

While previous attempts have been made to train echocardiogram foundation models [54], our contributions are the following:

- EchoAI is the only echocardiogram model that incorporates a video-based encoder trained using self-supervised learning.
- EchoAI is trained on 1.5 million echocardiograms, the largest dataset ever used in training an echocardiogram model.

3 Results

3.1 Echocardiogram Foundation Model

We pretrain EchoAI using the masked autoencoding (MAE) self-supervised learning technique. In this approach, we train the model to reconstruct the original echocardiogram recording while exposing it to only 10% of the video pixels. Following MAE pretraining, EchoAI demonstrates the capability to reconstruct various types and views of both adult and paediatric echocardiograms. We illustrate this process in Figure 1.

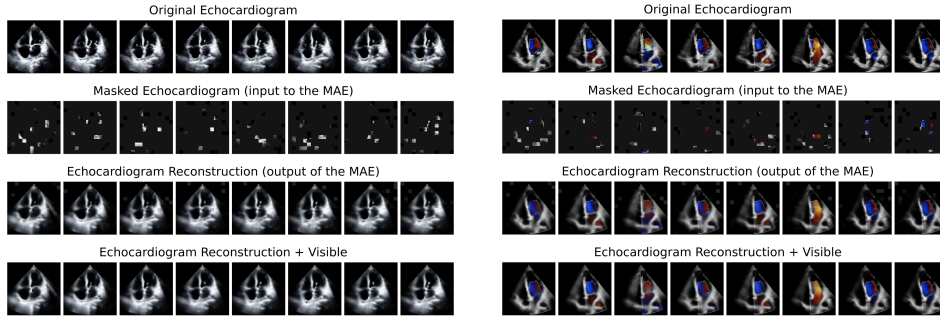


Fig. 1: Two Original, Masked, Reconstructed and Reconstructed + Visible Echocardiograms output by EchoAI Masked Autoencoder

3.2 Estimating Ejection Fraction

We finetune EchoAI using the EchoNet Dynamic datasets ([33]) to estimate the ejection fraction. We evaluate the model’s performance on the test datasplit comprising cases that were not part of the initial training dataset. The results showed a mean absolute error of 4.34 (9.40%), a root mean squared error of 5.76 (15.02%), and an R2 value of 0.78 when compared to the ground truth EF values measured by human experts. For a detailed analysis of the EF predictions, we provide the scatter plot in Figure 2 and the corresponding performance metrics in Table 1.

Parameter	Value
Root Mean Squared Error (RMSE)	5.76
Mean Absolute Error (MAE)	4.34
Root Mean Squared Percentage Error (RMSPE)	15.02%
Mean Absolute Percentage Error (MAPE)	9.40%
R2	0.78

Table 1: Performance Metrics of EchoAI in Estimating Ejection Fraction on the EchoNet Dynamic Test Dataset

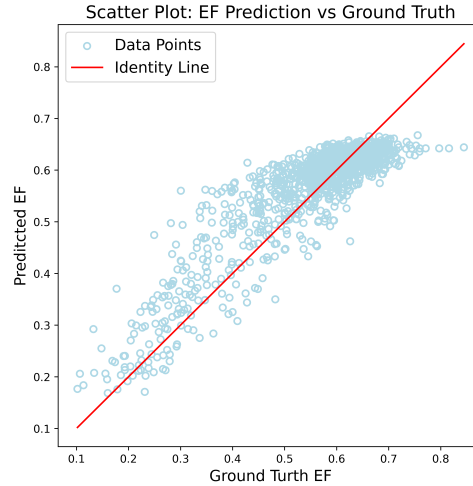


Fig. 2: Scatter Plot of EF Estimation using EchoAI on the EchoNet Dynamic Test Dataset

4 Discussion

4.1 Echocardiogram Foundation Model

EchoAI distinguishes itself as an exceptionally robust echocardiogram foundation model, thanks to its extensive training on a large, diverse echocardiogram dataset. This dataset encompasses 1.5 million echocardiogram recordings, showcasing a variety of echocardiogram views including Apical 4 Chamber, Parasternal Short Axis, and Parasternal Long Axis. Additionally, it incorporates different types of echocardiograms, including Doppler, 2D, and 3D, providing a comprehensive understanding. Spanning various patient age groups, from adults to paediatrics, this broad training further enhances EchoAI’s versatility and reliability as a robust foundation model for echocardiography.

4.2 Estimating Ejection Fraction

EchoAI demonstrates a mean absolute error of 4.34 (9.40%) in estimating the ejection fraction, showcasing a level of performance comparable to human accuracy. It is worth noting that the inter-user variability in ejection fraction estimation stands at 13.5% according to Farsalinos et al. (2015) [34].

While EchoAI performance falls below the results reported in [33], where the mean absolute percentage error was 4.1% and the root mean squared percentage error was 5.3%, it is important to note that the approach used in [33] involved the detection of 5 different heartbeats and the sampling of 32 frames from each heartbeat. This

approach is computationally expensive and requires a significantly more complex task-specific implementation, and also requires labelling the end of systole and diastole by a medical professional.

Future work would involve training a multimodal echocardiogram foundation model as detailed in [55]. By means of incorporating meaningful information from both image and language, a multimodal echocardiogram foundation model trained on the echocardiogram recordings and the associated reports would be expected to have an enhanced performance.

5 Conclusion

In this study, we introduce EchoAI, the pioneering foundation model for video-based echocardiograms. We train EchoAI on a diverse dataset comprising 1.5 million echocardiogram videos, encompassing both adult and pediatric patients. Demonstrating its versatility, EchoAI serves as a potent foundation model for various downstream tasks related to echocardiograms. Notably, it exhibits superior performance, requiring minimal labelled data for fine-tuning.

Upon fine-tuning on the EchoNet Dynamic dataset, EchoAI excels in estimating the cardiac ejection fraction, achieving expert-level performance. The model attains a mean absolute error of 4.34 (9.40%), showcasing its robust capability in enhancing diagnostic precision for echocardiogram-related analyses.

Acknowledgments. The computing for this project was performed on the Sherlock cluster. We would like to thank Stanford University and the Stanford Research Computing Center for providing computational resources and support that contributed to these research results.

6 Methods

6.1 Dataset

We compile a total of 1,495,588 echocardiogram videos for training EchoAI, the echocardiogram foundation model. We source these echocardiograms from publicly available datasets and also from Stanford University Hospital, as detailed below:

1. **EchoNet Dynamic:** comprising 10,030 Apical 4 Chamber echocardiograms of adult patients. This dataset is publicly available at <https://echonet.github.io/dynamic/>
2. **EchoNet Paediatric:** comprising 7,810 echocardiograms of paediatric patients. These echocardiograms are split as follows: 3,285 are of the Apical 4 Chamber view and the remaining 4,527 are of the Parasternal Long Axis view. This dataset is publicly available at <https://echonet.github.io/pediatric/>
3. **EchoNet LVH (Left Ventricular Hypertrophy):** comprising 12,000 echocardiograms of adult patients. These echocardiograms are of the Parasternal Long Axis view. This dataset is publicly available at <https://echonet.github.io/lvh/>
4. **Stanford Hospital Internal Dataset:** comprising 546,887 and 918,861 echocardiograms of adult and paediatric patients, respectively. The echocardiography

DICOM files are sourced from the Department of Cardiothoracic Surgery at Stanford University (CA); (IRB 52440) with a waiver of consent owing to the retrospective nature of the research.

A summary of the compiled datasets is in Table 2.

Table 2: Echocardiogram datasets used for training EchoAI

Dataset	Number of Videos		Views
	Adults	Paediatric	
EchoNet Dynamic [33]	10,030	0	A4C
EchoNet Paediatrics [56]	0	7,810	A4C: 3,285 PSAX: 4,527
EchoNet LVH [57]	12,000	0	PLAX
Stanford-Private	546,887	918,861	Miscellaneous

We adhere to a standardized data-preprocessing protocol for our videos. Initially, we resize the videos to align with the model’s input dimensions. Additionally, we apply augmentations following the protocol outlined by Cubuk et al. ([58]). To ensure uniformity, we standardize the frame rates. Finally, we sample a specific number of frames at a designated rate or distribute them evenly throughout the entire video.

6.2 EchoAI Training

EchoAI is a Video Vision Transformer model. We train EchoAI utilizing the Masked Autoencoding (MAE) technique, as elucidated in the study by Feichtenhofer et al. (2022) [32]. The MAE training protocol entails the incorporation of a lightweight decoder into the video vision transformer model’s encoder. The encoder is responsible for encoding the input into a single 2D matrix with specific dimensions, constituting the latent space representation of the input. Conversely, the decoder reconstructs the input image by utilizing the latent space representation, comprised of both visible tokens and mask tokens (refer to Figure 3).

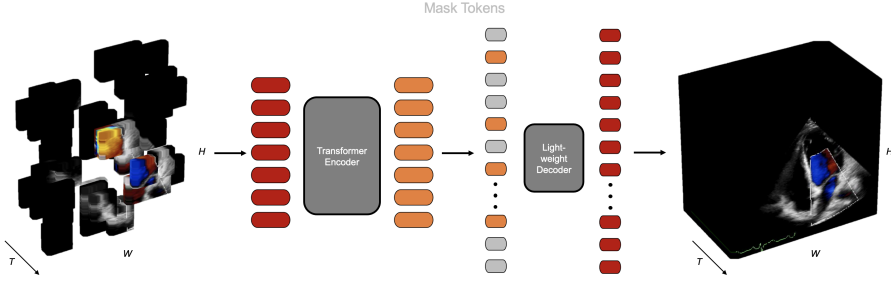


Fig. 3: EchoAI training pipeline - 90% of patches are masked and the model is trained to reconstruct the original echocardiogram recording

6.3 Estimating the Ejection Fraction

We fine-tune EchoAI to estimate the ejection fraction, as illustrated in Figure 4. The fine-tuning protocol comprises several essential steps. Firstly, we preprocess the data and segment the input video into patches of specific dimensions. We then embed these input patches, transforming the 3D pixel space into a linear vector with learned values. To retain positional and temporal information, we add learnable positional and temporal embeddings to the embedded patches. Optionally, we add a class token at the beginning of the sequence of embedded patches. Subsequently, we feed these embeddings through the transformer encoder, resulting in a latent representation of the initial image. Finally, we input the latent representation of the initial echocardiogram video through a dense layer which outputs the estimation of the ejection fraction. Essentially, this constitutes a standard training pipeline for a video vision transformer designed for a regression task.

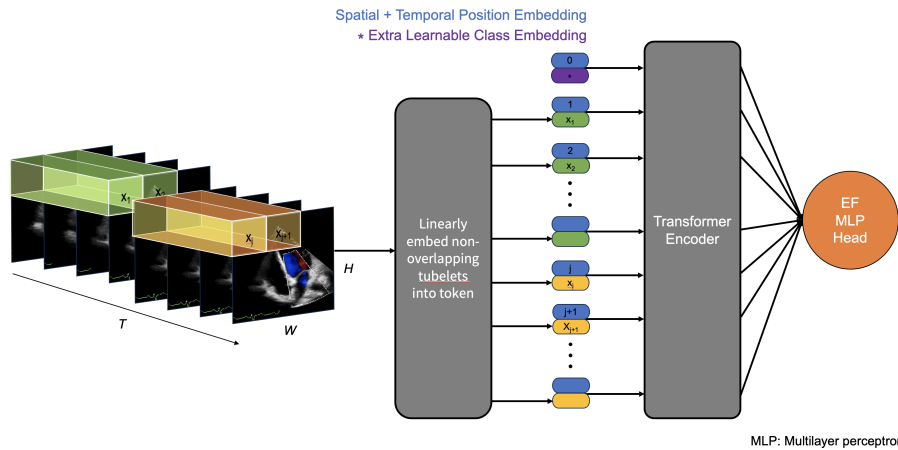


Fig. 4: EchoAI fine-tuning pipeline for estimating the ejection fraction on the EchoNet Dynamic test dataset

6.4 EchoAI Training and Finetuning Pipeline

We conduct training and fine-tuning of EchoAI over 50 epochs, distributing our code across four 40GB GPUs for parallel processing. Throughout this process, we employ the Mean Square Error (MSE) Loss, denoted as $MSE = \frac{1}{n} \sum_{i=1}^N (Y_i - \hat{Y}_i)^2$. This loss function serves to quantify the mean disparity between actual and predicted values, addressing both pixel values and ejection fraction estimation.

To optimize the learning process, we implement a standard cosine annealing scheduler, dynamically adjusting the learning rate per data iteration. The optimization is carried out using the AdamW optimizer, with base learning rates set at 0.0016 and 0.0024 for training and fine-tuning of EchoAI, respectively.

To expedite training, we implement automatic mixed precision and accumulated gradients across 2 data iterations. For EchoAI pertaining and fine-tuning, we explore

seven different hyperparameter configurations. These configurations are detailed in Appendix 1. To assess the significance of MAE pretraining, we also fine-tune a "vanilla" (not pre-trained) ViViT model to predict the ejection fraction.

Declarations

6.5 Funding

This project was supported in part by a National Heart, Lung, and Blood Institute (NIH NHLBI) grant (1R01HL157235-01A1) (W.H.) and by the AI in Medicine Scholarship from University College Dublin.

6.6 Code availability

The code and model weights for the EchoAI model are made available to the public at https://github.com/adildahlan/echo_ssl.

References

- [1] for Disease Control, C. & Prevention, N. C. f. H. S. About multiple cause of death, 1999–2020 (2022). URL <https://wonder.cdc.gov/mcd-icd10.html>. CDC WONDER Online Database.
- [2] Dunbar, S. B. *et al.* Projected costs of informal caregiving for cardiovascular disease: 2015 to 2035: A policy statement from the american heart association. *Circulation* **137**, e558–e577 (2018). URL <https://www.ahajournals.org/doi/10.1161/CIR.0000000000000570>. Publisher: American Heart Association.
- [3] Havranek, E. P. *et al.* Social determinants of risk and outcomes for cardiovascular disease: A scientific statement from the american heart association. *Circulation* **132**, 873–898 (2015).
- [4] Ghorbani, A. *et al.* Deep learning interpretation of echocardiograms. *npj Digital Medicine* **3**, 1–10 (2020). URL <https://www.nature.com/articles/s41746-019-0216-8>. Number: 1 Publisher: Nature Publishing Group.
- [5] Ouyang, D. *et al.* Video-based AI for beat-to-beat assessment of cardiac function. *Nature* **580**, 252–256 (2020). URL <https://www.nature.com/articles/s41586-020-2145-8>. Number: 7802 Publisher: Nature Publishing Group.
- [6] Zhou, J., Du, M., Chang, S. & Chen, Z. Artificial intelligence in echocardiography: detection, functional evaluation, and disease diagnosis. *Cardiovascular Ultrasound* **19**, 29 (2021). URL <https://doi.org/10.1186/s12947-021-00261-2>.
- [7] Feigenbaum, H. Evolution of echocardiography. *Circulation* **93**, 1321–1327 (1996). URL <https://www.ahajournals.org/doi/10.1161/01.CIR.93.7.1321>. Publisher: American Heart Association.

- [8] Cheitlin, M. D. *et al.* Acc/aha guidelines for the clinical application of echocardiography: a report of the american college of cardiology/american heart association task force on practice guidelines (committee on clinical application of echocardiography) developed in collaboration with the american society of echocardiography. *Circulation* **95**, 1686–1744 (1997).
- [9] Shad, R. *et al.* Predicting post-operative right ventricular failure using video-based deep learning. *Nature Communications* 2021 12:1 **12**, 1–8 (2021). URL <https://www.nature.com/articles/s41467-021-25503-9>. Publisher: Nature Publishing Group.
- [10] Rajpurkar, P. *et al.* Deep learning for chest radiograph diagnosis: A retrospective comparison of the CheXNeXt algorithm to practicing radiologists. *PLOS Medicine* **15**, e1002686 (2018). URL <https://dx.plos.org/10.1371/journal.pmed.1002686>.
- [11] Attia, Z. I. *et al.* An artificial intelligence-enabled ECG algorithm for the identification of patients with atrial fibrillation during sinus rhythm: a retrospective analysis of outcome prediction. *The Lancet* **394**, 861–867 (2019). URL <https://linkinghub.elsevier.com/retrieve/pii/S0140673619317210>.
- [12] Rajpurkar, P. *et al.* AppendiXNet: Deep learning for diagnosis of appendicitis from a small dataset of CT exams using video pretraining. *Scientific Reports* **10** (2020). URL <https://www.ncbi.nlm.nih.gov/pmc/articles/PMC7054445/>. Publisher: Nature Publishing Group.
- [13] Amann, J., Blasimme, A., Vayena, E., Frey, D. & Madai, V. I. Explainability for artificial intelligence in healthcare: a multidisciplinary perspective. *BMC Medical Informatics and Decision Making* **20**, 1–9 (2020). URL <https://doi.org/10.1186/s12911-020-01332-6>. Publisher: BioMed Central.
- [14] Cohen, J. P. *et al.* Problems in the deployment of machine-learned models in health care. *CMAJ : Canadian Medical Association Journal* **193**, E1391–E1394 (2021). URL <https://www.ncbi.nlm.nih.gov/pmc/articles/PMC8443295/>.
- [15] D’Amour, A. *et al.* Underspecification presents challenges for credibility in modern machine learning. URL <http://arxiv.org/abs/2011.03395>. 2011.03395[cs, stat].
- [16] Zhang, A., Xing, L., Zou, J. & Wu, J. C. Shifting machine learning for healthcare from development to deployment and from models to data. *Nature biomedical engineering* **6**, 1330–1345 (2022). URL <https://doi.org/10.1038/s41551-022-00898-y>.
- [17] Chiang, C.-W. & Yin, M. You’d better stop! understanding human reliance on machine learning models under covariate shift. URL <https://dl.acm.org/doi/10.1145/3447535.3462487>.

- [18] Eche, T., Schwartz, L. H., Mokrane, F.-Z. & Dercle, L. Toward generalizability in the deployment of artificial intelligence in radiology: Role of computation stress testing to overcome underspecification. *Radiology: Artificial Intelligence* **3**, e210097 (2021). URL <https://www.ncbi.nlm.nih.gov/pmc/articles/PMC8637230/>.
- [19] Subbaswamy, A. & Saria, S. From development to deployment: dataset shift, causality, and shift-stable models in health AI. *Biostatistics* **21**, 345–352 (2020). URL <https://doi.org/10.1093/biostatistics/kxz041>.
- [20] Saria, S. & Subbaswamy, A. Tutorial: Safe and reliable machine learning. URL <http://arxiv.org/abs/1904.07204>. 1904.07204[cs].
- [21] Noseworthy, P. A. *et al.* Assessing and mitigating bias in medical artificial intelligence. *Circulation: Arrhythmia and Electrophysiology* **13**, e007988 (2020). URL <https://www.ahajournals.org/doi/10.1161/CIRCEP.119.007988>. Publisher: American Heart Association.
- [22] Yu, A. C., Mohajer, B. & Eng, J. External validation of deep learning algorithms for radiologic diagnosis: A systematic review. *Radiology: Artificial Intelligence* **4**, e210064 (2022). URL <https://www.ncbi.nlm.nih.gov/pmc/articles/PMC9152694/>.
- [23] Rajpurkar, P., Chen, E., Banerjee, O. & Topol, E. J. AI in health and medicine. *Nature Medicine* **28**, 31–38 (2022). URL <https://www.nature.com/articles/s41591-021-01614-0>. Number: 1 Publisher: Nature Publishing Group.
- [24] Arnab, A. *et al.* ViViT: A video vision transformer. *Proceedings of the IEEE International Conference on Computer Vision* 6816–6826 (2021). URL <https://arxiv.org/abs/2103.15691v2>. Publisher: Institute of Electrical and Electronics Engineers Inc. ISBN: 9781665428125.
- [25] Dosovitskiy, A. *et al.* An image is worth 16x16 words: Transformers for image recognition at scale. *arXiv preprint arXiv:2010.11929* (2020). URL <https://arxiv.org/abs/2010.11929v2>.
- [26] He, K. *et al.* Masked autoencoders are scalable vision learners. *Proceedings of the IEEE Computer Society Conference on Computer Vision and Pattern Recognition* **2022-June**, 15979–15988 (2021). URL <https://arxiv.org/abs/2111.06377v3>. Publisher: IEEE Computer Society ISBN: 9781665469463.
- [27] Spathis, D., Perez-Pozuelo, I., Marques-Fernandez, L. & Mascolo, C. Breaking away from labels: The promise of self-supervised machine learning in intelligent health. *Patterns* **3**, 100410 (2022). URL <https://www.sciencedirect.com/science/article/pii/S2666389921002841>.

- [28] Wang, W.-C., Ahn, E., Feng, D. & Kim, J. A review of predictive and contrastive self-supervised learning for medical images. *Machine Intelligence Research* **20**, 483–513 (2023). URL <https://doi.org/10.1007/s11633-022-1406-4>.
- [29] Krishnan, R., Rajpurkar, P. & Topol, E. J. Self-supervised learning in medicine and healthcare. *Nature Biomedical Engineering* **6**, 1346–1352 (2022). URL <https://www.nature.com/articles/s41551-022-00914-1>.
- [30] Zhang, C. & Gu, Y. Dive into self-supervised learning for medical image analysis: Data, models and tasks. URL <http://arxiv.org/abs/2209.12157>. 2209.12157[cs].
- [31] Chowdhury, A., Rosenthal, J., Waring, J. & Umeton, R. Applying self-supervised learning to medicine: Review of the state of the art and medical implementations. *Informatics* **8**, 59 (2021). URL <https://www.mdpi.com/2227-9709/8/3/59>.
- [32] Feichtenhofer, C., Fan, H., Li, Y., He, K. & Ai, M. Masked autoencoders as spatiotemporal learners. *Advances in neural information processing systems* (2022). URL <https://arxiv.org/abs/2205.09113v2>.
- [33] Ouyang, D. *et al.* EchoNet-dynamic: a large new cardiac motion video data resource for medical machine learning (2019).
- [34] Farsalinos, K. E. *et al.* Head-to-head comparison of global longitudinal strain measurements among nine different vendors. *Journal of the American Society of Echocardiography* **28**, 1171–1181.e2 (2015). URL <https://linkinghub.elsevier.com/retrieve/pii/S0894731715004630>.
- [35] Madani, A., Arnaout, R., Mofrad, M. & Arnaout, R. Fast and accurate view classification of echocardiograms using deep learning. *npj Digital Medicine* **1**, 1–8 (2018). URL <https://www.nature.com/articles/s41746-017-0013-1>. Number: 1 Publisher: Nature Publishing Group.
- [36] Sánchez de la Nava, A. M., Atienza, F., Bermejo, J. & Fernández-Avilés, F. Artificial intelligence for a personalized diagnosis and treatment of atrial fibrillation. *American Journal of Physiology-Heart and Circulatory Physiology* **320**, H1337–H1347 (2021). URL <https://journals.physiology.org/doi/full/10.1152/ajpheart.00764.2020>. Publisher: American Physiological Society.
- [37] Vaid, A. *et al.* Multi-center retrospective cohort study applying deep learning to electrocardiograms to identify left heart valvular dysfunction. *Communications Medicine* **3**, 1–12 (2023). URL <https://www.nature.com/articles/s43856-023-00240-w>. Number: 1 Publisher: Nature Publishing Group.
- [38] Nedadur, R., Wang, B. & Tsang, W. Artificial intelligence for the echocardiographic assessment of valvular heart disease. *Heart* **108**, 1592–1599 (2022). URL <https://www.ncbi.nlm.nih.gov/pmc/articles/PMC9554049/>.

- [39] Goto, S. *et al.* Artificial intelligence-enabled fully automated detection of cardiac amyloidosis using electrocardiograms and echocardiograms. *Nature Communications* **12**, 2726 (2021). URL <https://www.nature.com/articles/s41467-021-22877-8>. Number: 1 Publisher: Nature Publishing Group.
- [40] Attia, Z. I. *et al.* Screening for cardiac contractile dysfunction using an artificial intelligence-enabled electrocardiogram. *Nature Medicine* **25**, 70–74 (2019). URL <https://www.nature.com/articles/s41591-018-0240-2>. Number: 1 Publisher: Nature Publishing Group.
- [41] Yao, X. *et al.* Artificial intelligence-enabled electrocardiograms for identification of patients with low ejection fraction: a pragmatic, randomized clinical trial. *Nature Medicine* **27**, 815–819 (2021). URL <https://www.nature.com/articles/s41591-021-01335-4>. Number: 5 Publisher: Nature Publishing Group.
- [42] Miyashita, Y. *et al.* Predicting heart failure onset in the general population using a novel data-mining artificial intelligence method. *Scientific Reports* **13**, 4352 (2023). URL <https://www.nature.com/articles/s41598-023-31600-0>. Number: 1 Publisher: Nature Publishing Group.
- [43] Yasmin, F. *et al.* Artificial intelligence in the diagnosis and detection of heart failure: the past, present, and future. *Reviews in Cardiovascular Medicine* **22**, 1095–1113 (2021).
- [44] Liu, B. *et al.* A deep learning framework assisted echocardiography with diagnosis, lesion localization, phenogrouping heterogeneous disease, and anomaly detection. *Scientific Reports* **13**, 3 (2023). URL <https://www.nature.com/articles/s41598-022-27211-w>. Number: 1 Publisher: Nature Publishing Group.
- [45] Fries, J. A. *et al.* Weakly supervised classification of aortic valve malformations using unlabeled cardiac MRI sequences. *Nature Communications* **10**, 3111 (2019). URL <https://www.nature.com/articles/s41467-019-11012-3>. Number: 1 Publisher: Nature Publishing Group.
- [46] Lai, J. *et al.* Practical intelligent diagnostic algorithm for wearable 12-lead ECG via self-supervised learning on large-scale dataset. *Nature Communications* **14**, 3741 (2023). URL <https://www.nature.com/articles/s41467-023-39472-8>. Number: 1 Publisher: Nature Publishing Group.
- [47] Wang, S. *et al.* Annotation-efficient deep learning for automatic medical image segmentation. *Nature Communications* **12**, 5915 (2021). URL <https://www.nature.com/articles/s41467-021-26216-9>. Number: 1 Publisher: Nature Publishing Group.
- [48] Zheng, H. *et al.* in *Hierarchical self-supervised learning for medical image segmentation based on multi-domain data aggregation* (eds De Bruijne, M. *et al.*) *Medical Image Computing and Computer Assisted Intervention – MICCAI 2021*,

Vol. 12901 622–632 (Springer International Publishing, 2021). URL https://link.springer.com/10.1007/978-3-030-87193-2_59. Series Title: Lecture Notes in Computer Science.

- [49] Ouyang, C. *et al.* Self-supervised learning for few-shot medical image segmentation. *IEEE Transactions on Medical Imaging* **41**, 1837–1848 (2022). URL <https://ieeexplore.ieee.org/document/9709261>. Conference Name: IEEE Transactions on Medical Imaging.
- [50] Huang, S.-C. *et al.* Self-supervised learning for medical image classification: a systematic review and implementation guidelines. *npj Digital Medicine* **6**, 1–16 (2023). URL <https://www.nature.com/articles/s41746-023-00811-0>. Number: 1 Publisher: Nature Publishing Group.
- [51] Azizi, S. *et al.* Big self-supervised models advance medical image classification. URL <http://arxiv.org/abs/2101.05224>. 2101.05224[cs,eess].
- [52] Eun, D.-i. *et al.* Deep-learning-based image quality enhancement of compressed sensing magnetic resonance imaging of vessel wall: comparison of self-supervised and unsupervised approaches. *Scientific Reports* **10**, 13950 (2020). URL <https://www.nature.com/articles/s41598-020-69932-w>. Number: 1 Publisher: Nature Publishing Group.
- [53] Eom, M. *et al.* Statistically unbiased prediction enables accurate denoising of voltage imaging data. *Nature Methods* **20**, 1581–1592 (2023). URL <https://www.nature.com/articles/s41592-023-02005-8>. Number: 10 Publisher: Nature Publishing Group.
- [54] Christensen, M., Vukadinovic, M., Yuan, N. & Ouyang, D. Multimodal foundation models for echocardiogram interpretation. URL <http://arxiv.org/abs/2308.15670>. 2308.15670[cs].
- [55] Geng, X. *et al.* Multimodal masked autoencoders learn transferable representations. URL <http://arxiv.org/abs/2205.14204>. 2205.14204[cs].
- [56] Reddy, C. D., Lopez, L., Ouyang, D., Zou, J. Y. & He, B. Video-based deep learning for automated assessment of left ventricular ejection fraction in pediatric patients. *Journal of the American Society of Echocardiography* **36**, 482–489 (2023). URL <https://linkinghub.elsevier.com/retrieve/pii/S0894731723000688>.
- [57] Duffy, G. *et al.* High-throughput precision phenotyping of left ventricular hypertrophy with cardiovascular deep learning. *JAMA Cardiology* **7**, 386–395 (2022). URL <https://doi.org/10.1001/jamacardio.2021.6059>.
- [58] Cubuk, E. D., Zoph, B., Shlens, J. & Le, Q. V. RandAugment: Practical automated data augmentation with a reduced search space. URL <http://arxiv.org/abs/1909.13719>. 1909.13719[cs].

7 Appendix 1

Table 3: Hyperparameter search experiments for EchoAI training and fine-tuning on the EchoNet Dynamic dataset for estimating the ejection fraction

Experiment	Architecture Size	Image Size	Number of Sampled Frames	Frames Sampling Rate	Video Target fps	Patch Size	Number of Reconstructed Frames
1	Large	224x224	16	4	30	16x16	8
2	Base	112x112	32	3	50	16x16	32
3	Large	112x112	32	3	50	16x16	32
4	Large	112x112	16	4	50	16x16	8
5	Large	112x112	16	4	50	16x16	8
6	Large	112x112	32	3	50	16x16	8
7	Large	112x112	32	3	50	16x16	16
8	Large	112x112	32	NA - equally spaced frames throughout the video.	50	16x16	8