Evaluating Agents using Social Choice Theory

Marc Lanctot¹, Kate Larson^{1,2}, Yoram Bachrach¹, Luke Marris¹, Zun Li³, Avishkar Bhoopchand¹, Thomas Anthony¹, Brian Tanner⁴ and Anna Koop¹ ¹Google DeepMind, ²University of Waterloo, ³University of Michigan, ⁴Artificial.Agency

We argue that many general evaluation problems can be viewed through the lens of voting theory. Each task is interpreted as a separate voter, which requires only ordinal rankings or pairwise comparisons of agents to produce an overall evaluation. By viewing the aggregator as a *social welfare function*, we leverage centuries of research in social choice theory to derive principled evaluation frameworks with axiomatic foundations. These evaluations are interpretable and flexible, while avoiding many of the problems currently facing cross-task evaluation. We apply this Voting-as-Evaluation (VasE) framework across multiple settings, including reinforcement learning, large language models, and humans. In practice, we observe that VasE can be more robust than popular evaluation frameworks (Elo and Nash averaging), discovers properties in the evaluation data not evident from scores alone, and can predict outcomes better than Elo in a complex seven-player game. We identify one particular approach, maximal lotteries, that satisfies important consistency properties relevant to evaluation, is computationally efficient (polynomial in the size of the evaluation data), and identifies game-theoretic cycles.

Keywords: Social choice, voting, general, agents, evaluation

Introduction

In this paper, we bridge two sub-disciplines of artificial intelligence: evaluation of general agents and computational social choice. Evaluation is central to driving progress in artificial intelligence and machine learning. Without principled evaluation procedures it is challenging, if not impossible, for both researchers and the broader public to understand the strengths and limitations of different systems. This confusion is further exacerbated when considering the evaluation problem across multiple tasks, features and metrics. For example, the Arcade Learning Environment (ALE) (Bellemare et al., 2013) inspired the development of general agents via deep reinforcement learning (RL) approaches, but the breadth of options available for assessment gave rise to a diverse set of incompatible evaluation methodologies (Machado et al., 2018). With the proliferation and accessibility of general environment suites and increasing interaction with human agents, there is a need for robust and principled evaluation schemes for general agents.

To ground our comparison of evaluations methods, we will use the pentathlon depicted in Fig-




Figure 1 | An evaluation problem for general agents. Each event has its own separate metric for determining the ranking of each participant, with gold, silver, and bronze corresponding to first, second, and third place ranks.

ure 1 where agents *A*, *B*, and *C* compete in five different events: archery, basketball, cycling, synchronized swimming, and tennis. Each sport has its own specific evaluation criteria: *e.g.*, fastest time, most points, match outcome. Every sport also awards its top winners with gold, silver, and bronze medals. Who should be considered the winner of the pentathlon? Social choice theory provides a framework for answering this question when we consider the standings within each

Corresponding author(s): Marc Lanctot, lanctot@google.com. © 2023 Google DeepMind. All rights reserved

competitions as votes aggregated according to some voting scheme. Though the voting methods of social choice theory have long been extended beyond the field's political origins, they have yet to be widely used for the evaluation of machine learning agents.

How do researchers currently evaluate agents? The most commonly used system to compare agents is the Elo rating system (Elo, 1978). Elo was designed originally to rank chess agents. It is still widely-used today in spite of several wellknown deficiencies (Balduzzi et al., 2018). For example, it cannot represent non-transitive relationships between agents, as in the classic game of Rock, Paper, Scissors where rock beats scissors, scissors beats paper, and paper beats rock. Because of the cyclic relationship, Elo assigns the same rating to each agent, predicting that one beats the other with probability $\frac{1}{2}$. Elo can also be manipulated by cloning: the addition of multiple copies of similar agents can overturn rankings. A technique such as Nash averaging (Balduzzi et al., 2018) addresses the cloning issue, but raises others. Nash averaging is a game-theoretic approach that interprets evaluation data as a game between agent and task (or agent versus agent), ranking agents by their expected utility against a maximum-entropy Nash equilibrium. We identify three problems with Nash averaging: it requires scores be directly comparable, it aggressively filters out tasks (due to selecting tasks adversarially), and can be highly sensitive to the set of included agents. In contrast, social choice theory provides methods that overcome these problems in a principled manner.

We introduce **Voting-as-Evaluation (VasE)**: an evaluation system for general agents based on computational social choice. Here, by "general agent" we mean any agent (human or learned) that can perform multiple tasks. In particular, the paper contains the following novel contributions:

- Presentation of a framework (VasE) for adapting computational social choice to the evaluation of general agents.
- A characterization of relevant consistency properties and their effects on the evaluation of general agents.

- Analysis of the findings of VasE on three different evaluation domains: reinforcement learning, large language models, and human competitions.
- An iterative variant of the maximal lotteries voting scheme (Fishburn, 1984) that produces a full ranking of agents: a gametheoretic method that repeatedly solves twoplayer zero-sum margin games as represented by the voter margin matrix, such as depicted in Figure 4.

VasE provides several benefits over existing evaluation schemes. VasE does not require score normalization across tasks, only ordinal rankings. This makes it straightforward to apply, even across incomparable metrics. Task distribution weights are user-controlled rather than systemcontrolled. This gives the evaluator the flexibility to decide the relative importance of each task depending on the context. The aggregate outcome is interpretable, as the consistency properties of voting methods are designed to satisfy specific practical axioms. These axioms also provide guarantees, such as robustness to clones. Finally, compared to Nash averaging, VasE does not filter tasks, and can be more robust to changes in subsets of agents.

Through our analysis, maximal lotteries emerges as a particularly useful voting method. Maximal lotteries satisfies all of the consistency properties discussed in this paper, is computable in polynomial time in the size of the evaluation data, and identifies groups of game-theoretic cycles (non-transitivity) among agents.

Implementations of the voting methods used in VasE, example applications, and datasets can be found in OpenSpiel (Lanctot et al., 2019)¹.

Evaluating Agents: Rating and Ranking

Elo is a classic rating system that ranks skill using a simple logistic model learned from win/loss outcomes (Elo, 1978). A rating, r_i , is assigned to each player *i* such that the probability of

¹Specifically, in the following folder: https: //github.com/google-deepmind/open_spiel/ tree/master/open_spiel/python/voting.




Figure 2 | Example effect of clones on Elo predictions. (Top) True win frequencies of a transitive relationship: *A* beats *B* beats *C*. (Bottom) Worstcase error of true p_{AC} from Elo's predictions \hat{p}_{AC} with clones of *B*.

player *i* beating player *j* is predicted as $\hat{p}_{ij} = \frac{1}{1+10^{(r_j-r_i)/400}}$. While Elo was designed specifically to rank players in the two-player zerosum, perfect information game of Chess, it has been widely applied to other domains² including in evaluation of large language models (Zheng et al., 2023). TrueSkill (Herbrich et al., 2006) and bayeselo (Coulom, 2005) are rating systems based on similar foundations (Bradley-Terry models of skill) that also model uncertainty over ratings using Bayesian methods.

Drawbacks of Elo

Elo is simple, but it is well-known that it cannot model nontransitive relationships (Balduzzi et al., 2018). Elo predictions can be incorrect even on transitive games (Bertand et al., 2023; Shah and Wainwright, 2017). Its inability to model nontransitivity is problematic since real-world games have large portions of the strategy space that are "extremely non-transitive" (Czarnecki et al., 2020). In practice, this transitivity assump-




Figure 3 | Head-to-head win rates for agents in the pentathlon from Figure 1. Given these win rates, Elo assigns A and C the same rating.

tion is violated in Go agents (Tuyls et al., 2018) and in human play data in Chess (Sanjaya et al., 2022), the very game Elo was designed for.

Elo ratings can also be manipulated by cloned agents, which formally are agents that perform similarly (though not necessarily identically) to each other. This is illustrated in Figure 2. Denote r_A as player A's Elo rating and p_{AB} is the true probability (win rate) of agent A beating B. Suppose there are three agents with true win rates of $p_{AB} = 0.55$, $p_{BC} = 0.52$, and $p_{AC} = 0.9$. Let $\vec{e} = (p_{ii} - \hat{p}_{ii})_{(i,i)}$ be a vector of differences between true win rates (ground truth) and Elo's predictions, and the overall prediction error as $|\vec{e}|_{\infty} = \max_{i,j} |e_{ij}|$. Elo's prediction error can very quickly rise as clones are introduced. E.g. if there are 10 copies of *B*, then Elo predicts $r_A - r_C = 98$ and there is a significant error: $\hat{p}_{AC} = 0.631$ when the ground truth $p_{AC} = 0.9$.

The win rates for our pentathlon are shown in Figure 3, which illustrates another surprising situation for Elo. Suppose we use Elo to rank agents from the example in Figure 1, where every instance of x being ranked above y counts as a win for x and loss for y. In this example, despite agent C winning the majority of the time against both A and B, and A only beating one of the other agents, Elo assigns the same rating to C and A. In the appendix, we formally show that Elo's update rule leads to the same magnitude of the gradient components for r_A and r_C on all steps.

Game-Theoretic Invariant Evaluation

Balduzzi et al. (2018) use the Schur decomposition to separate the problem of agent comparison

²https://en.wikipedia.org/wiki/Elo_ rating_system#Use_outside_of_chess.

into cyclic and transitive components, proposing multi-dimensional Elo (mElo) and Nash averaging. In the Agent-vs-Task (AvT) setting, they use a matrix *S* with *m* rows (agents) and *n* columns (tasks) with values corresponding to scores (*e.g.*, *normalized* average reward) for each agent in each task. In the Agent-vs-Agent (AvA) setting (*e.g.*, Chess), both rows and columns are agents and payoffs are expected utility for each agent. Agents are ranked by their expected values against a maximum-entropy Nash equilibrium strategy of a two-player zero-sum game. mElo can model nontransitive relationships but can be manipulated by adding copies of agents (i.e. it is not clone-proof).

Nash averaging achieves clone-proofness for both agents and tasks due to properties of Nash equilibria. However, these properties allow partial support to be assigned to the task distribution, which we call *adversarial task selection*. As a result, agents may be assessed over just a few tasks despite a wealth of available data.

Balduzzi et al. (2018) argue that an evaluation method should also be invariant to redundant copies of tasks. This task invariance property is, however, highly constraining. We show some counter-intuitive effects arising from it in our empirical evaluation section. Furthermore, being invariant to copies of tasks means there is no mechanism to weight the importance of tasks, which is often be a useful feature. Thus, we do not address frameworks that are invariant in this sense.

Other game-theoretic solution concepts can be used in place of Nash equilibrium: for example, correlated equilibrium in the *n*-player general AvA setting (Marris et al., 2022). Jordan et al. propose an evaluation scheme for general RL agents (Jordan et al., 2020) using α -Rank (Omidshafiei et al., 2019) in a similar game between agents and tasks: again, this requires score normalization.

Voting as Evaluation of General Agents

We propose viewing the evaluation of AI agents through the lens of social choice. There is a natural mapping of evaluation problems into vot-



Figure 4 | (Left) The voter preference matrix N(x, y) shows the number of events (votes) in which the agent on row x is preferred to the agent on column y, for the example in Figure 1. (Right) The voter margin matrix whose entries are $M(x, y) = \delta(x, y) = N(x, y) - N(y, x)$.

ing schemes, and by carefully selecting appropriate voting schemes, evaluation procedures inherit properties that are desirable within the general evaluation context. We title this framework **Voting as Evaluation** (VasE), and provide a brief introduction to formal concepts in the following section. More technical details are provided in the appendix.

Social Choice Theory Basics

A **voting scheme** is defined as $\langle A, V, f \rangle$ where $A = \{a_1, \ldots, a_m\}$ is the set of **alternatives**, V = $\{v_1, \ldots, v_n\}$ is the set of **voters**, and *f* is the **vot**ing rule that determines how votes are aggregated. Voters have preferences over alternatives: $a_1 \succ_{v_i} a_2$ indicates voter v_i strictly prefers alternative a_1 over alternative a_2 , and $a_1 \geq_{v_i} a_2$ indicates the voter has a weak preference. These preferences induce (nonstrict) total orders over alternatives, which we denote by \mathcal{L} . A preference profile, $[\geq] \in \mathcal{L}^n$, is a vector specifying the preferences of each voter in V. It can be useful to summarize the preference profile in a voter preference matrix N or vote margin matrix M. The preference count $N(x, y), x, y \in A$ is the number of voters in $[\geq]$ that strictly prefer x to y. The vote margin is the difference in preference count: $\delta(x, y) = N(x, y) - N(y, x)$. Both N and M matrices for the pentathlon example are shown in Figure 4.

The central problem of social choice theory is

how to aggregate preferences of a population so as to reach some collective decision. A voting rule that determines the "winner" (a non-empty subset, possibly with ties), is a **social choice function** (SCF). A voting rule that returns an aggregate ranking over all the alternatives is a **social welfare function** (SWF). Much of the social choice literature focuses on understanding what properties different voting rules support.

The **Condorcet winner** formally defines a fairly intuitive concept: *A* is the (strong) Condorcet winner if the number of votes where *A* is ranked more highly than *B* is greater than vice versa for all other alternatives *B*. A weak Condorcet winner wins or ties in every head-to-head pairing. Formally, given a preference profile, $[\geq]$, a weak Condorcet winner is an alternative $a^* \in A$ such that $\forall a' \in A, \delta(a^*, a') \ge 0$. If the inequality is strict for all pairs except (a^*, a^*) then we call it a strong Condorcet winner. While many have argued that this definition captures the essence of the correct collective choice (de Condorcet, 1785), in practice many preference profiles have no Condorcet winner.

Condorcet consistent voting schemes are those that return a Condorcet winner when it exists, but differ on how they handle settings with no Condorcet winners. We compare four deterministic Condorcet methods: Kemeny-Young (Kemeny, 1959; Young and Levenglick, 1978), Copeland (Copeland, 1951) due to its efficiency, and ranked pairs (Tideman, 1987) and Schulze (Schulze, 2011) due to their cloneproofness. See the appendix for formal definitions.

Scoring rules define another class of voting rules. Scoring rules translate voter rankings to a score vector $\mathbf{w} = (w_1, \ldots, w_m)$ where $w_1 \ge w_2 \ge \ldots \ge w_m$ and $w_1 > w_m$. The overall score for each alternative is computed by summing across all associated scores. Alternatives are ranked by their scores with the "winning" alternative being the one with the highest score. Many familiar voting schemes belong to this class of voting rules, including plurality, Borda, and *k*-approval voting (Brandt et al., 2016).

All scoring rules satisfy a property called popu-

lation consistency (Smith, 1973; Young, 1975). This property requires that when two disjoint sets of voters agree on some winning alternative a^* , merging the populations does not change the result. Scoring rules are not, however, Condorcet consistent. More broadly, population consistency and Condorcet consistency are incompatible (Young and Levenglick, 1978) for all deterministic voting schemes. Thus anyone selecting a voting scheme to use must make an explicit decision as to which property they value.

Probabilistic Voting: Maximal Lotteries

Probabilistic social choice functions (PSCFs) (Endriss, 2017) have emerged to address these impossibility results. Given a preference profile, a PSCF returns a distribution over alternatives (a lottery). One particular PSCF is the maximal lottery (Fishburn, 1984; Kreweras, 1965). A maximal lottery, $p \in \Delta(A)$, is one that is (weakly) preferred to any other lottery: namely $p^T M q \ge$ $0, \forall q \in \Delta(A)$, where *M* is the voter margin matrix, $M_{x,y} = (\delta(x, y))_{x,y \in A}$. Equivalently, one can view *M* as the payoffs of a carefully constructed symmetric zero-sum margin game where the payoffs are win or loss magnitudes of different pairwise comparisons. The maximal lottery is, thus, the mixed maximin (or Nash equilibrium) solution to the game, and can be computed via linear programming.

Maximal lotteries (ML) exhibit a number of interesting properties. First, they require little structure to be placed on voters' preferences since M is computed solely using pair-wise comparisons.³ Second, it is Condorcet-consistent, in that alternatives in the support of the maximal lottery are the Condorcet winners. Furthermore, ML is population consistent and guarantees composition consistency (a stronger form of clone-proofness) (Brandl et al., 2016).

We propose an iterative version of the maximal lotteries depicted in Algorithm 1, which repeatedly removes winners and solves the margin subgames among the remaining agents. Iterative ML (IML) retains the strong properties of ML (Brandl

³In particular, it does not require asymmetry, completeness or even transitivity in the individual voters' preferences.

Α	Algorithm 1: Iterative Maximal Lotteries					
(I	(IML)					
]	Input: An initial set A_0 of alternatives					
(Dutput: A ranking of winner sets, <i>W</i> , and					
	their corresponding probability					
	distributions					
1	Let $W \leftarrow ()$ be an empty sequence					
2	for round $t \in \{0, 1, 2, \cdots, m-1\}$ do					
3	if $ A_t = 0$ then					
4	break					
5	$x_t \leftarrow \text{MaximalLotteries}(A_t)$					
6	$w_t \leftarrow \{a \in A_t : x_t(a) > 0\}$					
7	Append (x_t, w_t) to the end of <i>W</i>					
8	$A_{t+1} = A_t - w_t$					
9	Remove the winners w_t from all the					
	votes.					
10	return W					

and Brandt, 2020). Additionally, as shown in our evaluation, it can identify game-theoretic cycles among subsets of agents. Details about this iterative approach can be found in the appendix.

Voting-as-Evaluation (VasE)

We now present our Voting-as-Evaluation framework, which, we argue, provides a principled framework for general agent evaluation. In VasE, we define *A* to be the set of *agents* to be evaluated. *Voters* are different tasks or environments on which agents are being evaluated (AvT setting) or different interactions/games played (AvA setting).

We assume each voter has their own way of evaluating the performance of agents *given its context*. This can be in terms of accumulated reward if considering RL agents or performance according to some particular metric. Figure 1 provides an example where, for example, cycling is evaluated by speed, basketball is evaluated by number of baskets scored, and synchronized swimming is evaluated on a combination of technical merit and artistic expression. Given their individual evaluation context, voters either generate a ranking of agents or answer pair-wise comparison queries (i.e. is agent *a* better than agent *b*). We interpret this as the *preferences* of the voters. Impor-

tantly, we do not assume that cross-task or cross game/interaction comparisons are possible, nor that all voters are using comparable performance metrics. Finally, to compare agents across multiple tasks or domains we require an aggregator that takes the "preferences" of the different tasks and returns a collective decision. Voting rules do exactly this. Thus the evaluation problem reduces to the problem of selecting an appropriate voting rule where appropriateness is defined by what properties the evaluator wishes to support. We observe that several of the consistency properties from social choice can be interpreted as desirable evaluation-framework properties.

- **Condorcet consistency:** If an agent outperforms every other agent in terms of headto-head comparisons, Condorcet consistent voting schemes will identify this.
- **Population consistency:** When evaluating on subsets of tasks, population consistency guarantees that consensus on the subsets is conclusive.
- **Clone consistency:** The addition of near duplicates, either deliberately or arising from testing variations in architecture and parameterization, should not change the ranking.

Since much of social choice theory is axiomatic in nature, these properties (and others) are clearly defined, supporting interpretability (Peters et al., 2020; Procaccia, 2019). Furthermore, its is known when certain properties are incompatible. This forces the evaluator to clearly articulate the trade-offs made when selecting one voting scheme over another, supporting transparency in the evaluation process. Consider the pentathlon of Fig. 1, with corresponding N(x, y)and M(x, y) (Fig. 4). If the evaluator places great importance on Condorcet consistency, they must select a rule guaranteed to return Agent C as the best agent (the strong Condorcet winner). If, instead, the evaluator prefers population consistency, they should select a scoring rule like plurality or Borda, both of which return Agents A and C as (tied) top agents.

	App	Bor	Plu	STV	Сор	RPs	Kem	Sch	ML
Condorcet consistency					\checkmark	\checkmark	\checkmark	\checkmark	\checkmark
Clone consistency	\checkmark					\checkmark		\checkmark	\checkmark
Population consistency	\checkmark	\checkmark	\checkmark						\checkmark
Complexity	т	m	т	m^2	m ²	<i>m</i> ³	m!	m ³	poly (m^2)

Table 1 | Summary of properties of each voting method used in our evaluation. Note that the complexity of ML depends on that of the underlying equilibrium solver (Cohen et al., 2019)). In addition to the above, maximal lotteries also satisfies two additional properties (independence of irrelevant alternatives and agenda consistency). See appendix for details.

	А	В	С	D
1st	RAINBOW	RAINBOW	RAINBOW	RAINBOW
2nd	DIST-DQN	DIST-DQN	A3c	DIST-DQN
3rd	PRIO-DDQN	PRIO-DDQN	DIST-DQN	A3C
4th	A3C	DUEL	PRIO-DDQN	PRIO-DDQN
5th	DUEL	A3C	DUEL	DUEL
6th	DDQN	DDQN	DDQN	DDQN
7th	NOISY-DQN	NOISY-DQN	NOISY-DQN	NOISY-DQN
8th	DQN	DQN	DQN	DQN

Table 2 | Rankings found by VasE using A) Approval(k = 3), Kemeny-Young, IML, Ranked Pairs, and Schulze, B) Borda and Copeland, C) Plurality, and D) STV.

Empirical Evaluation

To evaluate VasE, we present results of several applications, which together illustrate desirable features of our methodology. Due to space limitations, full results (include associated scores for every ranking) are deferred to the Appendix. We use nine different voting schemes: four scoring methods (approval, Borda, plurality, Single Transferable Vote (STV)) (Brandt et al., 2016), four deterministic Condorcet methods (Copeland (Copeland, 1951), ranked pairs (Tideman, 1987), Kemeny-Young (Kemeny, 1959; Young and Levenglick, 1978), Schulze (Schulze, 2011)) and one probabilistic (Condorcet) method: maximal lotteries (Brandl et al., 2016; Fishburn, 1984). The properties guaranteed are summarized in Table 1.

General Reinforcement Learning Agents

We start with an application to the Arcade Learning Environment (ALE), using the mean performance of eight agents across 54 Atari games from (Hessel et al., 2017, Table 5). For VasE, each vote (preference ranking) is determined by decreasing order of score, for a total of 54 complete preference rankings, one for each game. The aggregate rankings (total orders over alternatives) for all nine voting methods are shown in Table 2. Note that all nine methods top-rank Rainbow, which is also the strong Condorcet winner.

Observation 1: ALE votes are unique. To our surprise, despite most agents being variants of DQN, every ordering of agents is unique across 54 tasks: there are no repeated votes. The histogram of unique votes is an easy way to quantify the diversity of the task set (with respect to a set of agents) with an $O(n^2)$ enumeration over all pairs of votes.

Observation 2: Only A3C changes relative ranks across the voting methods. This is evident from the VasE comparison, but is not be immediately obvious from inspection of (Hessel et al., 2017, Table 5) nor from the aggregate Elo ratings. This could be due to A3C being the only policy gradient (a fundamentally different category of RL algorithm than DQN and its variants) agent, but suggests further investigation is warranted. Also,

A3C has many first-place wins and so is ranked second by plurality and third by STV due to their placing large importance on first-place wins.

Observation 3: The alternate evaluation protocols return identical rankings. ALE is deterministic and so generating unique episodes for comparison requires explicit variation. Hessel et al consider two forms of this: initial periods of forced no-op actions, or taking initial actions taken from human players. Running VasE on the alternative evaluation protocol in (Hessel et al., 2017, Table 6) results in identical rankings across all nine voting methods. Thus, the different protocols had insignificant impact on the final assessments.

Observation 4: Nash averaging requires score normalization. Recall that Nash averaging (Balduzzi et al., 2018) finds an equilibrium in the Agent-versus-Task matrix induced by (Hessel et al., 2017, Table 5). If we were to run Nash averaging on raw scores, the task player would place full weight on one task (skiing) in its equilibrium because the rewards are large and negative (< -10000) and outside the bounds of the other games, across all agents. To avoid this pathology, our Nash Averaging implementation

first normalizes scores into the range of [0, 1] as in previous work (Balduzzi et al., 2018). In contrast, VasE compares agents' raw scores only within the same task, without requiring normalization between different tasks.

Observation 5: Nash averaging has adversarial task selection in ALE. With normalization, Nash averaging finds a four-way tie for first place {A3c, DIST-DQN, RAINBOW, DUEL}, with a task distribution of (assault: 0.36, boxing: 0.29, breakout: 0.26, venture: 0.09). The consequence of the approach is clear: first, Nash equilibrium guarantees that the top agents in the support have the same value (0.3891 in this case) making them indistinguishable under this metric. Second, due to adversarial task selection, only four (7.4% of) tasks are used to rank agents.

Observation 6: Nash averaging can be sensitive to the set of agents. Finally, we augment the data by adding scores of a random agent and human performance reported in (Badia et al., 2020, Section H.4), resulting in 10 agents over 54 games. In VasE, the relative ranks of the original 8 agents remain almost identical to their counterparts in Table 2. Rainbow remains a strong Condorcet winner, random is consistently bottom-ranked, and the position of human differs by voting method. Nash averaging now finds a different four-way tie: {A3c, DIST-DQN, RAINBOW, HUMAN} (all with value 0.4253) and a significantly different task distribution: (asterix: 0.032, breakout: 0.39, gopher: 0.17, montezuma_revenge: 0.40). Note that again Nash averaging aggressively filters 93.6% of the data and shares only one task in its support with the 8-agent dataset.

In the appendix, we show results on α -Rank in the ALE, compute the Elo scores for agents (Rainbow is the top-ranked agent by Elo) and apply VasE on general adaptive RL agents (Team et al., 2023).

Ranking Large Language Models as Agents

In this section, we apply VasE to the AgentBench benchmark evaluation data (Liu et al., 2023), that assesses the performance of 25 large language models (LLMs), including both APIs and opensource models, as agents across 8 different environments (tasks). The tasks involve operating system and database use, using a knowledge graph to answer questions, playing a digital card game, solving lateral thinking puzzles, house-holding, and browsing and shopping on the web. As in the ALE, VasE builds a preference profile from the raw task scores from (Liu et al., 2023, Table 3), without any form of score normalization. In contrast, AgentBench defines an overall score by weighting each agent's task score by the reciprocal of the task's mean score.

VasE rankings are mostly consistent with the AgentBench overall ranking: gpt-4 is the strong Condorcet winner, which is also first place in all the VasE rankings.

Observation 7: Iterative Maximal Lotteries (IML) can identify qualitatively different classes of agents. Table 3 shows the top 8 ranks and scores by iterative maximal lotteries on AgentBench. The scoring system for IML is interpretable as "levels", where each level corresponds to a set of agents

Rank	Agent	Score
1	gpt-4	17.00
2	claude	16.00
3	gpt-3.5-turbo	15.00
4	text-davinci-003	14.00
5	claude-instant	13.00
6	text-davinci-002	12.00
7	chatglm	10.56
8	t-bison-001	10.43

Table 3 | Top 8 ranked agents using iterative maximal lotteries. Integer score differences between ranks represent Condorcet winners in the margin subgame that was solved. Each agent in the top six was chosen with probability 1, whereas the bottom two were part of Nash equilibrium distribution assigning probability 0.56 to chatglm and 0.43 to t-bison-001.

that were selected as winners in the margin subgame at each iteration, and an agent's score is equal to $l-1+w_a$, where l is the level they achieved and $w_{t,a}$ is the probability they were assigned in the equilibrium of the game. For example, in the first iteration (out of 17 total) gpt-4 is the only winner (selected with probability 1), so it achieves a score of 17 - 1 + 1 = 17.

This scoring system conveys qualitative information about results of each iteration. The top six agents have integer scores: they were Condorcet winners of their respective margin subgames. In other words, the higher-level agents dominate the lower, in terms of performing better on a greater number of tasks. Looking only at the raw data in (Liu et al., 2023, Table 3), text-davinci-002 and t-bison-001 seem similar: their overall scores differ only by 0.07 and the scores across tasks are comparable. However, Table 3 above shows these agents perform at different levels. This difference is confirmed by looking at the margin subgame between the bottom three agents: text-davinci-002 is a Condorcet winner of the margin subgame which excludes the top six agents. Though neither Elo nor the aggregate score make it obvious, text-davinci-002 is a stronger performer on these tasks than text-bison-001 and chatglm.

In the appendix, we show another gametheoretic cycle found by IML. It also provides example visualizations for greater interpretability on the Chatbot Arena (Zheng et al., 2023) dataset.

Observation 8: Nash averaging suffers from adversarial task selection in AgentBench. We run Nash averaging on AgentBench in a similar way as on ALE, by normalizing the scores into [0,1]. As in ALE, Nash averaging finds a lowsupport equilibrium, with a task distribution of (HouseHolding: 0.135, WebShopping: 0.865). Again, a large portion ($\frac{6}{8} = 75\%$) of the tasks are not used in ranking the agents. The task player places most weight on the only task that gpt-4 does not place 1st. Under this distribution, there is a two-way tie for top rank between gpt-4 and gpt-3.5-turbo with a Nash average value of 0.889.

See the appendix for further results using VasE for LLM evaluation. There, we apply VasE to a prompt engineering for text summarization task and to the Holistic Evaluation of Language Models (HELM) (Liang et al., 2022) data.

Ranking Human Players in Diplomacy

In the AvA setting evaluation systems should be predictive of individual games/matchups. In this subsection, we measure how well voting methods can predict the rank of human players in the game of Diplomacy, a 7-player mixed-motive game. Diplomacy involves negotiation, as well as the repeated formation and betrayal of alliances, in an effort to be the first to control 18 supply centers. VasE can be applied here by interpreting each 7agent evaluation task (one game played between 7 players) as a ranking over those 7 agents (i.e., a single vote). The simplest case is to rank agents by their final outcomes (the terminal payoffs) over each game. We use a dataset of anonymized human games played on webDiplomacy (web-Diplomacy Development Team) between 2008 and 2019. This dataset contains n = 31049 sevenplayer games played by m = 52958 players, and has also been used to train and evaluate Diplomacy RL agents (Anthony et al., 2020; , FAIR; Gray et al., 2020; Paquette et al., 2019). Note




Figure 5 | Average ranking error across 50 splits. Error bars represent 95% confidence intervals.

that a payoff tensor of the meta-game would require $7.52958^7 \approx 10^{32}$ entries, which is infeasible to solve using Nash averaging, α -rank, or correlated equilibrium based ranking. Even the much smaller game solved by maximal lotteries would have $52958^2 \approx 2.8$ million entries.

We run VasE on this dataset and compare it to Elo (a slight variant of which is used by webDiplomacy (Anthony, 2023)). The number of supply centers at the end of the game determines the ordering of players for that game. In VasE, this leads to a number of voters equal to the number of games in the dataset. In Elo, each end-of-game rank contributes $\binom{7}{2} = 21$ head-to-head match outcomes between players (*i*, *j*), with a win for *i* over *j* represented as player *i* achieving more supply centers than player *j*.

Given a set of games G, an evaluation system returns a ranking, R(G), over the agents. We compare this evaluation ranking to the actual agent-ranking for some specific game instance, which we denote by g. This allows us to infer how accurate our methods are in capturing the true agent-ranking. To this end, we use the Kendall-tau metric, $K_d(R(G), g)$, which counts the number of pairwise disagreements between two rankings, where the smaller the distance the more similar two rankings are (Kendall, 1938). We randomly generate 50 train/test splits, $(\mathcal{D}_R, \mathcal{D}_T)$, each with $|\mathcal{D}_R| = 28049$ and $|\mathcal{D}_T| =$ 3000. Each evaluation computes a player rank $R(\mathcal{D}_R)$ using \mathcal{D}_R , and incurs an average test error per game ErrorPerGAME($\mathcal{D}_T, R(\mathcal{D}_R)$) =

 $\frac{1}{|\mathcal{D}_T|} \sum_{g \in \mathcal{D}_T} K_d(R(\mathcal{D}_R), g).$ Results are shown in Fig. 5.

Observation 9: Some voting methods generalize better than Elo on outcome prediction in Diplomacy. Of the voting methods, we observe that approval voting with k = 3 and k = 2 and Copeland have significantly lower error than Elo. Plurality has slightly lower error (not significant), and Borda significantly higher. Copeland (the only Condorcet method) performed best: this is interesting, as Copeland bases its score directly on pairwise comparisons in the same way as Elo does in this 7-player game. Unlike Elo, Copeland scores are free from satisfying head-to-head win prediction semantics. This freedom might be why Copeland provides better generality than Elo in this complex 7-player negotiation task.

Conclusion and Future Work

In a recent paper "Rethink reporting of evaluation results in AI", the authors proposed guidelines for robust evaluation practices, the first of which included the statement "Aggregation decisions should be clearly explained, and analyses conducted to explore system performance should be described" (Burnell et al., 2023). Our framework, Voting-as-Evaluation (VasE), does precisely this. By leveraging key insights from social choice theory and adapting them for the general-agent evaluation problem, we provide explainable generalpurpose evaluation schemes (Peters et al., 2020; Procaccia, 2019). Through extensive experiments across multiple domains we illustrated the flexibility of our approach, and showed how VasE addresses challenges that alternative evaluation schemes (Elo and Nash Averaging) encounter. We observed that: data from evaluation problems is rich, as illustrated by the diversity of agent rankings across tasks; that game-theoretic approaches to evaluation place constraints that may lead to counter-intuitive findings, such as often using only a small subset of the evaluation data; that VasE provides a principled way of doing general evaluation using diverse, possibly noncomparable metrics across many scenarios; and that VasE naturally extends to the AvA setting, and can generalize better when predicting human per-game player rankings in a seven-player game than a standard rating system (Elo).

The flexibility of VasE is one of its strengths. The evaluator has a choice of voting rules at their disposal, each with well defined properties and tradeoffs. Thus, the evaluator, by selecting one rule over another, is clearly communicating the properties they deem to be important. While we intentionally leave this choice to the evaluator, in our opinion maximal lotteries are particularly well suited for evaluation problems. Maximal lotteries exhibits many of the properties we deem to be important, is computationally tractable, requires only pairwise comparisons, and the probabilistic nature of the scheme allows for nuanced interpretations of results that are critical when comparing agents and systems.

We identify directions for future work. Recent research on robust voting may provide methods to capture and represent uncertainty in the evaluation process (Boehmer et al., 2022), particularly when agent-performance is stochastic or sensitive to parameterizations. VasE explicitly uses only rankings or pairwise comparisons, ignoring cardinal information such as scores or rewards which may contain useful signals. Research on distortion (e.g., (Anshelevich et al., 2021)) may provide insights as to how to enrich VasE findings. More broadly, we believe the general-agent evaluation problem serves as a bridge between different research communities and facilitates sharing sharing problems, data, and methodologies, for the betterment of all.

References

- E. Anshelevich, A. Filos-Ratsikas, N. Shah, and A. A. Voudouris. Distortion in social choice problems: The first 15 years and beyond. In Z.-H. Zhou, editor, *Proceedings of the Thirtieth International Joint Conference on Artificial Intelligence, IJCAI-21*, pages 4294–4301. International Joint Conferences on Artificial Intelligence Organization, 8 2021. doi: 10.24963/ ijcai.2021/589. URL https://doi.org/10. 24963/ijcai.2021/589. Survey Track.
- T. Anthony. Ghost ratings, 2023. https://

webdiplomacy.net/ghostRatings.php. Retrieved April 2023.

- T. Anthony, T. Eccles, A. Tacchetti, J. Kramár, I. Gemp, T. Hudson, N. Porcel, M. Lanctot, J. Perolat, R. Everett, S. Singh, T. Graepel, and Y. Bachrach. Learning to play no-press diplomacy with best response policy iteration. In H. Larochelle, M. Ranzato, R. Hadsell, M. Balcan, and H. Lin, editors, *Advances in Neural Information Processing Systems*, volume 33, pages 17987–18003. Curran Associates, Inc., 2020.
- A. P. Badia, B. Piot, S. Kapturowski, P. Sprechmann, A. Vitvitskyi, Z. D. Guo, and C. Blundell. Agent57: Outperforming the Atari human benchmark. In H. D. III and A. Singh, editors, *Proceedings of the 37th International Conference on Machine Learning*, volume 119 of *Proceedings of Machine Learning Research*, pages 507–517. PMLR, 13–18 Jul 2020. URL https://proceedings.mlr. press/v119/badia20a.html.
- D. Balduzzi, K. Tuyls, J. Perolat, and T. Graepel. Re-evaluating evaluation. In S. Bengio, H. Wallach, H. Larochelle, K. Grauman, N. Cesa-Bianchi, and R. Garnett, editors, *Advances in Neural Information Processing Systems*, volume 31. Curran Associates, Inc., 2018.
- M. G. Bellemare, Y. Naddaf, J. Veness, and M. Bowling. The arcade learning environment: An evaluation platform for general agents. *Journal of Artificial Intelligence Research*, 47:253– 279, jun 2013.
- Q. Bertand, W. M. Czarnecki, and G. Gidel. On the limitations of the elo: Real-world games are not transitive not additive. *arXiv preprint arXiv:2206.12301*, 2023.
- N. Boehmer, R. Bredereck, P. Faliszewski, and R. Niedermeier. A quantitative and qualitative analysis of the robustness of (real-world) election winners. In *Equity and Access in Algorithms, Mechanisms, and Optimization*, EAAMO '22, New York, NY, USA, 2022. Association for Computing Machinery. ISBN 9781450394772. doi: 10.1145/3551624.3555292. URL https: //doi.org/10.1145/3551624.3555292.

- F. Brandl and F. Brandt. Arrovian aggregation of convex preferences. *Econometrica*, 88(2): 799—-844, 2020.
- F. Brandl, F. Brandt, and H. G. Seedig. Consistent probabilistic social choice. *Econometrica*, 84 (5):1839–1880, 2016.
- F. Brandt. Rolling the dice: Recent results in probabilistic social choice. In U. Endriss, editor, *Trends in Computational Social Choice*, chapter 1. AI Access, 2017.
- F. Brandt, V. Conitzer, U. Endriss, J. Lang, and A. D. Procaccia, editors. *Handbook of Computational Social Choice*. Cambridge University Press, 2016.
- R. Burnell, W. Schellaert, J. Burden, T. D. Ullman,
 F. Martinez-Plumed, J. B. Tenenbaum, D. Rutar,
 L. G. Cheke, J. Sohl-Dickstein, M. Mitchell, et al.
 Rethink reporting of evaluation results in AI.
 Science, 380(6641):136–138, 2023.
- M. B. Cohen, Y. T. Lee, and Z. Song. Solving linear programs in the current matrix multiplication time. In *Proceedings of the 51st Annual ACM Symposium on the Theory of Computing*, 2019.
- A. H. Copeland. A 'reasonable' social welfare function, 1951. Seminar on Mathematics in Social Sciences, University of Michigan (unpublished).
- R. Coulom. Bayesian Elo rating, 2005. https: //www.remi-coulom.fr/Bayesian-Elo.
- W. M. Czarnecki, G. Gidel, B. Tracey, K. Tuyls, S. Omidshafiei, D. Balduzzi, and M. Jaderberg. Real world games look like spinning tops. In H. Larochelle, M. Ranzato, R. Hadsell, M. Balcan, and H. Lin, editors, *Advances in Neural Information Processing Systems*, volume 33, pages 17443–17454. Curran Associates, Inc., 2020.
- M. de Condorcet. Essai sur l'application de l'analyse à la probabilité des décisions rendues à la pluralité des voix, 1785.
- A. E. Elo. *The Ratings of Chess Players, Past and Present*. Arco Publishing, Inc., 2nd edition, 1978.

- U. Endriss. *Trends in Computational Social Choice*. AI Access, 2017. ISBN 1326912097.
- M. F. A. R. D. T. (FAIR)[†], A. Bakhtin, N. Brown,
 E. Dinan, G. Farina, C. Flaherty, D. Fried,
 A. Goff, J. Gray, H. Hu, A. P. Jacob, M. Komeili,
 K. Konath, M. Kwon, A. Lerer, M. Lewis,
 A. H. Miller, S. Mitts, A. Renduchintala,
 S. Roller, D. Rowe, W. Shi, J. Spisak, A. Wei,
 D. Wu, H. Zhang, and M. Zijlstra. Humanlevel play in the game of Diplomacy by combining language models with strategic reasoning. *Science*, 378(6624):1067–1074,
 2022. doi: 10.1126/science.ade9097. URL https://www.science.org/doi/abs/10.
 1126/science.ade9097.
- P. C. Fishburn. Probabilistic social choice based on simple voting comparisons. *Review of Economic Studies*, 51(4):683–692, 1984.
- R. Freeman, M. Brill, and V. Conitzer. General tiebreaking schemes for computational social choice. In Proceedings of the 2015 International Conference on Autonomous Agents and Multiagent Systems, AAMAS '15, page 1401–1409, Richland, SC, 2015. International Foundation for Autonomous Agents and Multiagent Systems. ISBN 9781450334136.
- J. Gray, A. Lerer, A. Bakhtin, and N. Brown. Human-level performance in no-press diplomacy via equilibrium search. *CoRR*, abs/2010.02923, 2020. URL https://arxiv.org/abs/2010.02923.
- R. Herbrich, T. Minka, and T. Graepel. Trueskill™: A Bayesian skill rating system. In B. Schölkopf, J. Platt, and T. Hoffman, editors, *Advances in Neural Information Processing Systems*, volume 19. MIT Press, 2006.
- M. Hessel, J. Modayil, H. van Hasselt, T. Schaul, G. Ostrovski, W. Dabney, D. Horgan, B. Piot, M. G. Azar, and D. Silver. Rainbow: Combining improvements in deep reinforcement learning. *CoRR*, abs/1710.02298, 2017. URL http://arxiv.org/abs/1710.02298.
- S. Jordan, Y. Chandak, D. Cohen, M. Zhang, and P. Thomas. Evaluating the performance of reinforcement learning algorithms. In H. D. III

and A. Singh, editors, Proceedings of the 37th International Conference on Machine Learning, volume 119 of Proceedings of Machine Learning Research, pages 4962–4973. PMLR, 13–18 Jul 2020. URL https://proceedings.mlr. press/v119/jordan20a.html.

- J. Kemeny. Mathematics without numbers. *Daedalus*, 88(4):577–591, 1959.
- M. Kendall. A new measure of rank correlation. *Biometrika*, 30(1/2):81–89, 1938.
- G. Kreweras. Aggregation of preference orderings. In Mathematics and Social Sciences I: Proceedings of the seminars of Menthon-Saint-Bernard, France (1–27 July 1960) and of Gösing, Austria (3–27 July 1962), pages 73–79, 1965.
- M. Lanctot, E. Lockhart, J.-B. Lespiau, V. Zambaldi, S. Upadhyay, J. Pérolat, S. Srinivasan, F. Timbers, K. Tuyls, S. Omidshafiei, D. Hennes, D. Morrill, P. Muller, T. Ewalds, R. Faulkner, J. Kramár, B. D. Vylder, B. Saeta, J. Bradbury, D. Ding, S. Borgeaud, M. Lai, J. Schrittwieser, T. Anthony, E. Hughes, I. Danihelka, and J. Ryan-Davis. OpenSpiel: A framework for reinforcement learning in games. *CoRR*, abs/1908.09453, 2019. URL http://arxiv.org/abs/1908.09453.
- P. Liang, R. Bommasani, T. Lee, D. Tsipras, D. Soylu, M. Yasunaga, Y. Zhang, D. Narayanan, Y. Wu, A. Kumar, B. Newman, B. Yuan, B. Yan, C. Zhang, C. Cosgrove, C. D. Manning, C. Ré, D. Acosta-Navas, D. A. Hudson, E. Zelikman, E. Durmus, F. Ladhak, F. Rong, H. Ren, H. Yao, J. Wang, K. Santhanam, L. Orr, L. Zheng, M. Yuksekgonul, M. Suzgun, N. Kim, N. Guha, N. Chatterji, O. Khattab, P. Henderson, Q. Huang, R. Chi, S. M. Xie, S. Santurkar, S. Ganguli, T. Hashimoto, T. Icard, T. Zhang, V. Chaudhary, W. Wang, X. Li, Y. Mai, Y. Zhang, and Y. Koreeda. Holistic evaluation of language models. CoRR, abs/2211.09110, 2022. See latest results at: https://crfm.stanford. edu/helm/latest/.
- X. Liu, H. Yu, H. Zhang, Y. Xu, X. Lei, H. Lai, Y. Gu,H. Ding, K. Men, K. Yang, S. Zhang, X. Deng,A. Zeng, Z. Du, C. Zhang, S. Shen, T. Zhang,

Y. Su, H. Sun, M. Huang, Y. Dong, and J. Tang. Agentbench: Evaluating llms as agents, 2023.

- LMSysOrg. Chatbot arena conversation dataset release, 2023. See https://lmsys.org/ blog/2023-07-20-dataset/. Accessed August 14th, 2023.
- M. C. Machado, M. G. Bellemare, E. Talvitie, J. Veness, M. J. Hausknecht, and M. Bowling. Revisiting the arcade learning environment: Evaluation protocols and open problems for general agents. *Journal of Artificial Intelligence Research*, 61:523–562, 2018.
- L. Marris, M. Lanctot, I. Gemp, S. Omidshafiei, S. McAleer, J. Connor, K. Tuyls, and T. Graepel. Game theoretic rating in *n*-player generalsum games with equilibria. *arXiv preprint arXiv:2210.02205*, 2022.
- S. Omidshafiei, C. Papadimitriou, G. Piliouras, K. Tuyls, M. Rowland, J.-B. Lespiau, W. M. Czarnecki, M. Lanctot, J. Perolat, and R. Munos. *α*-rank: Multi-agent evaluation by evolution. *Scientific Reports*, 9(1):9937, 2019.
- P. Paquette, Y. Lu, S. S. Bocco, M. Smith, S. O.-G., J. K. Kummerfeld, J. Pineau, S. Singh, and A. C. Courville. No-press Diplomacy: Modeling multi-agent gameplay. In H. Wallach, H. Larochelle, A. Beygelzimer, F. d'Alché-Buc, E. Fox, and R. Garnett, editors, *Advances in Neural Information Processing Systems*, volume 32. Curran Associates, Inc., 2019.
- D. Peters, A. D. Procaccia, A. Psomas, and Z. Zhou. Explainable voting. *Advances in Neural Information Processing Systems*, 33:1525–1534, 2020.
- A. D. Procaccia. Axioms should explain solutions. The Future of Economic Design: The Continuing Development of a Field as Envisioned by Its Researchers, pages 195–199, 2019.
- K. H. Rosen. *Discrete Mathematics and Its Applications*. Addison Wesley, 5th edition, 2003.
- R. Sanjaya, J. Wang, and Y. Yang. Measuring the non-transitivity in chess. *Algorithms*, 15 (5), 2022. ISSN 1999-4893. doi: 10.3390/ a15050152. URL https://www.mdpi.com/ 1999-4893/15/5/152.

- M. Schulze. A new monotonic, cloneindependent, reversal symmetric, and Condorcet-consistent single-winner election method. *Social Choice and Welfare*, 36(2): 267–303, 2011.
- A. K. Sen. Choice functions and revealed preference. *Review of Economic Studies*, 38(3):307–317, 1971.
- A. K. Sen. Social choice theory: A re-examination. *Econometrica*, 45(1):53–89, 1977.
- N. B. Shah and M. J. Wainwright. Simple, robust and optimal ranking from pairwise comparisons. 18(1):7246–7283, 2017.
- J. Smith. Aggregation of preferences with variable electorate. *Econometrica*, 41(6):1027–1041, 1973.
- A. A. Team, J. Bauer, K. Baumli, S. Baveja, F. Behbahani, A. Bhoopchand, N. Bradley-Schmieg, M. Chang, N. Clay, A. Collister, V. Dasagi, L. Gonzalez, K. Gregor, E. Hughes, S. Kashem, M. Loks-Thompson, H. Openshaw, J. Parker-Holder, S. Pathak, N. Perez-Nieves, N. Rakicevic, T. Rocktäschel, Y. Schroecker, J. Sygnowski, K. Tuyls, S. York, A. Zacherl, and L. Zhang. Human-timescale adaptation in an open-ended task space. *CoRR*, abs/2301.07608, 2023. URL https://arxiv.org/abs/2301.07608. Accepted to ICML 2023.
- O. Team, A. Stooke, A. Mahajan, C. Barros, C. Deck, J. Bauer, J. Sygnowski, M. Trebacz, M. Jaderberg, M. Mathieu, N. McAleese, N. Bradley-Schmieg, N. Wong, N. Porcel, R. Raileanu, S. Hughes-Fitt, V. Dalibard, and W. M. Czarnecki. Open-ended learning leads to generally capable agents. *CoRR*, abs/2107.12808, 2021. URL https://arxiv.org/abs/2107.12808.
- N. Tideman. Independence of clones as a criterion for voting rules. *Social Choice and Welfare*, 4 (3):185–206, 1987.
- K. Tuyls, J. Perolat, M. Lanctot, J. Z. Leibo, and T. Graepel. A generalized method for empirical game theoretic analysis. In *Proceedings of the International Conference on Autonomous Agents and Multiagent Systems (AAMAS)*, 2018.

- webDiplomacy Development Team. webdiplomacy. https://webdiplomacy.net/. Accessed April 2023.
- H. P. Young. Social choice scoring functions. SIAM Journal on Applied Mathematics, 28(4):824– 838, 1975.
- H. P. Young and A. Levenglick. A consistent extension of Condorcet's election principle. *SIAM Journal of Applied Mathematics*, 35(2):285–300, 1978.
- L. Zheng, W.-L. Chiang, Y. Sheng, S. Zhuang, Z. Wu, Y. Zhuang, Z. Lin, Z. Li, D. Li, E. P. Xing, H. Zhang, J. E. Gonzalez, and I. Stoica. Judging llm-as-a-judge with mt-bench and chatbot arena, 2023. See also https: //lmsys.org/blog/2023-05-03-arena/ and https://huggingface.co/spaces/ lmsys/chatbot-arena-leaderboard. Accessed August 13th, 2023.

Nash Averaging

Lemma 1 (Symmetric MENE). In a two-player, symmetric, zero-sum game, the maximum entropy Nash equilibrium (MENE) results in unique and equal mixed strategies for both players.

Proof. Let an NE be the tuple (x_1, x_2) in a two-player zero-sum game. If there is a second NE, (x'_1, x'_2) , any mixture over x_1 and x'_1 , or x_2 and x'_2 is also an NE (convexity). Furthermore, (x_1, x'_2) and (x'_1, x_2) are also an NEs (interchangeable). Therefore the maximum of any strictly concave function will select uniquely from the set of Nash equilibria. Maximum entropy therefore performs equilibrium selection uniquely. If the game is symmetric, $\{x_1, x'_1, ...\} = \{x_2, x'_2, ...\}$, both players have the same components of the NE. Therefore, the MENE of symmetric, two-player, zero-sum games has the property that $x_1 = x_2$.

Lemma 2 (Entropy of Product of Marginals). When $x_i \ge 0$, $x_j \ge 0$, $\sum_i x_i = 1$ and $\sum_j y_j = 1$,

$$-\sum_{ij} x_i y_j \ln\left(x_i y_j\right) = -\sum_i x_i \ln\left(x_j\right) - \sum_j y_j \ln\left(y_j\right).$$
(1)

The Nash averaging work (Balduzzi et al., 2018) formulates the AvT problem (Section D) as a symmetric, two-player, zero-sum *double game*. A double game has two games within it, and each player, $p = \{1, 2\}$, has two "subplayers", $\{A, B\}$, that each control a mixed strategy, $\{x_p^A, x_p^B\}$. There is a single asymmetric score matrix *S*. This is an unusual formulation, and was presented this way to make the conditions compute Multidimensional Elo (Balduzzi et al., 2018) clearer. However, when computing the Nash average, there is an equivalent *single game* formulation that is simpler to reason about.

Theorem 1 (Nash Average AvT Equivalence).

$$\arg_{x_{1}^{A}, x_{2}^{A}} \min_{x_{1}^{A}, x_{1}^{B}} \max_{x_{2}^{A}, x_{2}^{B}} \begin{bmatrix} x_{1}^{A} \\ x_{1}^{B} \end{bmatrix}^{T} \begin{bmatrix} 0 & S \\ -S^{T} & 0 \end{bmatrix} \begin{bmatrix} x_{2}^{A} \\ x_{2}^{B} \end{bmatrix}$$
(2)

 $= \arg\min_{x_1^A} \max_{x_2^B} (x_1^A)^T S x_2^B, \ where \ \mathbf{1}^T x_p^A = 1, \ \mathbf{1}^T x_p^B = 1, \ x_p^A \ge 0 \ and \ x_p^B \ge 0.$

Proof. First, note that the optimization can be decomposed into the sum of two separate optimizations.

$$\min_{x_1^A, x_1^B} \max_{x_2^A, x_2^B} \begin{bmatrix} x_1^A \\ x_1^B \end{bmatrix}^T \begin{bmatrix} 0 & S \\ -S^T & 0 \end{bmatrix} \begin{bmatrix} x_2^A \\ x_2^B \end{bmatrix}$$
(3)

$$= \left(\min_{x_1^A} \max_{x_2^B} (x_1^A)^T S x_2^B \right) + \left(\min_{x_1^B} \max_{x_2^A} (x_1^B)^T (-S^T) x_2^A \right)$$
(4)

$$= \left(\min_{x_1^A} \max_{x_2^B} (x_1^A)^T S x_2^B \right) - \left(\min_{x_2^A} \max_{x_1^B} (x_2^A)^T S x_1^B \right) = 0$$
(5)

As expected, this evaluates to a game value of zero. By Lemma 1, we know that $x^A = x_1^A = x_2^A$ and $x^B = x_1^B = x_2^B$ when using the maximum entropy criterion. Therefore, in order to find the MENE of the double game, by Lemma 2 we only need to find the MENE of the two-player zero-sum asymmetric single game, where player 1 has payoffs *S*.

Elo Rating Analysis of Example in Figure 1

Recall that, when applying Elo to the example in Figure 1, every time x is preferred to y counts as a win for x and loss for y. This leads to the win rates depicted in Figure 3, or the following matrix:

$$\begin{bmatrix} 0.8 & 0.4 \\ 0.2 & 0.4 \\ 0.6 & 0.6 \end{bmatrix}$$

Suppose we start with initial parameters $r_A^0 = r_B^0 = r_C^0$. Each iteration *t*, Elo applies an update rule of the form:

$$r_x^{t+1} = r_x^t + \Delta_{r_x^t}$$

where $\Delta_{r_x^t}$ is the magnitude of the gradient of r_x^t , defined below.

Suppose agents *x* and *y* play a game *g* and *x* wins (achieving a score of 1) and y loses (achieving a score of 0). The contribution of the change in ratings from just this single game is (Elo, 1978):

$$\Delta_{Elo}(g, r_x, r_y, x, y) = K \cdot (S(g, x, y) - E(r_x, r_y)),$$

where *K* is a constant (usually 16 or 32), S(g, x, y) = 1 is the score achieved by agent *x* against *y* in game *g*, and $E(r_x, r_y)$ is the expected score according to the logistic model:

$$E(r_x, r_y) = \frac{1}{1 + e^{(r_y - r_x)/400}}.$$

Note that $E(r_x, r_y) = 1 - E(r_y, r_x)$.

If there were only one game played, between agent x and agent y, the rating r_x would increase by $\Delta(g, r_x, x, y)$ and r_y would decrease by $\Delta(g, r_x, x, y)$. Given a batch of head-to-head games \mathcal{G} , let $\mathcal{G}(x)$ be the games involving x. The gradient component of r_x is:

$$\Delta_{r_x^t} = \sum_{g \in \mathcal{G}(x)} \Delta(g, r_x, r_y, x, y) - \Delta(g, r_y, r_x, y, x).$$

For the game depicted in Figure 3, this leads to:

$$\begin{split} \Delta_{r_A^t} &= & 4K(1-E(r_A,r_B)) \\ &-1K(1-E(r_B,r_A)) \\ &+2K(1-E(r_A,r_C)) \\ &-3K(1-E(r_C,r_A)) \\ &= & 2K-4K\cdot E(r_A,r_B)+K\cdot E(r_B,r_A) \\ &-2K\cdot E(r_A,r_C)+3K\cdot E(r_C,r_A) \\ &= & 2K-4K\cdot E(r_A,r_B)+K(1-E(r_A,r_B)) \\ &-2K\cdot E(r_A,r_C)+3K(1-E(r_A,r_C)) \\ &= & 6K-5K\cdot E(r_A,r_B)-5K\cdot E(r_A,r_C), \end{split}$$

and

$$\begin{split} \Delta_{r_{C}^{t}} &= & 3K(1 - E(r_{C}, r_{A})) \\ &- 2K(1 - E(r_{A}, r_{C})) \\ &+ 3K(1 - E(r_{C}, r_{B})) \\ &- 2K(1 - E(r_{C}, r_{B})) \\ &= & 2K - 3K \cdot E(r_{C}, r_{A}) + 2K \cdot E(r_{A}, r_{C}) \\ &- 3K \cdot E(r_{C}, r_{B}) + 2K \cdot E(r_{B}, r_{C}) \\ &= & 2K - 3K \cdot E(r_{C}, r_{A}) + 2K(1 - E(r_{C}, r_{A})) \\ &- 3K \cdot E(r_{C}, r_{B}) + 2K(1 - E(r_{C}, r_{B})) \\ &= & 6K - 5K \cdot E(r_{C}, r_{A}) - 5K \cdot E(r_{C}, r_{B})). \end{split}$$

It is easy to see that at iteration t = 0, $\Delta_{r_A^t} = \Delta_{r_C^t}$ since all the ratings are equal and $E(r_A, r_B) = E(r_A, r_C) = E(r_C, r_A) = E(r_C, r_B) = \frac{1}{2}$. So r_A and r_C will be incremented by the same amount, and the rating of r_B will decrease by some amount. At iteration t > 0, it will still be the case that $E(r_A, r_C) = E(r_C, r_A) = \frac{1}{2}$ because $r_A^1 = r_C^1$. So the only difference in the terms of the gradients is that one has $E(r_A, r_B)$ and the other has $E(r_C, r_B)$. But, it is also the case that these are equal: $E(r_A, r_B) = E(r_C, r_B)$, since $r_C = r_A \Rightarrow r_C - r_B = r_A - r_B$. So the gradients $\Delta_{r_A^t} = \Delta_{r_C^t}$ for all $t \ge 0$.

Social Choice and Voting Methods

In this section we provide technical details pertaining to the key concepts we use from social choice theory. We also introduce the different voting rules used in the experiments, including our iterative version of maximum lotteries, which may be of independent interest.

Properties

We provide formal definitions of key concepts that were introduced in Section . Recall that a **voting scheme** is defined by $\langle A, V, f \rangle$ where *A* is the set of alternatives, *V* is the voting population, and *f* is a voting rule. Furthermore, voters' preferences are captured in a preference profile, [\geq], a vector specifying the preferences of each voter.

Given a specific preference profile, it is often useful to know how many voters prefer an alternative x over some other alternative y. Define

$$N(x, y) = |\{v \in V | x \succ_v y\}|$$

where N(x, x) = 0. Furthermore, define the **vote margin** between alternatives x and y as

$$\delta(x, y) = N(x, y) - N(y, x).$$

Definition 1 (Condorcet Winner (de Condorcet, 1785)). *Given a specific preference profile,* $[\geq]$ *, alternative a* \in *A is a (weak)* **Condorcet winner** *if* $\forall a' \in A$, $\delta(a, a') \geq 0$. *If* $\forall a' \in A, \delta(a, a') > 0$ *then a is a* **strong** *Condorcet winner*.

We observe that a Condorcet winner might not exist. Consider the following scenario with 3 voters with the following preferences over alternatives A: $\{a >_1 b >_1 c, b >_2 c >_2 a, c >_3 a >_3 b\}$. No single alternative is even a weak Condorcet winner due to the cycle in the aggregate preferences.

Definition 2 (Condorcet Consistency). A voting scheme is **Condorcet consistent** if it identifies Condorcet winners when they exist.⁴

Definition 3 (Population Consistency (Smith, 1973)). *Given two disjoint sets of voters,* $V, V', V \cap V' = \emptyset$ *with preference profiles* $[\geq]$ *and* $[\geq']$ *, a voting scheme is* **population consistent** *if*

$$f([\geq]) \cap f([\geq']) \neq \emptyset$$

then

$$f([\geq,\geq']) \subseteq f([\geq]) \cap f([\geq']).$$

If this holds with equality, then f is resolute.

Recall that the class of scoring rules are population consistent. A scoring rule is characterized by a score vector $\mathbf{w} = (w_1, \ldots, w_m)$ where $w_1 \ge w_2 \ge \ldots \ge w_m$ and $w_1 > w_m$. Each voter, given its ranking \ge_i , assigns score w_1 to its top-ranked alternative, w_2 to the second-ranked alternative, and so on. An overall score for each alternative is computed by summing across all weights assigned to it by the different agents in *V*, and the set of alternatives with the highest score is returned as the outcome of the social choice function, $f_{\mathbf{w}}(\cdot)$ (or a ranking where alternatives are ordered by their scores is returned). That is, given \mathbf{w} and $[\ge]$, where $w^j(a)$ is the score voter *j* assigns to alternative *a*,

$$SCF_{\mathbf{w}}([\geq]) = \arg \max_{a \in \mathcal{A}} \sum_{j \in V} w^{j}(a).$$

Observe that social welfare functions are also well-defined via scoring vectors, where in the aggregated ranking alternatives are ranked according to their weighted sums. Many familiar voting schemes belong to this class of voting rules, including plurality, Borda, and *k*-approval. For example, the Borda rule is defined by scoring vector $\mathbf{w} = (m-1, m-2, ..., 1, 0)$, Plurality corresponds to $\mathbf{w} = (1, 0, 0, ..., 0)$, while *k*-approval is captured by $\mathbf{w} = (1_1, ..., 1_k, 0, ..., 0)$, where the first *k* alternatives are deemed acceptable to the agent.

The next key property is **clone consistency**. Before introducing this property we must first introduce some terminology. Let *A* and *B* be sets of alternative such that $B \subseteq A$. Given $[\geq] B$ is a *component* of *A* if for all $a \in A \setminus B$ and $b, b' \in B$, $a \geq b$ if and only if $a \geq b'$. That is, *b* and *b'* are *clones* of each other since they have the same relationship to all alternatives not in *B*.

A voting rule is clone consistent if two conditions hold (Tideman, 1987):

- 1. If the voting rule returns a clone then it must also be the case that when any member of the clone set is removed and the voting rule is applied, then it still returns a clone.
- 2. If the voting rule returns an alternative *a* that is not in the clone set then it must be the case that the voting rule also returns *a* when any member of the clone set is removed from consideration.

Definition 4 (Clone consistency (Tideman, 1987)). Let $\langle A, V, f \rangle$ be a voting scheme, and let $[\geq]$ be the preferences of the voters over A. Let B be a set of clones under $[\geq]$. Furthermore, we use notation $[\geq]_{|_{C \subset A}}$ to mean the preferences of voters restricted to alternatives in $C \subset A$. Voting rule f is clone consistent if:

1. For any $x \in B \ B \cap f([\geq]) \neq \emptyset \Leftrightarrow B \setminus \{x\} \cap f([\geq]_{|A \setminus \{x\}}) \neq \emptyset$

2. For any $x \in B$ and $y \in A$ such that x is a clone but x is not a clone of y, $y \in f([\geq]) \Leftrightarrow y \in f([\geq]_{|A\setminus \{y\}})$

⁴By *identifies* we mean that either the set of alternatives returned by a social choice function contains Condorcet winners or the social welfare function, top-ranks Condorcet winners.

	App	Bor	Plu	STV	Сор	RPs	Kem	Sch	ML
Condorcet consistency					\checkmark	\checkmark	\checkmark	\checkmark	\checkmark
Clone consistency	\checkmark					\checkmark		\checkmark	\checkmark
Population consistency	\checkmark	\checkmark	\checkmark						\checkmark
Agenda consistency									\checkmark
Ind. Irrelevant Alt (IIA)	\checkmark								\checkmark
Complexity	m	т	m	m^2	<i>m</i> ²	<i>m</i> ³	m!	т ³	poly (m^2)

Table 4 | Summary of properties of each voting method used in our evaluation.

The final property of interest is **agenda consistency**, a strong property that is only supported by probabilistic social choice functions. First note that an agenda, $B \subseteq A$ is simply a subset of alternatives over which voters have preferences. As before let $[\geq]_{|_B}$ be voters preferences restricted to some agenda B, and recall that voting rule $f([\geq])$ returns a distribution $p \in \Delta(A)$.

Definition 5 (Agenda Consistency). *Given (probabilistic) voting scheme* $\langle A, V, f \rangle$ *with* $f([\geq]) = p$, *let* $B, C \subseteq A$ be two agendas such that $supp(p) \in B \cap C$. Then voting rule f is agenda consistent if

$$p \in f([\geq]_{|_{B}}) \cap f([\geq]_{|_{C}}) \Leftrightarrow p \in f([\geq_{|_{B \cup C}}]).$$

The careful reader will observe that this definition is the combination of Sen's γ -expansion and α -contraction properties (Sen, 1971, 1977).

Voting Methods used in the Applications

In this subsection, we describe each of the voting methods used in the applications of VasE in the paper. See Table 4 for a summary of the properties each method.

We use the pentathlon example depicted in Figure 1 as a simple recurring example. Recall the preference profile $[\geq] =$

Weight	Vote
1	A > B > C
1	A > C > B
2	C > A > B
1	A > B > C $A > C > B$ $C > A > B$ $B > C > A$

which leads to preference and margin matrices

	(0	4	2	١		(0	3	-1	١
N =	1	0	2	,	$M = N - N^T =$	-3	0	-1].
	3	3	0))	$M = N - N^T =$	1	1	0	/

Immediately we see that C is a Condorcet winner because all of the values in the last row of M are positive except the diagonal (which is always zero). So all of the Condorcet methods will top-rank C.

Approval Voting

In approval voting, the top *k* alternatives in each vote are given 1 points, and the score is determined by total points earned. When k = 2, *A* has a score of 1 + 1 + 2 = 4, *C* has a score of 1 + 2 + 1 = 4, and *B*

has a score of 1 + 1 = 2. Since approval voting is deterministic, a tie-breaker rule would be needed to determine a winner and totally-ordered social welfare function in this case.

Approval voting is a scoring method and hence population consistent. The score is computable by summing over the k top entries, so the complexity is linear in m.

Plurality (1-Approval)

Plurality defines an alternative's score as the number of votes in which it was chosen as the top rank. In the example, this leads to *A* with a score of 2, *B* with a score of 2, and *B* with a score of 1. Since plurality is a deterministic rule, a tie-breaker would have to be used to determine which of *A* or *C* is top-ranked in the social welfare function.

Borda

Borda will assign points to each alternative depending on their place in the vote $(m - 1, m - 2, m - 3, \dots, 0)$, and an alternative's score is their total points over all the votes. A scores $2 + 2 + 2 \cdot 1 = 6$, B scores 1 + 2 = 3, and C scores $1 + 2 \cdot 2 + 1 = 6$.

Single Transferable Vote (STV)

STV is a multi-winner method similar to plurality that attempts to approach proportional representation by re-assigning the interpretation of surplus votes.

Suppose the number of winners is determined to be k. The election proceeds in rounds. In each stage, there are a number of total votes (n) and number of remaining candidates (m). On each round, either a winner is added to the set of winners or a loser is added to the set of losers. The process stops if the number of winners is k.

The following takes place in each round. First, a "quota" is defined as the amount of votes that a winner must achieve to be declared a winner. Let *n* be the total number of votes and *k* be the number of winners. The Droop quota $\lfloor \frac{n}{k+1} + 1 \rfloor$ is used for this. If there are any alternatives that reach the quota, they are elected. Votes that were used to elect the winner (up to the quota) are removed, and any surplus votes (votes that go beyond the quota) are transferred to a lower-ranking alternative, *e.g.*, the top-ranked alternative is deleted from the vote and the next alternative in each surplus vote becomes the top-ranked alternative. If there are not enough votes to reach the quota for this round, the alternative with the lowest number of votes is eliminated, and all of the votes that top-ranked the losing alternative are transferred in a similar way.

We define a social welfare function to be the winners sorted by how early they were elected (earliest being ranked higher) followed by the losing alternatives sorted by how late they were eliminated (latest being ranked higher).

We also define a score for STV. Suppose the ranking is a concatenation of list W (winners) and L (losers). When there is a winner in a round, they are appended to W, when there is a loser in the round, they are prepended to L. The winners then have a base score of $2m - i_w$, where i_w is the winner's index in W. The losing alternatives have a base score of $m - i_l$, where i_l is the index of the loser in L. To these base values we concatenate ".X" where X is the number of votes they received in the round they won or were eliminated. Each scores are interpretable: if it exceeds m, they are a winner, and their position determines which round they won in; if the score is less than or equal to m then the alternative lost and the order determines which round they lost. The score encodes the number of votes as extra information after the period.

By default, if the number of winners is not specified, we choose $k = \min(1, \lfloor \frac{m}{2} \rfloor)$.

In the running example from Figure 1, STV ranks the alternatives C > A > B with scores (6.3, 3.2, 2.1) for alternatives *C*, *A*, and *B*, respectively.

Copeland

Copeland's method assigns a score to alternative $a \in A$ equal to the number of other candidates beaten head-to-head the half times the number of head-to-head ties. Define $A_{\neg a} = A - \{a\}$. Then, COPELAND($[\geq], a$) =

$$|\{b \in A_{\neg a} : \delta(a, b) > 0\}| + \frac{1}{2}|\{b \in A_{\neg a} : \delta(a, b) = 0\}|.$$

From the margin matrix *M*: the Copeland score of *A* is 1, *B* is 0, and *C* is 2. So the overall ranking is C > A > B.

Copeland is Condorcet consistent but not clone-proof. It only has to loop over each row in the margin matrix once to compute each alternative's score, so its complexity is $O(m^2)$.

Kemeny-Young

Let \vec{a} denote a specific sequence over all the alternatives in $a \in A$. Let a[i] denote the alternative in vote \vec{a} at position i (0 is the top (most preferred), and $|\vec{a}| - 1$ is the bottom (least preferred).

Let $Z(\vec{a}) = \{0, 1, \dots, |\vec{a}| - 1\}$, and $Z_{i,j}(\vec{a}) = \{(i, j) | (i, j) \in Z(\vec{a}) \times Z(\vec{a}), j > i\}$. Define the Kemeney value of a sequence as the sum of preference margins between every two pair of alternatives in \vec{a} where one (j) is ranked lower than the other (i) in \vec{a} :

KemenyValue
$$(\vec{a}) = \sum_{Z_{i,j}(\vec{a})} N(a[i], a[j]).$$

The Kemeny-Young voting method (Kemeny, 1959; Young, 1975) enumerates all possible |A|! permutations, choosing the one that maximizes the Kemeny value $\operatorname{argmax}_{\vec{a}} \operatorname{KEMENYVALUE}(\vec{a})$.

While Kemeny-Young is not a scoring method, we define a sensible score for each individual. Let $Z_{i=pos(a),j} = Z_{i,j} \cap \{(i, j) \in Z_{i,j} \text{ s.t. } i = pos(a)\}$, where pos(a) is alternative *a*'s position in \vec{a} . The score is then the sum of preference margins versus all the agents that rank lower than *a* it in the sequence KEMENYSCORE $(\vec{a}, a) =$

$$\begin{cases} 0 & \text{if } pos(a) = |\vec{a}| - 1; \\ \sum_{(i,j) \in Z_{pos(a),i}} N(a, a[j]) & \text{otherwise.} \end{cases}$$

Under these definitions, the Kemeny method attributes the following scores to the example from Figure 1:

Ranking	Kemeny Value
A > B > C	8
A > C > B	9
B > A > C	5
B > C > A	6
C > A > B	10
C > B > A	7

In this case, C > A > B is chosen, and the scores are (6, 4, 0) for C, A, and B, respectively.

Schulze

The Schulze method constructs a graph between candidates and weighs the alternative using the strength of paths between each alternative (Schulze, 2011).

Let *p* represent a path between two candidates $a, b \in A$, and pos(p, c) (defined similarly to Kemeny-Young, the position/index of alternative *c* in *p*). A valid path *p* between two candidates $a, b \in A$ is a sequence where

- the first alternative in the sequence (position 0) is *a*, and
- the last alternative in the sequence (position m 1) is b, and
- for every pair of alternatives (*i*, *j*) next to each other in the order (*pos*(*p*, *j*) = *pos*(*p*, *i*) + 1), the number of votes that prefer the agent at position *i* is higher than those who prefer the agent at position *j* : δ(*p*[*i*], *p*[*j*]) > 0.

Define $Z(p) = \{(0, 1), (1, 2), (2, 1), \dots, (m - 2, m - 1)\}$. The strength of the path as its weakest link:

PathStrength(p) =
$$\min_{i,j\in Z(p)} N(p[i], p[j]).$$

A *m*-by-*m* matrix *P* is constructed where each entry between two alternatives represents the strongest path between the two alternatives: $P(a, b) = \max_p \text{PATHSTRENGTH}(p)$. The Schulze method then assigns a social welfare function rank:

$$a > b \Leftrightarrow P(a, b) > P(b, a).$$

Similarly to Kemeny, scores are not defined in the case of Schulze, but we define one to be the sum of alternatives that are preferred an alternative *a* to all other alternatives *b* lower than *a* in the rating.

SchulzeScore(>, a) =
$$\sum_{a>b} N(a, b)$$
.

In the recurring example from Figure 1, the strongest paths are:

Path End Points	Path	Path Strength
$A \rightarrow B$	(A, B)	4
$C \rightarrow A$	(C, A)	3
$C \rightarrow B$	(C, B)	3

and a resulting matrix

$$P = \left(\begin{array}{rrrr} 0 & 4 & 0 \\ 0 & 0 & 0 \\ 3 & 3 & 0 \end{array}\right).$$

This leads to the ranking C > A > B, and scores (7, 4, 0) for alternatives C, A, and B, respectively.

The Schulze method is Condorcet consistent *and* clone consistent. The computation of the strongest paths between all candidates is similar to computing the widest path problem on a graph and can be done using dynamic programming; in particular, using a variants of the Floyd-Warshall algorithm (Rosen, 2003) in $O(m^3)$.

Ranked pairs (Tideman's method)

Ranked pairs (Tideman, 1987) is another method that is both Condorcet consistent and clone consistent.

Ranked pairs also builds a graph and then remove nodes from the graph to determine their final ranks. The first thing that is done is to sort all the pairs of alternatives (a, b) in decreasing order of strength of victory $\delta(a, b)$, choosing only one combination if $\delta(a, b) = 0$. Denote this sorted sequence (of length $\binom{m}{2}$) R_p .

Having R_p , a directed (acyclic) graph is constructed. Enumerating each entry $(a, b) \in R_p$ in decreasing order of preference strength, we add a directed edge $a \rightarrow b$ only if it would not create a (directed) cycle.

Once the graph is created, the source (a vertex with no incoming edges) corresponds to the winner. To determine a full ranking, we iteratively remove vertices (and all associated edges) that correspond to the sources (choosing arbitrarily if there are no remaining sources, *i.e.*, disconnected nodes).

Again, there is no scores defined for this method, but we define the score of an alternative to be the total sum of all edge weights ($\delta(a, b)$) over all paths that reach other alternatives that originate from the source when it is removed.

In the running example from Figure 1, this leads to the following sorted pairs:

$\delta(a,b)$	Pair $((a, b))$
3	(A, B)
1	(C, A)
1	(C, B)

and a graph with edges $A \rightarrow B$, then $C \rightarrow A$, and $C \rightarrow B$, depicted in Figure 6.




Figure 6 | Graph constructed by ranked pairs method on the example from Figure 1.

So, first *C* is removed, then *A*, leaving *B*, which results in a ranking of C > A > B and scores (5, 3, 0) for *C*, *A*, and *B*, respectively.

Maximal Lotteries

Maximal lotteries is probabilistic social choice method which chooses ranks based on the the solution of a two-player zero-sum game whose utilities are defined by the margin matrix (Fishburn, 1984; Kreweras, 1965). That is, suppose there are probability distributions over alternatives (lotteries) $x, y \in \Delta(A)$. A lottery x is maximal if and only if is is the solution of the game

$$\max_{x \in \Delta(A)} \min_{y \in \Delta(Y)} x^T M y \ge 0.$$
(6)

The interpretation is that x is a distribution over alternatives such that, if an adversary were to choose a different distribution, the expected margin would still be non-negative.

Here, *M* is an anti-symmetric matrix ($M = -M^T$), so the game above is a symmetric two-player zero-sum game over the same strategy spaces (*A*). As a result, It is a well-known fact of game theory that there always exists a solution to the game and the value of Equation 6 is always 0. Also, an exact solution can be computed efficiently using linear programming that is polynomial in the size of *M*.

Maximal lotteries guarantees all of the consistency properties mentioned in this paper: Condorcet consistency, clone consistency, population consistency, and agenda consistency. It is the only method to satisfy both population consistency and clone consistency (Brandl et al., 2016) and can achieve this combination of properties due to being a probabilistic method. In addition, it satisfies independence of irrelevant alternatives (Brandl and Brandt, 2020), a property at the heart of Arrow's impossibility theorem. Finally, by being probabilistic, it avoids some strategic manipulation that is known to be problematic in deterministic voting rules (Brandt, 2017).

In the recurring example from Figure 1, one can immediately see from the margin matrix that C is a dominant strategy and hence the only minimax-optimal solution to game formulated in Equation 6 chooses C with probability 1.

Iterative Maximal Lotteries (IML)

We now describe a slight refinement of maximal lotteries (ML) that produces a special type of social welfare function. The maximal lotteries method can be iterated as shown in Algorithm 2.

```
Algorithm 2: Iterative Maximal Lotteries (IML)
   Input: An initial set A<sup>0</sup> of alternatives
   Output: A ranking of winner sets, W, and their corresponding probability distributions
 1 Let W \leftarrow () be an empty sequence
2 for round t \in \{0, 1, 2, \cdots, m-1\} do
 3
       if |A_t| = 0 then
        break
 4
       x_t \leftarrow \text{MaximalLotteries}(A_t)
 5
       w_t \leftarrow \{a \in A_t : x_t(a) > 0\}
 6
       Append (x_t, w_t) to the end of W
 7
       A_{t+1} = A_t - w_t
8
       Remove the winners w_t from all the votes.
 9
10 return W
```

We refer to the cardinality |W| as the *number of levels* of the resulting evaluation. On each round, W is augmented with the set of winners for that round (and their corresponding distributions), and then these agents are removed from the set of alternatives and deleted from all of the votes for the next round. (Note: in practice, this can be easily achieved by maintaining a margin matrix M_t in each round and deleting the rows and columns that correspond to the winners in it rather than modifying the votes on line 9).

A reasonable question to ask is if this iterative version of maximal lotteries preserves the properties of the original voting scheme. The answer is yes. In particular, by leveraging agenda consistency (Definition 5) or equivalently Sen's α -contraction and γ -expansion properties (Sen, 1971, 1977), one

can "safely" remove alternatives that are not in the support of the lottery returned by the maximal lottery as they have no effect on the outcome. Issues, like the lack of independence of irrelevant alternatives that drive many impossibility results when working with deterministic voting rules, no longer apply to maximal lotteries (Brandl and Brandt, 2020).

There are a some interesting interpretations of *W*. First, if |W| = m, then every w_t is a singleton and there were no mixed strategy equilibria (cycles) and the order is strictly transitive. More generally, the number of levels determines how often (on average) the subgroups have mixed strategy (cyclic) solutions: a high value close to *m* means mostly transitive solutions in each subgroup. A low number of levels (closer to 0) means there is often mixed strategy solutions. Also, roughly speaking, the agent's level (the level achieved by that agent – earlier in W referring to the top, and later to the bottom) determines its relative rank. An agent with a higher level means it was chosen earlier as a winner of the subgroup of agents at that time, whereas agents at the same level are comparable (contained within the same strategic cycle).

Define LEVEL(W, a) = 0 for an agent at the bottom level and |W| - 1 for the agents at the top level. We extract a total order by defining a score that corresponds to the agent's level plus the probability of the strategy that selects it within its level:

$$IMLSCORE(W, a) = LEVEL(W, a) + x_{|W|-1-LEVEL(W,a)}(a).$$

This leads to an interpretable score. First, the number of levels is directly conveyed in the range of values (if the highest score is *s*, then the number of levels in the ranking (|W|) is $\lceil s \rceil + 1$), and the size of each level as well as probabilities assigned to each agent, directly readable from the second (fractional) part of the score. For example, an agent achieving a score of 3.45 means that it reached the third level and had a probability of 0.45 among the level-4 agents (level 0 scores use the interval (0, 1], level 1 uses the internal (1, 2], level 2 uses the interval (2, 3], etc.).

In the recurring example from Figure 1, this leads to three rounds, with margin matrices:

$$M_0 = \begin{pmatrix} 0 & 3 & -1 \\ -3 & 0 & -1 \\ 1 & 1 & 0 \end{pmatrix}$$
$$M_1 = \begin{pmatrix} 0 & 3 \\ -3 & 0 \end{pmatrix}$$
$$M_2 = (0),$$

with solutions $x_0 = \{(C, 1)\}, x_1 = \{(A, 1)\}, \text{ and } x_2 = \{(B, 1)\}.$

This leads to C > A > B and scores (3, 2, 1) for alternatives *C*, *A*, and *B*, respectively. Note that the number of levels is accessible by inspection and there were no game-theoretic cycles in the iterative winner selection because all the values scores have integer values.

Similarities and Differences between Maximal Lotteries and Nash Averaging

On first glance, it may appear that maximal lotteries (Fishburn, 1984) and Nash averaging (Balduzzi et al., 2018) are similar, and indeed there are some similarities: both solve a two-player zero-sum game derived from what can be viewed as preference information from the evaluation process. Namely, cardinal utilities for Nash averaging and ordinal information in the case of maximal lotteries.

However, there are many differences between the two methods:

- 1. The game that is solved is different. Maximal lotteries solves the game induced by the margin matrix, *M*, which can be formulated from ranked preferences lists (or pairwise comparison data). Nash averaging solves the game that uses actual payoffs (*e.g.*, normalized scores in the case of Atari, and expected winnings in the AvA case like heads-up poker).
- 2. The targeted solution concept is different. The form of the Nash equilibrium returned by maximal lotteries is left unspecified (unconstrained) whereas Nash averaging requires the maximum-entropy Nash equilibrium to guarantee uniqueness.
- 3. How rankings are derived from the solution is different. The rankings derived by maximal lotteries are based on the Nash equilibrium distribution itself, whereas the ranking according to Nash averaging is based on the expected value to each agent under the maximum-entropy Nash equilibrium.
- 4. Extensions to more general AvA setting (*i.e.*, *n*-player with $n \ge 3$, or general-sum) differ. Nash averaging naturally extends to the meta-game played by the *n* players (Marris et al., 2022), leading to tensors whose sizes are generally exponential in *n* (necessitating more efficient solution concepts such as correlated equilibria). In maximal lotteries, using the AvA model described above, every game played is a vote that contributes to defining the margin matrix, *M*, which is necessarily symmetric and hence quadratic in *m*.

One of the main differences is that Nash averaging, by design, uses the magnitude of the score in comparing agents, so one big expected win of 10 is preferred to seven wins of size 1. In maximal lotteries, the wins are non-numerical, and it is *only* the number of times an agent ranks more highly than another that determines its pairwise value in the game that gets solved. The comparison may be determined from some underlying numerical value (such as number of supply centers achieved, in the game of Diplomacy), but only the pairwise comparisons end up influencing the margin matrix.

Maximal lotteries can be iterated while preserving its guarantees, as discussed in Section 10. We believe that Nash averaging can be iterated in a very similar way (*e.g.*, as Algorithm 2), producing a sequence of subgames where agents in the support are removed and process is continued in a new subgame without the agents. Similarly to maximal lotteries, this would produce a sequence of groups of agents where agents in the same group were all in the support of the subgame defined at the time they were removed. We believe that the invariance properties of the original Nash averaging (Balduzzi et al., 2018) could also be preserved by this variant. However, agents in the same group would always be indistinguishable because they achieve the same expected value to the maximum-entropy Nash equilibrium of the subgame that was solved when they were in the support.

Voting Method Logistics: Variable Vote Lengths, Uneven Alternative Distributions, and Tie-Breaking

There are several subtleties to be aware of when applying voting methods for evaluation. In this section, we discuss some of these issues.

Define the length of a vote to be the number of alternatives in its preference order. Some methods are can be sensitive to unequal vote lengths. For example, if Borda assigns points decreasing from m - 1 to the lowest agent, then agents in votes of length less than m are getting the same score despite being compared to fewer agents. Similarly for other scoring methods: a first-place win for plurality is scored the same way even if, for example, in one case the ballots might contain only 2 candidates, and in another there are 7. Our applications, in Section 10, were mostly unaffected by variable vote lengths as most of them had the same length. The only application that differed in length was the

second application of HELM.

Another potential problem is if the data set of votes contains an uneven distribution of alternatives. This can happen if, for example, one alternative is present in 80% of the votes versus another alternative appearing in only 60% of the votes. This, again, can affect scoring rules because one agent may have an easier time being reflected in the top ranks if they are present in a large number of votes. Again, most of our applications in Section 10 are not affected by this problem because the distribution is uniform or very close to uniform. In the AvA application to Diplomacy described in Section 10, the average number of games player per player is 4.104 ± 0.749 (95% confidence intervals); hence, this can have an effect on the results. However, since Elo does not control for uneven distributions and to remain fair to Elo, our results did not control for the distribution of games played.

Another potential problem is how to deal with ties in scores, leading to uncertainty on how rank agents. In the applications in this paper, we simple break ties randomly in way that is consistent across all methods (more specifically, by adding small random perturbations to the values compared). However, there has been some work on more principled ways to break ties that could be applied to VasE. For example, the Normal Independent Voter Perturbation (NIVP) is a general method that satisfies several desirable properties, one of them being the preservation of clone-proofness (Freeman et al., 2015).

Full Results on the Arcade Learning Environment

Results from (Hessel et al., 2017, Table 5)

Elo ratings for the ALE agents are shown on the left side of Table 5.

The VasE rankings and scores from (Hessel et al., 2017, Table 5) are shown in Table 6. Note that in the case of Iterative Maximal Lotteries, there is a cycle in the preferences on the fourth level (between A3c and DUELING-DQN) due to a tie in the head-to-head comparison, *i.e.*, δ (A3C, DEULING-DQN) = 0.

		Agent	Elo rating
Agent	Elo rating	RAINBOW	1049
RAINBOW	424	DIST-DQN	953
DIST-DQN	325	PRIO-DDQN	912
PRIO-DDQN	274	DUEL	880
DUEL	238	A3C	855
A3c	213	HUMAN	849
DDQN	162	DDQN	810
NOISY-DQN	92	NOISY-DQN	748
DQN	0	DQN	658
		RANDOM	0

Table 5 | Left: Elo ratings for ALE agents (relative to bottom agent defined to have rating 0) across 54 Atari games. Right: Relative Elo ratings when human and random are included in the set of agents.

Results from (Hessel et al., 2017, Table 5) and Human + Random from (Badia et al., 2020, Section H.4)

If we add the scored for two more agents (random and human), the Elo ratings are shown in the right side of Table 5. The resulting VasE rankings and scores are shown in Table 7.

Analysis of Atari results with α -Rank

To try another game-theoretic approach, we also evaluate α -rank on the same score matrix. In particular, we use the high ranking-intensity parameter method (Omidshafiei et al., 2019, Section 2.5) found in its open reference implementation (Lanctot et al., 2019). In contrast to Nash averaging, α -rank finds a full support equilibrium with agent probabilities in [0.07, 0.21], task probabilities in [0.005, 0.057], and a ranking resembling VasE: RAINBOW > DIST-DQN > DUEL > PRIO-DDQN > A3C > DDQN > NOISY-DQN > DQN. In this case, α -rank is considerably less adversarial in the weighting of tasks for ranking. The full weight distributions for agents and tasks found by α -rank are given Figures 8 and 7.

Approval(k=3)

		-
Rank	Agent	Score
1	rainbow	41
2	dist-dqn	35
3	prio-ddqn	23
4	a3c	22
5	duel-ddqn	19
6	ddqn	11
7	nois-dqn	8
8	dqn	3

Borda								
Rank	Agent	Score						
1	rainbow	295						
2	dist-dqn	247						
3	prio-ddqn	222						
4	dueling-ddqn	201						
5	a3c	187						
6	ddqn	159						
7	nois-dqn	122						
8	dqn	79						

Copeland								
Rank	Agent	Score						
1	rainbow	7.0						
2	dist-dqn	6.0						
3	prio-ddqn	5.0						
4	duel-ddqn	3.5						
5	a3c	3.5						
6	ddqn	2.0						
7	nois-dqn	1.0						
8	dqn	0.0						

Kemeny-Young

Rank	Agent	Score					
1	rainbow	295					
2	dist-dqn	232					
3	prio-ddqn	188					
4	a3c	125					
5	duel-ddqn	123					
6	ddqn	78					
7	nois-dqn	36					
8	dqn	0					

Iterative Maximal Lotteries

iterative maximu hotteries								
Rank	Agent	Score						
1	rainbow	7.00						
2	dist-dqn	6.00						
3	prio-ddqn	5.00						
4	a3c	3.98						
5	duel-ddqn	3.02						
6	ddqn	3.00						
7	nois-dqn	2.00						
8	dqn	1.00						

Plurality Rank Agent Score rainbow 19 1 2 a3c 12 3 dist-dqn 8 4 prio-ddqn 6 5 duel-ddqn 5 6 2 nois-dqn 7 2 ddqn 8 0 dqn

Ranked Pairs

Agent

a3c

ddqn

dqn

rainbow

dist-dqn

prio-ddqn

duel-ddqn

nois-dqn

Rank

1

2

3

5

4

6

7

8

Schulze Agent

rainbow

dist-dqn

a3c

ddqn

dqn

prio-ddqn

duel-ddqn

nois-dqn

Score

241

204

168

137

110

73

36

0

STV(num winners = 3)

Rank	Agent	Score
1	rainbow	16.19
2	dist-dqn	15.14
3	a3c	14.16
4	duel-ddqn	8.12
5	prio-ddqn	7.6
6	nois-dqn	6.3
7	ddqn	5.2
8	dqn	4.0

Table 6 | VasE results for Atari data from (Hessel et al., 2017, Table 5).

Rank

1

2

3

4

5

6

7

8

Score

642

430

292

102

152

68

20

0

Α	Approval(k=3)				Borda		Copeland			
Rank	Agent	Score		Rank	Agent	Score		Rank	Agent	Score
1	rainbow	38		1	rainbow	384		1	rainbow	9.0
2	dist-dqn	29		2	dist-dqn	331		2	dist-dqn	8.0
3	human	23		3	prio-ddqn	304		3	prio-ddqn	7.0
4	prio-ddqn	20		4	duel-ddqn	284		4	duel-ddqn	5.5
5	a3c	20		5	a3c	268		5	a3c	5.5
6	duel-ddqn	13		6	human	264		6	ddqn	4.0
7	noisy-dqn	8		7	ddqn	239		7	human	3.0
8	ddqn	8		8	nois-dqn	200		8	nois-dqn	2.0
9	dqn	3		9	dqn	152		9	dqn	1.0
10	random	0		10	random	4		10	random	0.0

K	Kemeny-Young				ve Maximal	Lotteries		Plurality	
Rank	Agent	Score		Rank	Agent	Score	Rank	Agent	Score
1	rainbow	384		1	rainbow	9.00	1	human	19
2	dist-dqn	314		2	dist-dqn	8.00	2	rainbow	11
3	prio-ddqn	271		3	prio-ddqn	7.00	3	a3c	9
4	a3c	206		4	duel-ddqn	5.83	4	dist-dqn	5
5	duel-ddqn	206		5	a3c	5.17	5	duel-ddqn	5
6	ddqn	158		6	ddqn	5.00	6	prio-ddqn	3
7	human	119		7	human	4.00	7	ddqn	2
8	nois-dqn	90		8	nois-dqn	3.00	8	random	0
9	dqn	54		9	dqn	2.00	9	nois-dqn	0
10	random	0		10	random	1.00	10	dqn	0

Ranked Pairs

Schulze

STV(num winners = 3)

Rank	Agent	Score	Rank	Agent	Score	Rank	Agent	Score
1	rainbow	1172	1	rainbow	315	1	human	20.19
2	dist-dqn	890	2	dist-dqn	278	2	rainbow	19.14
3	prio-ddqn	696	3	prio-ddqn	242	3	a3c	18.14
5	a3c	390	4	a3c	211	4	dist-dqn	10.12
4	duel-ddqn	444	5	duel-ddqn	184	5	duel-ddqn	9.6
6	ddqn	302	6	ddqn	147	6	prio-ddqn	8.5
7	human	202	7	human	119	7	ddqn	7.2
8	nois-dqn	126	8	nois-dqn	90	8	random	6.0
9	dqn	54	9	dqn	54	9	nois-dqn	5.0
10	random	0	10	random	0	10	dqn	4.0

Table 7 | VasE results on Atari with data from (Hessel et al., 2017, Table 5) merged with two extra columns (human and random) taken from (Badia et al., 2020, Section H.4) .

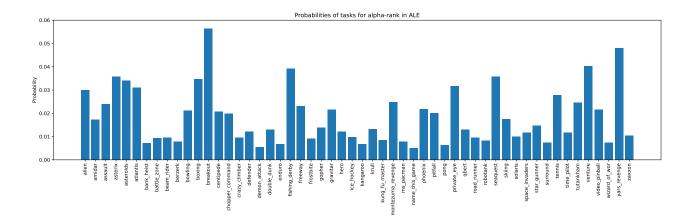


Figure 7 | Task distribution computed by α -Rank.




Figure 8 | Agent distribution computed by α -Rank.

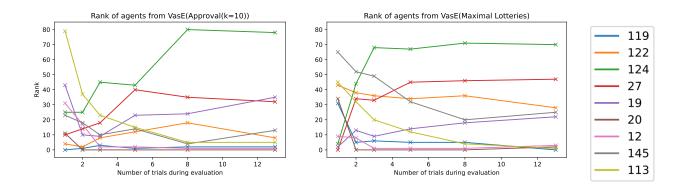


Figure 9 | Ranks of agents by number of test-time trials under different voting methods. A lower rank means a better agent. For t = 1, there is no Condorcet winner. For $t \in \{2, 3, 5, 8\}$ agent 20 is a strong Condorcet winner. At t = 13: agent 119 is a weak Condorcet winner, Approval(k = 10)'s top three ranks are (20, 12, 119), and ML's top three are (119, 113, 20).

Full Results on Adaptive Agents

We now apply VasE to a larger-scale environment: adaptive agents (AdA) (Team et al., 2023) in a procedurally-generated, open-ended 3D embodied task space (XLand) (Team et al., 2021). Our main question: *How do agents compare in their ability to adapt to the task as the amount of test-time experience increases?*

We obtained a dataset from the authors' internal leaderboard consisting of m = 150 agents across n = 46 tasks. Agents are trained via memory-based meta-RL resulting in human-timescale adaptation to new tasks. The set of agents differ by architecture and training parameters; the set of tasks differ in adaptation requirements such as experimentation, tool use, and division of labor. During evaluation, each task is repeated for some number of successive trials $t \in \{1, 2, 3, 5, 8, 13\}$ where the environment (but *not* the agent memory) is reset between trials. A successfully adaptive agent may discover and remember relevant information and carry it to the future trials. The dataset is then a tensor of shape (150, 46, 6) with each entry corresponding to the mean reward over 250 repetitions for that (agent, task, trials) combination. We run six instances of VasE: one for each value of t, each instance of size (150, 46). Figure 9 shows how the relative rank of a subset of agents changes as t increases.

Our VasE framework uncovers several interesting phenomena. First, we observe how significantly the ranks change between t = 1 and t = 2: the best agents at higher t are not best at t = 1, possibly because the adaptive agents focus more on exploration to uncover the hidden rules of the task in early trials. Similarly, some of the worst agents at higher values of t are among the best at t = 1, indicating a basic ability to perform on the task once but not as proficient in adaptation over several trials. Some agents (12, 20, 119) remain among the best after $t \ge 2$ and others (113) gradually improve to among the best as t increases, possibly due to different RL training techniques or memory approaches.

We also ran Copeland on the same set of agents as in Figure 9. The result is show in Figure 10.

In conversing with the original authors of Team et al. (2023), these were descriptions they sent us for the top agents:

- 12: An agent with a Transformer-XL memory, 169M Transformer-only parameters, (353M total parameters) and effective context length of 1800 timesteps, trained for 20 billion frames.
- 20: A larger version of 12, trained for longer. Specifically with 256M Transformer-only parameters,

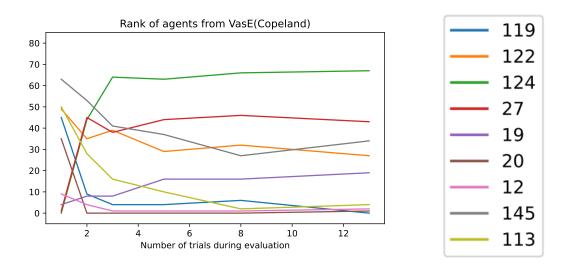


Figure 10 | Ranks of agents by number of trials using the Copeland voting method. The result is similar to Iterative Maximal Lotteries from Figure 9.

Agent \setminus Method	Approval(k=10)	Copeland	Iterative Maximal Lotteries
12	9.0	3.0	3.83
19	24.0	11.83	13.0
20	1.83	6.0	6.0
27	24.83	36.16	34.16
113	27.33	18.33	19.0
119	1.5	11.33	8.66
122	8.66	35.16	35.83
124	49.33	50.66	54.0

Table 8 | Average rank for each agent over $t \in \{1, 2, 3, 5, 8, 12\}$ (lower is better).

(533M total parameters) trained for 46 billion frames.

- 119: An agent that used "skip memory" as described in (Team et al., 2023, Section 3.7), combining a GRU and Transformer XL to increase the effective context length.
- 113: Similar to 119 but with a shorter skip length (and therefore shorter effective context length), also trained for fewer steps than 119.

The authors also told us that "12 was the best agent used in the single-agent setting in Team et al. (2023)".

Table 8 shows the average ranks achieved by all the group of agents selected for Figures 9 and 10 across the different number of trials. When using Copeland or Maximal Lotteries, agent 12 has had the best average rank among the chosen agents.

As a demonstration, the VasE results (for the top 10 agents only – recall in this application that the number of agents, m = 150, and number of tasks, n = 46) for the number of trials t = 13 are shown in Table 9.

Арр	Approval(k=10)				Borda		Copeland			
Rank	Agent	Score		Rank	Agent	Score		Rank	Agent	Score
1	20	25		1	12	5513		1	119	148.5
2	12	20		2	20	5498		2	20	148.0
3	119	19		3	100	5396		3	12	147.0
4	103	15		4	118	5371		4	8	143.5
5	35	15		5	8	5313		5	113	142.5
6	113	14		6	31	5282		6	102	142.0
7	118	12		7	119	5270		7	35	141.5
8	21	12		8	112	5226		8	31	141.5
9	122	11		9	26	5211		9	103	141.0
10	120	11		10	113	5157		10	118	140.0

Iterative Maximal Lotteries			•	Plurality	7	Ranked Pairs			
Rank	Agent	Score	Rank	Agent	Score	Rank	Agent	Score	
1	119	64.96	1	119	8	1	119	244818	
2	113	64.04	2	113	4	2	20	241132	
3	20	64.00	3	145	3	3	12	236988	
4	12	63.00	4	103	3	4	8	232798	
5	8	61.53	5	121	2	5	102	228972	
6	103	61.19	6	118	2	6	113	225482	
7	102	61.14	7	35	2	7	35	221996	
8	31	61.14	8	26	2	8	103	218860	
9	35	60.98	9	20	2	9	31	215936	
10	30	60.02	10	146	1	10	118	212186	

	Schulze	2	STV(n	um wini	ners = 10)
Rank	Agent	Score	Rank	Agent	Score
1	119	3717	1	119	300.8
2	20	3693	2	20	299.5
3	12	3663	3	103	298.5
4	8	3631	4	145	297.5
5	102	3607	5	113	296.5
6	113	3581	6	21	295.6
7	35	3556	7	121	294.5
8	31	3534	8	35	293.6
9	100	3505	9	143	292.6
10	103	3480	10	33	150.3

Table 9 | VasE Results on the Adaptive Agents ((Team et al., 2023)) leaderboard dataset.

Evaluation of Large Language Models

Here we begin to describe several applications of VasE to the evaluation of large language models.

In total, there are six applications on three data sources: Chatbot Arena (Zheng et al., 2023), AgentBench (Liu et al., 2023), our own prompt engineering task for text summarization and Q&A, and three separate applications on the Holistic Evaluation of Language Models (HELM) data (Liang et al., 2022).

Full Results on AgentBench

The Elo ratings for agents in AgentBench are shown in Table 10.

As an example visualization that is possible with the VasE results, we show the subgraph of the top eight agents computed by the Ranked Pairs method in Figure 11. A similar visualization could be computed for the graph constructed by the Schulze method.

Model	Elo	AgentBench (OA) score
gpt-4	1282	4.41
claude	999	2.77
gpt-3.5-turbo	992	2.55
text-davinci-003	879	2.1
chatglm2	692	1.31
claude-instant	640	1.9
openchat-13b	540	1.15
text-davinci-002	525	1.46
t-bison-001	496	1.39
wizardlm-30b	491	0.83
llama2-13b-chat	384	0.55
wizardlm-13b	369	0.59
vicuna-13b	361	0.62
codegeex2-6b	354	0.53
openchat-8192-13b	336	0.51
baichuan-13b-chat	250	0.36
koala-13b	227	0.34
llama2-7b-chat	224	0.31
chatglm-6b	209	0.31
vicuna-7b	182	0.24
baichuan-7b	182	0.22
wizardcoder-15b	146	0.21
internlm-chat-7b	125	0.23
dolly-v2-12b	104	0.15
oasst-sft-4-pythia-12b	0	0.07

Table 10 | Elo values (relative to bottom agent who is defined to have 0 Elo) for agents in AgentBench benchmark evaluation.

Full results for VasE methods are shown in Tables 11, 12, 13, and 14.

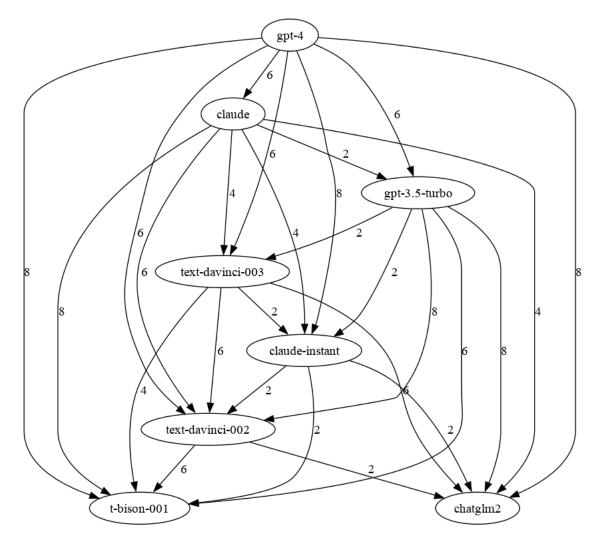


Figure 11 | The directed subgraph containing the top eight agents found by the Ranked Pairs method on the AgentBench data. Edge weights to the margin $\delta(x, y)$ for directed edge $x \to y$. From this visualization, see how strong (in number of votes (tasks)) each win or loss is against all neighbors.

Approval(k=8)

Borda

Rank	Agent	Score] [Rank	Agent	Score
1	gpt-4	8		1	gpt-4	188
2	claude	8		2	claude	174
3	gpt-3.5-turbo	8		3	gpt-3.5-turbo	173
4	text-davinci-003	7		4	text-davinci-003	164
5	chatglm2	7		5	chatglm2	146
6	claude-instant	6		6	claude-instant	138
7	text-davinci-002	5		7	text-davinci-002	120
8	t-bison-001	5		8	t-bison-001	115
9	openchat-13b	4		9	openchat-13b	115
10	wizardlm-30b	1		10	wizardlm-30b	111
11	vicuna-13b	1		11	llama2-13b-chat	99
12	wizardlm-13b	1		12	vicuna-13b	94
13	llama2-13b-chat	1		13	codegeex2-6b	89
14	codegeex2-6b	1		14	wizardlm-13b	87
15	chatglm-6b	1		15	openchat-8192-13b	83
16	openchat-8192-13b	0		16	llama2-7b-chat	67
17	baichuan-13b-chat	0		17	baichuan-13b-chat	66
18	koala-13b	0		18	koala-13b	62
19	llama2-7b-chat	0		19	chatglm-6b	57
20	vicuna-7b	0		20	vicuna-7b	51
21	internlm-chat-7b	0		21	baichuan-7b	51
22	baichuan-7b	0		22	dolly-v2-12b	40
23	wizardcoder-15b	0		23	wizardcoder-15b	38
24	dolly-v2-12b	0		24	internlm-chat-7b	37
25	oasst-sft-4-pythia-12b	0		25	oasst-sft-4-pythia-12b	35

Table 11 | Results for Approval(k = 8) and Borda methods on AgentBench.

Copeland			Iterative Maximal Lotteries			
Rank	Agent	Score		Rank	Agent	Score
1	gpt-4	24.0		1	gpt-4	17.00
2	claude	23.0		2	claude	16.00
3	gpt-3.5-turbo	22.0		3	gpt-3.5-turbo	15.00
4	text-davinci-003	21.0		4	text-davinci-003	14.00
5	claude-instant	20.0		5	claude-instant	13.0
6	text-davinci-002	19.0		6	text-davinci-002	12.00
7	chatglm2	17.5		7	chatglm2	10.56
8	t-bison-001	16.5		8	t-bison-001	10.43
9	openchat-13b	16.5		9	openchat-13b	10.00
10	wizardlm-30b	15.0		10	wizardlm-30b	9.00
11	llama2-13b-chat	13.0		11	codegeex2-6b	7.66
12	codegeex2-6b	12.5		12	llama2-13b-chat	7.34
13	vicuna-13b	11.5		13	vicuna-13b	6.52
14	openchat-8192-13b	11.0		14	openchat-8192-13b	6.48
15	wizardlm-13b	10.5		15	wizardlm-13b	5.53
16	baichuan-13b-chat	8.0		16	baichuan-13b-chat	5.47
17	koala-13b	8.0		17	vicuna-7b	4.50
18	llama2-7b-chat	8.0		18	koala-13b	4.36
19	vicuna-7b	6.0		19	llama2-7b-chat	4.13
20	chatglm-6b	5.5		20	baichuan-7b	3.57
21	baichuan-7b	4.5		21	chatglm-6b	3.42
22	dolly-v2-12b	2.5		22	dolly-v2-12b	2.52
23	internlm-chat-7b	2.0		23	oasst-sft-4-pythia-12b	2.48
24	oasst-sft-4-pythia-12b	2.0		24	internlm-chat-7b	2.00
25	wizardcoder-15b	0.5		25	wizardcoder-15b	1.00

Table 12 | Results for Copeland and Iterative Maximal Lotteries methods on AgentBench.

Ranked Pairs

Plurality

Rank	Agent	Score	Rank	Agent	Score
1	gpt-4	7	1	gpt-4	1516
2	gpt-3.5-turbo	1	2	claude	1332
3	claude	0	3	gpt-3.5-turbo	1170
4	text-davinci-003	0	4	text-davinci-003	1008
5	claude-instant	0	5	claude-instant	860
6	text-davinci-002	0	6	text-davinci-002	760
7	t-bison-001	0	7	t-bison-001	480
8	chatglm2	0	8	chatglm2	612
9	openchat-13b	0	9	openchat-13b	482
10	wizardlm-30b	0	10	wizardlm-30b	408
11	vicuna-13b	0	11	llama2-13b-chat	246
12	wizardlm-13b	0	12	vicuna-13b	140
13	llama2-13b-chat	0	13	codegeex2-6b	214
14	codegeex2-6b	0	14	openchat-8192-13b	170
15	openchat-8192-13b	0	15	wizardlm-13b	130
16	baichuan-13b-chat	0	16	koala-13b	84
17	koala-13b	0	17	baichuan-13b-chat	68
18	llama2-7b-chat	0	18	llama2-7b-chat	52
19	chatglm-6b	0	19	chatglm-6b	18
20	vicuna-7b	0	20	vicuna-7b	26
21	internlm-chat-7b	0	21	baichuan-7b	20
22	baichuan-7b	0	22	dolly-v2-12b	4
23	wizardcoder-15b	0	23	internlm-chat-7b	2
24	dolly-v2-12b	0	24	oasst-sft-4-pythia-12b	2
25	oasst-sft-4-pythia-12b	0	25	wizardcoder-15b	0

Table 13 | Results for plurality and Ranked Pairs methods on AgentBench.

Schulze				STV(<i>k</i> = 8)			
Rank	Agent	Score		Rank	Agent	Score	
1	gpt-4	123	1	1	gpt-4	50.7	
2	claude	116		2	claude	49.4	
3	gpt-3.5-turbo	111		3	gpt-3.5-turbo	48.2	
4	text-davinci-003	106		4	text-davinci-003	47.2	
5	claude-instant	101		5	claude-instant	46.2	
6	text-davinci-002	96		6	text-davinci-002	45.2	
7	t-bison-001	89		7	t-bison-001	44.1	
8	chatglm2	85		8	openchat-13b	43.1	
9	openchat-13b	80		9	chatglm2	25.0	
10	wizardlm-30b	75		10	wizardlm-30b	24.0	
11	llama2-13b-chat	69		11	vicuna-13b	23.0	
12	vicuna-13b	64		12	wizardlm-13b	22.0	
13	codegeex2-6b	60		13	llama2-13b-chat	21.0	
14	openchat-8192-13b	55		14	codegeex2-6b	20.0	
15	wizardlm-13b	50		15	openchat-8192-13b	19.0	
16	koala-13b	44		16	baichuan-13b-chat	18.0	
17	baichuan-13b-chat	39		17	koala-13b	17.0	
18	llama2-7b-chat	34		18	llama2-7b-chat	16.0	
19	chatglm-6b	29		19	chatglm-6b	15.0	
20	vicuna-7b	25		20	vicuna-7b	14.0	
21	baichuan-7b	20		21	internlm-chat-7b	13.0	
22	dolly-v2-12b	14		22	baichuan-7b	12.0	
23	internlm-chat-7b	9		23	wizardcoder-15b	11.0	
24	oasst-sft-4-pythia-12b	5		24	dolly-v2-12b	10.0	
25	wizardcoder-15b	0		25	oasst-sft-4-pythia-12b	9.0	

Table 14 | Results for Schulze and STV(k = 8) methods on AgentBench.

[0	0	20	32	24	-2	20	14	39]
0	0	33	87	17	-7	67	-8	50
-20	-33	0	25	-7	2	10	-28	12
-32	-87	-25	0	-21	-3	26	-54	-11
-24	-17	7	21	0	-13	21	-27	27
2	7	-2	3	13	0	1	6	5
-20	-67	-10	-26	-21	-1	0	-65	-26
-14	8	28	54	27	-6	65	0	48
[-39	-50	-12	11	-27	-5	26	-48	0]

Figure 12 | Margin subgame solved by IML when there are 8 remaining alternatives. Entries represent $\delta(x, y)$ for agent on row x and column y. Agents RWKV-4-Raven-14B, chatglm, and gpt4all-13b-snoozy correspond to agents on the first, third, and sixth rows and columns, respectively.

VasE Analysis on Chatbot Arena Dataset

In this section, we apply VasE to the Chatbot Arena conversation dataset (LMSysOrg, 2023)⁵. This dataset contains 33000 crowd-source conversations between with human preference annotations from Chatbot Arena⁶.

The data set contains conversations between 20 different models, containing some overlap with models in AgentBench. Each datapoint contains binary comparisons (win, loss, ties) between two models, hence our application of VasE focuses on Condorcet voting methods.

Results for VasE are shown in Tables 15 and 16. The rankings are mostly consistent with the Elo ratings found in Chatbot Arena, but we identify a two interesting findings: IML finds some game-theoretic cycles and comparison of the Ranked Pairs graph with AgentBench.

Comparing IML and other Condorcet Methods

Here, we show an instance where IML identifies a game-theoretic cycle whereas the other Condorcet methods rank the alternatives differently. Looking at Table **??**, ranks 12-20: Copeland and Ranked Pairs and Schulze rank the following three agents according to:

gpt4all-13b-snoozy > RWKV-4-Raven-14B > chatglm-6b,

whereas IML ranks gpt4all-13b-snoozy above RWKV-4-Raven-14B and chatglm, but all three within the same level (identifying a game-theoretic cycle).

Looking more closely, we see that IML find a distribution with probabilities 0.833 on gpt4all-13b-snoozy, 0.0833 on RWKV-4-Raven-14B, and 0.0833 on chatglm-6b, and a margin subgame depicted in Figure 12. This distribution leads to the following expected values to the column player:

⁵Dataset available at https://lmsys.org/blog/2023-07-20-dataset/, released on July 10th, 2023. Updated leaderboard being hosted at https://huggingface.co/spaces/lmsys/chatbot-arena-leaderboard

⁶https://lmsys.org/blog/2023-05-03-arena/

0.8333 [2 7 -2 3 13 0 1 6 5] +0.0833 [0 0 20 32 24 -2 20 14 39] +0.0833 [-20 -33 0 25 -7 2 10 -28 12] = [0 3.0821 0 7.2471 12.2451 0 3.332 3.8318 8.4133].

When the column (minimizing) player plays a best response here they then achieve a value of 0, which is the equilibrium value (both players receive 0 in expectation).

From this analysis, it is also easy to see that choosing any one of the three deterministically is not an equilibrium strategy. If, instead, the row player chose only one among these three strategies to play with probability 1, the column player would have a better response in each case and force the row player to receive strictly lower payoff (i.e. -2 if the row player chooses either gpt4all-13b-snoozy or RWKV-4-Raven-14B, or -33 of the row player chooses chatglm-6b. Hence, IML is choosing a safer maximal lottery due to the adversarial nature of the margin subgame, identifying three strategies and a mixed distribution at this level.

Visualization and Comparison to Agent Bench

We also show a visualization of the Ranked Pairs graph on this dataset in Figure 13. Due to the much larger dataset, the edge weights are significantly more granular in this case than on Agent-Bench. However, we do see some similarities: top agents are similarly-ranked. In both cases gpt-4 > claude > gpt-3.5-turbo. This is a remarkable consistency given that the benchmarks test significantly different tasks, and one comes from score metrics and the other from crowd-sourced human annotations.

Automated Prompt Evaluation for Language Model Task Summarization

We apply our evaluation method to automate the process of selecting task prompts for large language models (LLMs). LLMs achieve high performance on a wide range of language tasks, ranging from sentiment analysis or entity recognition to summarization and paraphrasing. However, applying LLMs to such tasks requires choosing a *prompt*, a textual description of the task. The choice of the prompt can have a high impact on performance; as a result, researchers and practitioners spend considerable effort on experimenting with various prompts. Further, a good prompt for one domain may be less suitable for another domain, which requires matching or tailoring prompts to each domain. We now show how our evaluation techniques enable automating the prompt selection process.

We consider a summarization task where a long piece of text (example shown in Figure 14) must be summarized into a short piece of text capturing the most pertinent information of the original text. We create a set of *t* tasks, where each task consists of *n* pieces of text that must be summarized. To evaluate the quality of the summary, each piece of text r_i is associated with *q* multiple choice question that must be answered given the summary. Importantly, these questions are only available at evaluation time, so the process generating the summary has no access to the evaluation questions when generating the summary.

More concretely, the LLM task description is depicted in Figure 15.

	<u>1</u>	
Rank	Agent	Score
1	gpt-4	19.0
2	claude-v1	18.0
3	claude-instant-v1	17.0
4	guanaco-33b	16.0
5	gpt-3.5-turbo	15.0
6	wizardlm-13b	13.5
7	palm-2	13.0
8	vicuna-13b	12.0
9	vicuna-7b	11.0
10	koala-13b	10.5
11	mpt-7b-chat	9.0
12	gpt4all-13b-snoozy	7.0
13	RWKV-4-Raven-14B	6.5
14	oasst-pythia-12b	6.0
15	alpaca-13b	5.5
16	chatglm-6b	4.0
17	fastchat-t5-3b	4.0
18	stablelm-tuned-alpha-7b	2.0
19	dolly-v2-12b	1.0
20	llama-13b	0.0

Copeland

Iterative Maximal Lotteries

Rank	Agent	Score
1	gpt-4	17.00
2	claude-v1	16.00
3	claude-instant-v1	15.00
4	guanaco-33b	14.00
5	gpt-3.5-turbo	13.00
6	wizardlm-13b	11.997
7	koala-13b	11.003
8	palm-2	11.00
9	vicuna-13b	10.00
10	vicuna-7b	9.00
11	mpt-7b-chat	8.00
12	gpt4all-13b-snoozy	6.83
13	RWKV-4-Raven-14B	6.083
14	chatglm-6b	6.083
15	oasst-pythia-12b	6.00
16	alpaca-13b	5.00
17	fastchat-t5-3b	4.00
18	stablelm-tuned-alpha-7b	3.00
19	dolly-v2-12b	2.00
20	llama-13b	1.00

Table 15 | VasE results for Copeland and IML methods on the Chatbot Arena conversation dataset.

Rank	Agent	Score
1	gpt-4	11624
2	claude-v1	9220
3	claude-instant-v1	7421
4	guanaco-33b	6350
5	gpt-3.5-turbo	6146
6	wizardlm-13b	4405
7	palm-2	4207
8	vicuna-13b	3721
9	vicuna-7b	2126
10	koala-13b	1801
11	mpt-7b-chat	963
12	gpt4all-13b-snoozy	856
13	RWKV-4-Raven-14B	819
14	oasst-pythia-12b	670
15	alpaca-13b	440
16	fastchat-t5-3b	186
17	chatglm-6b	110
18	stablelm-tuned-alpha-7b	63
19	dolly-v2-12b	26
20	llama-13b	0

Ranked Pairs

Schulze

	0 0110120	
Rank	Agent	Score
1	gpt-4	1190
2	claude-v1	1071
3	claude-instant-v1	1021
4	guanaco-33b	969
5	gpt-3.5-turbo	939
6	wizardlm-13b	896
7	palm-2	859
8	vicuna-13b	784
9	vicuna-7b	713
10	koala-13b	639
11	mpt-7b-chat	541
12	gpt4all-13b-snoozy	518
13	RWKV-4-Raven-14B	499
14	oasst-pythia-12b	419
15	alpaca-13b	304
16	fastchat-t5-3b	221
17	chatglm-6b	170
18	stablelm-tuned-alpha-7b	120
19	dolly-v2-12b	63
20	llama-13b	0

Table 16 | VasE results for Ranked Pairs and Schulze methods on the Chatbot Arena conversation dataset.

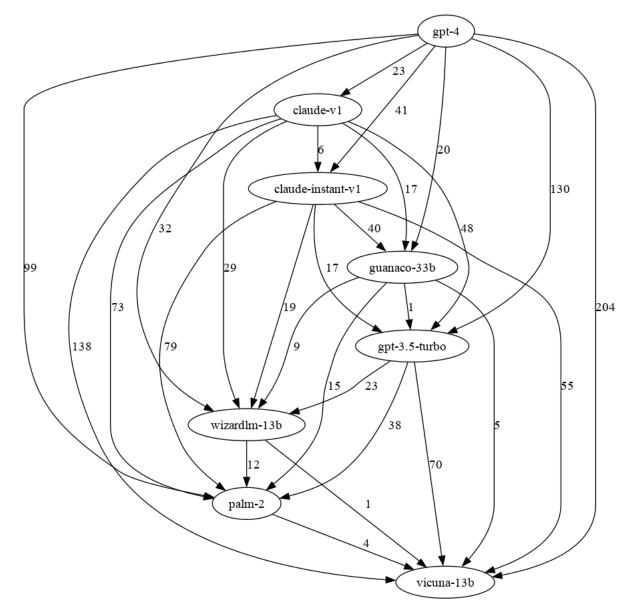


Figure 13 | The directed subgraph containing the top eight agents found by the Ranked Pairs method on the Chatbot Arena data. Edge weights to the margin $\delta(x, y)$ for directed edge $x \to y$. From this visualization, see how strong (in number of votes) each win or loss is against all neighbors.

The city of Alton is a small, peaceful village in the middle of the country. It has a population of around 20,000 people. The village has a lot of art galleries, and there are many museums. Many people from other cities visit Alton in order to enjoy the artistic and cultural life. The main attraction of the city is the maze of mirrors. Question 1: What is Alton famous for? a. Its location b. Its art and culture c. The underground caves d. The ocean Answer 1: b. Its art and culture Question 2: What does Alton have many of? a. Schools b. Museums c. Factories d. Cars Answer 2: b. Museums Question 3: What is the main attraction in Alton? a. the underground caves b. the maze of mirrors c. the jungle d. the ocean Answer 3: b. the maze of mirrors

Figure 14 | Example tourist destination page (long text).

A wise and intelligent assistant is summarizing entries regarding tourist destinations, trying to generate shorter summaries which only include the most important information. <specific prompt> Here are example entries and summaries. Entry 1: <example full text1> Summary 1: <example summary 1> Entry 2: <example full text 2> Summary 2: <example summary 2> Entry 3:

Figure 15 | Example task description for the LLM.

In the template shown in Figure 15, <example full text_{*i*}> and <example summary _{*i*}> are manually created full text descriptions of a destination and a manually created summary text for that destination. The prompts to be evaluated are injected into the above template in the <specific prompt> location. In our evaluation we consider the following prompts (clearly many other prompts can be evaluated in a similar way).

Our analysis is based on pieces of text about made-up tourist destinations, giving a description of the location as well as tourist attractions available there. The evaluation questions relate to the description of the destination and the attractions. We ensure that details pertain to made-up destinations so that no background knowledge that the LLM may have can be used to answer the questions regarding the destination. The prompts we use are show in Figure 16.

An LLM performs the summarization tasks given guidance provided by a textual prompt. We then use our VasE to select the best prompt for the task at hand; in this domain then, a specific prompt corresponds to an agent in the AvT setting. Our score for a generated summary depends on both the number of questions that can be correctly answered given the summary, and the length of the summary. In our evaluation, we have t = 5 tasks, each consisting of n = 3 pieces of text to be summarized, each including q = 3 questions about the text (i.e. n = 3 tourist destinations per task, each associated with q = 3 questions, so each task is scored based on the summary length and the $n \cdot q = 9$ questions for the destinations of the task). The score achieved on a piece of text is the number of questions that can be answered given the summary minus a length penalty term (in our evaluation we use a penalty of 0.1 log(length), though clearly many other evaluation options may

- 1. The assistant keeps almost the entire original text, changing very few words.
- 2. The assistant keeps only the most important information, feeling free to remove boring parts.
- 3. The assistant doesn't remove any of the information, and keeps pretty much all the details.
- 4. The assistant keeps any information that may be interesting for tourists, but skips the. remaining parts.
- 5. The assistant sticks to the facts in the summary, and ignores whatever is subjective evaluation.
- 6. The assistant uses simple words.
- 7. The assistant tends to use complex and impressive language.

Figure 16 | Prompts (agents) used in prompt evaluation for summarization.




Figure 17 | Agent vs task matrix: scores achieved for different prompts across tasks.

be used). The total score on a task is the sum of the scores on the n pieces of text that the task is composed of. We generate the summary of a piece of text by applying an LLM. We apply few-shot prompting to generate the summary. In all cases we use the same few-shot examples of texts and summaries, and we consider various prompts by adding a short description.

The matrix of results is shown in Figure 17: this leads to 5 votes among 7 candidates. Despite the closeness in values, VasE identifies a strong Condorcet winner: prompt 6. VasE results are shown in Table 17.

All of the Condorcet methods (Copeland, Kemeny-Young, Maximal Lotteries, Schulze, Ranked Pairs) choose the same decisive order for the top four prompts: 6 > 3 > 1 > 2. The scoring methods vary due to the top-ranked agents differing significantly across tasks, electing 6, 3, 2, 2 for Approval(k = 2), Borda, Plurality, and STV, respectively.

Similarly to Atari, when applying Nash averaging the task player mixes over only two tasks (*T*3 : 0.56, *T*5 : 0.44) resulting in first place tie between prompts 2 and 3, and full rank 2 = 3 > 5 > 1 > 7 > 6. In this case, adversarial task selection results in the strong Condorcet winner being ranked last place by Nash averaging.

Doudo

Approval(k=2)						
Rank	Agent	Score				
1	6	4				
2	3	2				
3	2	2				
4	7	1				
5	5	1				
6	4	0				
7	1	0				

	Borda	
Rank	Agent	Score
1	3	22
2	6	21
3	2	17
4	1	17
5	5	11
6	7	10
7	4	7

Copeland				
Rank	Agent	Score		
1	6	6.0		
2	3	5.0		
3	1	4.0		
4	2	3.0		
5	7	1.0		
6	5	1.0		
7	4	1.0		

Kemeny-Young				Iterati	ve Maxi	mal Lotteries		
ank	Agent	Score		Rank	Agent	Score		Rank
1	6	21		1	6	5.00	1	1
2	3	20		2	3	4.00		2
3	1	15		3	1	3.00		3
4	2	11		4	2	2.00		4
5	4	5		5	4	0.33		5
6	7	3		6	7	0.33		6
7	5	0		7	5	0.33		7

Plurality					
Rank	Agent	Score			
1	2	2			
2	6	1			
3	5	1			
4	3	1			
5	7	0			
6	4	0			
7	1	0			

Ranked Pairs			Schulze			STV(num winners =			ners = 3)	
Rank	Agent	Score		Rank	Agent	Score		Rank	Agent	Score
1	6	45		1	6	19		1	2	14.2
2	3	33		2	3	16		2	6	13.2
3	1	18		3	1	12		3	5	7.1
4	2	8		4	2	9		4	3	6.1
5	7	1		5	4	4		5	7	5.0
6	5	1		6	5	2		6	4	4.0
7	4	0		7	7	0		7	1	3.0

Table 17 | VasE results on the prompt engineering for text summarization.

Application to HELM

Application to the HELM: Core Scenarios

We applied VasE to the data from the central repository Holistic Evaluation of Language Models (HELM) (Liang et al., 2022)⁷.

Here, we describe the application of VasE to data from a central repository curated and maintained by Stanford's Center for Research on Foundation Models called Holistic Evaluation of Language Models (HELM). In this data source, there are 39 models (agents) evaluated across a 42 different *scenarios* in several categories such as question & answering, information retrieval, toxicity detection, sentiment analysis, knowledge, reasoning, etc., as well as several metrics and taxonomies for analyses.

In this section, we restrict ourselves to the core scenarios (Liang et al., 2022, Section 3), a broad subset of all scenarios: 37 models, and tasks each correspond to a specific metric (accuracy, calibration

⁷Note: the HELM data processed here was retrieved in April 2023.

error, robustness, fairness, efficiency, bias, toxicity, and summarization metrics) upon which models are judged. For each metric (task), models are sorted by head-to-head win rate across all scenarios pertinent for that metric. VasE identifies text-davinci-002 as a strong Condorcet winner and is top-ranked by all Condorcet methods as well as Borda, with text-davinci-003, Cohere Command beta (52.4B), TNLG v2 (530B), OPT (175B), and text-ada-001 appearing in the top five models across methods.

We now highlight customized evaluation using non-uniform task weightings. Suppose, instead of an overall aggregate measure where all metrics are treated equally, the user strongly prefers nontoxic, fair and unbiased models. VasE can produce a cautious choice by counting *e.g.*, the toxicity vote five times, and bias and fairness each three times. In this case, there is no longer any Condorcet winners, and YaLM (100B) is top-ranked by 7 of 9 voting methods. This is better than simply choosing the best model under the one metric because preferences of other metrics are still accounted for in the final rank. As another example: in the HELM paper, authors cautioned against looking at efficiency in isolation (independent of accuracy). So, VasE can choose an efficient model by counting efficiency six times, accuracy four times, and each of other metrics once. In this case, there is a weak Condorcet winner: text-curie-001, while App(k = 5), plurality, and STV now elects text-ada-001.

In this case, VasE identifies text-davinci-002 as a weak Condorcet winner. The results for the top-10 agents are shown in Tables 18, 19, and 20.

VasE Applied to All HELM Scenarios

Our second application of VasE to the HELM data involves m = 37 models over n = 39 tasks, each corresponding to a scenario, where models are compared via scenario-specific metrics.

This is a quite different than the application to the core scenarios where the scenarios are carefully selected subset of all scenarios and head-to-head win rates are already provided. Second: the tasks now correspond to all the scenarios available from the results repository (https://crfm.stanford.edu/helm/latest/?groups=1).

The scenarios and their corresponding domain-specific metric are shown in Table 21. For this application, we assemble the votes from the first table of each scenario listed on each scenario's page (*e.g.*, BoolQ's data is available at https://crfm.stanford.edu/helm/latest/?group=boolq and the data from first table on the page is taken from https://storage.googleapis.com/crfm-helm-public/benchmark_output/runs/v0.2.2/groups/boolq.json).

Several features of VasE are showcased in this second application. First, the metrics all have numerical values which are *not* comparable across tasks. Second, not all models have been evaluated on each scenario. This leads to votes of slightly variable length, but not *e.g.*, to arbitrary value choices for missing scores. In this case, VasE identifies code-davinci-002 as a strong Condorcet winner. The top-10 models for each method are shown in Tables 22, 23, and 24.

Approval	(k=5)
----------	-------

Rank	Agent	Score
1	text-davinci-003	4
2	Cohere Command beta (52.4B)	4
3	text-davinci-002	3
4	TNLG v2 (530B)	3
5	Anthropic-LM v4-s3 (52B)	3
6	YaLM (100B)	2
7	text-ada-001	2
8	text-babbage-001	2
9	text-curie-001	2
10	ada (350M)	2

Borda

Rank	Agent	Score
1	text-davinci-002	232
2	text-davinci-003	213
3	TNLG v2 (530B)	191
4	text-curie-001	189
5	davinci (175B)	182
6	OPT (175B)	180
7	GPT-J (6B)	176
8	OPT (66B)	173
9	Cohere Command beta (52.4B)	173
10	Cohere Command beta (6.1B)	172

Copeland

	1	
Rank	Agent	Score
1	text-davinci-002	35.5
2	text-davinci-003	33.0
3	TNLG v2 (530B)	31.5
4	text-curie-001	28.5
5	OPT (175B)	28.0
6	Cohere Command beta (6.1B)	28.0
7	Cohere Command beta (52.4B)	27.5
8	davinci (175B)	27.0
9	J1-Grande v2 beta (17B)	26.0
10	GPT-J (6B)	24.5

Table 18 | VasE methods Approval, Borda, and Copeland on HELM Core Scenarios.

Rank	Agent	Score
1	text-davinci-002	14.64
2	text-curie-001	14.36
3	text-davinci-003	13.69
4	OPT (175B)	13.31
5	Cohere Command beta (52.4B)	12.53
6	GPT-J (6B)	12.27
7	Cohere xlarge v20221108 (52	12.15
8	GPT-NeoX (20B)	12.05
9	TNLG v2 (530B)	11.69
10	YaLM (100B)	11.17

Iterative Maximal Lotteries

Pluralit	y

Rank	Agent	Score
1	text-ada-001	2
2	Cohere Command beta (52.4B)	2
3	YaLM (100B)	1
4	text-davinci-002	1
5	curie (6.7B)	1
6	TNLG v2 (530B)	1
7	GLM (130B)	0
8	text-babbage-001	0
9	text-curie-001	0
10	text-davinci-003	0

Ranked Pairs

Rank	Agent	Score
1	text-davinci-002	1640
2	text-davinci-003	1464
3	Cohere Command beta (52.4B)	1324
4	TNLG v2 (530B)	1262
5	J1-Grande v2 beta (17B)	1158
6	Cohere Command beta (6.1B)	1102
7	GLM (130B)	1026
8	text-curie-001	976
9	OPT (175B)	882
10	davinci (175B)	794

Table 19 | VasE methods IML, Plurality, and Ranked Pairs on HELM Core Scenarios.

Schulze		
Rank	Agent	Score
1	text-davinci-002	166
2	text-davinci-003	161
3	Cohere Command beta (52.4B)	156
4	TNLG v2 (530B)	151
5	J1-Grande v2 beta (17B)	145
6	Luminous Supreme (70B)	139
7	Anthropic-LM v4-s3 (52B)	135
8	BLOOM (176B)	131
9	Cohere xlarge v20221108	128
10	Cohere Command beta (6.1B)	125

STV(num winners = 5)

Rank	Agent	Score
1	text-ada-001	74.2
2	Cohere Command beta (52.4B)	73.2
3	text-davinci-002	72.2
4	YaLM (100B)	71.2
5	curie (6.7B)	37.1
6	TNLG v2 (530B)	36.1
7	GLM (130B)	35.0
8	text-babbage-001	34.0
9	text-curie-001	33.0
10	text-davinci-003	32.0

Table 20 | VasE methods Schulze and STV on HELM Core Scenarios.

Metric	Scenario
EM	boolq
	hellaswag
	openbookqa
	truthful qa
	mmlu
	imdb
	raft
	civil comments
	blimp
	wikifact
	babi_qa
	dyck_language
	synthetic_reasoning
	gsm
	legal_support
	lsat_qa
	legal_support
	entity_data_imputation
	entity_matching
	bbq
F1	narrative_qa
	natural_qa_closed_book
	natural_qa_openbook_longans
	quac
	synthetic_reasoning_natural
RR@10	msmarco_regular
NDCG@10	msmarco_trec
ROUGE-2	summarization_cnndm
	summarization_xsum
BPB	ice
	the_pile
	twitter_aae
	twitter_aae_white
Equivalent	math_regular
	math_chain_of_thought
LCS	copyright_text
Stereotypes (race)	disinformation_reiteration
Toxic fraction	bold
	real_toxicity_prompts

Table 21 | List of all HELM scenarios categorized by metric used to rank models.

Approval(k=5)

Rank	Agent	Score
1	text-davinci-003	28
2	text-davinci-002	23
3	Cohere Command beta (52B)	17
4	TNLG v2 (530B)	16
5	Anthropic-LM v4-s3 (52B)	16
6	code-davinci-002	7
7	OPT (175B)	6
8	J1-Grande v2 beta (17B)	6
9	GPT-NeoX (20B)	6
10	BLOOM (176B)	6

Borda

Rank	Agent	Score
1	text-davinci-003	1079
2	text-davinci-002	1057
3	TNLG v2 (530B)	963
4	Cohere Command beta (52)	945
5	Anthropic-LM v4-s3 (52B)	917
6	J1-Grande v2 beta (17B)	905
7	Cohere xlarge v20221108 52B	811
8	Cohere xlarge v20220609 52B	796
9	OPT (175B)	748
10	davinci (175B)	747

Copeland

Rank	Agent	Score
1	code-davinci-002	38.0
2	text-davinci-003	37.0
3	text-davinci-002	36.0
4	Cohere Command beta (52.4B)	34.5
5	Anthropic-LM v4-s3 (52B)	34.5
6	TNLG v2 (530B)	33.0
7	J1-Grande v2 beta (17B)	32.0
8	Luminous Supreme (70B)	31.0
9	Cohere xlarge v20221108 52B	30.0
10	Cohere xlarge v20220609 52B	29.0

Table 22 | VasE results for Approval, Borda, and Copeland methods on HELM All Scenarios.

Iterative	Maximal	Lotteries
-----------	---------	-----------

Rank	Agent	Score
1	code-davinci-002	27.00
2	text-davinci-003	26.00
3	text-davinci-002	25.00
4	Cohere Command beta (52.4B)	23.52
5	Anthropic-LM v4-s3 (52B)	23.48
6	TNLG v2 (530B)	23.00
7	J1-Grande v2 beta (17B)	22.00
8	Luminous Supreme (70B)	21.00
9	Cohere xlarge v20221108 52B	20.00
10	Cohere xlarge v20220609 52B	19.00

Plurality

Rank	Agent	Score
1	text-davinci-003	11
2	text-davinci-002	5
3	code-davinci-002	5
4	Cohere Command beta 52B	4
5	OPT (175B)	2
6	Anthropic-LM v4-s3 52B	2
7	davinci (175B)	1
8	babbage (1.3B)	1
9	TNLG v2 (530B)	1
10	TOpp (11B)	1

Ranked Pairs

Rank	Agent	Score
1	code-davinci-002	11544
2	text-davinci-003	11395
3	text-davinci-002	10472
4	Cohere Command beta 52B	9581
5	Anthropic-LM v4-s3 52B	8888
6	TNLG v2 (530B)	8202
7	J1-Grande v2 beta (17B)	7451
8	Luminous Supreme (70B)	6784
9	Cohere xlarge v20221108 52B	6258
10	Cohere xlarge v20220609 52B	5748

Table 23 | VasE results for IML, Plurality, and Ranked Pairs methods on HELM All Scenarios.

Rank	Agent	Score
1	code-davinci-002	681
2	text-davinci-003	676
3	text-davinci-002	653
4	Anthropic-LM v4-s3 (52B)	627
5	Cohere Command beta 52B	610
6	TNLG v2 (530B)	591
7	J1-Grande v2 beta (17B)	566
8	Luminous Supreme (70B)	551
9	Cohere xlarge v20221108 52B	535
10	Cohere xlarge v20220609 52B	514

STV(num winners = 5)

Rank	Agent	Score
1	text-davinci-003	78.11
2	text-davinci-002	77.7
3	Cohere Command beta (52.4B)	76.7
4	code-davinci-002	75.7
5	OPT (175B)	74.9
6	babbage (1.3B)	39.3
7	Anthropic-LM v4-s3 (52B)	38.2
8	davinci (175B)	37.1
9	TNLG v2 (530B)	36.1
10	T0pp (11B)	35.1

Table 24 | VasE results for Schulze and STV methods on HELM All Scenarios.