

APE-then-QE: Correcting then Filtering Pseudo Parallel Corpora for MT Training Data Creation

Akshay Batheja, Sourabh Deoghare, Diptesh Kanojia, Pushpak Bhattacharyya

CFILT, Indian Institute of Technology Bombay

{akshaybatheja, sourabhdeoghare, diptesh, pb}@cse.iitb.ac.in

Abstract

Automatic Post-Editing (APE) is the task of automatically identifying and correcting errors in the Machine Translation (MT) outputs. We propose a *repair-filter-use* methodology that uses an APE system to correct errors on the target side of the MT training data. We select the sentence pairs from the original and corrected sentence pairs based on the quality scores computed using a Quality Estimation (QE) model. To the best of our knowledge, this is a novel adaptation of APE and QE to extract quality parallel corpus from the pseudo-parallel corpus. By training with this filtered corpus, we observe an improvement in the Machine Translation system’s performance by **5.64** and **9.91** BLEU points, for English-Marathi and Marathi-English, over the baseline model. The baseline model is the one that is trained on the whole pseudo-parallel corpus. *Our work is not limited by the characteristics of English or Marathi languages; and is language pair-agnostic, given the necessary QE and APE data.*

1 Introduction

The performance of machine translation systems has experienced significant advancements with the introduction of Neural Machine Translation (NMT) models. However, these NMT models are data-hungry. In order to train high-quality NMT systems, we require a parallel corpus that is not only abundant but also of excellent quality (Batheja and Bhattacharyya, 2022). But NMT for low-resource languages is difficult due to the unavailability of high-quality parallel data. Hence, we have to rely on the noisy web-crawled corpora for low-resource languages. The task of **Parallel Corpus Filtering** aims to provide a scoring mechanism that helps extract good-quality parallel corpus from a noisy pseudo-parallel corpus. The task of **Automatic Post Editing** (APE) task aims to automatically identify and correct errors in MT outputs. The task of **Quality Estimation** (QE) aims to provide

a quality score for a translation when the reference translation is unavailable. Our **motivation** is as follows: As the APE with QE systems has yet to be investigated for error correction in noisy pseudo-parallel corpora, this encourages us to utilize them to enhance the quality of the pseudo-parallel corpus. We use the APE model to rectify errors in the target side of the noisy pseudo-parallel corpus. Next, we employ Quality Estimation to assign quality scores to the sentence pairs present in the original and corrected pseudo-parallel corpus and select the parallel sentences with the highest quality scores. We aim to improve the quality of Machine Translation for the English (En) - Marathi (Mr) language pair by using an APE model to rectify errors on the target side of the pseudo-parallel corpus. We observe that APE and QE-assisted corpus filtering significantly improves the performance of the En-Mr MT system. We restrict our experiments solely to the En-Mr language pair due to a lack of APE and QE resources.

Our contributions are:

1. **Adaption of APE-then-QE**, we initially calculate QE scores for the original pseudo-parallel corpus. Next, we apply Automatic Post-Editing (APE) to the target side of the pseudo-parallel corpus and calculate QE scores for the resulting APE-edited pseudo-parallel corpus. Based on these scores, we determine whether to utilize the APE-edited sentence pairs or stick with the original sentence pairs when training the Neural Machine Translation (NMT) systems, shown in figure 1. To the best of our knowledge, this is a novel adaptation of APE and QE for extracting quality parallel corpus from the pseudo-parallel corpus.
2. Demonstration of **performance improvement** of the Machine Translation systems by **5.64** and **9.91** BLEU points for English-

Marathi and Marathi-English language pairs, over the model trained on the whole pseudo-parallel corpus, shown in table 2; the choice of language pairs was dictated by the availability of APE and QE data, manually created for English-Marathi pairs.

2 Related Work

2.1 Parallel Corpus Filtering

Neural Machine Translation (NMT) is extremely *data hungry* (Sutskever et al., 2014; Bahdanau et al., 2015; Vaswani et al., 2017). Herold et al. (2022) studied various types of noise present in the Pseudo-Parallel corpora and investigated if the current filtering systems remove all types of noise.

Recently, Batheja and Bhattacharyya (2022) used a Phrase Pair Injection with LaBSE (Feng et al., 2020) based Corpus Filtering to extract high-quality parallel data from a noisy parallel corpus. Briakou et al. (2022) proposed an approach to reconstruct the original translations and translate, in a multi-task fashion, and use it to automatically edit the mined corpus. They train a multi-task model using synthetic supervision from mined bitexts. They show improvement in the bitext quality of the CCMatrix corpus. In contrast, we use a different training strategy to train the APE systems, namely, Curriculum Training Strategy (Deoghare and Bhattacharyya, 2022). Batheja and Bhattacharyya (2023) proposed a Quality Estimation based corpus filtering approach that performed better than all previously proposed methods. In contrast, we use APE and QE-assisted filtering to correct and extract high-quality data from noisy pseudo-parallel data.

2.2 Automatic Post Editing

Automatic Post-Editing (APE) is an auxiliary task in a Machine Translation (MT) field, which is aimed at automatically identifying and correcting MT output errors (Chatterjee et al., 2020). APE systems have the potential to reduce human effort by correcting systematic and repetitive translation errors (Läubli et al., 2013; Pal et al., 2016). Recent APE approaches utilize transfer learning by adapting pre-trained language or translation models to perform APE (Lopes et al., 2019; Wei et al., 2020; Sharma et al., 2021). Also, the recent approaches use multilingual or cross-lingual models to get latent representations of the source and target sentences (Lee et al., 2020). Oh et al. (2021) have

shown that gradually adapting pre-trained models to APE by using the Curriculum Training Strategy (CTS) improves performance. Deoghare and Bhattacharyya (2022) showed that augmenting the APE data with phrase-level APE triplets improves feature diversity, and using a QE system allows for identification and discarding poor-quality APE outputs. We use the APE system to rectify errors in the target side of the noisy pseudo-parallel corpus.

3 Approaches

3.1 Phrase Pair Injection (PPI) with LaBSE-based Filtering (Batheja and Bhattacharyya, 2022)

Batheja and Bhattacharyya (2022) proposed a combination of Phrase Pair Injection (Sen et al., 2021) and LaBSE-based Corpus Filtering to extract high-quality parallel data from a pseudo-parallel corpus. We train a PBSMT model on the pseudo-parallel corpus using the *Moses*¹ decoder. Then, we extract the longest unique phrase pairs with the highest translation probability. We use LaBSE² to generate the source and target sentence embeddings for the pseudo-parallel corpora. Then, we extract high-quality parallel sentences from pseudo-parallel corpora based on the cosine similarity computed between the source and target sentence embeddings. We apply the same process on the longest unique phrase pairs and extract LaBSE-filtered high-quality phrase pairs. We augment these high-quality phrase pairs with LaBSE-filtered parallel sentences.

3.2 Quality Estimation (QE) based Filtering (Batheja and Bhattacharyya, 2023)

Batheja and Bhattacharyya (2023) proposed Quality Estimation based Filtering approach to extract high-quality parallel corpus from noisy pseudo-parallel corpus using threshold QE score values. We borrow their En-Mr sentence level QE model to perform QE based Filtering.

3.3 Our Approach, APE-then-QE based Filtering

Deoghare and Bhattacharyya (2022) proposed a curriculum training strategy to train the APE system. We borrow the same training strategy to train

¹<http://www2.statmt.org/ Moses/?n=Development.GetStarted>

²<https://huggingface.co/sentence-transformers/LaBSE>

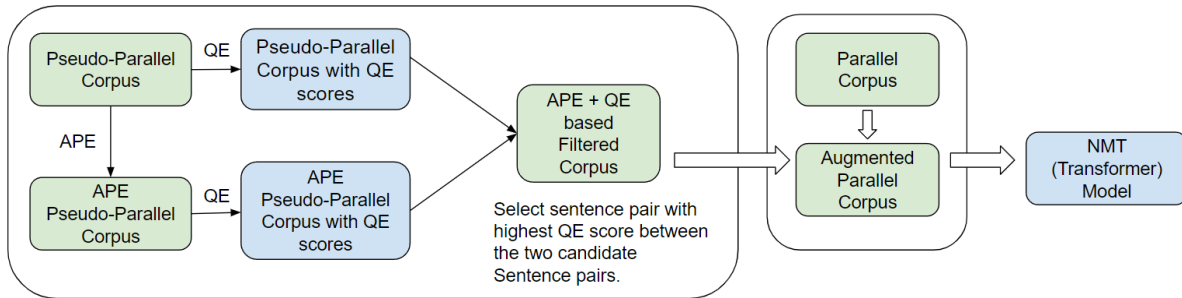


Figure 1: The proposed APE-then-QE based corpus filtering pipeline.

our En-Mr APE system. The training details are mentioned in A.3.

We use the trained APE system to correct errors in the target side of the noisy pseudo-parallel corpus. As APE systems are prone to the problem of ‘over-correction’, we use a sentence-level quality estimation (QE) system to select the final output between an original target sentence and the corresponding output generated by the APE model. We compare our approach against three previously proposed approaches, namely, **LaBSE based Filtering**, **LaBSE + PPI with LaBSE based Filtering and QE based Filtering**.

4 Experimental Setup

Corpus Name	# Samples	Type
APE data	18K triplets	Real
Parallel Corpus	6M pairs	Synthetic
Phrase-Level Data	60K triplets	
APE data	2.5M triplets	

Table 1: Dataset Statistics for the task of Automatic Post Editing for En-Mr language pair

4.1 Dataset

In all NMT experiments, we use two sets of corpus, namely, Parallel and Pseudo-Parallel corpus. The En-Mr **Parallel corpus** consists of 248K high-quality sentence pairs, which include the ILCI phase 1, Bible, PIB, and PM-India corpus (Jha, 2010; Christos Christodouloupoulos, 2015; Haddow and Kirefu, 2020). The En-Mr **Pseudo-Parallel** corpus contains 3.28M sentence pairs of varying quality from the Samanantar Corpus (Ramesh et al., 2021).

We use the WMT22 En-Mr APE shared task data to develop the APE system (Bhattacharyya

et al., 2022). The statistics are listed in Table 1. The train set consists of 18K APE triples $\langle source, MT\ output, reference \rangle$ generated with the help of professional post-editors. We also use synthetically generated 2.5M APE triplets. The NMT model, which we train as a step in the CTS, is trained using the publically available parallel corpora (Samanantar (Ramesh et al., 2021), Anuvaad, Tatoeba, and ILCI (Bansal et al., 2013)) containing around 6M sentence pairs. The detailed APE data statistics are mentioned in table 1. The annotation guidelines for the task of APE are mentioned in the **Appendix A.4**.

For evaluation, we use the FLORES 101 test set, which contains 1,012 sentence pairs for the En-Mr language pair.

4.2 Models

We use a Transformer based architecture to train the NMT models for all our experiments. We use MonoTransQuest model architecture to train the QE models. The training details and model architecture is mentioned in **Appendix A.2** and **A.3**.

Baseline: We train the baseline NMT models on the whole pseudo-parallel corpus augmented with the parallel corpus for the En-Mr language pair.

LaBSE based Filtering: In this model, we use the LaBSE filtering with threshold **0.8** to extract good quality parallel sentences from the En-Mr pseudo-parallel corpus. Then, we augment the parallel corpus with the LaBSE-filtered parallel sentences and train the respective NMT models.

PPI with LaBSE based Filtering: We perform Phrase Pair Injection with LaBSE-based Filtering to train the respective NMT models. This involves extracting LaBSE-filtered parallel sentences and phrases from the pseudo-parallel corpus and augmenting them with the parallel corpora. We train this model for the purpose of comparing it with our

Technique	# Sentence Pairs (in Millions)	En→Mr	Mr→En
APE-then-QE based Filtering	3.5M	14.44	25.81
APE based Filtering	3.5M	14.28	24.43
QE based Filtering (Batheja and Bhattacharyya, 2023)	2.61M	9.4	17.7
PPI with LaBSE based Filtering (Batheja and Bhattacharyya, 2022)	4.09M	9.9	17.0
LaBSE based Filtering (Batheja and Bhattacharyya, 2022)	2.85M	8.8	16.7
Baseline	3.5M	8.8	15.9

Table 2: BLEU scores of NMT models on FLORES101 test data. For actual instances of translations please refer to Appendix A.1

proposed best model.

QE based Filtering: We use the En-Mr sentence level QE model provided by (Batheja and Bhattacharyya, 2023) to compute the quality scores for the pseudo-parallel corpora. Then, we extract high-quality sentence pairs from the pseudo-parallel corpus using the threshold value of **-0.5** for the En-Mr language pair. We augment the extracted high-quality sentence pairs with the parallel corpus and train the respective NMT models.

Our Model, APE based Filtering: We train an APE system for the En-Mr language pair and use it to correct errors in the target side of a noisy pseudo-parallel corpus. We augment the corrected pseudo-parallel corpus with the parallel corpus and use it to train the NMT models.

Our Model, APE-then-QE based Filtering: First, we train an APE system for the En-Mr language pair. This APE system is then used to correct errors in the target side of a noisy pseudo-parallel corpus. Next, we use a sentence-level QE system to choose the final target sentence, either the original or the corresponding output generated by the APE model. Finally, we augment the corrected pseudo-parallel corpus with the parallel corpus and use it to train the NMT models.

5 Results and Analysis

We evaluate our NMT models using BLEU (Papineni et al., 2002). We use sacrebleu (Post, 2018) python library to calculate the BLEU scores. Table 2 shows that **APE-then-QE based filtering** model outperforms all other models for the En-Mr language pair. The **APE-then-QE based filtering** model improves the MT system’s performance by **5.64** and **9.91** BLEU points over the **baseline**

model for En→Mr and Mr→En, respectively. It also outperforms **QE based Filtering** and **LaBSE + PPI-LaBSE based Filtering** model by **5.04, 8.11** BLEU points for En→Mr and **4.54, 8.81** BLEU points for Mr→En, respectively.

We observe a significant improvement in the En-Mr NMT system by **5.48** and **8.53** BLEU points over the baseline, merely by correcting errors in the target side of the noisy pseudo-parallel corpus using the En-Mr APE system. Furthermore, we have also discovered that utilizing QE-based sentence selection alongside APE-based pre-editing of the pseudo-parallel corpus resulted in a further enhancement of the En-Mr NMT system by **0.16** and **1.38** BLEU points when compared to the **APE-based filtering model**.

6 Conclusion and Future Work

In this work, we show that correcting errors in the target side of the noisy pseudo-parallel corpus using an APE model and selecting high-quality sentence pairs from the original and corrected sentence pairs using QE helps NMT models improve their performance significantly. Also, the proposed approach is independent of the properties of English and Marathi languages and can be applied to any language pair. However, our language pair-agnostic approach requires APE and QE data to correct and filter noise from pseudo-parallel data.

In the future, we will use the proposed approach and analyze data from other language pairs. We also plan to use a combination of word and sentence level QE to select high-quality sentence pairs between original and APE-corrected sentence pairs.

Limitations

Developing APE and QE systems involves using human-annotated data, which can be costly and time-consuming. We restrict our experiments solely to the En-Mr language pair due to a lack of APE and QE resources. The QE-based filtering experiments involve a hyper-parameter called “threshold quality score”. One of our limitations is the usual one, namely finding the correct set of hyperparameters through a large number of experiments.

Ethics Statement

The aim of our work is to improve the quality of En-Mr MT systems by using APE and QE models to rectify errors on the target side of the pseudo-parallel corpus and extract high-quality parallel corpus. The datasets that we used in this work are publicly available, and we have cited the sources of all the datasets that we have used. Publicly available datasets can contain biased sentences.

References

- Dzmitry Bahdanau, Kyung Hyun Cho, and Yoshua Bengio. 2015. Neural machine translation by jointly learning to align and translate. 3rd International Conference on Learning Representations, ICLR 2015 ; Conference date: 07-05-2015 Through 09-05-2015.
- Akanksha Bansal, Esha Banerjee, and Girish Nath Jha. 2013. Corpora creation for indian language technologies—the ilci project. In *the sixth Proceedings of Language Technology Conference (LTC '13)*.
- Akshay Batheja and Pushpak Bhattacharyya. 2022. [Improving machine translation with phrase pair injection and corpus filtering](#). In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 5395–5400, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Akshay Batheja and Pushpak Bhattacharyya. 2023. ["a little is enough": Few-shot quality estimation based corpus filtering improves machine translation](#).
- Pushpak Bhattacharyya, Rajen Chatterjee, Markus Freitag, Diptesh Kanojia, Matteo Negri, and Marco Turchi. 2022. [Findings of the WMT 2022 shared task on automatic post-editing](#). In *Proceedings of the Seventh Conference on Machine Translation (WMT)*, pages 109–117, Abu Dhabi, United Arab Emirates (Hybrid). Association for Computational Linguistics.
- Eleftheria Briakou, Sida Wang, Luke Zettlemoyer, and Marjan Ghazvininejad. 2022. [BitextEdit: Automatic bitext editing for improved low-resource machine translation](#). In *Findings of the Association for Computational Linguistics: NAACL 2022*, pages 1469–1485, Seattle, United States. Association for Computational Linguistics.
- Rajen Chatterjee, Markus Freitag, Matteo Negri, and Marco Turchi. 2020. [Findings of the WMT 2020 shared task on automatic post-editing](#). In *Proceedings of the Fifth Conference on Machine Translation*, pages 646–659, Online. Association for Computational Linguistics.
- Mark Steedman. Christos Christodouloupoulos. 2015. A massively parallel corpus: the bible in 100 languages. Language resources and evaluation.
- Sourabh Deoghare and Pushpak Bhattacharyya. 2022. [IIT Bombay’s WMT22 automatic post-editing shared task submission](#). In *Proceedings of the Seventh Conference on Machine Translation (WMT)*, pages 682–688, Abu Dhabi, United Arab Emirates (Hybrid). Association for Computational Linguistics.
- Fangxiaoyu Feng, Yinfei Yang, Daniel Cer, Naveen Ariavazhagan, and Wei Wang. 2020. Language-agnostic bert sentence embedding.
- Barry Haddow and Faheem Kirefu. 2020. Pmindia – a collection of parallel corpora of languages of india.
- Christian Herold, Jan Rosendahl, Joris Vanvinckenroye, and Hermann Ney. 2022. [Detecting various types of noise for neural machine translation](#). In *Findings of the Association for Computational Linguistics: ACL 2022*, pages 2542–2551, Dublin, Ireland. Association for Computational Linguistics.
- Girish Nath Jha. 2010. The TDIL program and the Indian language corpora initiative (ILCI). In *Proceedings of the Seventh International Conference on Language Resources and Evaluation (LREC'10)*. European Language Resources Association (ELRA).
- Samuel Lübli, Mark Fishel, Gary Massey, Maureen Ehrensberger-Dow, and Martin Volk. 2013. [Assessing post-editing efficiency in a realistic translation environment](#). In *Proceedings of the 2nd Workshop on Post-editing Technology and Practice*, Nice, France.
- Jihyung Lee, WonKee Lee, Jaehun Shin, Baikjin Jung, Young-Kil Kim, and Jong-Hyeok Lee. 2020. [POSTECH-ETRI’s submission to the WMT2020 APE shared task: Automatic post-editing with cross-lingual language model](#). In *Proceedings of the Fifth Conference on Machine Translation*, pages 777–782, Online. Association for Computational Linguistics.
- António V. Lopes, M. Amin Farajian, Gonçalo M. Correia, Jonay Trénous, and André F. T. Martins. 2019. [Unbabel’s submission to the WMT2019 APE shared task: BERT-based encoder-decoder for automatic post-editing](#). In *Proceedings of the Fourth Conference on Machine Translation (Volume 3: Shared Task Papers, Day 2)*, pages 118–123, Florence, Italy. Association for Computational Linguistics.

- Shinhyeok Oh, Sion Jang, Hu Xu, Shounan An, and Insoo Oh. 2021. [Netmarble AI center’s WMT21 automatic post-editing shared task submission](#). In *Proceedings of the Sixth Conference on Machine Translation*, pages 307–314, Online. Association for Computational Linguistics.
- Santanu Pal, Sudip Kumar Naskar, and Josef van Genabith. 2016. [Multi-engine and multi-alignment based automatic post-editing and its impact on translation productivity](#). In *Proceedings of COLING 2016, the 26th International Conference on Computational Linguistics: Technical Papers*, pages 2559–2570, Osaka, Japan. The COLING 2016 Organizing Committee.
- Kishore Papineni, Salim Roukos, Todd Ward, and Wei-Jing Zhu. 2002. [Bleu: a method for automatic evaluation of machine translation](#). In *Proceedings of the 40th Annual Meeting of the Association for Computational Linguistics*, pages 311–318, Philadelphia, Pennsylvania, USA. Association for Computational Linguistics.
- Matt Post. 2018. [A call for clarity in reporting BLEU scores](#). In *Proceedings of the Third Conference on Machine Translation: Research Papers*, pages 186–191, Brussels, Belgium. Association for Computational Linguistics.
- Gowtham Ramesh, Sumanth Doddapaneni, Aravinth Bheemaraj, Mayank Jobanputra, Raghavan AK, Ajitesh Sharma, Sujit Sahoo, Harshita Diddee, Mahalakshmi J, Divyanshu Kakwani, Navneet Kumar, Aswin Pradeep, Srihari Nagaraj, Kumar Deepak, Vivek Raghavan, Anoop Kunchukuttan, Pratyush Kumar, and Mitesh Shantadevi Khapra. 2021. [Samanantar: The largest publicly available parallel corpora collection for 11 indic languages](#).
- Sukanta Sen, Mohammed Hasanuzzaman, Asif Ekbal, Pushpak Bhattacharyya, and Andy Way. 2021. Neural machine translation of low-resource languages using smt phrase pair injection. *Natural Language Engineering*, 27(3):271–292.
- Abhishek Sharma, Prabhakar Gupta, and Anil Nelakanti. 2021. [Adapting neural machine translation for automatic post-editing](#). In *Proceedings of the Sixth Conference on Machine Translation*, pages 315–319, Online. Association for Computational Linguistics.
- Ilya Sutskever, Oriol Vinyals, and Quoc V Le. 2014. Sequence to sequence learning with neural networks. *Advances in neural information processing systems*, 27.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. [Attention is all you need](#). In *Advances in Neural Information Processing Systems*, volume 30. Curran Associates, Inc.
- Daimeng Wei, Hengchao Shang, Zhanglin Wu, Zhengzhe Yu, Liangyou Li, Jiixin Guo, Minghan Wang, Hao Yang, Lizhi Lei, Ying Qin, and Shiliang Sun. 2020. [HW-TSC’s participation in the WMT 2020 news translation shared task](#). In *Proceedings of the Fifth Conference on Machine Translation*, pages 293–299, Online. Association for Computational Linguistics.

A Appendix

A.1 Instances of Translation (Referred from table 2)

The instances of translations for En-Mr and Mr-En are shown in figure 2 and 3.

A.2 Model Architecture (Referred from section 4.2, line no. 225)

We use a Transformer based architecture to train English-Marathi NMT models for all our experiments. The encoder of the Transformer consists of 6 encoder layers and 8 encoder attention heads. The encoder uses embeddings of dimension 512. The decoder of the Transformer also consists of 6 decoder layers and 8 decoder attention heads. The English-Marathi NMT models consist of around 66M parameters. For developing an APE system, a transformer-based two-encoder single-decoder architecture having around 40M parameters is used. The encoders use the same architecture as IndicBERT and are also initialized using the IndicBERT weights. The decoder contains two cross-attention layers with 8 attention heads. The size of the APE model

A.3 Training Details (Referred from section 4.2, line no. 225)

We used the Indic NLP library for preprocessing the Indic language data and Moses for preprocessing the English language data. For Indic languages, we normalize and tokenize the data. For English, we lowercase and tokenize the data.

We use the OpenNMT-py library to train the Transformer based NMT models. The hyperparameter values are selected using manual tuning. The optimizer used was adam with betas (0.9, 0.98). The initial learning rate used was $5e-4$ with the inverse square root learning rate scheduler. We use 8000 warmup updates. The dropout probability value used was 0.1 and the criterion used was label smoothed cross entropy with label smoothing of 0.1. We use a batch size of 4096 tokens. All the models were trained for 200,000 training steps.

We use Curriculum Training Strategy (CTS) (Deoghare and Bhattacharyya, 2022) to train APE system. Initially, we use pseudo-parallel corpus

English Input: though it is widely used, especially among non-romani, the word "gypsy" is often considered offensive because of its associations with negative stereotypes and inaccurate perceptions of romani people.

Marathi Reference: याचा वापर विशेषतः रोमानी नसलेल्यांमध्ये व्यापकपणे केला जात असला तरी, "जिप्सी" हा शब्द बरेचदा नकारात्मक रूढी आणि रोमानी लोकांबद्दलच्या चुकीच्या समजुतीशी संबंधित असल्यामुळे आक्षेपार्ह समजला जातो.

No Filtering: याचा मोठ्या प्रमाणात वापर केला जातो , विशेषतः नॉन – रोमानीमध्ये " जिप्सी " हा शब्द सहसा त्याच्या नकारात्मक क्लिप्टिक्समुळे आणि रोमानी लोकांच्या असत्य विचारांमुळे होतो .

PPI with LaBSE based Filtering: हे मोठ्या प्रमाणावर वापरले जाते, विशेषतः रोमानियामध्ये 'जिप्सी' हा शब्द नेहमी त्यांच्या संघटनांमुळे आणि रोमानियाच्या लोकांच्या अचूकता आणि अचूकता यांमुळे चर्चेत असतो.

QE based Filtering: याचा मोठ्या प्रमाणात वापर केला जातो , विशेषतः नॉन – रोमी मध्ये , " जिप्सी " हा शब्द सहसा रोमी लोकांच्या नकारात्मक आणि अचूक शब्दांमुळे होतो

APE+QE based Filtering जरी याचा मोठ्या प्रमाणात वापर केला जात असला तरी , विशेषतः गैर – रोमानियामध्ये , " जिप्सी " हा शब्द बहुतेक वेळा आक्षेपार्ह मानला जातो कारण रोमानी लोकांच्या नकारात्मक रूढी आणि चुकीच्या समजुतीमुळे .

Comments: The word "though" and "offensive" is not translated by **baseline**, **PPI with LaBSE based Filtering** and **QE based Filtering**. **APE+QE based Filtering** correctly translates the sentence.

Figure 2: Examples of NMT model output for En→Mr

Marathi Input: परंतु , हे सत्य नाही. या दस्तऐवजाच्या पाठीमागे काहीतरी लिहिले असले तरी, तो एक खजिन्याचा नकाशा नाही .

English Reference: however, that is not true. although there is something written on the back of the document, it is not a treasure map .

Baseline: but this is not true .

PPI with LaBSE based Filtering: but, this is not the truth.

QE based Filtering: but, that is not true, though something is written behind this document, it is not a map of a treasure.

APE+QE based Filtering: however, this is not true. although something is written behind the back of this document, it is not a treasure map .

Comments: **Baseline** and **PPI with LaBSE based Filtering** models translate only first sentence. **QE based Filtering** and **APE+QE based Filtering** correctly translate the sentences.

Figure 3: Examples of NMT model output for Mr→En

A.4 Annotation Details (Referred from section 4, line no. 215)

A.4.1 APE Guidelines

The guidelines provided to the annotators for the Automatic Post-Editing task are shown in Figure 5.

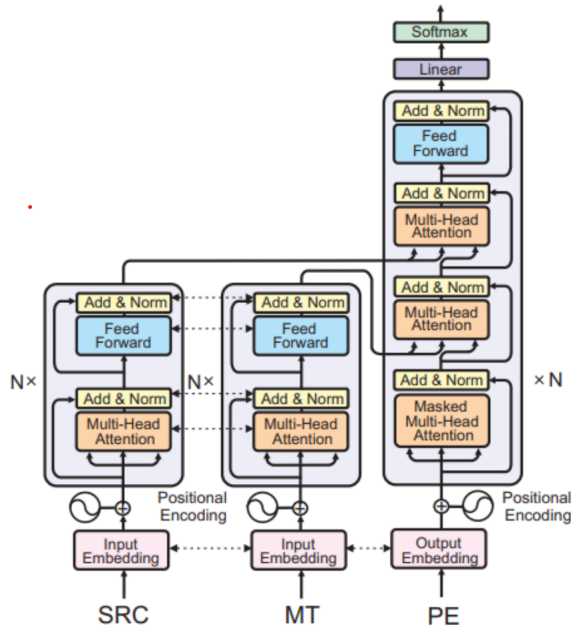


Figure 4: Dual-encoder Single Decoder Architecture. Dashed arrows represent tied parameters and common embedding matrices for encoders and decoder (Deoghare and Bhattacharyya, 2022)

(Samanantar (Ramesh et al., 2021)), Anuvaad³ and ILCI (Bansal et al., 2013) and tatoeba⁴ corpus to train an encoder-decoder model to translate English into Marathi. Then, we add another encoder to the model and train the resulting dual-encoder single-decoder model for the APE task. This involves training the model through multiple stages using synthetic APE data and fine-tuning it with real APE data. For training the APE system, we use a batch size of 16. We set the number of epochs to 1000 and use the early stopping to halt the training by using patience over the 20 training steps. We use the Adam optimizer with an initial learning rate of 5e-5 and the 0.9 and 0.997 beta values. Both encoders of the model are initialized using IndicBERT weights.

We use a single Nvidia A100 GPU with 40 GB memory to train our NMT and APE. Training the APE model using CTS and including the fine-tuning, takes around 48 hours when using a single GPU.

³Anuvaad: Github Repo

⁴Tatoeba Project

POST-EDITING INSTRUCTIONS (English to Marathi)

In this task, you are presented with automatic translations of English sentences from different domains.

You are required to post-edit the given machine translation output by applying *** minimal edits *** required to transform the system output into a fluent sentence with the same meaning as the source sentence.

While post-editing, remember that the post-edited sentence is to be intended as a transcription of spoken language. Also, depending on the style of the source language talk, you can use the corresponding style in the target language (e.g. if the talk uses a friendly/colloquial style you can use informal words too).

Note also that the focus is the correctness of the single sentence within the given context, NOT the consistency of a group of sentences. Hence, surrounding segments should be used to understand the context but NOT to enforce consistency on the use of terms. In particular, different but correct translations of terms across segments should not be corrected.

=====
POST-EDITING INSTRUCTIONS
=====

In this task, you are presented with English sentences and corresponding automatic machine translations in Marathi. Starting from the source, you are asked to post-edit each given automatic translation by applying the minimal edits required to transform the system output into a fluent sentence with the same meaning as the source, keeping the structure of the sentence as close as possible to the original.

While post-editing, remember the following guidelines:

1. The source should be your first source of information, please make sure the target correctly reflects this.
2. Depending on the style of the source language, you can use the corresponding style in the target language (e.g., if the segment uses a friendly/colloquial style you can use informal words too).
3. The focus is the correctness of the single sentence within the given context, NOT the consistency of a group of sentences. Hence, surrounding segments should be used to understand the context but NOT to enforce consistency on the use of terms.
4. The quality expected is high.
5. It can be defined as being comprehensible (*i.e.*, an end-user perfectly understands the content of the message), accurate (*i.e.*, it communicates the same meaning as the source text), stylistically fine, though the style may not be as good as that achieved by a native-speaker human translator.
6. The syntax is normal, grammar and punctuation are correct.

Figure 5: Guidelines for the English-Marathi Automatic Post-Editing Task.