Brave: Byzantine-Resilient and Privacy-Preserving Peer-to-Peer Federated Learning

Zhangchen Xu*1, Fengqing Jiang*1, Luyao Niu1, Jinyuan Jia2, Radha Poovendran1

¹University of Washington

²The Pennsylvania State University
{zxu9,fqjiang,luyaoniu,rp3}@uw.edu, jinyuan@psu.edu

Abstract

Federated learning (FL) enables multiple participants to train a global machine learning model without sharing their private training data. Peer-to-peer (P2P) FL advances existing centralized FL paradigms by eliminating the server that aggregates local models from participants and then updates the global model. However, P2P FL is vulnerable to (i) honestbut-curious participants whose objective is to infer private training data of other participants, and (ii) Byzantine participants who can transmit arbitrarily manipulated local models to corrupt the learning process. P2P FL schemes that simultaneously guarantee Byzantine resilience and preserve privacy have been less studied. In this paper, we develop Brave, a protocol that ensures Byzantine Resilience And priVacypr<u>E</u>serving property for P2P FL in the presence of both types of adversaries. We show that Brave preserves privacy by establishing that any honest-but-curious adversary cannot infer other participants' private data by observing their models. We further prove that Brave is Byzantine-resilient, which guarantees that all benign participants converge to an identical model that deviates from a global model trained without Byzantine adversaries by a bounded distance. We evaluate Brave against three state-of-the-art adversaries on a P2P FL for image classification tasks on benchmark datasets CI-FAR10 and MNIST. Our results show that the global model learned with Brave in the presence of adversaries achieves comparable classification accuracy to a global model trained in the absence of any adversary.

1 Introduction

Federated learning (FL) (McMahan et al. 2017; Konečný et al. 2016) allows multiple participants to collaboratively train a global model while avoiding sharing their private data. In a classic centralized FL paradigm, a central server coordinates the training process among the distributed participants and aggregates their local models. However, centralized FL is not viable when the server is subject to faults or becomes untrustworthy and/or unavailable (Lalitha et al. 2019).

To address the high dependence on the reliability of the server in centralized FL, Peer-to-Peer (P2P) federated learning has been proposed in (Lalitha et al. 2019; Roy et al.

*These authors contributed equally. Copyright © 2024, Association for the Advancement of Artificial Intelligence (www.aaai.org). All rights reserved. 2019). In P2P FL, the global model is updated by leveraging information exchange between individual participants, thereby eliminating the need for a central server. The P2P paradigm presents two significant advantages. First, it eliminates the potential vulnerabilities associated with a single point of failure. Second, it can be deployed for decentralized applications such as vehicle-to-vehicle networks (Chen et al. 2021) and Internet-of-Things (Savazzi, Nicoli, and Rampa 2020).

Due to the absence of central coordination in the P2P setting, the behaviors of participants are unpredictable and uncontrollable. An unauthorized agent can participate in P2P FL aiming to obtain sensitive data and/ or disrupt the training process. Since local models are shared among participants, honest-but-curious participants may be able to infer private training data by launching a membership inference attack (Nasr, Shokri, and Houmansadr 2019). Therefore, it is crucial to implement privacy-preserving techniques such as secure Multi-Party Computation (MPC) (Yao 1982) for model aggregation in P2P settings. Besides honest-but-curious participants, Byzantine participants can send inconsistent models to different participants in P2P networks, inject biased models, or even withhold its updates (Tolpegin et al. 2020; Xie, Koyejo, and Gupta 2019; Fang et al. 2020). As a consequence, Byzantine participants can degrade the global model or even cause the FL to fail. Therefore, Byzantine-resilient model aggregation rules are needed to defend against Byzantine attacks in P2P FL.

The current Byzantine-resilient model aggregation rules (Blanchard et al. 2017; Yin et al. 2018; Li et al. 2019), however, are not readily compatible with privacy-preserving techniques such as MPC. These model aggregation rules (Blanchard et al. 2017; Yin et al. 2018; Li et al. 2019) eliminate the compromised models from adversaries by disclosing each individual participant's information. Consequently, the honest-but-curious adversaries can infer private training data owned by the other participants, leveraging such information disclosure. At present, however, P2P FL schemes that simultaneously guarantee Byzantine resilience and preserve privacy have been less investigated.

In this paper, we design a P2P FL scheme that achieves Byzantine resilience while preserving privacy. We consider the presence of both honest-but-curious and Byzantine participants, and define three properties:

information-theoretic privacy, ϵ -convergence, and agreement. Information-theoretic privacy ensures that no information about the participants' local models is leaked during the training process, ϵ -convergence implies that the distance between global models learned with and without Byzantine participants is at most ϵ , and agreement indicates the global model of all benign participants are identical. We guarantee information-theoretic privacy by first letting each participant make a commitment of its local model, which will be 'locked' and thus not editable in the future. We then utilize MPC technique to compare and sort the participants' local models without disclosing their true values. Each participant then invokes a trimming scheme to exclude the largest and smallest f local models when updating the global model, where f is the maximum number of Byzantine participants. The main contributions of our paper are summarized as follows.

- We propose Brave, a <u>Byzantine Resilience And priVacy-prEserving protocol</u> for P2P FL. We prove that Brave ensures the local model of each participant to be information-theoretically private during the learning process.
- We design a privacy-preserving trimming scheme to ensure ϵ -convergence in the presence of Byzantine adversaries. We further leverage distributed consensus to ensure agreement. We theoretically prove that Brave is resilient to Byzantine participants given N>3f+2, where N is the total number of participants.
- We evaluate Brave against three state-of-the-art adversaries on two image classification tasks. Our results show that Brave guarantees ϵ -convergence if N>3f+2 holds. Furthermore, the global model trained using P2P FL that implements Brave achieves comparable classification accuracy to a global model learned in the absence of any adversary.

The rest of the paper is organized as follows. We present the literature review in Section 2. In Section 3, we present the system model and problem formulation. Section 4 describes Brave, a multi-stage protocol in P2P FL that is information-theoretic privacy and Byzantine resilience. Section 5 shows empirical results of Brave for image classification tasks on benchmark datasets including CIFAR10 and MNIST. Section 6 concludes this paper and discusses future work.

2 Related Work

In this section, we first review Byzantine-resilient and privacy-preserving solutions developed for centralized FL. We then present P2P FL schemes that guarantee Byzantine resilience and/ or preserve privacy.

Solutions in Centralized Federated Learning: To preserve privacy in FL, differential privacy (DP) (Dwork 2008) based mechanisms were widely used to protect model parameters (Truex et al. 2019; Wei et al. 2020). However, (Hitaj, Ateniese, and Perez-Cruz 2017) pointed out that DP is not adequate for safeguarding privacy in collaborative machine learning. Additionally, DP factors could result in reduction

of model accuracy (Bagdasaryan, Poursaeed, and Shmatikov 2019). An alternative secure multi-party computation (MPC) (Yao 1982) based approach was adopted in (Bonawitz et al. 2017), which presented a model aggregation method for FL using a pairwise mask to cloak the local model. In (Mugunthan et al. 2019), DP and MPC were simultaneously applied to further strengthen the privacy-preserving property.

Multiple Byzantine-resilient model aggregation rules were proposed to address the presence of Byzantine adversaries in FL. Multi-Krum (Blanchard et al. 2017) updated the global model by selecting the gradient that minimizes the sum of squared distances to its N-f closest gradients. Similarly, (Yin et al. 2018) proposed two coordinatewise model aggregation rules, trimmed mean and median. In trimmed mean (resp. median), the server sorted the value of each model, removed the largest and smallest f values, and then computed the mean (resp. median) of the remaining values for the global model update.

To simultaneously preserve privacy and guarantee Byzantine resilience, DP and Byzantine-resilient model aggregation techniques were adopted in (Ma et al. 2022b,a). The authors of (He, Karimireddy, and Jaggi 2020; Liu et al. 2021) implemented Multi-Krum on two non-colluding honest-butcurious servers for secure aggregation, and applied private calculation to ensure privacy. It is worth noting that (Liu et al. 2021) implemented median as the Byzantine-resilience aggregation rule, where local models from all participants were sorted using MPC. In (Velicheti, Xia, and Koyejo 2021), a clustered FL framework that randomly clusters clients before filtering malicious updates was proposed, which cryptographically preserved the local model privacy and was robust to Byzantine adversaries. A very recent work (Mohamad et al. 2023) discussed the potential challenges in secure aggregation based on cryptographic schemes for FL.

Solutions in P2P Federated Learning: There are two main categories in realizing P2P FL. The first category adopted a fully decentralized framework where no coordinator existed. In (Lalitha et al. 2019), the participants aggregated data and updated their model by observing their one-hop neighbors. In (Roy et al. 2019), the participant who intended to renew its local model actively initiated an update by requesting the latest model from other participants. Another category leveraged blockchain (Li et al. 2021; Ramanan and Nakayama 2020; Chen et al. 2021; Shayan et al. 2021) or distributed consensus algorithms (Che et al. 2021; Han et al. 2022) to synchronize the FL process and coordinate the model aggregation. For example, (Chen et al. 2021) proposed a blockchain-based P2P FL, where the public verifiable secret sharing (PVSS) scheme was implemented to preserve privacy. In (Li et al. 2021), blockchain was used for global model storage and the local model update exchange, and a committee consensus mechanism was proposed to reduce the amount of consensus computing. In (Ramanan and Nakayama 2020), smart contract was applied to coordinate the round delineation, model aggregation, and update tasks in FL. In (Che et al. 2021; Han et al. 2022), two distributed consensus algorithms, PBFT (Castro and Liskov 1999) and Hotstuff (Yin et al. 2019), were applied to coordinate the FL training process, and Multi-Krum was

implemented to enable Byzantine-resilience model aggregation. However, these solutions did not consider privacy-preserving and Byzantine resilience simultaneously.

Currently, Byzantine-resilient and privacy-preserving P2P FL has been less studied. The authors of (Shayan et al. 2021) simultaneously considered privacy-preserving property and Byzantine resilience in P2P FL. Blockchain and PVSS were used in (Shayan et al. 2021) to ensure differential privacy, whereas Multi-Krum was applied to defend against Byzantine clients. The approach in (Shayan et al. 2021) may inherit the performance degradation with respect to DP factors (Hitaj, Ateniese, and Perez-Cruz 2017). Different from (Shayan et al. 2021), Brave is information-theoretically private. We further demonstrate that Brave does not degrade the performance of global model trained by P2P FL. Therefore, the present paper is complementary to (Shayan et al. 2021).

3 System Model and Problem Formulation

System Model. We consider a P2P FL (Lalitha et al. 2019; Roy et al. 2019) consisting of a set of participants $\mathbb{P} = \{P_1, \dots, P_N\}$ who aim to learn a global model w. Each participant P_i owns a certain amount of private data \mathcal{D}_i . At iteration t of P2P FL, each participant P_i updates its local model $w_i(t)$ using gradient descent as

$$w_i(t+1) = w(t) - \eta g_i(t),$$
 (1)

where $g_i(t) = \frac{\partial \mathcal{L}(\mathcal{D}_i; w(t))}{\partial w(t)}$ is the gradient, $\mathcal{L}(\mathcal{D}_i; w(t))$ is the loss function of P_i , and η is the learning rate. Participant P_i then receives local models $w_j(t+1)$ from other participants $j \neq i$, and updates the global model as

$$w(t+1) = \frac{1}{N} \sum_{i=1}^{N} w_i(t+1).$$
 (2)

Such a procedure repeats until a stopping criterion is met.

Threat Model. We consider a P2P FL framework where both passive and Byzantine adversaries exist and potentially overlap, with the remaining participants identified as benign. The adversaries are assumed to have full access to the messages they receive but are incapable of eavesdropping or intercepting the communications of others. Furthermore, these adversaries have limited computational capability to solve the discrete logarithms problem (McCurley 1990). This assumption is the foundation for the security of numerous public key systems and protocols (Lee and Chang 1998; Joux, Odlyzko, and Pierrot 2014). Specifically, Passive adversaries (Nasr, Shokri, and Houmansadr 2019) follow the procedure of P2P FL but aim to obtain the local models from the other participants, thereby extrapolating private training data by launching MIA (Nasr, Shokri, and Houmansadr 2019) on these local models. Byzantine adversaries aim at compromising the learning performance of P2P FL by biasing the local models of other participants. In pursuit of their objectives, the Byzantine adversaries can create compromised local models, and send different local models to different participants or just remain silent in the communication process.

Problem Formulation. Our aim of this paper is to develop a protocol such that the P2P FL guarantees both *information-theoretic privacy* and *Byzantine resilience*, de-

fined as below.

Definition 1 (Information-Theoretic Privacy). A benign participant P_i 's local model w_i is information-theoretically private if its local model w_i cannot be revealed by a passive adversary by observing the message sent by P_i .

Definition 2 (Byzantine Resilience). A P2P FL scheme is Byzantine-resilient if the following properties hold: 1) ϵ -Convergence: There exists $\epsilon \geq 0$ such that $\|w(T) - w(T)^*\| \leq \epsilon$ holds with probability at least ζ , where $w(T)^*$ is the global model obtained using Eqn. (1) and (2) without Byzantine adversaries, and T is the iteration index when P2P FL terminates. 2) Agreement: The global model w(t) of all benign participants is identical for each iteration t.

Remark. Ensuring information-theoretic privacy and Byzantine resilience implies the protocol is resilient to both passive adversaries and Byzantine adversaries.

4 Design of Brave

We designed Brave, a multi-stage protocol in P2P FL that comprises four stages: Commitment, Privacy-preserving Comparison, Sorting & Trimming, and Aggregation & Verification. The proposed protocol is proven to achieve information-theoretic privacy and Byzantine resilience if N>3f+2.




Figure 1: This figure shows the overall workflow of Brave.

To defend against Byzantine adversaries who might input differing models at various stages, Brave starts with a commitment stage (①) after participants update their local models in each iteration. Following this, Brave enters a privacy-preserving comparison stage (②), which enables the sorting of local models without revealing any information about their true values. Brave then incorporate trimmed mean (Yin et al. 2018) in the sorting & trimming stage (③) to remove the outliers possibly introduced by Byzantine adversaries. In the last aggregation & verification stage (④), MPC (Bonawitz et al. 2017) is performed to aggregate models while preserving privacy. This stage also verifies the consistency of the aggregated model with the commitment. Fig. 2 illustrates the schematic message flow of Brave when applied to a P2P FL with six participants.

Notations. We use \mathbb{Z}_q to denote the set of non-negative integers that are no larger than q. We denote \mathbb{Z}_q^m as the set of m-dimensional vectors with each entry taking values from \mathbb{Z}_q . We denote set $\{1,\ldots,m\}$ as [m].

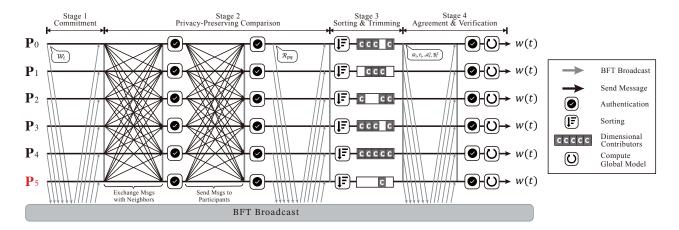


Figure 2: This figure depicts a P2P FL with six participants $\{P_0, \ldots, P_5\}$ and illustrates the schematic message flow of Brave. In this example, P_5 is a Byzantine adversary. In Stage 1, all participants broadcast their commitments of local models to BFT broadcast module. In Stage 2, the participants first exchange messages among themselves using the point-to-point communication network. After that, they send a set of relationships among local models to BFT broadcast. In Stage 3, the participant sorts the local models along each coordinate after receiving the pairwise comparison results. It then trims the largest and smallest f values in each coordinate. In Stage 4, MPC is is performed to aggregate models while preserving privacy.

Stage 1: Commitment

In what follows, we introduce the Commitment stage of Brave. In this stage, each P_i first updates its local model w_i using Eqn. (1). Then, a one-to-one strictly monotonic mapping is performed to map floating point representation of w_i to \mathbb{Z}_q with q being a large number, and therefore, $w_i \in \mathbb{Z}_q^m$. If not specified, we assume all $w_i \in \mathbb{Z}_q^m$ when the context is clear. The protocol then generates a private random helper $r_i^w \in \mathbb{Z}_q^m$. Given local model w_i and random helper r_i^w , P_i next generates a *commitment* of w_i as $W_i = C(w_i, r_i^w)$, where C represents the commitment operation (we defer the detailed introduction on commitment later). We say that w_i w.r.t. W_i is the *claimed local model* of W_i . Note that for a benign participant, w_i is exactly the local model, but for a Byzantine participant, the claim of W_i may not be equal to its local model. The commitment W_i is then broadcast to all other participants using BFT broadcast. The details of the BFT broadcast can be found in Appendix A.

Brave utilizes the Pedersen commitment scheme for \mathcal{C} , defined as follows.

Definition 3 (Pedersen Commitment Scheme (Pedersen 1992)). Let G_q denote a group of prime order q, such that the discrete logarithm problem in this group is infeasible. Let g and h denote independent generators of G_q that are known to all participants. The commitment W_i of local model $w_i \in \mathbb{Z}_q$ is generated as

$$\mathcal{C}(w_i, r_i^w) := g^{w_i} h^{r_i^w}, \tag{3}$$

where exponents and multiplication are coordinate-wise.

The Pedersen commitment in Eqn. (3) provides our protocol with the following properties. First, the commitment W_i does not reveal any information about the local model w_i , and thus w_i is information-theoretically hiding (Pedersen 1992). Second, the commitment is computationally binding in the sense that one cannot solve for a local model w'_i

such that $C(w_i, r_i^w) = C(w_i', r_i^{w'})$ to open the commitment if it is unable to solve discrete logarithm problems. Finally, the commitments obtained using Eqn. (3) are *additively homomorphic*, i.e.,

$$C(w_1, r_1^w)C(w_2, r_2^w) = C(w_1 + w_2, r_1^w + r_2^w).$$
(4)

These properties are summarized in the following lemma 1.

Lemma 1 ((Pedersen 1992)). The commitment procedure in Definition 3 is computationally binding and additively homomorphic. Furthermore, it ensures that the local model w_i is information-theoretically hiding.

In our design, the commitment scheme "locks" the initial input and prevents an adversary node from modifying it in later steps. We prove that the proposed commitment allows us to achieve the information-theoretic privacy and Byzantine resilience of Brave in the Appendix. For a comprehensive understanding, detailed pseudocode of this stage is provided in Algorithm 1 in Appendix A.

Stage 2: Privacy-Preserving Comparison

In this stage, each P_i conducts a privacy-preserving comparison, which coordinate-wise compares its model with all other participants. To preserve the privacy of the true values in the local model, the comparison is achieved by sharing a masked value obtained by adding a random number to the true value, then canceling it during pairwise comparison.

Specifically, P_i generates two random vectors v_{ij} , $r_{ij}^v \in \mathbb{Z}_q^m$ associated with each P_j . It then calculates a masked local model of P_i with respect to P_j as $c_{ij} = w_i + v_{ij}$, and sums two random helpers as $r_{ij}^{w+v} = r_i^w + r_{ij}^v$ for the purpose of authentication. After that, it computes the commitment of v_{ij} , denoted as \mathcal{V}_{ij} , using Eqn. (3) and random helper r_{ij}^v , and sends c_{ij} , r_{ij}^{w+v} , as well as \mathcal{V}_{ij} to P_j . In this communication, there are also some random vectors s_{ij}^1 ,

 r_{ij}^{s1} , s_{ij}^2 , and r_{ij}^{s2} being exchanged, which serve as padding randomness in the next stage. After receiving the message from P_j , P_i leverages the additively homomorphic property of commitment (Lemma 1) to verify the authenticity of P_j 's masked local model c_{ji} using

$$W_j \cdot V_{ji} = \mathcal{C}(c_{ji}, r_{ji}^{w+v}), \tag{5}$$

where \mathcal{W}_j is the commitment generated by P_j in Stage 1. If Eqn. (5) holds for every coordinate of c_{ji} , P_i calculates $d_{ij} = v_{ij} + c_{ji}$ and $r_{ij}^d = r_{ij}^v + r_{ji}^{w+v}$. It then sends a message $m_{ij} := [d_{ij}, r_{ij}^d, \mathcal{V}_{ij}, \mathcal{V}_{ji}]$ to all other participants except P_i . As shown in Fig. 2, we do not use BFT broadcast here, since P_i can never know d_{ij} — if it knows, it can calculate v_{ji} , and then get P_j 's local model $w_j = c_{ji} - v_{ji}$.

After exchanging messages with all other participants, each P_i now coordinate-wise compares the local models of any other two participants denoted as w_q and w_p with $q,p \neq i$. P_i first check if \mathcal{V}_{pq} or \mathcal{V}_{qp} from P_q and P_p are the same, If they are not the same, then at least one of P_q and P_p is malicious. The participant then verifies whether the following two relations

$$\begin{cases}
d_{pq} = v_{pq} + c_{qp} = v_{pq} + v_{qp} + w_q \\
d_{qp} = v_{qp} + c_{pq} = v_{qp} + v_{pq} + w_p
\end{cases}$$
(6)

hold true or not by calculating the commitment of d_{pq} and d_{qp} via $\mathcal{V}_{pq}, \mathcal{V}_{qp}, \mathcal{W}_p$, and \mathcal{W}_q . Note that $v_{pq}+v_{qp}$ is a common term in Eqn. (6). Therefore, if Eqn. (6) holds for all coordinates, then P_i can obtain a coordinate-wise relationship \bowtie between w_p^k and w_q^k for each coordinate k, where $\bowtie \{<,>\}$. We assume ties are broken arbitrarily, so that an equality relationship does not occur. Finally, P_i broadcasts the relationship of each P_p and P_q along each coordinate k to all participants using BFT broadcast. Please refer to Algorithm 2 in Appendix A for detailed information.

Stage 3: Sorting & Trimming

The Sorting & Trimming stage starts after the relationships are broadcast. In this stage, P_i first counts the relationships it received from BFT broadcast. If a relationship $w_p^k\bowtie w_q^k$ appears more than 2f times, it is accepted by P_i . Then in each coordinate k, P_i sorts $\{w_j^k: P_j \in \mathbb{P} \setminus P_i\}$ coordinatewise in ascending order based on the accepted relationships as $\mathcal{S}_i^k:=w_a^k<\ldots< w_b^k$. We denote the length of \mathcal{S}_i^k as $N_i^k\leq N$, where the equality holds when all local models of the participants can be sorted in \mathcal{S}_i^k using \mathcal{R}_{pq} . After sorting, P_i trims the lowest f and highest f values in each \mathcal{S}_i^k . We denote the remaining participants in the trimmed \mathcal{S}_i^k as contributors of coordinate k, denoted as $\mathbb{C}_i^k \subset \mathbb{P}$. Detailed protocol can be found in Algorithm 3 in Appendix A.

Stage 4: Aggregation & Verification

Given the contributors from Stage 3, the last stage, Aggregation and Verification, sums the local models of contributors and updates a global model. Specifically, each P_i calculates

a cloaked local model \bar{w}_i within each coordinate k as follows

$$\bar{w}_i^k := \left(w_i^k - \sum_{j \in \mathbb{C}_{-i}^k} a_{ij}^k + \sum_{j \in \mathbb{C}_{+i}^k} a_{ij}^k \right) \bmod \beta, \quad (7)$$

where $\mathbb{C}^k_{-i} \subset \mathbb{C}^k_i$ (resp. $\mathbb{C}^k_{+i} \subset \mathbb{C}^k_i$) is the set of contributors whose local models are lower (resp. greater) than w^k_i in k-th coordinate, β is a commonly known large prime number, and a_{ij} is an agreed randomness between P_i and P_j . A similar calculation will be performed to obtain the summation of the cloaked random helpers for verification. Then P_i sends the cloaked \bar{w}_i and \bar{r}_i with corresponding commitments \mathcal{A}_i and \mathcal{B}_i to all participants via BFT broadcast.

After receiving \bar{w}_i and \bar{r}_i from the BFT broadcast, all participants then sum the cloaked values and calculate the global model \bar{w} . Each participant then verifies if

$$C(\bar{w}^k, \bar{r}^k) = \prod_{P_j \in \mathbb{C}_i^k} \mathcal{W}_j^k \tag{8}$$

holds in each coordinate. If Eqn. (8) holds, P_i computes w^k as $\frac{\bar{w}^k}{N_i^k-2f}$ for each coordinate k. P_i next projects w^k to the floating numbers, and completes one iteration of P2P FL. The pseudocode is provided in Algorithm 4 in Appendix A.

We note that if Eqn. (8) does not hold, then P_i can identify the Byzantine adversaries thanks to the commitment scheme. Specifically, for each contributor $P_j \in \mathbb{C}^k_i$, if

$$C(\bar{w}_j^k, \bar{r}^k) \neq \mathcal{W}_j^k \prod_{P_h \in \mathbb{C}_{-i}^k} \mathcal{A}_{ih}^k \prod_{P_h \in \mathbb{C}_{+i}^k} (\mathcal{A}_{ih}^k)^{-1}, \qquad (9)$$

then P_i flags P_j as a Byzantine adversary. We term this procedure as *blame*, and the detailed algorithm can be found in Algorithm 5 in Appendix A.

Privacy and Resilience Guarantees of Brave

We present the information-theoretic privacy and Byzantine resilience of Brave in Appendix B. Specifically, we leverage Lemma 1 of the Pedersen Commitment scheme to prove information-theoretic privacy. To show the Byzantine resilience of Brave, we prove ϵ -convergence and agreement, respectively. We show that the global model obtained by the benign participants deviates from the optimal one by a bounded distance, i.e., satisfies ϵ -convergence property. We then prove agreement by showing that the relationship \bowtie accepted by benign participants preserves the correct ordering of the claimed local models, then prove the global model of all benign participants is the same using BFT broadcast.

5 Experiments

We evaluate Brave against three state-of-the-art adversaries using two image classification tasks. We demonstrate that Brave ensures the models learned by P2P FL achieve comparable accuracy to global models trained in the absence of any adversary, and hence resilient to the adversaries.

Experimental Setup

<u>Datasets</u>: We use two benchmark datasets: CIFAR10 (Krizhevsky 2009) and MNIST (LeCun, Cortes, and Burges

Table 1: This table presents the classification accuracy of the learned 2NN and CNN using a P2P FL with N=10 and f=2. The second row of the table represents the scenario where the Byzantine adversaries send their true local models and do not launch any attack. Rows 3-6 correspond to different threat models. We observe that Brave ensures the P2P FL to learn a global model with near-optimal classification accuracy against all threat models, and hence is Byzantine-resilient.

Adversary Strategy	w/o Brave		Brave	
	2NN+MNIST	CNN+CIFAR10	2NN+MNIST	CNN+CIFAR10
No Attack	97.35 %	63.94 %	97.21%	63.55%
Label Flip	89.91%	52.15%	96.74 %	60.91 %
Sign Flip	11.35%	48.68%	97.02 %	63.54 %
Gaussian ($\sigma = 0.1$)	92.02%	55.58%	96.92%	63.08 %
Gaussian $(\sigma = 1)$	53.01%	10.01%	97.12 %	61.92 %

Table 2: This table presents the accuracy of the 2NN model trained by P2P FL with Brave involving N=10,15,20 participants. The number of Byzantine adversaries is set as f/N=20%. We observe that Brave ensures near-optimal classification accuracy with different choices of N, and Brave is insensitive to parameter N.

Adv. Strategy	N = 10	N = 15	N = 20
No Attack	97.21%	97.54%	97.64 %
Label Flip	96.74%	97.18%	97.50 %
Sign Flip	97.02%	97.34%	97.51 %
Gaussian ($\sigma = 0.1$)	96.92%	97.39%	97.42 %
Gaussian ($\sigma = 1$)	97.12%	97.27%	97.59 %

2010), for image classification tasks. CIFAR10 consists of 50000 training and 10000 testing images, each of size 32×32 . Each image within CIFAR10 belongs to one of ten classes. There are 60000 training and 10000 testing images in MNIST dataset. Each image is of size 28×28 , and can be classified to one out of ten classes.

Brave Setup: We implement Brave on two P2P FL with different settings. In the first P2P FL, we let the participants train a 2-hidden-layer model (2NN) using samples from the MNIST dataset. In the second P2P FL, the participants learn a Convolutional Neural Network (CNN) model using CIFAR10 dataset. In both P2P FL, the training images from CIFAR10 or MNIST dataset are independently and identically distributed (i.i.d.) to the participants so that each participant has $|\mathcal{D}_i| = 2000$ images within its private dataset. The participants update their local models $w_i(t)$ using stochastic gradient descent (SGD) algorithm with learning rate $\eta = 0.01$ (McMahan et al. 2017).

Baseline Setup: We present the effectiveness of Brave by comparing with a baseline, P2P FL-naïve. The baseline implements the classic P2P FL as given in Eqn. (1) and (2).

Threat Models: We evaluate Brave against Byzantine ad-

<u>Threat Models</u>: We evaluate Brave against Byzantine adversaries who adopt distinct strategies, detailed as below.

- *No Attack*: The adversaries does not initiate any attack and behave as benign participants.
- Label Flip Attack (Tolpegin et al. 2020): Label flip attack is a data poisoning attack. A Byzantine adversary launches a label flip attack by training its local model us-

ing mislabeled data. As a consequence, a global model that is corrupted by label flip attacks may misclassify the input image, and hence exhibits low classification accuracy.

- Sign Flip Attack (Xie, Koyejo, and Gupta 2019): A Byzantine adversary carries out a sign flip attack by first flipping the sign of its local model and then sending it to the other participants. As a consequence, the original local model w_i of a Byzantine adversary is manipulated as $-w_i$.
- Gaussian Attack (Fang et al. 2020): Gaussian attack is essentially an instantiation of a model poisoning attack. A Byzantine adversary manipulates its local model by adding a zero-mean Gaussian noise $y^k \sim \mathcal{N}(0, \sigma^2)$ to $w_i^k(t)$ along each dimension k. Here σ is the standard deviation that can be tuned by the Byzantine adversary. In our experiments, we evaluate the scenarios where σ are chosen as 0.1 and 1.

The state-of-the-art white-box membership inference attack (MIA) (Zhang et al. 2020) requires the passive adversaries to access the local models of other participants and the architecture of the neural network. By our design of Brave, the passive adversaries can only receive the masked local models and commitments, whereas the local models are hidden. Therefore, the white-box MIA is infeasible for P2P FL when Brave is implemented.

<u>Evaluation Metric</u>: We use classification accuracy over the testing dataset as the evaluation metric. It captures the fraction of input images sampled from the testing dataset that can be correctly classified by using the learned model.

Experimental Results

In what follows, we demonstrate the effectiveness of Brave.

Byzantine Resilience of Brave: We evaluate the classification accuracy of the learned global models obtained by P2P FL with N=10 participants and f=2 Byzantine adversaries. In Table 1, we present the classification accuracy of the learned 2NN and CNN when the Byzantine adversaries adopt different attack strategies. We observe that if the Byzantine adversaries does not initiate any attack, then Brave retains comparable accuracy compared with

classic P2P FL that does not implement Brave. Furthermore, Brave guarantees significantly higher accuracy of the learned model once the Byzantine adversaries send compromised local models to the other participants, and thereby is Byzantine-resilient.

 ϵ -convergence of Brave: We demonstrate ϵ -convergence of Brave in Fig. 3a-3c. We observe that if N>3f+2 holds, then Brave guarantees that the global model learned in the presence of Byzantine adversaries remains ϵ -close to the global model learned when f=0. We further notice that the value of ϵ increases with respect to the number of Byzantine adversaries. The presence of more Byzantine adversaries could introduce additional bias to the learned global model, or even cause FL to fail (as shown in Fig. 3a when f=4).

Insensitivity to the Number of Participants N: We evaluate the effectiveness of Brave when applying to P2P FL of different scales, i.e., the number of participants is $N=\{10,15,20\}$. In all three settings, we fix the ratio of Byzantine participants as f/N=20%. We find that the classification accuracy increases with respect to the number of participants N, given that f/N remains fixed. Such increment of accuracy is because more training data is used as N increases. Therefore, we believe that Brave is insensitive to the scale of P2P FL. For P2P FL of different scales, Brave guarantees their Byzantine resilience when N>3f+2 holds.

Sensitivity to the Ratio of Byzantine Adversaries f/N:

We evaluate the effectiveness of Brave when the ratio of Byzantine adversaries f/N varies in Fig. 4a-4c. We consider the 2NN learned using P2P FL with N=10. We observe that Brave can maintain high classification accuracy (stay close to the orange curve with triangle markers) when f satisfies N>3f+2 (the left-hand side of the vertical red line). When P2P FL does not implement Brave, a significant decrease in accuracy can be observed from the blue curve even when N>3f+2 holds. Once N>3f+2 is violated, the Byzantine resilience guarantee provided by Brave decreases. However, P2P FL with Brave implemented still outperforms P2P FL-naïve which does not adopt Brave.

6 Conclusion and Future Work

In this paper, we considered peer-to-peer federated learning in the presence of both passive and Byzantine adversaries. The passive adversaries aimed at inferring the other participants' private information during the training process, whereas Byzantine adversaries could arbitrarily manipulate the information it sent to disrupt the learning algorithm. We developed a four-stage P2P FL protocol named Brave that information-theoretically preserves privacy and is resilient to malicious attacks caused by Byzantine adversaries. We evaluated Brave using two image classification tasks with CIFAR10 and MNIST datasets. Our results showed that Brave can effectively defend against the state-of-the-art adversaries. In future work, we will reduce the complexity of Brave and incorporate the delays incurred on the communication links when participants exchange information.

Acknowledgements

This work is partially supported by the National Science Foundation (NSF) under grant No. 2229876 and Air Force Office of Scientific Research (AFOSR) under grant FA9550-23-1-0208.

This work is supported in part by funds provided by the National Science Foundation, by the Department of Homeland Security, and by IBM. Any opinions, findings, and conclusions or recommendations expressed in this material are those of the author(s) and do not necessarily reflect the views of the National Science Foundation or its federal agency and industry partners.

References

Bagdasaryan, E.; Poursaeed, O.; and Shmatikov, V. 2019. Differential privacy has disparate impact on model accuracy. *Advances in Neural Information Processing Systems*, 32.

Blanchard, P.; El Mhamdi, E. M.; Guerraoui, R.; and Stainer, J. 2017. Machine learning with adversaries: Byzantine tolerant gradient descent. *Advances in Neural Information Processing Systems*, 30.

Bonawitz, K.; Ivanov, V.; Kreuter, B.; Marcedone, A.; McMahan, H. B.; Patel, S.; Ramage, D.; Segal, A.; and Seth, K. 2017. Practical secure aggregation for privacy-preserving machine learning. In *ACM SIGSAC Conference on Computer and Communications Security*, 1175–1191.

Castro, M.; and Liskov, B. 1999. Practical Byzantine Fault Tolerance. In *Third Symposium on Operating Systems Design and Implementation*, OSDI '99, 173–186. USA: USENIX Association. ISBN 1880446391.

Che, C.; Li, X.; Chen, C.; He, X.; and Zheng, Z. 2021. A Decentralized Federated Learning Framework via Committee Mechanism with Convergence Guarantee. *arXiv* preprint *arXiv*:2108.00365.

Chen, J.-H.; Chen, M.-R.; Zeng, G.-Q.; and Weng, J.-S. 2021. BDFL: a Byzantine-fault-tolerance decentralized federated learning method for autonomous vehicle. *IEEE Transactions on Vehicular Technology*, 70(9): 8639–8652.

Dwork, C. 2008. Differential privacy: A survey of results. In *International Conference on Theory and Applications of Models of Computation*, 1–19. Springer.

Fang, M.; Cao, X.; Jia, J.; and Gong, N. 2020. Local model poisoning attacks to Byzantine-robust federated learning. In *29th USENIX Security Symposium (USENIX Security 20)*, 1605–1622.

Han, J.; Han, Y.; Huang, G.; and Ma, Y. 2022. DeFL: Decentralized Weight Aggregation for Cross-silo Federated Learning. *arXiv* preprint arXiv:2208.00848.

He, L.; Karimireddy, S. P.; and Jaggi, M. 2020. Secure Byzantine-robust machine learning. *arXiv preprint* arXiv:2006.04747.

Hitaj, B.; Ateniese, G.; and Perez-Cruz, F. 2017. Deep models under the GAN: information leakage from collaborative deep learning. In *ACM SIGSAC Conference on Computer and Communications Security*, 603–618.

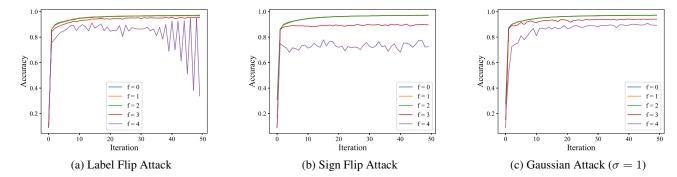


Figure 3: This figure presents the accuracy of 2NN learned using P2P FL with N=10 participants at each iteration t. When the number of Byzantine adversaries f satisfies N>3f+2, i.e., $f\in\{0,1,2\}$, Brave ensures ϵ -convergence property as given in Definition 2. When f violates N>3f+2, the Byzantine adversaries can corrupt the learned 2NN, and even prevents FL from converging (Fig. 3a, f=4).

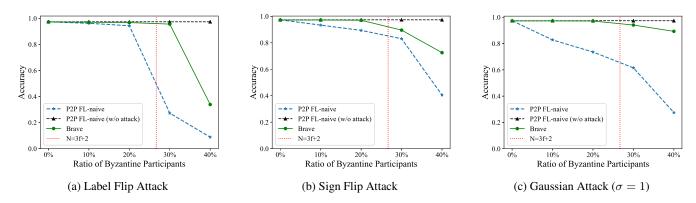


Figure 4: This figure presents how accuracy of the learned 2NN varies with respect to the ratio of Byzantine participants when N=10. If N>3f+2 holds (the left-hand side of the vertical red line), then Brave guarantees Byzantine resilience as the performance of learned 2NN is comparable to P2P FL-naïve learned without any adversary.

Joux, A.; Odlyzko, A.; and Pierrot, C. 2014. The past, evolving present, and future of the discrete logarithm. *Open Problems in Mathematics and Computational Science*, 5–36.

Konečný, J.; McMahan, H. B.; Yu, F. X.; Richtárik, P.; Suresh, A. T.; and Bacon, D. 2016. Federated learning: Strategies for improving communication efficiency. *arXiv* preprint arXiv:1610.05492.

Kotla, R.; Alvisi, L.; Dahlin, M.; Clement, A.; and Wong, E. 2007. Zyzzyva: Speculative Byzantine fault tolerance. In *Twenty-first ACM SIGOPS Symposium on Operating Systems Principles*, 45–58.

Krizhevsky, A. 2009. *Learning multiple layers of features from tiny images*. Ph.D. thesis, University of Toronto.

Lalitha, A.; Kilinc, O. C.; Javidi, T.; and Koushanfar, F. 2019. Peer-to-peer federated learning on graphs. *arXiv preprint arXiv:1901.11173*.

Lamport, L.; Shostak, R.; and Pease, M. 2019. *The Byzantine generals problem*, 203–226. Association for Computing Machinery. ISBN 9781450372701.

LeCun, Y.; Cortes, C.; and Burges, C. 2010.

MNIST handwritten digit database. Available: http://yann.lecun.com/exdb/mnist.

Lee, W.-B.; and Chang, C.-C. 1998. Efficient group signature scheme based on the discrete logarithm. *IEE Proceedings-Computers and Digital Techniques*, 145(1): 15–18

Li, L.; Xu, W.; Chen, T.; Giannakis, G. B.; and Ling, Q. 2019. RSA: Byzantine-robust stochastic aggregation methods for distributed learning from heterogeneous datasets. In *the AAAI Conference on Artificial Intelligence*, volume 33, 1544–1551.

Li, Y.; Chen, C.; Liu, N.; Huang, H.; Zheng, Z.; and Yan, Q. 2021. A Blockchain-Based Decentralized Federated Learning Framework with Committee Consensus. *IEEE Network*, 35(1): 234–241.

Liu, A.; Zhang, J. Y.; Kumar, N.; Khurana, D.; and Koyejo, O. O. 2021. Scalable Robust Federated Learning with Provable Security Guarantees.

Ma, X.; Sun, X.; Wu, Y.; Liu, Z.; Chen, X.; and Dong, C. 2022a. Differentially Private Byzantine-robust Federated

- Learning. IEEE Transactions on Parallel and Distributed Systems.
- Ma, X.; Zhou, Y.; Wang, L.; and Miao, M. 2022b. Privacy-preserving Byzantine-robust federated learning. *Computer Standards & Interfaces*, 80: 103561.
- McCurley, K. S. 1990. The discrete logarithm problem. In *Proc. of Symp. in Applied Math*, volume 42, 49–74. USA.
- McMahan, B.; Moore, E.; Ramage, D.; Hampson, S.; and y Arcas, B. A. 2017. Communication-efficient learning of deep networks from decentralized data. In *Artificial Intelligence and Statistics*, 1273–1282. PMLR.
- Mohamad, M.; Onen, M.; Jaballah, W. B.; and Contu, M. 2023. SoK: Secure Aggregation based on cryptographic schemes for Federated Learning. In *Privacy Enhancing Technologies Symposium*, volume 1.
- Mugunthan, V.; Polychroniadou, A.; Byrd, D.; and Balch, T. H. 2019. SMPAI: Secure multi-party computation for federated learning. In *the NeurIPS 2019 Workshop on Robust AI in Financial Services*.
- Nasr, M.; Shokri, R.; and Houmansadr, A. 2019. Comprehensive privacy analysis of deep learning: Passive and active white-box inference attacks against centralized and federated learning. In *IEEE Symposium on Security and Privacy (SP)*, 739–753. IEEE.
- Pedersen, T. P. 1992. Non-Interactive and Information-Theoretic Secure Verifiable Secret Sharing. In *Advances in Cryptology CRYPTO '91*, volume 576, 129–140. Springer Berlin Heidelberg. ISBN 978-3-540-55188-1.
- Ramanan, P.; and Nakayama, K. 2020. Baffle: Blockchain based aggregator free federated learning. In 2020 IEEE International Conference on Blockchain (Blockchain), 72–81. IEEE.
- Roy, A. G.; Siddiqui, S.; Pölsterl, S.; Navab, N.; and Wachinger, C. 2019. Braintorrent: A peer-to-peer environment for decentralized federated learning. *arXiv* preprint *arXiv*:1905.06731.
- Savazzi, S.; Nicoli, M.; and Rampa, V. 2020. Federated Learning With Cooperating Devices: A Consensus Approach for Massive IoT Networks. *IEEE Internet of Things Journal*, 7(5): 4641–4654.
- Shayan, M.; Fung, C.; Yoon, C. J. M.; and Beschastnikh, I. 2021. Biscotti: A Blockchain System for Private and Secure Federated Learning. *IEEE Transactions on Parallel and Distributed Systems*, 32(7): 1513–1525.
- Shi, E. 2020. Foundations of Distributed Consensus and Blockchains. *URL: http://elaineshi. com/docs/blockchain-book. pdf.*
- Tolpegin, V.; Truex, S.; Gursoy, M. E.; and Liu, L. 2020. Data poisoning attacks against federated learning systems. In *European Symposium on Research in Computer Security*, 480–501. Springer.
- Truex, S.; Baracaldo, N.; Anwar, A.; Steinke, T.; Ludwig, H.; Zhang, R.; and Zhou, Y. 2019. A hybrid approach to privacy-preserving federated learning. In *12th ACM Workshop on Artificial Intelligence and Security*, 1–11.

- Velicheti, R. K.; Xia, D.; and Koyejo, O. 2021. Secure Byzantine-Robust Distributed Learning via Clustering. *arXiv preprint arXiv:2110.02940*.
- Wei, K.; Li, J.; Ding, M.; Ma, C.; Yang, H. H.; Farokhi, F.; Jin, S.; Quek, T. Q.; and Poor, H. V. 2020. Federated learning with differential privacy: Algorithms and performance analysis. *IEEE Transactions on Information Forensics and Security*, 15: 3454–3469.
- Xie, C.; Koyejo, S.; and Gupta, I. 2019. Zeno: Distributed stochastic gradient descent with suspicion-based fault-tolerance. In *International Conference on Machine Learning*, 6893–6901. PMLR.
- Yao, A. C. 1982. Protocols for secure computations. In 23rd Annual Symposium on Foundations of Computer Science, 160–164.
- Yin, D.; Chen, Y.; Kannan, R.; and Bartlett, P. 2018. Byzantine-robust distributed learning: Towards optimal statistical rates. In *International Conference on Machine Learning*, 5650–5659. PMLR.
- Yin, M.; Malkhi, D.; Reiter, M. K.; Gueta, G. G.; and Abraham, I. 2019. Hotstuff: BFT consensus with linearity and responsiveness. In *ACM Symposium on Principles of Distributed Computing*, 347–356.
- Zhang, J.; Zhang, J.; Chen, J.; and Yu, S. 2020. GAN enhanced membership inference: A passive local attack in federated learning. In *IEEE International Conference on Communications (ICC)*, 1–6. IEEE.

A Detailed Algorithms of Brave

BFT Broadcast

All stages of Brave require the participants to broadcast messages via a module named BFT broadcast. BFT broadcast utilizes Byzantine-fault-tolerant (BFT) distributed consensus algorithms, which follow a propose-vote paradigm (Shi 2020). In the BFT broadcast, the message sent by each participant is treated as a proposal. All participants will incorporate the proposal to their local information set as long as more than N-f participants agree with the proposal. Typical implementations of the BFT distributed consensus algorithms include PBFT (Castro and Liskov 1999), Zyzzyva (Kotla et al. 2007), and Hotstuff (Yin et al. 2019). Using the state-of-the-art implementation of BFT broadcast, Hotstuff (Yin et al. 2019), Brave guarantees that all participants will reach an agreement on messages sent by the participants, with communication complexity linear in N.

Stage 1: Commitment

After updating its local model $w_i(t)$ in each iteration, participant P_i generates a *commitment* of $w_i(t)$. Commitment allows participants to pledge to a chosen value while keeping it hidden from others, with the ability to reveal that value later.

Algorithm 1: Stage 1: Commitment

```
1: for all P_i \in \mathbb{P} in parallel do
2: w_i = \operatorname{Update}(w(t), \mathcal{D}_i)
3: r_i^w \leftarrow \operatorname{Generate} a random helper for commitment
4: \mathcal{W}_i = \mathcal{C}(w_i, r_i^w)
5: \operatorname{BFT-Broadcast}(\mathcal{W}_i)
6: end for
```

Stage 2: Privacy-preserving Comparison

In this stage, participant P_i conducts a privacy-preserving comparison, which coordinate-wise compares its model with all other participants.

Algorithm 2: Stage 2: Privacy-Preserving Comparison

```
1: for all P_i \in \mathbb{P} in parallel do
               for all P_j \in \mathbb{P} \setminus \{P_i\} in parallel do
  2:
                    Generate random vectors v_{ij}, r_{ij}^v, s_{ij}^1, r_{ij}^{s1}, s_{ij}^2, r_{ij}^{s2} in \mathbb{Z}_q^m c_{ij} = v_{ij} + w_i; r_{ij}^{w+v} = r_i^w + r_{ij}^v
  3:
  4:
                    \mathcal{V}_{ij} = \mathcal{C}(v_{ij}, r_{ij}^v)
  5:
                    Send [\mathcal{V}_{ij}, c_{ij}, r_{ij}^{w+v}, s_{ij}^1, r_{ij}^{s1}, s_{ij}^2, r_{ij}^{s2}] to P_j
  6:
                   Receive [V_{ji}, c_{ij}, r_{ij}^{u+v}, s_{ij}^{1}, r_{ij}^{s_{ij}}, r_{ji}^{s_{ij}}, s_{ji}^{s_{ij}}, r_{ji}^{s_{ij}}] from P_{j} if W_{j} \cdot V_{ji} = C(c_{ji}, r_{ji}^{w+v}) then
d_{ij} = v_{ij} + c_{ji}; r_{ij}^{d} = r_{ij}^{v} + r_{ji}^{w+v}
Send m_{ij} = [d_{ij}, r_{ij}^{d}, V_{ij}, V_{ji}] to \mathbb{P} \setminus \{P_{j}\}
  7:
  8:
  9:
10:
                    end if
11:
               end for
12:
               while receive m_{pq} and m_{qp} from P_p and P_q do
13:
                    if same values of \mathcal{V}_{pq} or \mathcal{V}_{qp} from m_{pq} and m_{qp} then
14:
                          if \mathcal{C}(d_{pq}, r_{pq}^d) = \mathcal{V}_{pq} \cdot \mathcal{V}_{qp} \cdot \mathcal{W}_q and \mathcal{C}(d_{qp}, r_{qp}^d) = \mathcal{V}_{qp} \cdot \mathcal{V}_{pq} \cdot \mathcal{W}_p then
15:
                                for all k \in [m] do
16:
                               \mathcal{R}_{pq} = \{ \overset{\text{\tiny left}}{w_p^k} \bowtie w_q^k : \forall k \} end for
17:
18:
                                BFT-Broadcast(\mathcal{R}_{pq})
19:
                          end if
20:
21:
                    end if
               end while
23: end for
```

Stage 3: Sorting and Trimming

In this stage, the participant sorts the local models along each coordinate after receiving the pairwise comparison results. It then trims the largest and smallest f values in each coordinate and denotes the remainder as contributors.

Algorithm 3: Stage 3: Contributor Selection

```
for all P_i \in \mathbb{P} in parallel do
          for all \mathcal{R}_{pq} from BFT Broadcast do
 2:
             if w_p^k > w_q^k (resp. w_p^k < w_q^k) appears more than 2f times then Accept w_p^k > w_q^k (resp. w_p^k < w_q^k)
  3:
 4:
  5:
          end for
  6:
          for all k \in [m] do
  7:
              \mathcal{S}_i^k \leftarrow \text{Topological sort all accepted relationships}
  8:
              N_i^k \leftarrow \text{Length of } \mathcal{S}_i^k
  9:
              \mathbb{C}_i^k \leftarrow \text{Participants define sorted } (f+1) \text{-th to } (N_i^k - f) \text{-th as Contributors.}
10:
11:
12: end for
```

Stage 4: Aggregation and Verification

In this stage, P_i generates a private one-time pad (Bonawitz et al. 2017), and applies it to mask the selected contributing coordinates of its local model before transmitting them via BFT broadcast. After receiving the masked coordinates from other participants, each P_i adds the masked values coordinate-wise and verifies authenticity leveraging the commitment scheme. Finally, each P_i computes the global model if the summations of the masked values are authenticated. P_i can also identify the Byzantine adversaries if the summations are not authenticated using *blame*.

Algorithm 4: Stage 4: Aggregation and Verification

```
1: for all P_i \in \mathbb{P} in parallel do
                for all P_i \in \mathbb{P} \setminus \{P_i\} do
   2:
                      a_{ij} = s_{ij}^{1} + s_{ji}^{1}; r_{ij}^{a} = r_{ij}^{s1} + r_{ij}^{s1}
b_{ij} = s_{ij}^{2} + s_{ji}^{2}; r_{ij}^{b} = r_{ij}^{s2} + r_{ij}^{s2}
\mathcal{A}_{ij} = \mathcal{C}(a_{ij}, r_{ij}^{a}); \mathcal{B}_{ij} = \mathcal{C}(b_{ij}, r_{ij}^{b})
   3:
  4:
   5:
   6:
                 \mathcal{A}_i, \mathcal{B}_i \leftarrow \text{Pack all } \mathcal{A}_{ij} \text{ and } \mathcal{B}_{ij}
   7:
                for all k \in [m] do
   8:
                       if P_i \in \mathbb{C}_i^k then
  9:
                             \bar{w}_i^k = \left(w_i^k - \sum_{j \in \mathbb{C}_{-i}^k} a_{ij}^k + \sum_{j \in \mathbb{C}_{+i}^k} a_{ij}^k\right) \bmod \beta
10:
                             \bar{r}_i^k = \left(r_i^k - \sum_{j \in \mathbb{C}_{-i}^k} b_{ij}^k + \sum_{j \in \mathbb{C}_{+i}^k} b_{ij}^k\right) \bmod \beta
11:
                       end if
12:
13:
                 end for
                BFT-Broadcast(\bar{w}_i, \bar{r}_i, \mathcal{A}_i, \mathcal{B}_i)
14:
                 for all k \in [m] do
15:
                      \bar{w}^k = \sum_{P_i \in \mathbb{C}_i^k} \bar{w}_j^k \mod \beta
16:
                      \begin{split} \bar{r}^k &= \sum_{P_j \in \mathbb{C}^k_i} \bar{r}^k_j \bmod \beta \\ & \text{if } \mathcal{C}(\bar{w}^k, \bar{r}^k) = \prod_{P_j \in \mathbb{C}^k_i} \mathcal{W}^k_j \text{ then} \end{split}
17:
18:
                             w^k = \frac{\bar{w}^k}{N_i^k - 2f}
19:
                       end if
20:
                 end for
21:
22: end for
```

B Theoretical Analysis of Brave

In this section, we theoretically analyze the information-theoretic privacy and Byzantine resilience of Brave.

Algorithm 5: Blame

```
1: if \mathcal{C}(\bar{w}^k, \bar{r}^k_j) \neq \prod_{P_j \in \mathbb{C}^k_i} \mathcal{W}^k_j then

2: for all P_j \in \mathbb{C}^k_i do

3: if \mathcal{C}(\bar{w}^k_j, \bar{r}^k) \neq \mathcal{W}^k_j \prod_{P_h \in \mathbb{C}^k_{-i}} \mathcal{A}^k_{ih} \prod_{P_h \in \mathbb{C}^k_{+i}} (\mathcal{A}^k_{ih})^{-1} then

4: Flag P_j as Byzantine adversary

5: end if

6: end for

7: end if
```

Proof of Information-Theoretic Privacy

We show that when the passive adversaries are not colluding, Brave guarantees P2P FL to be privacy-preserving as follows.

Theorem 2 (Information-theoretic Privacy). *Consider a P2P FL in the presence of passive adversaries who are not colluding. Our proposed protocol, Brave, guarantees information-theoretic privacy of the participants' local models.*

Proof Sketch. The proof can be divided into two parts. First, Lemma 1 shows the information-theoretically hiding property of the commitment, i.e., the commitment itself contains no information about the local model. Second, during the execution of the protocol, the local model is always masked with some random vectors v_{ij} in Algorithm 2 and $\sum_{j \in \mathbb{C}^k_{+i}} a^k_{ij} - \sum_{j \in \mathbb{C}^k_{-i}} a^k_{ij}$ in Algorithm 4, which are also information-theoretically hiding by our protocol design. Therefore, the masked local model is independent of the local model.

Proof of Byzantine Resilience

In what follows, we establish the Byzantine resilience of P2P FL after applying Brave if N>3f+2. We first show that using Brave, the messages broadcast by benign participants preserve the ordering of claimed local models. The preservation of order prevents Byzantine adversaries from forging the results of sorting by manipulating their claimed local models.

Lemma 3 (Local Non-Forgeability). If a benign participant P_i broadcasts $w_p^k > w_q^k$ at coordinate k, then the claimed local model of P_p w.r.t. to \mathcal{W}_p is greater than that of P_q at coordinate k.

Proof. Consider three cases when i) both P_p and P_q are benign, ii) either P_p or P_q is Byzantine, iii) both P_p and P_q are Byzantine. We show the proof of case iii), and similar approaches can be applied to cases i) and ii).

Suppose that in coordinate k, $w_p^k > w_q^k$ holds. To pass the authentication of a benign P_i , P_p and P_q must find a) another valid pairs w_q' or w_p' such that $w_q^{k'} > w_p^{k'}$ but $w_q^k < w_p^k$, or b) another valid vector $v_{qp}' + v_{pq}'$ such that $v_{qp}^{k'} + v_{pq}^{k'} - v_{pq}^k - v_{pq}^k > w_p^k - w_q^k$. However, Lemma 1 indicates that the Pedersen commitment scheme is computational binding, i.e., a Byzantine participant can not find another value that opens the same commitment. Therefore, both a) and b) are infeasible, and the comparison result of d_{pq} and d_{qp} truly reflects the relationship between the claimed local models w_p and w_q .

Remark. In Lemma 3, we prove that the relationship accepted by benign participants preserves the correct ordering of the claimed local models.

Next, we move from a local perspective to a holistic one. We first show below the Byzantine-resilience of BFT broadcast if N > 3f + 2. We then prove the adversary cannot forge a comparison, as shown in Proposition 1.

Lemma 4. If N > 3f + 2, then the messages sent by a participant via BFT broadcast will be received identically by benign participants.

Proof. According to (Lamport, Shostak, and Pease 2019), consensus can be reached if N > 3f without authentication under synchronous network assumption, and identical information can be received. Thus the lemma follows given N > 3f + 2 > 3f.

Proposition 1 (Global Non-Forgeability). If $w_p^k > w_q^k$ is accepted by a benign participant P_i using Algorithm 2, then the claimed local model of P_p w.r.t. to W_p is greater than that of P_q at coordinate k given N > 3f + 2.

Proof. If P_p and P_q are both benign, the above argument trivially holds. Then we prove by contradiction to show that the Byzantine adversary cannot forge the result. Assume $w_p^k > w_q^k$ is true, and a benign participant receives a wrong relationship $w_p^k < w_q^k$ for more than f times. Recall that there are at most f faulty participants, so there is at least one benign participant that also broadcast $w_p^k < w_q^k$, which contradicts Lemma 1.

We next prove the liveness property of Brave, i.e., Brave allows the benign participants to accept the true relationships between their local models, regardless of the adversaries' behaviors during training.

Proposition 2 (Liveness). Suppose P_p and P_q are benign participants and assume w.l.o.g. $w_p^k > w_q^k$. If N > 3f + 2 holds, then Algorithm 2 will guarantee that $w_p^k > w_q^k$ is accepted by all benign participants.

Proof. Since P_p and P_q are benign, they will follow the protocol and send m_{pq} and m_{pq} that can be authenticated to other participants. As N>3f+2, apart from P_p and P_q , there are at least (N-2)-f>2f benign nodes that will respond with $w_p^k>w_q^k$. Therefore, all benign participants would receive more than 2f times $w_p^k>w_q^k$ and accept $w_p^k>w_q^k$.

Given the aforementioned guarantees provided by Brave, we show that the benign P_i and P_j can reach an agreement on relationship \bowtie during Stage 2.

Proposition 3 (Agreement on Pairwise Relationships). *The accepted relationships of all benign participants are identical given* N > 3f + 2.

Proof. This property is guaranteed by the BFT broadcast given N > 3f, as shown in Lemma 4.

With Proposition 1 and 3, we can now conclude that the relationships among benign participants are *correct* and *identical*. Therefore, an agreement on sorting can be reached.

Corollary 1 (Agreement on Sorting). Given any benign participants P_i and P_j , if N > 3f + 2 holds, then Brave guarantees the sorting results $S_i^k = S_j^k$ for all k, i.e., the sorting of all benign participants is identical.

Based on Corollary 1, we show that Brave guarantees all benign participants to obtain an identical global model w.

Proposition 4 (Agreement on Global Model). The global model w of all benign participants is identical given N > 3f + 2.

Proof. Given Corollary 1 and Lemma 4, $S_i^k = S_j^k$, $\bar{w}_i^k = \bar{w}_j^k$, and $\bar{r}_i^k = \bar{r}_j^k$ for all benign participants P_i and P_j . Thus \bar{w}^k calculated in Line 16 is identical among benign participants, leading to identical verification result in Line 18 of Algorithm 4. Therefore, the global model w is also identical.

We conclude this section by proving that the global model obtained by the benign participants deviates from the optimal one by a bounded distance, i.e., satisfies ϵ -convergence property.

Theorem 5. Assume that local model $w_i(t)$ belongs to a bounded set and is z-sub-exponential for all i and t. The global model w(T) obtained by applying Brave to P2P FL satisfies $||w(T) - w(T)^*|| \le \epsilon$ with probability at least ζ , where

$$\zeta = 1 - 2m \exp\{-(N - f) \min_{i} |\mathcal{D}_{i}| \min\{\frac{\tau}{2z}, \frac{\tau^{2}}{2z^{2}}\}\}\$$
$$-2(N - f)m \exp\{\min_{i} |\mathcal{D}_{i}| \min\{\frac{\delta}{2z}, \frac{\delta^{2}}{2z^{2}}\}\},\$$

 $\epsilon = \sqrt{m} \frac{\tau + 3f\delta/N}{1 - 2f/N}$, and $w(T)^*$ is the optimal global model obtained using Eqn. (1) and (2) when P2P FL terminates at iteration T.

Proof. Using Corollary 1, we have that benign participants P_i and P_j own identical $\mathcal{S}_i^k = \mathcal{S}_j^k$ for all benign participants i, j. They further hold identical global model w(t) for all iteration t. Consider an arbitrary benign participant. If w(T) is z-sub-exponential, then using Lemma 3 of (Yin et al. 2018) yields that

$$|w(T)^k - w(T)^{k^*}| \le \frac{\tau + 3f\delta/N}{1 - 2f/N}$$

holds for each coordinate k with probability at least $1 - 2\exp\{-(N - f)\min_i |\mathcal{D}_i| \min\{\frac{\tau}{2z}, \frac{\tau^2}{2z^2}\}\} - 2(N - f)\exp\{\min_i |\mathcal{D}_i| \min\{\frac{\delta}{2z}, \frac{\delta^2}{2z^2}\}\}$. By using the definitions of $\|\cdot\|$ and union bound over all coordinate k, we have that

$$||w(T) - w(T)^*|| \le \sqrt{m} \frac{\tau + 3f\delta/N}{1 - 2f/N}$$

holds with probability at least ζ for any $\tau, \delta \geq 0$.