

---

# Context Matters: Pushing the Boundaries of Open-Ended Answer Generation with Graph-Structured Knowledge Context

---

Somnath Banerjee  Amrui Sahoo  Sayan Layek  Avik Dutta 

Rima Hazra  Animesh Mukherjee 

 Indian Institute of Technology Kharagpur

 Singapore University of Technology and Design

{som.iitkgpcse, sayanlayek2002}@kgpian.iitkgp.ac.in  
rima\_hazra@sutd.edu.sg, animeshm@cse.iitkgp.ac.in

## Abstract

In the continuously advancing AI landscape, crafting context-rich and meaningful responses via Large Language Models (LLMs) is essential. Researchers are becoming more aware of the challenges that LLMs with fewer parameters encounter when trying to provide suitable answers to open-ended questions. To address these hurdles, the integration of cutting-edge strategies, augmentation of rich external domain knowledge to LLMs, offers significant improvements. This paper introduces a novel framework that combines graph-driven context retrieval in conjunction to knowledge graphs based enhancement, honing the proficiency of LLMs, especially in domain specific community question answering platforms like AskUbuntu, Unix, and ServerFault. We conduct experiments on various LLMs with different parameter sizes to evaluate their ability to ground knowledge and determine factual accuracy in answers to open-ended questions. Our methodology GRAPHCONTEXTGEN consistently outperforms dominant text-based retrieval systems, demonstrating its robustness and adaptability to a larger number of use cases. This advancement highlights the importance of pairing context rich data retrieval with LLMs, offering a renewed approach to knowledge sourcing and generation in AI systems. We also show that, due to rich contextual data retrieval, the crucial entities, along with the generated answer, remain factually coherent with the gold answer.

## 1 Introduction

In the field of artificial intelligence, LLMs [54, 29] stand out as significant breakthroughs. They highlight the advanced capabilities of machines in both text understanding [38] and generating [76]. While LLMs usually produce high-quality outputs they often struggle in areas with limited resources [7, 19]. They also have limitations due to knowledge cutoff dates. In many cases, they hallucinate [43] when faced with very specific, low-resource or domain specific topics. There is also a trade-off between quality and the billions of parameters [84], which makes the LLM challenging to explore and analyze for researchers with limited resource capacity. Recently, to address these challenges, grounding of LLMs <sup>1</sup> and the Retrieval-Augmented Generation (RAG) method [89] have been proposed. This

<sup>1</sup><https://techcommunity.microsoft.com/t5/fasttrack-for-azure/grounding-llms/ba-p/3843857>

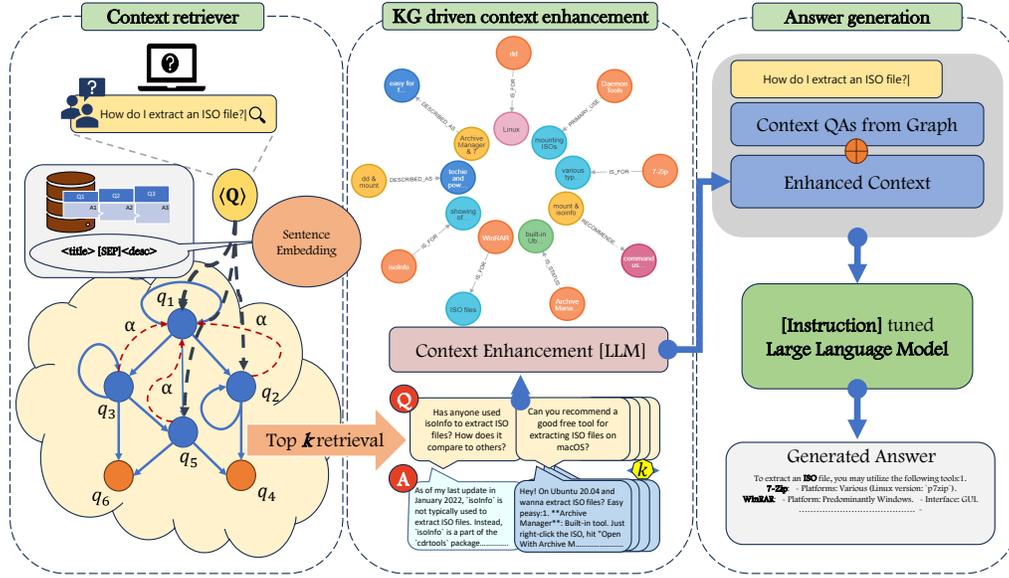


Figure 1: Schematic of the GRAPHCONTEXTGEN framework.

approach allows large models to actively utilize the information from external databases as they operate. This feature is particularly useful as it means the models can provide answers that are not just based on their original training data, but are also detailed, current, and well-informed by accessing a wider range of information sources. This opens up the potential for even more factually accurate and contextually relevant responses in real-time.

A pivotal aspect shaping the effectiveness of knowledge grounding is its choice of retrieval [34] mechanism. Even though traditional text-based retrieval methods were favored for pulling content from diverse sources, the increasing complexity of questions and the demand for more than simple keyword matching is prompting a change in the research landscape. Moreover, prevailing state-of-the-art (SOTA) methodologies in text-based retrieval grapple with determining the optimal chunk size <sup>2</sup>, particularly when indexing and querying. This inconsistency in chunk delineation can introduce variability in results, especially when interfacing with diverse datasets that exhibit heterogeneous characteristics in terms of content density, topic distribution, and structural composition. Graph-based retrieval systems are gaining traction in this regard. Instead of just casting a wide net, they delve into structured data where interconnected nodes and edges encapsulate intricate relationships, ensuring a deeper semantic understanding. This structured approach not only brings forth more contextually pertinent results by cutting down the ambiguity often seen in keyword-centric searches [93], but it is also adept at swiftly navigating complex queries by traversing interconnected knowledge. The dynamic nature of these systems further allows them to adapt to ever-evolving data, paving the way for unearthing unexpected insights and forming indirect, transitive connections among diverse entities.

This grounding technique is vital in various text generation sectors, including dialogue systems [36], open-domain question answering [40], and novelty-controlled paraphrasing [81]. StackOverflow’s recent initiative, OverflowAI <sup>3</sup>, focuses on refining search, adding new features, enhancing code, and fostering discussion platforms. Simultaneously, the trend in automated answer generation on community question answering platforms promises timely, accurate information delivery, reducing errors, and ensuring immediate knowledge access. While past research has centered on selecting answers from prior questions or summarizing them, our study uniquely harnesses LLMs to craft answers specifically for these platforms.

<sup>2</sup><https://www.pinecone.io/learn/chunking-strategies/>

<sup>3</sup><https://stackoverflow.blog/2023/07/27/announcing-overflowai/>

Therefore, we introduce the GRAPHCONTEXTGEN framework that incorporates graph-based retrieval and offers enhanced context to LLMs. Our approach centers on ensuring the factual accuracy of the generated answers through knowledge graph-based context enhancement. In addition, we carry out extensive experiments with a wide range of LLMs in terms of different parameters for answer generation. We primarily target low-resource domains like AskUbuntu <sup>4</sup>, Unix <sup>5</sup>, and ServerFault <sup>6</sup>, aiming to gauge the effectiveness of LLM-generated answers in these specialized areas and evaluate their resilience against catastrophic forgetting.

**Contribution:** The key contribution of this paper is as follows.

- We introduce a framework named GRAPHCONTEXTGEN which integrates a graph-based retrieval mechanism in conjunction with enhancement of context using knowledge graph for CQA answer generation. This combined approach consistently outperforms previous state-of-the-art (SOTA) methods. Moreover, employing the instruction tuning strategy with LLMs further enhances performance (see Section 4).
- We evaluate a range of recently released LLMs from 1.5B to 40B on CQA of low resource domains for answer generation in a zero shot setting (see Table 2).
- In addition to automatic evaluation, we also perform evaluation based on human judgements and demonstrate that in both cases our proposed framework consistently outperforms all current SOTA text-based retrieval techniques (see Table 3 and Section 6).
- We perform a detailed retrospective analysis comparing actual answers with those generated by our framework. This analysis aims to understand the factual alignment between generated and actual answers, noting that generated answers typically align factually with the actual ones (see Figure 3).

## 2 Related Work

**Large language models:** Recent progress in LLMs [48, 14] has positioned them as dominant successors to earlier transformer-based models for tackling generation tasks in natural language. Over the past several years, there has been a surge in introducing LLMs <sup>7</sup> like GPT3 [5], Llama2 [66] etc. for this purpose. The newly introduced LLMs have demonstrated the ability to grasp and interpret context, subsequently producing human like responses. These models generate fluent and high quality answers very well for general questions [87]. So, these models are often used as the base architecture for various generation based tasks such as long Q&A [57, 27], multiple choice Q&A [56], dialogue systems [11, 25, 69, 62], chatbot systems [32, 77]. However, despite the high capability of these methods, they generate factually incorrect [61] responses and are oftentimes not aligned with the actual question for domain specific knowledge. Generally, this issue of LLMs is called hallucination [12, 45]. Due to the cutoff knowledge, models sometime fail to provide faithful answer for a general question. To tackle this problem, recent studies [61] proposed a method of augmenting retrieved knowledge from diverse sources as a context to LLMs.

**Retrieval augmented generation:** Retrieval-augmented generation (RAG) [41, 51] is a framework that merges the capabilities of large pretrained language models with the advantages of external retrieval or search mechanisms. Earlier, augmenting language models with retrieved knowledge had shown effective performance for knowledge-intensive tasks [18]. It is particularly useful in scenarios where a language model needs to pull in specific factual information from an extensive corpus to generate relevant and accurate outputs. In recent studies, the researchers attempt to augment external knowledge through knowledge graph prompting [75], few shot domain adaptation [31], retrieval-generation synergy [59], knowledge graph-based subgraph retrieval augmented generation [28], augmented adapter retriever (AAR) [89].

**Instruction tuning:** Although LLMs have already shown impressive generation capabilities, oftentimes they cannot align the user’s objective with its training objective [90]. This is because while in general LLMs are trained to minimize the contextual word prediction error, users want to receive responses given some instructions of their choice. To mitigate that, various methods such as supervised fine tuning (instruction tuning) [70], RLHF [95, 63, 49, 17], RLAIIF [33] have been used

---

<sup>4</sup><https://askubuntu.com/>

<sup>5</sup><https://community.unix.com/>

<sup>6</sup><https://serverfault.com/>

<sup>7</sup>[https://huggingface.co/spaces/HuggingFaceH4/open\\_llm\\_leaderboard](https://huggingface.co/spaces/HuggingFaceH4/open_llm_leaderboard)

Attributes	AskUbuntu		Unix		Serverfault	
	Train	Test	Train	Test	Train	Test
Size	15,505	203	19,742	241	10908	226
Year of questions	2019-20	2021-23	2019-20	2021-23	2019-20	2021-23
Avg. length of questions	254.38	156.65	205.85	220.57	259.81	248.93
Avg. length of answers	122.22	217.16	181.17	210.02	145.30	161.73

Table 1: Dataset statistics.

to enhance the capabilities and controllability of LLMs. Also, parameter efficient techniques [42] have been proposed to fine tune less number of model parameters and more adapter’s parameters.

**Answer generation:** Over the years several approaches such as feature based methods [73, 74], convolutional neural networks (CNNn) [58, 52], recurrent neural networks (RNNn) [71], attention mechanism [64, 13] have been proposed for answer selection and summarization. Some studies have leveraged additional information to balance the information between questions and answers. For example, user models [78, 35], latent topics [88], external knowledge [60], or question subjects [79] have been utilized to compensate for this information imbalance. Several answer summarization techniques are proposed for low-resource domains, such as condensing technical answers into concise summaries. Some recent research focuses on summarizing diverse content on StackOverflow [8], using AnswerBot—an answer summary generator [82], Opiner—which summarizes API reviews [68], extracting key sentences to guide developers on StackOverflow [46], and multi-document summarization [83]. In the realm of answer summarization, numerous studies [16, 47] harness graphical structures, leverage existing graph-based summarizers [44, 15, 30], and employ graph-centric measures. In the age of LLMs, some research has centered around controlled summary generation via effective keyword-based prompting [22].

### 3 Dataset

In this experiment, we select three domain-specific datasets from open-source CQA platforms: AskUbuntu, ServerFault, and Unix, all of which originate from a low-resource domain with minimal properly annotated data available on these topics. These datasets, considered from June 2023, includes questions (title and body), a list of answers, an accepted answer flag, tags for the questions, and the posting dates and times for both questions and answers. For each question, the accepted answer serves as the ground truth. Due to the limited resources of the datasets and the high expenses associated with human involvement, we opt not to use human annotations. Further we apply several filtering procedures, such as duplicate question removal, non-specific answer removal, and length constraints (token limit in LLM) resulting in our dataset. Adopting the temporal splitting approach inspired by [20, 21], we consider training set from 2019-2020 and test dataset from 2021-2023. Due to resource limitations, we randomly sample test dataset, the details of which are provided in Table 1. From the training set of each dataset, we construct an instruction-tuning dataset by pairing questions and answers in the format ‘ $[INST]Question[\backslash INST]Answer : actual\_answer$ ’. We prepare this instruction data for each dataset.

### 4 Methodology

In this section, we explain our proposed framework GRAPHCONTEXTGEN. The overall framework is shown in Figure 1. Our proposed framework consists of three modules – (1) context retriever (2) KG-driven context enhancement (3) answer generation. Before explaining every module, we describe the problem in detail below.

#### 4.1 Preliminaries

Given a community question answering (CQA) system, there is a collection of questions and their associated accepted answers, represented as  $\langle Q, A_Q \rangle = \{(q_1, a_{q_1}), (q_2, a_{q_2}), \dots (q_n, a_{q_n})\}$ . The anchor question (query) is represented by  $q$ . We consider subset of question pool  $Q_{pool}$ , where  $Q_{pool} \subset Q$ . We represent our instruction tuned dataset as  $\mathcal{D}_{INST}$  which contains instruction  $INST$ , question pool  $Q_{pool}$  and their accepted answer  $A_{Q_{pool}}$ . Our objective is formalized as follows.

**Context retriever:** In this module, we consider anchor question  $q$  and the  $Q_{pool}$  as input and output

the most relevant questions from the  $Q_{pool}$ . The set of relevant questions is represented by  $Q_{top_k}^q$ . We explain the working procedure of the module in subsequent sections.

**KG driven context enhancement:** This module takes the query  $q$  and the final set of most relevant question  $Q_{top_k}^q$  as input to formulate enhanced context. The initial context is represented by  $C^q$  which is the  $\langle Q_{top_k}^q, A_{Q_{top_k}^q} \rangle$  pairs. Further, we represent the sequence of sentences by  $S$  that are obtained from the entity extraction procedure and knowledge graph. Enhanced context is represented by  $C_{enc}^q$ .

**Answer generation:** In this module, we provide the query  $q$  and enhanced context  $C_{enc}^q$  as input to generate the answer denoted by  $a_q^{gen}$ . We denote the ground truth answer as  $a_q^{gt}$ . We explain each of the above-mentioned steps in subsequent sections.

---

**Algorithm 1** GRAPHCONTEXTGEN

---

- 1: Input: Initial question pool  $Q_{pool}$ , query  $q$ , LLM  $M$ , instruction dataset  $\mathcal{D}_{INST}$
  - 2: **function** RETRIEVER( $Q_{pool}, q$ )
  - 3:   Build  $G(V, E)$ , nodes  $V = Q_{pool}$ , edges  $E \subseteq Q_{pool} \times Q_{pool}$  where  $sim(q_a, q_b) > T \forall q_a, q_b \in Q_{pool}$
  - 4:   Build extended graph  $G'(V', E')$  where  $V' = V \cup q$  and  $E' = E \cup E_q$
  - 5:    $Q_{pool}^{ranked} = \text{sort}(QueryAwarePageRank(G'))$
  - 6:   Choose a set of top  $k$  questions  $Q_{top_k}^q$
  - 7: **end function**
  - 8: **function** CONTEXTENHANCER( $Q_{top_k}^q, q$ )
  - 9:   context  $C^q = \langle Q_{top_k}^q, A_{Q_{top_k}^q} \rangle$
  - 10:   Extract  $\tau^{init}(h, r, t)$  using LLM  $M$  and REBEL from  $C^q$
  - 11:    $Ent(C^q) = EntitySetBuilder(\tau^{init})$  where  $Ent(C^q)$  contains set of entities  $e_1, e_2, \dots, e_n$
  - 12:   Extract triplets  $\tau(h, r, t)$  from Wikidata for  $h \in Ent(C^q)$
  - 13:   Filtered triples set  $\tau'$  if  $t \in Ent(C^q)$
  - 14:   Prepare triplets set  $\tau^f = \tau^{init} \cup \tau'$
  - 15:   Build sequence of sentences  $S$  from all triplets  $\tau^f$
  - 16:   Enhanced context  $C_{enc}^q = C_q \oplus S$
  - 17: **end function**
  - 18: **function** ANSWERGENERATOR( $C_{enc}^q, q$ )
  - 19:    $M' = \text{SupervisedFineTuning}(M, \mathcal{D}_{INST})$
  - 20:    $a_q^{gen} = M'(C_{enc}^q, q)$
  - 21: **end function**
- 

## 4.2 Context retriever

The objective of this module is to retrieve relevant previous questions given the query question. Our *RETRIEVER* module in Algorithm 1, consists of two parts – (I) question-question graph (Q-Q graph) construction and (II) retrieval of top relevant questions.

**(I) Q-Q graph construction:** We build a question-question graph (Q-Q graph) to obtain the relevant questions from the previously posted question pool  $Q_{pool}$ . In a Q-Q graph  $(G(V, E))$ , nodes ( $V$ ) are the questions and the edges ( $E$ ) are formed based on the cosine similarity between the concatenated embeddings of the title and the body of two questions. We include the edge only if the similarity score crosses a particular threshold<sup>8</sup>. The major motivation for building the Q-Q graph is that it can help to identify semantically similar questions based on the structural properties of the graph. This systematically prepared graph will be utilized to prioritize a set of existing questions given a query  $q$ .

**(II) Retrieval of top relevant questions:** For a given query  $q$ , we extend the existing Q-Q graph  $G(V, E)$  to  $G'(V', E')$ . We form the graph  $G'$  by including the query  $q$  as a node and further measure the similarity with all the nodes in  $G$ . If the similarity score passes a threshold<sup>9</sup>, the edges ( $E_q$ ) are formed between question  $q$  to the respective nodes in  $G$  accordingly. We conceptualize that questions (in graph  $G'$ ) with high node centric score from the perspective of the query node  $q$

<sup>8</sup>Empirically identified based on graph density.

<sup>9</sup>We followed the same threshold used in Q-Q graph construction.

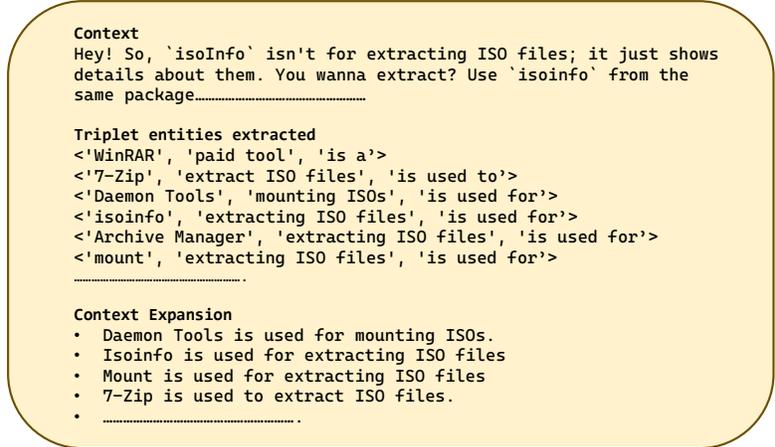


Figure 2: Sample context preparation.

could be considered as the relevant questions (nodes) to the query  $q$ . We use personalized PageRank (PPR) [72] which introduces bias toward the query node and tailor the ranking based on the node preference (i.e., prior information).

We obtain PPR scores for all the nodes (except  $q$ ) in graph  $G'$ . For the given query node  $q$ , we select the top  $k$  relevant questions. This top  $k$  question set is referred to as  $Q_{top_k}^q$ . We do the above mentioned process for all the queries in the query set.

**4.3 KG driven context enhancement**

From the previous module, we obtain  $Q_{top_k}^q$  questions and their answers  $A_{Q_{top_k}^q}$  and use them as context  $C^q$  for a query  $q$ . It is observed that LLMs lack in generating aligned answers for open ended questions [2] even after providing the relevant context. In this module, we attempt to enhance the retrieved context  $C^q$ . In this process (see CONTEXTENHANCER module in algorithm 1), we follow two major steps – (i) entity identification and triplet formation, (ii) enhanced context formulation.

**Entity identification and triplet formation:** In this stage, we first identify all the important information (e.g., entities) present in the  $C^q$ . For important information identification, we employ the LLM  $M$  and REBEL [26] to obtain initial relation triplets ( $\tau^{init}$ ) from the context  $C^q$ . We use a simple prompt plus the context  $C^q$  to the LLM  $M$  for relation triplet extraction task. In case of REBEL, we obtain the triplets by passing  $C^q$  as input to their internal function. Note that a triplet consists of (head\_entity, tail\_entity, relation). We prepare a set  $Ent(C^q)$  which contains all the entities present in these triplets. Further, we use Wikidata to obtain one hop neighbors of each entity and their relationship again in the form of triplets. We now consider all the new triplets ( $\tau'$ ) as well as those in  $\tau^{init}$  to prepare a new extended set of triplets  $\tau^f$ . We retain only those triplets in  $\tau'$  whose head\_entity and tail\_entity are present in the original context  $C^q$ . **Enhanced context formulation:** We construct a set of sub-contexts ( $S$ ) in the form of sequence of sentences from triplet set  $\tau^f$ . Basically, we form the sentence by placing the head entity, the relation and the tail entity in sequence. We finally construct the enhanced context  $C_{enc}^q$  by concatenating the actual context  $C_q$  and  $S$ . We illustrate the process in Figure 2.

**4.4 Answer generation**

In this section, we use the enhanced context  $C_{enc}^q$  and the given query  $q$  to generate the answers using LLM. In this component, we use the LLM in two ways – pretrained LLM and finetuned LLM. In the pretrained setup, we pass the enhanced context  $C_{enc}^q$  and the query question  $q$  as input and obtain the answer as output. In this setting, we use the LLM (model  $M$ ) as black box. For fine tuned version, we utilize instruction dataset  $\mathcal{D}_{INST}$  to efficiently fine tune the LLM  $M$ . The fine tuned model is represented as  $M'$  Further, we use the enhanced context  $C_{enc}^q$  and query  $q$  as input to the fine tuned model  $M'$  and obtain the generated answer  $a_q^{gen}$ .

Method	AskUbuntu			Unix			ServerFault		
	BERTScore	ROUGE 1	ROUGE L	BERTScore	ROUGE 1	ROUGE L	BERTScore	ROUGE 1	ROUGE L
Size ↑	macro-F1 score								
Phi (1.5B) [37]	0.803	0.219	0.202	0.792	0.191	0.176	0.790	0.202	0.183
Falcon (7B) [1]	0.718	0.167	0.153	0.794	0.151	0.138	0.801	0.181	0.166
MPT (7B) [65]	0.738	0.156	0.147	0.786	0.138	0.127	0.709	0.144	0.132
StackLlama (7B) [3]	0.797	0.136	0.130	0.774	0.122	0.112	0.785	0.131	0.120
Llama2 (7B) [67]	0.809	0.221	0.204	0.792	0.178	0.163	0.813	0.183	0.167
Flan-t5-xxl (11B) [55]	0.795	0.131	0.114	0.792	0.106	0.098	0.816	0.135	0.124
Vicuna (13B) [9]	0.741	0.177	0.163	0.789	0.181	0.165	0.810	0.185	0.169
Llama2 (13B) [67]	0.810	0.227	0.211	0.806	0.191	0.175	0.819	0.189	0.176
Gpt-neox (20B) [4]	0.724	0.136	0.127	0.776	0.140	0.131	0.799	0.152	0.161
Falcon (40B) [1]	0.721	0.182	0.167	0.801	0.179	0.171	0.812	0.186	0.173

Table 2: Comparison of zero-shot learning performance of various models of different sizes across the AskUbuntu, Unix, and ServerFault datasets. Metrics include BERTScore, ROUGE 1, and ROUGE L scores. The cell color intensity indicates the relative performance, with darker shades representing higher values. The best results are marked with the darkest shade of cyan for BERTScore & magenta for ROUGE scores.

Method	AskUbuntu				Unix				ServerFault			
	BERTScore	ROUGE 1	ROUGE L	FactSumm	BERTScore	ROUGE 1	ROUGE L	FactSumm	BERTScore	ROUGE 1	ROUGE L	FactSumm
	macro-F1 score											
	Pre-LLM era											
AnswerBot [82]	0.803	0.236	0.111	0.578	0.791	0.191	0.091	0.583	0.802	0.191	0.094	0.642
GenQA [24]	0.781	0.095	0.071	0.551	0.555	0.048	0.04	0.427	0.668	0.059	0.045	0.662
TechSumBot [86]	0.781	0.100	0.05	0.580	0.776	0.077	0.039	0.563	0.781	0.064	0.034	0.655
	LLM era (best performing LLM from Table 2 is used, i.e., Llama2 (13B))											
[w/o INST] TEXTGEN	0.812	0.217	0.202	0.612	0.809	0.179	0.162	0.683	0.810	0.179	0.166	0.733
[w/o INST] TEXTCONTEXTGEN	0.827	0.223	0.204	0.619	0.818	0.184	0.168	0.683	0.823	0.198	0.175	0.738
[w/o INST] GRAPHGEN	0.823	0.204	0.188	0.619	0.809	0.181	0.162	0.683	0.816	0.182	0.166	0.737
[w/o INST] GRAPHCONTEXTGEN	0.831	0.222	0.206	0.621	0.822	0.184	0.169	0.685	0.823	0.197	0.175	0.738
FineTuned GEN Zero-Shot	0.815	0.203	0.187	0.608	0.812	0.183	0.167	0.661	0.821	0.195	0.179	0.733
TEXTGEN	0.821	0.183	0.170	0.623	0.823	0.186	0.169	0.684	0.829	0.197	0.179	0.738
TEXTCONTEXTGEN	0.833	0.221	0.200	0.636	0.834	0.182	0.161	0.689	0.831	0.198	0.180	0.739
GRAPHGEN	0.827	0.182	0.170	0.636	0.817	0.183	0.164	0.691	0.831	0.198	0.180	0.737
GRAPHCONTEXTGEN*	0.840	0.214	0.189	0.639	0.837	0.187	0.169	0.693	0.839	0.198	0.181	0.737

Table 3: Comparison of various question-answering and summarization methods on AskUbuntu, Unix, and ServerFault platforms using evaluation metrics BERTScore, ROUGE 1, ROUGE L, and FactSumm. Methods are categorized into those developed before the LLM era (pre-LLM era) and those developed during the LLM era. \*  $p$ -value < 0.05 on comparison with pre-LLM era models. The best results are marked with the darkest shade of cyan for BERTScore, magenta for ROUGE score & blue for FactSumm.

## 5 Experimental setup

**Baselines:** In this work, we use various methods as baselines. Some of the baselines are proposed by us which we believe are very competitive to our best approach.

- (i) **Pre-LLM era baselines:** We compare our approach with SOTA answer generation/summarization works such as **AnswerBot** [82, 6], **GenQA** [24] and **TechSumBot** [85] (see Appendix A.2). Due to unavailability of the codebase and unclear implementation details, we could not compare this paper [10] with our method.
- (ii) **Zeroshot LLMs:** In this setting, we use various competitive LLMs to generate the answer of the given question. The LLMs are of different parameter sizes (7B to 40B). Such a choice enables us to understand how well models with diverse parameter sizes perform in zero shot setting.
- (iii) **[w/o INST] TEXTGEN:** In this setup, we use a vector database (chromaDB<sup>10</sup> and FAISS<sup>11</sup>) containing all the training set questions. We compute contextual similarity between query  $q$  and all the questions in database. We rank the questions in database based on the cosine similarity scores (higher scores get top ranks) and retrieve top  $k$  questions. Further we use the top  $k$  questions and their actual answers as few shot examples to the pretrained LLM for generating the answer.
- (iv) **[w/o INST] TEXTCONTEXTGEN:** In this setup, we retrieve the top  $k$  questions and their answers using the same method as **[w/o INST] TEXTGEN**. Subsequently, we use context enhancement component of our approach to enhance the context. Further we provide the enhanced context and the query as input to the pretrained LLM and obtain the generated answer.

<sup>10</sup><https://docs.trychroma.com/getting-started>

<sup>11</sup><https://python.langchain.com/docs/integrations/vectorstores/faiss>

- (v) **[w/o INST] GRAPHGEN**: In this setup, we use the RETRIEVER module of our algorithm to retrieve the top  $k$  questions. We use  $k$  questions and their answers as few shot examples to the pretrained LLM for generating the answer.
- (vi) **[w/o INST] GRAPHCONTEXTGEN**: We follow the retrieval step from **[w/o INST] GRAPHGEN**. Further we use our CONTEXTENHANCER module to enhance the context.
- (vii) **FINETUNED GEN ZERO-SHOT**: In this setting, we use instruction fine tuned LLM in zero shot settings. Here, we pass the questions as input and the fine tuned LLM generates the answer.
- (viii) **TEXTGEN**: This setup is same as **[w/o INST] TEXTGEN**. However, we use our instruction fine tuned LLM for generation.
- (ix) **GRAPHGEN**: This setup is same as **[w/o INST] GRAPHGEN**. However, we use our instruction fine tuned LLM for generation.

**Parameter setting**<sup>12</sup>: In our method GRAPHCONTEXTGEN, we use Flag embedding [80] (bge-large-en) to obtain embedding for each question in the training set. The dimension of the embedding is 1024. We construct the edges of the Q-Q graph if the embedding cosine similarity between two questions cross a threshold of 0.8<sup>13</sup>. In PPR algorithm, the  $\alpha$  value is set to 0.85,  $max\_iter$  is set to 100 and  $tol$  is set to 1e-6. The  $k$  value is set to 2<sup>14</sup>. For parameter settings of instruction tuned models, see Appendix A.1.

**Evaluation metrics**: We have used three metrics – ROUGE score<sup>15</sup>, BERT score [91, 92] and FactSumm score [23] for automatic evaluation of generated answers. Note that the FactSumm [23] package extracts the facts from the generated text and the ground truth text and computes an overall score based on the fact overlap and fact mismatch. This package has also been used in earlier works [39, 50] to measure the factual accuracy of the generated text.

## 6 Results

The Table 2 notes the BERTScore, ROUGE 1, ROUGE L (macro-F1) values achieved by different LLMs in a zero-shot setup across three domains – AskUbuntu, Unix, and ServerFault.

**Zero-shot answer generation by different LLMs**: For the AskUbuntu dataset, the Llama2 (13B) model consistently achieves the top BERTScore (0.810) compared to the other existing models. For ROUGE 1, ROUGE L metrics also, this model leads with scores of 0.227 and 0.211, respectively. For the Unix dataset, the Llama2 (13B) model remains dominant, particularly in BERTScore (0.806). Vicuna (13B) is best in terms of ROUGE 1 (0.181), while Llama2 (13B) is best in terms of ROUGE L (0.175). For the ServerFault dataset, the trend remains similar: Llama2 (13B) dominates with a BERTScore of 0.819; Vicuna (13B) leads in terms of ROUGE 1 (0.185) and Llama2 (13B) in terms of ROUGE L (0.176).

We observe that the performances are not always directly proportional to the model size. Llama2 (13B) most often outperforms bigger models like Gpt-neox (20B) and Falcon (40B). Similarly, models of comparable sizes, such as Falcon (7B), MPT (7B), and StackLlama (7B), display varied performances, emphasizing that model architecture and training methods are equally crucial as is the size.

**Main results**: Table 3 shows the baseline results and compares them with our proposed method. In the Pre-LLM era, AnswerBot showcases competitive results with BERTScore of 0.803, 0.791, and 0.802 for AskUbuntu, Unix, and ServerFault, respectively. GenQA tends to underperform with the lowest BERTScore of 0.55 for the Unix platform. Among the methods from this era, AnswerBot also achieves the highest FactSumm score across all platforms.

In the results pertaining to the LLM era, the reference model for generating answers is always set to Llama2 (13B) which performed the best in the zero-shot setting<sup>16</sup>. For all the three datasets, our models GRAPHCONTEXTGEN outperforms all other baselines in terms of BERTScore. In terms of

<sup>12</sup>Values of all these hyperparameters are obtained through grid search.

<sup>13</sup>Empirically computed based on graph density.

<sup>14</sup>Empirically identified to fit the whole context within the acceptable token limit of the LLMs.

<sup>15</sup><https://huggingface.co/spaces/evaluate-metric/rouge>

<sup>16</sup>Interestingly, the results remain unchanged even if we use Llama2 (70B).

ID	Error Type	Samples
1	Misaligned Retrieval Outcomes	<p>Question: How can I change the <b>desktop environment</b> in Ubuntu?</p> <p>Retrieved Content: Steps to change the <b>desktop wallpaper</b> in Ubuntu.</p> <p>Generated Answer: To <b>change the wallpaper</b>, right-click on the desktop and select 'Change Wallpaper'.....</p> <p>Analysis: The retrieved content precisely discusses <b>changing the wallpaper</b>, but the user's query was about <b>changing the entire desktop environment</b>, not just the wallpaper.</p>
2	Entity Misalignment	<p>Question: What is the use of <b>'chmod'</b> in UNIX ?</p> <p>Retrieved Entity: <b>'chown'</b> command details from the <b>KG</b>.</p> <p>Generated Answer: ..... <b>'chown'</b> is used to change the owner of a file or directory.....</p> <p>Analysis: The retrieved information is accurate about <b>'chown'</b>, but the user's query was about <b>'chmod'</b>. This represents a wrong entity linking.</p>
3	Composite Query Conundrums	<p>Question: How do I <b>configure the firewall</b> on my server to <b>allow SSH access</b>, and also <b>set up an FTP server</b> for file transfers?</p> <p>Retrieved Content: Detailed steps on <b>configuring the firewall</b> for <b>SSH access</b>.</p> <p>Generated Answer: To <b>configure the firewall</b> for <b>SSH access</b>, you need to open port 22 and apply the necessary rules...</p> <p>Analysis: While the retrieved content and generated answer correctly address the <b>firewall configuration</b> for <b>SSH</b>, the question's second aspect about <b>setting up an FTP server</b> is entirely neglected.</p>
4	Factual Fidelity Fallacies	<p>Question: How can I <b>upgrade</b> to the <b>latest version</b> of <b>Ubuntu</b> ?</p> <p>Retrieved Content: Steps to <b>upgrade Ubuntu 16.04 to Ubuntu 18.04</b>.</p> <p>Generated Answer: To <b>upgrade</b> to the <b>latest version</b> of <b>Ubuntu</b>, follow these steps to upgrade from Ubuntu 16.04 to <b>18.04</b> ...</p> <p>Analysis: While the retrieved and generated content might be factually correct for the specific version transition, it's outdated if the latest version is <b>beyond Ubuntu 18.04</b>.</p>
5	Contextual Content Crux	<p>Question: How do I solve the <b>XYZ error</b> in Ubuntu?</p> <p>Retrieved Content: A post briefly mentioning the <b>XYZ error</b> with a comment saying, <b>"I also faced this."</b></p> <p>Generated Answer: The <b>XYZ error</b> is an issue <b>some users have faced</b> in Ubuntu.....</p> <p>Analysis: The retrieved content acknowledges the error but <b>provides no solution</b> or detailed information, leading to an unsatisfactory and unhelpful answer.</p>

Table 4: The actual rationale being marked with the **green** and retrieved and generated rationale marked as **red**.

FactSumm, GRAPHCONTEXTGEN is best for two out the three datasets (AskUbuntu and Unix). This indicates that our model produces factually more correct answers compared to the different baselines. For the ROUGE 1 and ROUGE L once again GRAPHCONTEXTGEN shows competitive performance in two out of the three datasets (Unix and ServerFault). In general, the models of the LLM era are always better in terms of these two metrics compared to the models of the pre-LLM era.

**Grounding of the generated answers:** We use the UniversalNER [94] model to identify the entities present in the ground truth answer and the generated answer. The Jaccard similarity between the entity sets in the ground truth and the generated answers for our model are 0.85, 0.75 and 0.79 for the Askubuntu, Unix, and ServerFault datasets respectively (see Figure 3 (A)). The overlap in the number of triplets for the three datasets is shown in Figure 3 (B). The numeric values in both the figures point that the answers generated by our model are rich in entity and relationships that are actually present in the ground truth answer.

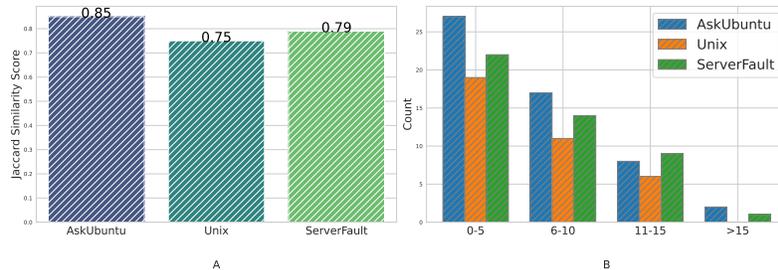


Figure 3: Performance metrics on community datasets using the UniNER model. (A) Jaccard similarity scores illustrate the level of overlap between predicted entities and actual entities. (B) Triplet overlap distribution across different ranges, provide insights into the depth of entity matching in the model's predictions.

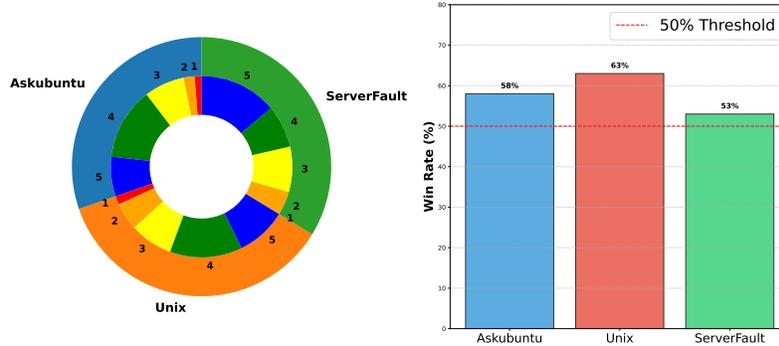


Figure 4: Comparative analysis of human feedback on the generated answers for test questions drawn from Askubuntu, Unix, and ServerFault. On the left, a dual-layer pie chart breaks down the total number of answers and their respective ratings from 1 to 5. The right side displays a bar graph indicating the percentage of wins for answers from each community, benchmarked against a 50% threshold. Notably, a majority of the ratings lean toward the higher end, indicating overall positive reception.

## 7 Human Evaluation

In the results of the automatic evaluation, it is essential to remember that low values of BERTScore or FactSumm might also correspond to lower-quality ground truth answers posted by humans. Thus there are possibilities of the model generated answers to be superior in quality compared to the ground truth answers. Such points can be verified only by human judgement experiments which is what we conduct in this section.

We engaged nine undergraduate students, each an expert in their domain, to undertake our annotation task, dividing them into groups of three for each dataset. All these students are majoring in Computer Science and have a proven track record of contributing high-quality answers within relevant community platforms. They voluntarily joined our project after receiving an invitation through departmental emails and were rewarded with Amazon gift cards for their contributions. Each undergraduate student annotates 50 instances individually. We utilize the Doccano<sup>17</sup> tool for obtaining the annotations. The annotators provided feedback on a scale from 1 to 5. A rating of ‘1’ means the answer is unhelpful or misleading, while a ‘5’ indicates an exemplary response. In Figure 4, we display the feedback distribution for test instances. In the pie chart, the outer ring represents the three datasets. For every dataset, five segments in the inner ring depict the distribution of ratings from 1 to 5. The plot reveals that the answers generated by our model for both the AskUbuntu and the Unix test cases predominantly have a rating of 4 as per human judgement, while those generated by our model for the ServerFault test cases predominantly have ratings of 5. Next we compute ‘win rate’ which refers to the percentage of individuals who favor the output from our model over the standard zero-shot output. In our analysis comparing answers generated by our model with those from a simple zero-shot approach, we observe a notable trend in win rates across the three platforms. Specifically, for Askubuntu, Unix, and ServerFault, the win rates are 58%, 63%, and 53%, respectively. These rates consistently exceed the 50% benchmark.

## 8 Error Analysis

To better understand the quality of auto-generated answers, we examine randomly sampled answers and observe that they sometimes have errors originating from either the retrieval or generation phase, or both. This section presents a systematic error analysis highlighting the error types and corresponding examples (see Table 4).

**Misaligned retrieval outcomes:** This misalignment occurs when the retrieved content, accurate in its context, doesn’t match the user’s intended query, leading to off-target responses due to the generation’s reliance on the retrieved data. On platforms like AskUbuntu, Unix, and ServerFault,

<sup>17</sup><https://elements.heroku.com/buttons/doccano/doccano>

overlapping themes, like a ‘boot issues’ query retrieving ‘USB booting’ content instead of ‘system booting problems’, exacerbates the issue.

**Entity misalignment:** This issue arises when the retrieval mechanism accurately finds data but incorrectly links it to an entity in the knowledge graph, causing responses to deviate from the user’s context. For example, in UNIX, a term like ‘read’ might refer to a command or a configuration file, leading to misassociations if not accurately disambiguated.

**Composite query conundrums:** This problem occurs when a user’s query involves multiple issues, and the retrieval system typically focuses primarily on one, neglecting the others. For example, on platforms like AskUbuntu, a user might ask about ‘memory and CPU usage’, and the system might only address the memory part.

**Factual fidelity fallacies:** This issue arises when the RAG system, skilled in retrieval and generation, delivers answers that lack factual accuracy or are outdated, a common issue in rapidly evolving platforms like AskUbuntu. For instance, a query about a software tool may elicit a response based on outdated versions.

**Contextual content crux:** When the system retrieves broad or limited contents, it can produce answers that lack depth or specificity, a challenge often seen on platforms like AskUbuntu. For example, a query about a specific Ubuntu feature might get a general response if the corpus lacks in-depth content.

## 9 Conclusion

This study addresses a notable challenge in CQA platforms: the automatic generation of answers across popular platforms often lacks clear problem definitions, leading to issues with proper knowledge grounding and factually incoherent responses. We present GRAPHCONTEXTGEN, which, to the best of our knowledge, is the first solution that uses graph retrieval combined with knowledge graph context for this challenge in domain-specific CQA platforms. Our evaluations indicate that this model outperforms previous prominent approaches. Notably, human evaluators determine that answers generated by GRAPHCONTEXTGEN exhibit greater factual coherence and knowledge grounding. We further demonstrate that researchers with constrained GPU resources can adopt this solution with smaller parameter LLMs and achieve performance that are at par with larger models.

Driven by these encouraging results, we aim to develop GRAPHCONTEXTGEN into an accessible tool. We envision a straightforward task, perfect for novice developers, users, and researchers, where they can obtain the optimal answers from GRAPHCONTEXTGEN. This initiative highlights the significant potential of state-of-the-art generative language models in bridging knowledge grounding gaps and enhancing factual coherence, especially given hardware constraints. We look forward to more advancements in this area.

## References

- [1] Technology innovation institute tii. falcon llm, 2023. URL <https://falconllm.tii.ae/>. [Online; accessed 10-July-2023].
- [2] Qingyao Ai, Ting Bai, Zhao Cao, Yi Chang, Jiawei Chen, Zhumin Chen, Zhiyong Cheng, Shoubin Dong, Zhicheng Dou, Fuli Feng, Shen Gao, Jiafeng Guo, Xiangnan He, Yanyan Lan, Chenliang Li, Yiqun Liu, Ziyu Lyu, Weizhi Ma, Jun Ma, Zhaochun Ren, Pengjie Ren, Zhiqiang Wang, Mingwen Wang, Ji-Rong Wen, Le Wu, Xin Xin, Jun Xu, Dawei Yin, Peng Zhang, Fan Zhang, Weinan Zhang, Min Zhang, and Xiaofei Zhu. Information retrieval meets large language models: A strategic report from chinese ir community. *AI Open*, 4:80–90, 2023. ISSN 2666-6510. doi: <https://doi.org/10.1016/j.aiopen.2023.08.001>. URL <https://www.sciencedirect.com/science/article/pii/S2666651023000049>.
- [3] Edward Beeching, Younes Belkada, Kashif Rasul, Lewis Tunstall, Leandro von Werra, Nazneen Rajani, and Nathan Lambert. Stackllama: An rl fine-tuned llama model for stack exchange question and answering, 2023. URL <https://huggingface.co/blog/stackllama>.
- [4] Sidney Black, Stella Biderman, Eric Hallahan, Quentin Anthony, Leo Gao, Laurence Golding, Horace He, Connor Leahy, Kyle McDonell, Jason Phang, Michael Pieler, Usvsn Sai Prashanth,

- Shivanshu Purohit, Laria Reynolds, Jonathan Tow, Ben Wang, and Samuel Weinbach. GPT-NeoX-20B: An open-source autoregressive language model. In *Proceedings of BigScience Episode #5 – Workshop on Challenges & Perspectives in Creating Large Language Models*, pages 95–136, virtual+Dublin, May 2022. Association for Computational Linguistics. doi: 10.18653/v1/2022.bigscience-1.9. URL <https://aclanthology.org/2022.bigscience-1.9>.
- [5] Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners, 2020.
- [6] Liang Cai, Haoye Wang, Bowen Xu, Qiao Huang, Xin Xia, David Lo, and Zhenchang Xing. Answerbot: An answer summary generation tool based on stack overflow. In *Proceedings of the 2019 27th ACM Joint Meeting on European Software Engineering Conference and Symposium on the Foundations of Software Engineering, ESEC/FSE 2019*, page 1134–1138. Association for Computing Machinery, 2019. ISBN 9781450355728. doi: 10.1145/3338906.3341186.
- [7] Zhikai Chen, Haitao Mao, Hang Li, Wei Jin, Hongzhi Wen, Xiaochi Wei, Shuaiqiang Wang, Dawei Yin, Wenqi Fan, Hui Liu, and Jiliang Tang. Exploring the potential of large language models (llms) in learning on graphs, 2023.
- [8] Yang Chengran, Bowen Xu, Ferdian Thung, Yucen Shi, Ting Zhang, Zhou Yang, Xin Zhou, Jieke Shi, Junda He, DongGyun Han, and David Lo. Answer summarization for technical queries: Benchmark and new approach, 2022.
- [9] Wei-Lin Chiang, Zhuohan Li, Zi Lin, Ying Sheng, Zhanghao Wu, Hao Zhang, Lianmin Zheng, Siyuan Zhuang, Yonghao Zhuang, Joseph E. Gonzalez, Ion Stoica, and Eric P. Xing. Vicuna: An open-source chatbot impressing gpt-4 with 90%\* chatgpt quality, March 2023. URL <https://lmsys.org/blog/2023-03-30-vicuna/>.
- [10] Yang Deng, Wai Lam, Yuexiang Xie, Daoyuan Chen, Yaliang Li, Min Yang, and Ying Shen. Joint learning of answer selection and answer summary generation in community question answering, 2019.
- [11] Yang Deng, Wenqiang Lei, Lizi Liao, and Tat-Seng Chua. Prompting and evaluating large language models for proactive dialogues: Clarification, target-guided, and non-collaboration, 2023.
- [12] Shehzaad Dhuliawala, Mojtaba Komeili, Jing Xu, Roberta Raileanu, Xian Li, Asli Celikyilmaz, and Jason Weston. Chain-of-verification reduces hallucination in large language models, 2023.
- [13] Cícero Nogueira dos Santos, Ming Tan, Bing Xiang, and Bowen Zhou. Attentive pooling networks. *ArXiv*, abs/1602.03609, 2016.
- [14] Michael R. Douglas. Large language models, 2023.
- [15] Günes Erkan and Dragomir R. Radev. Lexrank: Graph-based lexical centrality as salience in text summarization. *J. Artif. Int. Res.*, 22(1):457–479, dec 2004. ISSN 1076-9757.
- [16] Kavita Ganesan, ChengXiang Zhai, and Jiawei Han. Opinosis: a graph-based approach to abstractive summarization of highly redundant opinions. In *Proceedings of the 23rd international conference on computational linguistics*, pages 340–348. Association for Computational Linguistics, 2010.
- [17] Leo Gao, John Schulman, and Jacob Hilton. Scaling laws for reward model overoptimization, 2022.
- [18] Kelvin Guu, Kenton Lee, Zora Tung, Panupong Pasupat, and Ming-Wei Chang. Realm: Retrieval-augmented language model pre-training. In *Proceedings of the 37th International Conference on Machine Learning, ICML’20*. JMLR.org, 2020.

- [19] Kelvin Guu, Kenton Lee, Zora Tung, Panupong Pasupat, and Ming-Wei Chang. Realm: Retrieval-augmented language model pre-training, 2020.
- [20] Rima Hazra, Hardik Aggarwal, Pawan Goyal, Animesh Mukherjee, and Soumen Chakrabarti. Joint autoregressive and graph models for software and developer social networks. In Djoerd Hiemstra, Marie-Francine Moens, Josiane Mothe, Raffaele Perego, Martin Potthast, and Fabrizio Sebastiani, editors, *Advances in Information Retrieval - 43rd European Conference on IR Research, ECIR 2021, Virtual Event, March 28 - April 1, 2021, Proceedings, Part I*, volume 12656 of *Lecture Notes in Computer Science*, pages 224–237. Springer, 2021.
- [21] Rima Hazra, Arpit Dwivedi, and Animesh Mukherjee. Is this bug severe? a text-cum-graph based model for bug severity prediction. In Massih-Reza Amini, Stéphane Canu, Asja Fischer, Tias Guns, Petra Kralj Novak, and Grigorios Tsoumakas, editors, *Machine Learning and Knowledge Discovery in Databases*, pages 236–252, Cham, 2023. Springer Nature Switzerland. ISBN 978-3-031-26422-1.
- [22] Junxian He, Wojciech Kryscinski, Bryan McCann, Nazneen Rajani, and Caiming Xiong. CTRLsum: Towards generic controllable text summarization. pages 5879–5915, Abu Dhabi, United Arab Emirates, December 2022. Association for Computational Linguistics. URL <https://aclanthology.org/2022.emnlp-main.396>.
- [23] Hoon Heo. Factsumm: Factual consistency scorer for abstractive summarization. <https://github.com/Huffon/factsumm>, 2021.
- [24] Chao-Chun Hsu, Eric Lind, Luca Soldaini, and Alessandro Moschitti. Answer generation for retrieval-based question answering systems. In *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*, pages 4276–4282, Online, August 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.findings-acl.374. URL <https://aclanthology.org/2021.findings-acl.374>.
- [25] Vojtěch Hudeček and Ondřej Dušek. Are llms all you need for task-oriented dialogue?, 2023.
- [26] Pere-Lluís Hugué Cabot and Roberto Navigli. REBEL: Relation extraction by end-to-end language generation. In *Findings of the Association for Computational Linguistics: EMNLP 2021*, pages 2370–2381, Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.findings-emnlp.204. URL <https://aclanthology.org/2021.findings-emnlp.204>.
- [27] Ehsan Kamalloo, Nouha Dziri, Charles Clarke, and Davood Rafiei. Evaluating open-domain question answering in the era of large language models. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 5591–5606, Toronto, Canada, July 2023. Association for Computational Linguistics. doi: 10.18653/v1/2023.acl-long.307. URL <https://aclanthology.org/2023.acl-long.307>.
- [28] Minki Kang, Jin Myung Kwak, Jinheon Baek, and Sung Ju Hwang. Knowledge graph-augmented language models for knowledge-grounded dialogue generation, 2023.
- [29] Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B. Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. Scaling laws for neural language models, 2020.
- [30] Ashkan Kazemi, Verónica Pérez-Rosas, and Rada Mihalcea. Biased TextRank: Unsupervised graph-based content extraction. In *Proceedings of the 28th International Conference on Computational Linguistics*, pages 1642–1652, Barcelona, Spain (Online), December 2020. International Committee on Computational Linguistics. doi: 10.18653/v1/2020.coling-main.144. URL <https://aclanthology.org/2020.coling-main.144>.
- [31] C. S. Krishna. Prompt generate train (pgt): Few-shot domain adaption of retrieval augmented generation models for open book question-answering, 2023.
- [32] Gibbeum Lee, Volker Hartmann, Jongho Park, Dimitris Papailiopoulos, and Kangwook Lee. Prompted llms as chatbot modules for long open-domain conversation, 2023.

- [33] Harrison Lee, Samrat Phatale, Hassan Mansoor, Kellie Lu, Thomas Mesnard, Colton Bishop, Victor Carbune, and Abhinav Rastogi. Rlaif: Scaling reinforcement learning from human feedback with ai feedback, 2023.
- [34] Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen tau Yih, Tim Rocktäschel, Sebastian Riedel, and Douwe Kiela. Retrieval-augmented generation for knowledge-intensive nlp tasks, 2021.
- [35] Yaliang Li, Nan Du, Chaochun Liu, Yusheng Xie, Wei Fan, Qi Li, Jing Gao, and Huan Sun. Reliable medical diagnosis from crowdsourcing: Discover trustworthy answers from non-experts. WSDM '17, page 253–261, New York, NY, USA, 2017. Association for Computing Machinery. ISBN 9781450346757. doi: 10.1145/3018661.3018688. URL <https://doi.org/10.1145/3018661.3018688>.
- [36] Yu Li, Baolin Peng, Yelong Shen, Yi Mao, Lars Liden, Zhou Yu, and Jianfeng Gao. Knowledge-grounded dialogue generation with a unified knowledge representation, 2022.
- [37] Yuanzhi Li, Sébastien Bubeck, Ronen Eldan, Allie Del Giorno, Suriya Gunasekar, and Yin Tat Lee. Textbooks are all you need ii: phi-1.5 technical report, 2023.
- [38] Long Lian, Boyi Li, Adam Yala, and Trevor Darrell. Llm-grounded diffusion: Enhancing prompt understanding of text-to-image diffusion models with large language models, 2023.
- [39] Wei Liu, Huanqin Wu, Wenjing Mu, Zhen Li, Tao Chen, and Dan Nie. Co2sum: Contrastive learning for factual-consistent abstractive summarization. *ArXiv*, abs/2112.01147, 2021. URL <https://api.semanticscholar.org/CorpusID:244798787>.
- [40] Yujie Lu, Siqi Ouyang, and Kairui Zhou. Structured knowledge grounding for question answering, 2023.
- [41] S. S. Manathunga and Y. A. Illangasekara. Retrieval augmented generation and representative vector summarization for large unstructured textual data in medical education, 2023.
- [42] Sourab Mangrulkar, Sylvain Gugger, Lysandre Debut, Younes Belkada, Sayak Paul, and Benjamin Bossan. Peft: State-of-the-art parameter-efficient fine-tuning methods. <https://github.com/huggingface/peft>, 2022.
- [43] Nick McKenna, Tianyi Li, Liang Cheng, Mohammad Javad Hosseini, Mark Johnson, and Mark Steedman. Sources of hallucination by large language models on inference tasks, 2023.
- [44] Rada Mihalcea and Paul Tarau. TextRank: Bringing order into text. pages 404–411, Barcelona, Spain, July 2004. Association for Computational Linguistics. URL <https://aclanthology.org/W04-3252>.
- [45] Niels Mündler, Jingxuan He, Slobodan Jenko, and Martin Vechev. Self-contradictory hallucinations of large language models: Evaluation, detection and mitigation, 2023.
- [46] Sarah Nadi and Christoph Treude. Essential sentences for navigating stack overflow answers, 2019.
- [47] AmirHossein Naghshzan, Latifa Guerrouj, and Olga Baysal. Leveraging unsupervised learning to summarize APIs discussed in stack overflow. *IEEE*, sep 2021. doi: 10.1109/scam52516.2021.00026. URL <https://doi.org/10.11092Fscam52516.2021.00026>.
- [48] Humza Naveed, Asad Ullah Khan, Shi Qiu, Muhammad Saqib, Saeed Anwar, Muhammad Usman, Naveed Akhtar, Nick Barnes, and Ajmal Mian. A comprehensive overview of large language models, 2023.
- [49] Long Ouyang, Jeff Wu, Xu Jiang, Diogo Almeida, Carroll L. Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, John Schulman, Jacob Hilton, Fraser Kelton, Luke Miller, Maddie Simens, Amanda Askell, Peter Welinder, Paul Christiano, Jan Leike, and Ryan Lowe. Training language models to follow instructions with human feedback, 2022.

- [50] Hongjing Qian, Yutao Zhu, Zhicheng Dou, Haoqi Gu, Xinyu Zhang, Zheng Liu, Ruofei Lai, Zhao Cao, Jian-Yun Nie, and Ji-Rong Wen. Webbrain: Learning to generate factually correct articles for queries by grounding on large web corpus, 2023.
- [51] Ori Ram, Yoav Levine, Itay Dalmedigos, Dor Muhlgay, Amnon Shashua, Kevin Leyton-Brown, and Yoav Shoham. In-context retrieval-augmented language models, 2023.
- [52] Jinfeng Rao, Hua He, and Jimmy Lin. Experiments with convolutional neural network models for answer selection. SIGIR '17, page 1217–1220, New York, NY, USA, 2017. Association for Computing Machinery. ISBN 9781450350228. doi: 10.1145/3077136.3080648. URL <https://doi.org/10.1145/3077136.3080648>.
- [53] Nils Reimers and Iryna Gurevych. Sentence-bert: Sentence embeddings using siamese bert-networks, 2019.
- [54] Adam Roberts, Colin Raffel, and Noam Shazeer. How much knowledge can you pack into the parameters of a language model? In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 5418–5426, Online, November 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.emnlp-main.437. URL <https://aclanthology.org/2020.emnlp-main.437>.
- [55] Adam Roberts, Hyung Won Chung, Anselm Levskaya, Gaurav Mishra, James Bradbury, Daniel Andor, Sharan Narang, Brian Lester, Colin Gaffney, Afroz Mohiuddin, Curtis Hawthorne, Aitor Lewkowycz, Alex Salcianu, Marc van Zee, Jacob Austin, Sebastian Goodman, Livio Baldini Soares, Haitang Hu, Sasha Tsvyashchenko, Aakanksha Chowdhery, Jasmijn Bastings, Jannis Bulian, Xavier Garcia, Jianmo Ni, Andrew Chen, Kathleen Kenealy, Jonathan H. Clark, Stephan Lee, Dan Garrette, James Lee-Thorp, Colin Raffel, Noam Shazeer, Marvin Ritter, Maarten Bosma, Alexandre Passos, Jeremy Maitin-Shepard, Noah Fiedel, Mark Omernick, Brennan Saeta, Ryan Sepassi, Alexander Spiridonov, Joshua Newlan, and Andrea Gesmundo. Scaling up models and data with t5x and seqio. *arXiv preprint arXiv:2203.17189*, 2022. URL <https://arxiv.org/abs/2203.17189>.
- [56] Joshua Robinson, Christopher Michael Rytting, and David Wingate. Leveraging large language models for multiple choice question answering, 2023.
- [57] Jon Saad-Falcon, Joe Barrow, Alexa Siu, Ani Nenkova, Ryan A. Rossi, and Franck Dernoncourt. Pdfriage: Question answering over long, structured documents, 2023.
- [58] Aliaksei Severyn and Alessandro Moschitti. Learning to rank short text pairs with convolutional deep neural networks. SIGIR '15, page 373–382, New York, NY, USA, 2015. Association for Computing Machinery. ISBN 9781450336215. doi: 10.1145/2766462.2767738. URL <https://doi.org/10.1145/2766462.2767738>.
- [59] Zhihong Shao, Yeyun Gong, Yelong Shen, Minlie Huang, Nan Duan, and Weizhu Chen. Enhancing retrieval-augmented large language models with iterative retrieval-generation synergy, 2023.
- [60] Ying Shen, Yang Deng, Min Yang, Yaliang Li, Nan Du, Wei Fan, and Kai Lei. Knowledge-aware attentive neural network for ranking question answer pairs. SIGIR '18, page 901–904, New York, NY, USA, 2018. Association for Computing Machinery. ISBN 9781450356572. doi: 10.1145/3209978.3210081. URL <https://doi.org/10.1145/3209978.3210081>.
- [61] Kurt Shuster, Spencer Poff, Moya Chen, Douwe Kiela, and Jason Weston. Retrieval augmentation reduces hallucination in conversation. In *Findings of the Association for Computational Linguistics: EMNLP 2021*, pages 3784–3803, Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.findings-emnlp.320. URL <https://aclanthology.org/2021.findings-emnlp.320>.
- [62] Charlie Snell, Sherry Yang, Justin Fu, Yi Su, and Sergey Levine. Context-aware language modeling for goal-oriented dialogue systems. In *Findings of the Association for Computational Linguistics: NAACL 2022*, pages 2351–2366, Seattle, United States, July 2022. Association for Computational Linguistics. doi: 10.18653/v1/2022.findings-naacl.181. URL <https://aclanthology.org/2022.findings-naacl.181>.

- [63] Nisan Stiennon, Long Ouyang, Jeffrey Wu, Daniel Ziegler, Ryan Lowe, Chelsea Voss, Alec Radford, Dario Amodei, and Paul F Christiano. Learning to summarize with human feedback. In H. Larochelle, M. Ranzato, R. Hadsell, M.F. Balcan, and H. Lin, editors, *Advances in Neural Information Processing Systems*, volume 33, pages 3008–3021. Curran Associates, Inc., 2020. URL [https://proceedings.neurips.cc/paper\\_files/paper/2020/file/1f89885d556929e98d3ef9b86448f951-Paper.pdf](https://proceedings.neurips.cc/paper_files/paper/2020/file/1f89885d556929e98d3ef9b86448f951-Paper.pdf).
- [64] Ming Tan, Cicero dos Santos, Bing Xiang, and Bowen Zhou. Improved representation learning for question answer matching. In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 464–473, Berlin, Germany, August 2016. Association for Computational Linguistics. doi: 10.18653/v1/P16-1044. URL <https://aclanthology.org/P16-1044>.
- [65] MosaicML NLP Team. Introducing mpt-7b: A new standard for open-source, commercially usable llms, 2023. URL [www.mosaicml.com/blog/mpt-7b](http://www.mosaicml.com/blog/mpt-7b). Accessed: 2023-05-05.
- [66] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, Dan Bikel, Lukas Blecher, Cristian Canton Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes, Jeremy Fu, Wenyin Fu, Brian Fuller, Cynthia Gao, Vedanuj Goswami, Naman Goyal, Anthony Hartshorn, Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madian Khabsa, Isabel Kloumann, Artem Korenev, Punit Singh Koura, Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee, Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra, Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi, Alan Schelten, Ruan Silva, Eric Michael Smith, Ranjan Subramanian, Xiaoqing Ellen Tan, Binh Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zheng Yan, Iliyan Zarov, Yuchen Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurelien Rodriguez, Robert Stojnic, Sergey Edunov, and Thomas Scialom. Llama 2: Open foundation and fine-tuned chat models, 2023.
- [67] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, Dan Bikel, Lukas Blecher, Cristian Canton Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes, Jeremy Fu, Wenyin Fu, Brian Fuller, Cynthia Gao, Vedanuj Goswami, Naman Goyal, Anthony Hartshorn, Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madian Khabsa, Isabel Kloumann, Artem Korenev, Punit Singh Koura, Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee, Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra, Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi, Alan Schelten, Ruan Silva, Eric Michael Smith, Ranjan Subramanian, Xiaoqing Ellen Tan, Binh Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zheng Yan, Iliyan Zarov, Yuchen Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurelien Rodriguez, Robert Stojnic, Sergey Edunov, and Thomas Scialom. Llama 2: Open foundation and fine-tuned chat models, 2023.
- [68] Gias Uddin and Foutse Khomh. Automatic summarization of api reviews. ASE '17, page 159–170. IEEE Press, 2017. ISBN 9781538626849.
- [69] Josef Valvoda, Yimai Fang, and David Vandyke. Prompting for a conversation: How to control a dialog model?, 2022.
- [70] Leandro von Werra, Younes Belkada, Lewis Tunstall, Edward Beeching, Tristan Thrush, Nathan Lambert, and Shengyi Huang. Trl: Transformer reinforcement learning. <https://github.com/huggingface/trl>, 2020.
- [71] Di Wang and Eric Nyberg. A long short-term memory model for answer sentence selection in question answering. pages 707–712, Beijing, China, July 2015. Association for Computational Linguistics. doi: 10.3115/v1/P15-2116.
- [72] Hanzhi Wang, Zhewei Wei, Junhao Gan, Sibao Wang, and Zengfeng Huang. Personalized pagerank to a target node, revisited. In *Proceedings of the 26th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining, KDD '20*, page 657–667, New York, NY, USA, 2020. Association for Computing Machinery. ISBN 9781450379984. doi: 10.1145/3394486.3403108. URL <https://doi.org/10.1145/3394486.3403108>.

- [73] Kai Wang, Zhaoyan Ming, and Tat-Seng Chua. A syntactic tree matching approach to finding similar questions in community-based qa services. In *Proceedings of the 32nd International ACM SIGIR Conference on Research and Development in Information Retrieval*, SIGIR '09, page 187–194, New York, NY, USA, 2009. Association for Computing Machinery. ISBN 9781605584836. doi: 10.1145/1571941.1571975. URL <https://doi.org/10.1145/1571941.1571975>.
- [74] Mengqiu Wang and Christopher Manning. Probabilistic tree-edit models with structured latent variables for textual entailment and question answering. In *Proceedings of the 23rd International Conference on Computational Linguistics (Coling 2010)*, pages 1164–1172, Beijing, China, August 2010. Coling 2010 Organizing Committee. URL <https://aclanthology.org/C10-1131>.
- [75] Yu Wang, Nedim Lipka, Ryan A. Rossi, Alexa Siu, Ruiyi Zhang, and Tyler Derr. Knowledge graph prompting for multi-document question answering, 2023.
- [76] Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Brian Ichter, Fei Xia, Ed Chi, Quoc Le, and Denny Zhou. Chain-of-thought prompting elicits reasoning in large language models, 2023.
- [77] Jing Wei, Sungdong Kim, Hyunhoon Jung, and Young-Ho Kim. Leveraging Large Language Models to Power Chatbots for Collecting User Self-Reported Data. *arXiv e-prints*, art. arXiv:2301.05843, January 2023. doi: 10.48550/arXiv.2301.05843.
- [78] Jiahui Wen, Jingwei Ma, Yiliu Feng, and Mingyang Zhong. Hybrid attentive answer selection in cqa with deep users modelling. AAAI'18/IAAI'18/EAAI'18. AAAI Press, 2018. ISBN 978-1-57735-800-8.
- [79] Wei Wu, Xu Sun, and Houfeng Wang. Question condensing networks for answer selection in community question answering. pages 1746–1755, Melbourne, Australia, July 2018. Association for Computational Linguistics. doi: 10.18653/v1/P18-1162. URL <https://aclanthology.org/P18-1162>.
- [80] Shitao Xiao, Zheng Liu, Peitian Zhang, and Niklas Muennighoff. C-pack: Packaged resources to advance general chinese embedding, 2023.
- [81] Jiayuan Xie, Wenhao Fang, Qingbao Huang, Yi Cai, and Tao Wang. Enhancing paraphrase question generation with prior knowledge. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 31:1464–1475, 2023. doi: 10.1109/TASLP.2022.3221045.
- [82] Bowen Xu, Zhenchang Xing, Xin Xia, and David Lo. Answerbot: Automated generation of answer summary to developers' technical questions. In *2017 32nd IEEE/ACM International Conference on Automated Software Engineering (ASE)*, pages 706–716, 2017. doi: 10.1109/ASE.2017.8115681.
- [83] Yumo Xu and Mirella Lapata. Coarse-to-fine query focused multi-document summarization. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 3632–3645, Online, November 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.emnlp-main.296. URL <https://aclanthology.org/2020.emnlp-main.296>.
- [84] Zhaozhuo Xu, Zirui Liu, Beidi Chen, Yuxin Tang, Jue Wang, Kaixiong Zhou, Xia Hu, and Anshumali Shrivastava. Compress, then prompt: Improving accuracy-efficiency trade-off of llm inference with transferable prompt, 2023.
- [85] Chengran Yang, Bowen Xu, Jiakun Liu, and David Lo. Techsumbot: A stack overflow answer summarization tool for technical query. In *2023 IEEE/ACM 45th International Conference on Software Engineering: Companion Proceedings (ICSE-Companion)*, pages 132–135, 2023. doi: 10.1109/ICSE-Companion58688.2023.00040.
- [86] Chengran Yang, Bowen Xu, Ferdian Thung, Yucen Shi, Ting Zhang, Zhou Yang, Xin Zhou, Jieke Shi, Junda He, Donggyun Han, and David Lo. Answer summarization for technical queries: Benchmark and new approach. In *Proceedings of the 37th IEEE/ACM International Conference*

on Automated Software Engineering, ASE '22, New York, NY, USA, 2023. Association for Computing Machinery. ISBN 9781450394758. doi: 10.1145/3551349.3560421. URL <https://doi.org/10.1145/3551349.3560421>.

- [87] Zhun Yang, Adam Ishay, and Joohyung Lee. Coupling large language models with logic programming for robust and general reasoning from text. In *Findings of the Association for Computational Linguistics: ACL 2023*, pages 5186–5219, Toronto, Canada, July 2023. Association for Computational Linguistics. doi: 10.18653/v1/2023.findings-acl.321. URL <https://aclanthology.org/2023.findings-acl.321>.
- [88] Seunghyun Yoon, Joongbo Shin, and Kyomin Jung. Learning to rank question-answer pairs using hierarchical recurrent encoder with latent topic clustering. pages 1575–1584, June 2018. doi: 10.18653/v1/N18-1142.
- [89] Zichun Yu, Chenyan Xiong, Shi Yu, and Zhiyuan Liu. Augmentation-adapted retriever improves generalization of language models as generic plug-in, 2023.
- [90] Shengyu Zhang, Linfeng Dong, Xiaoya Li, Sen Zhang, Xiaofei Sun, Shuhe Wang, Jiwei Li, Runyi Hu, Tianwei Zhang, Fei Wu, and Guoyin Wang. Instruction tuning for large language models: A survey, 2023.
- [91] Tianyi Zhang\*, Varsha Kishore\*, Felix Wu\*, Kilian Q. Weinberger, and Yoav Artzi. Bertscore: Evaluating text generation with bert. In *International Conference on Learning Representations*, 2020. URL <https://openreview.net/forum?id=SkeHuCVFDr>.
- [92] Tianyi Zhang, Varsha Kishore, Felix Wu, Kilian Q. Weinberger, and Yoav Artzi. Bertscore: Evaluating text generation with bert, 2020.
- [93] Yufeng Zhang, Jinghao Zhang, Zeyu Cui, Shu Wu, and Liang Wang. A graph-based relevance matching model for ad-hoc retrieval, 2021.
- [94] Wenxuan Zhou, Sheng Zhang, Yu Gu, Muhao Chen, and Hoifung Poon. Universalner: Targeted distillation from large language models for open named entity recognition. 2023.
- [95] Daniel M. Ziegler, Nisan Stiennon, Jeffrey Wu, Tom B. Brown, Alec Radford, Dario Amodei, Paul Christiano, and Geoffrey Irving. Fine-tuning language models from human preferences. *arXiv preprint arXiv:1909.08593*, 2019. URL <https://arxiv.org/abs/1909.08593>.

## A Appendix

### A.1 Instruction tune hyperparameters

Hyperparameter	Value
Learning Rate	2e-4
Batch Size	4
Gradient Accumulation Step	1
Number of Epochs	10
Weight Decay	0.001
Optimizer	paged adamw 32bits
LR scheduler	cosine
Warmup ratio	0.03
Max grad norm	0.3
bf16	True
LoRA r, alpha, dropout	64, 16, 0.1
bf16	True
Quantization	4bit
PEFT Techniques	LoRA
Trainer	SFTT

Table 5: Hyperparameters for instruction tuning the LLM using SFTT trainer.

## A.2 Pre-LLM era baselines

### A.2.1 AnswerBot [82, 6]:

Authors of this work proposed an approach called AnswerBot, where the task is to generate a summary from diverse answers for a query. They followed three major steps – relevant question retrieval, useful answer paragraph selection, diverse answer summary generation. For retrieval, they used word2vec model and relevance calculation algorithm. For answer paragraph selection, they used various query, paragraph and user related features – *relevance to query*, *entity overlap*, *information entropy*, *semantic pattern*, *format patterns*, *paragraph position*, *vote on answer*. In answer summary generation stage, they used maximal marginal relevance (MMR) algorithm to select a subset of answer paragraphs. Further they used selected answer paragraphs to form the answer summary.

### A.2.2 GenQA [24]:

Authors of this paper proposed a framework to generate answers from the top candidates of a set of answer selection models. Instead of selecting the best candidates, they train a sequence to sequence transformer model to generate an answer from candidate set.

### A.2.3 TechSumBot [85]:

Authors of this paper show that developers frequently turn to StackOverflow for solutions, but they often encounter redundant or incomplete results. Current tools designed to summarize StackOverflow answers have clear drawbacks: they predominantly depend on manually-designed features, they struggle to filter out repetitive content, and they usually target specific programming languages. This tool autonomously produces answer summaries by extracting and ranking answers for their relevance, measuring the core importance of each sentence, and eliminating redundant details. Presented in a search engine format, TechSumBot’s efficiency is benchmarked against existing StackOverflow summary methods.

## A.3 Ablation study

In this section, we attempt to understand how well each component of our model is working and contributing to the overall performance. Here, we have done this study mainly from three different angles (see Table 6).

- (i) *Based on embedding algorithms*: The performance differences between sentence BERT [53] and BGE embeddings [80] within the TEXTGEN model are evident. The BGE variant demonstrates a slightly improved performance over sentence BERT.
- (ii) *Based on one-shot*: When focusing on one-shot methodologies, the GRAPHGEN model achieves marginally better scores compared to the TEXTGEN model. This suggests that the incorporation of graph structures potentially aids in better knowledge retrieval.
- (iii) *Based on only knowledge graph context*: Focusing solely on the knowledge graph context, two variants emerge: ONLYCONTEXTGEN[FT] (from text) and ONLYCONTEXTGEN[FG] (from graph). The ‘From Graph’ variant consistently exhibits slightly higher scores across all platforms than its ‘From Text’ counterpart. This underscores the importance of leveraging structured graph data for enhanced performance in our application.

## A.4 Sample prompt and generated answer

The sample prompt and the generated answer for a specific example is shown in Table 7.

Method	AskUbuntu	Unix	ServerFault
<i>Based on embedding algorithms</i>			
[w/o INST] TEXTGEN (Sentence BERT)	0.808	0.783	0.803
[w/o INST] TEXTGEN (BGE)	0.812	0.809	0.810
<i>Based on one-shot</i>			
[w/o INST] TEXTGEN	0.809	0.807	0.807
[w/o INST] GRAPHGEN	0.818	0.809	0.812
<i>Based on only knowledge graph context</i>			
[w/o INST] ONLYCONTEXTGEN[FT]	0.819	0.807	0.819
[w/o INST] ONLYCONTEXTGEN[FG]	0.827	0.820	0.818

Table 6: Ablation study highlighting the performance of various methods. FT: From text, FG: From graph.

Question	How do I extract an ISO file?
Context	<p>Question: Has anyone used isoInfo to extract ISO files? How does it compare to others?</p> <p>Answer: Hey! So, 'isoInfo' isn't for extracting ISO files; it just shows details about them. You wanna extract? Use 'isoinfo' from the same package. Like this: <code>isoinfo -i image.iso -x /PATH/INSIDE/ISO &gt;output.file</code>  Now, comparing 'isoinfo' with other tools:</p> <ol style="list-style-type: none"> <li>1. 7-Zip: Cool for many file types, has both GUI and command-line.</li> <li>2. WinRAR: Good for ISOs, but it's paid (though many stick to the trial).</li> <li>3. Daemon Tools: Great for 'mounting' ISOs, but can extract too.</li> <li>4. dd &amp; mount (Linux stuff): More techie, but pretty powerful.</li> </ol> <p>If you're a Linux person comfy with commands, go for 'isoinfo'. If not, maybe try a tool with a friendly interface.</p> <p>Question: Can you recommend a good free tool for extracting ISO files on Ubuntu 20.04?</p> <p>Answer: Hey! On Ubuntu 20.04 and wanna extract ISO files? Easy peasy:</p> <ol style="list-style-type: none"> <li>1. Archive Manager: Built-in tool. Just right-click the ISO, hit "Open With Archive Manager", and boom, you're in.</li> <li>2. 7-Zip: Not just a Windows thing! Get the Linux version, 'p7zip', with:  <code>sudo apt install p7zip-full</code>  Then run: <code>7z x file.iso</code></li> <li>3. mount: A bit techie. Mount the ISO, copy its stuff, like:  <code>mkdir /path/to/mountpoint</code>  <code>sudo mount -o loop file.iso /path/to/mountpoint</code>  <code>cp -r /path/to/mountpoint /path/to/destination</code>  <code>sudo umount /path/to/mountpoint</code></li> <li>4. isoinfo: Fancy extracting specific stuff? Grab it with:  <code>sudo apt install genisoimage</code></li> </ol> <p>Most folks will find Archive Manager or 7-Zip super easy. But if you're a command line junkie, try 'mount' or 'isoinfo'.</p> <p>Question: What could be the important context to answer this?</p> <p>Answer:  ('Archive Manager is a built-in tool'),  ('Archive Manager is used for extracting ISO files'),  ('7-Zip is a Linux version'),  ('7-Zip is used to extract ISO files'),  ('7-Zip is used for extracting ISO files'),  ('WinRAR is a paid tool'),  ('Daemon Tools is used for mounting ISOs'),  ('dd &amp; mount is a Linux stuff'),  ('isoinfo is used for extracting specific stuff'),  ('isoinfo is used for extracting ISO files'),  ('mount is used for extracting ISO files')</p>
Answer	<p>To extract an ISO in Linux/Ubuntu:</p> <ol style="list-style-type: none"> <li>1. Archive Manager: Built-in. Right-click the ISO, select "Open With Archive Manager", and extract.</li> <li>2. 7-Zip: Install using '<code>sudo apt install p7zip-full</code>' and extract with '<code>7z x file.iso</code>'.</li> <li>3. mount: Create a mount point '<code>mkdir /mount/spot</code>'. Mount with '<code>sudo mount -o loop file.iso /mount/spot</code>', copy with '<code>cp -r /mount/spot /destination</code>', then unmount '<code>sudo umount /mount/spot</code>'.</li> <li>4. isoinfo: Install with '<code>sudo apt install genisoimage</code>'.</li> </ol> <p>To extract specifics, use '<code>isoinfo -i image.iso -x /PATH/INSIDE/ISO &gt;output.file</code>'.</p> <p>For ease, go with Archive Manager or 7-Zip. If you're command-line savvy, try 'mount' or 'isoinfo'.</p>

Table 7: Sample prompt an generated answer.