

# Transfer Learning in ECG Diagnosis: Is It Effective?

Cuong V. Nguyen<sup>1</sup> and Cuong D.Do<sup>1,2\*</sup>

<sup>1</sup> College of Engineering and Computer Science, VinUniversity, Hanoi, Vietnam

<sup>2</sup> VinUni-Illinois Smart Health Center, VinUniversity, Hanoi, Vietnam

{cuong.nv, cuong.dd}@vinuni.edu.vn

## ABSTRACT

The adoption of deep learning in ECG diagnosis is often hindered by the scarcity of large, well-labeled datasets in real-world scenarios, leading to the use of transfer learning to leverage features learned from larger datasets. Yet the prevailing assumption that transfer learning consistently outperforms training from scratch has never been systematically validated. In this study, we conduct the first extensive empirical study on the effectiveness of transfer learning in multi-label ECG classification, by investigating comparing the fine-tuning performance with that of training from scratch, covering a variety of ECG datasets and deep neural networks. We confirm that fine-tuning is the preferable choice for small downstream datasets; however, when the dataset is sufficiently large, training from scratch can achieve comparable performance, albeit requiring a longer training time to catch up. Furthermore, we find that transfer learning exhibits better compatibility with convolutional neural networks than with recurrent neural networks, which are the two most prevalent architectures for time-series ECG applications. Our results underscore the importance of transfer learning in ECG diagnosis, yet depending on the amount of available data, researchers may opt not to use it, considering the non-negligible cost associated with pre-training.

**Keywords**— Transfer learning, electrocardiography, decision support systems.

## 1. INTRODUCTION

Electrocardiogram (ECG) signals play a critical role in the early detection and diagnosis of cardiovascular diseases. The integration of automatic ECG interpretation, fueled by digitization and deep learning, has demonstrated performance on par with cardiologists [1, 2]. A major challenge to wide-scale adaptation of deep learning to ECG diagnosis is the lack of large-scale,

high-quality labeled datasets in most real-world scenarios, due to prohibitive collection and annotation costs. To overcome this challenge, transfer learning is commonly employed, where features and parameters learned from a large dataset are reused and fine-tuned on a typically smaller, new dataset. This technique has been adapted from computer vision [3–7] to the ECG domain. Some studies have applied transfer learning to classify ECG arrhythmia by borrowing pre-trained weights on 2-D ImageNet [8], after transforming 1-D ECG signals to 2-D representations. For example, Salem et al. [9] generated 2-D spectrograms from ECG using Fourier Transform and applied pre-trained weights of DenseNet [10] on ImageNet [8] to detect ventricular fibrillation, atrial fibrillation, and ST-changes. Tadesse et al. [11] also employed spectrograms and leveraged pre-trained inception-v3 GoogLeNet [12] to diagnose cardiovascular diseases. Gajendran et al. [13] and Venton et al. [14] leveraged scalogram for 2-D conversion and reusing convolutional neural networks (CNNs) [10, 12, 15–18] pre-trained on ImageNet to classify ECG records. Zhang et al. [19] applied Hilbert Transform and Wigner-Ville distribution [20, 21] to convert signals to 2-D then using pre-trained ResNet101 [16] to build their classifiers.

Additionally, applying transfer learning directly to 1-D signals has shown encouraging results. Strodthoff et al. [26] reported significant improvements when pre-training *xresnet1d101* [27] on the PTB-XL [25] dataset and subsequently fine-tuning on smaller datasets. Weimann et al. [28] achieved up to a 6.57% improvement in the classification performance of Atrial Fibrillation using CNNs, pre-trained on the large Icentia11K dataset [29]. Jang et al. [30] showed that pre-training a convolutional autoencoder on the AUMC ICU dataset [31] of size 26,481 worked better than training from random initialization on the 10,646-sample dataset of the Shaoxing People’s Hospital of China [32]. Other studies have also reported positive results of transfer learning [33–38].

While previous 1-D approaches have demonstrated the effectiveness of transfer learning in ECG diagnosis, these studies often focused on specific datasets and

\*Corresponding author. Source code is available at [github.com/cuongvng/transfer-learning-ecg-diagnosis](https://github.com/cuongvng/transfer-learning-ecg-diagnosis).

**Table 1.** Datasets used in this work.

Dataset	Labels used	Samples	Training samples	Testing samples
PTB-XL [22]	5	21,837	17,441	2,203
CPSC2018 [23]	9	6,877	4,603	2,268
Georgia [24]	10	10,344	6,895	3,397
PTB [25]	2	549	349	173
Ribeiro [2]	7	827	554	273

model architectures. An implicit assumption is that transferring knowledge from a large upstream dataset consistently improves downstream performance on another dataset, compared to training from random initialization (scratch). However, this hypothesis has not been systematically verified. In this study, we aim to validate the hypothesis by testing it across different ECG datasets and deep learning architectures. Specifically, we conduct extensive experiments using three upstream datasets for pre-training models and five downstream datasets for fine-tuning pre-trained models. We employ six deep learning models, encompassing the two predominant architectures for ECG diagnosis: Convolutional Neural Networks [39–47] and Recurrent Neural Networks (RNNs) [43, 46, 48–53]. The comparison between fine-tuning performance and training from scratch provides insights into the effectiveness of transfer learning in ECG applications. Our key contributions and findings are as follows:

- We conduct the first extensive study on the effectiveness of transfer learning in the ECG domain, including six popular DNN architectures and five ECG datasets.
- Contrary to expectations, fine-tuning does not consistently outperform training from scratch. Its advantages diminish as the size of the downstream dataset increases.
- Fine-tuning can accelerate convergence, whereas training from scratch generally requires a longer time to sufficiently converge.
- For ECG data, fine-tuning demonstrates greater effectiveness with CNNs than with RNNs.

## 2. MATERIALS & METHODS

### 2.1. Datasets

We used five publicly available ECG datasets in this work. The first was PTB-XL [22], containing 21,837 ECG records from 18,885 patients, covering 44 diagnostic statements. Signals were sampled at either 500 Hz or 1000 Hz, with a duration of ten seconds each.

The 44 labels were categorized into five superclasses, namely: NORM (normal ECG), MI (Myocardial Infarction), STTC (ST/T-Changes), HYP (Hypertrophy), and CD (Conduction Disturbance) [26]. We focused on these five superclasses when conducting experiments with this dataset.

The second dataset was from the China Physiological Signal Challenge 2018 (CPSC2018) [23], including 6,877 ECG records, sampled at 500 Hz and lasted for 6-60 seconds each. There are nine diagnostic labels: NORM, AF (Atrial Fibrillation), I-AVB (First-degree atrioventricular block), LBBB (Left Bundle Branch Block), RBBB (Right Bundle Branch Block), PAC (Premature Atrial Contraction), PVC (Premature ventricular contraction), STD (ST-segment Depression), and STE (ST-segment Elevated).

The third was the Georgia dataset [24], consisting of 10,344 ECG signals with 10 seconds in length and a sampling rate of 500 Hz. The dataset has a diverse range of 67 unique diagnoses. However, our research concentrated on a subset of 10 specific labels having the highest number of samples: NORM, AF, I-AVB, PAC, SB (Sinus Bradycardia), LAD (left axis deviation), STach (Sinus Tachycardia), TAb (T-wave Abnormal), TInv (T-wave Inversion), and LQT (Prolonged QT interval).

The fourth was the PTB Diagnostic ECG Database [25], containing 549 ECG records sampled at 1000 Hz. We focused on two diagnostic classes: Myocardial Infarction (MI) and Healthy controls (NORM), covering 200 over 268 subjects involved in this dataset (it is worth noting that while there are ECG records from 290 subjects, clinical summaries are available for only 268 of them).

The last source was the Ribeiro dataset [2]. This contains 827 ECG records with seven annotations: NORM, I-AVB, RBBB, LBBB, SB, AF, and STach.

We reduced the sampling frequency of all ECG records to 100 Hz. This helps reduce computational load while retaining essential information. In addition, all records need to have the same duration. Since most ECG signals in the five datasets lasted for ten seconds, we used this as the desired duration. For records exceeding this timeframe, we applied cropping. For shorter records, since they only account for a tiny fraction, specifically six out of 6,877 records in the CPSC2018

dataset and 52 out of 10,334 records in the Georgia dataset, we simply omitted them. Each dataset was then split into training and test subsets with a test size ratio of 0.33.

## 2.2. Experiment Settings

### 2.2.1. Evaluation Metric

We evaluated model performance on a dataset using their average  $f_1$ -score on the test subset across all labels, weighted by the number of samples belonging to each label in the test subset. Importantly, the test subset was only used for evaluation during each training epoch and was never employed to update the model’s parameters, ensuring prevention of data leakage [54].

### 2.2.2. Pre-training

In this work, we examined six DNN architectures. Three of these were convolutional: ResNet1d18, ResNet1d50, and ResNet1d101, which were adapted from the original 2-D versions [16]. The other three were recurrent DNNs: Long Short Term Memory (LSTM) [55], Bidirectional LSTM [55], and Gated Recurrent Unit (GRU) [56]. Three datasets were used for pre-training: PTB-XL, CPSC2018, and Georgia, due to their substantial sample sizes. Each of the six models was pre-trained on the training subset of each dataset for 100 epochs using Adam optimizer [57] with learning rate 0.01. We evaluated each model on the test subset during training, and only the checkpoint that achieved the best evaluation metric over 100 epochs was saved as the pre-trained model. We opted not to save the last checkpoint at the 100<sup>th</sup> epoch due to observed overfitting as training progressed, especially for the three recurrent models.

Training a model from scratch involved the same process described above and was applied to all five datasets, not limited to the three largest ones.

### 2.2.3. Fine-tuning

When fine-tuning a pre-trained model on a downstream dataset, as the number of output neurons may be different, we replaced the top fully-connected layer in the pre-trained model with a new layer with the number of neurons equal to the number of labels in the downstream dataset. For example, when fine-tuning ResNet1d18, which was pre-trained on PTB-XL (five labels), on Ribeiro as the downstream dataset (seven labels), we replaced the top layer with five outputs with a new one with seven outputs, and kept the layer’s input unchanged. Then the whole model underwent the same training procedure as pre-training, described in Section 2.2.2.

## 3. RESULTS

### 3.1. Fine-tuning does not necessarily improve performance


Figure 1 illustrates the performance comparison between fine-tuning and training from scratch. Each chart corresponds to one of the three upstream datasets, with the results of all six models on each downstream dataset scattered for both cases. The bars denote the average performance across the six models, providing the overall comparison.

Clearly, transfer learning does not consistently outperform training from scratch. On one hand, it significantly improved the model’s performance on Ribeiro and PTB, the two small downstream datasets. On the other hand, when using Georgia as the downstream dataset, there is little average difference in performance, despite variations among individual models. This is depicted in Figure 1(a) for PTB-XL and Figure 1(b) for CPSC2018 as upstream datasets. Notably, when fine-tuning on PTB-XL, the overall performance is slightly poorer than training from random initialization, regardless of whether pre-training occurred on CPSC2018 or Georgia, as seen in Figure 1(b) and 1(c).


Figure 2 shows an alternative perspective on the comparison, using the same model legend as in Figure 1. Each point on the plot represents a model and downstream dataset combination. In the scenario of pre-training on PTB-XL (Figure 2(a)), nearly all points remained above the identity line, indicating the superior performance of fine-tuning. However, after pre-training on CPSC2018 and Georgia datasets, fine-tuning RNNs mostly led to poorer results, as more triangular symbols (representing RNNs) fell below the line, especially for PTB-XL as the downstream dataset (shown as purple points). This observation aligns with the results shown in Figure 1.

### 3.2. Fine-tuning improvement fades with downstream dataset size

The results presented in Section 3.1 suggest that the comparison between fine-tuning and training from scratch is influenced by the size of the downstream dataset. Fine-tuning exhibited the most significant improvement over training from scratch when the dataset size was small (as observed in the cases of Ribeiro and PTB), with diminishing improvement as larger datasets (PTB-XL, CPSC2018, and Georgia) were used. To gain better insights, we conducted experiments with three pre-trained ResNets on the Georgia dataset. For the downstream task, we varied the size of the PTB-XL training set from 500 to 9000 samples, measuring the average  $f_1$ -score improvement achieved by fine-tuning

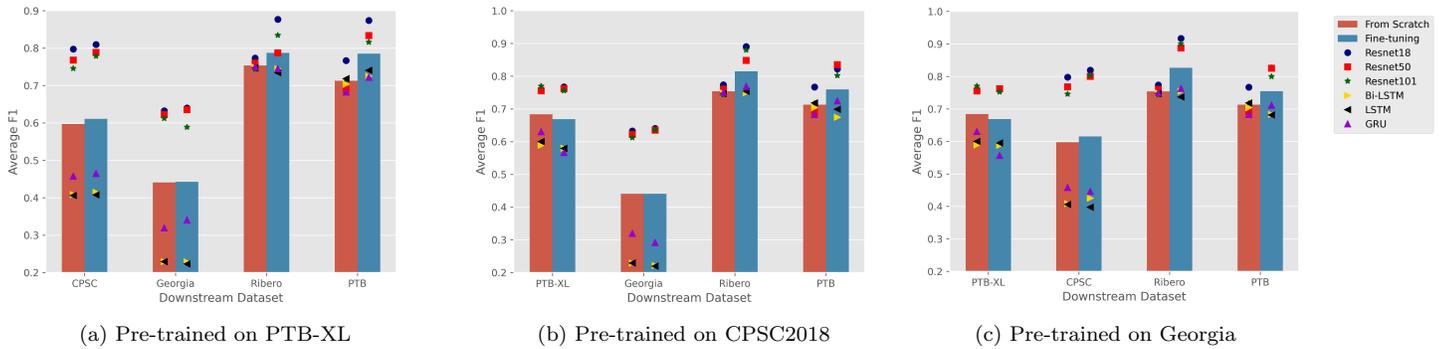

**Fig. 1.** Performance comparison of fine-tuning and training from scratch, with three upstream datasets, six models, and four downstream datasets. In each chart, six symbols depict the average  $f_1$ -scores for the respective models, and the bar shows the mean average score across these six models.

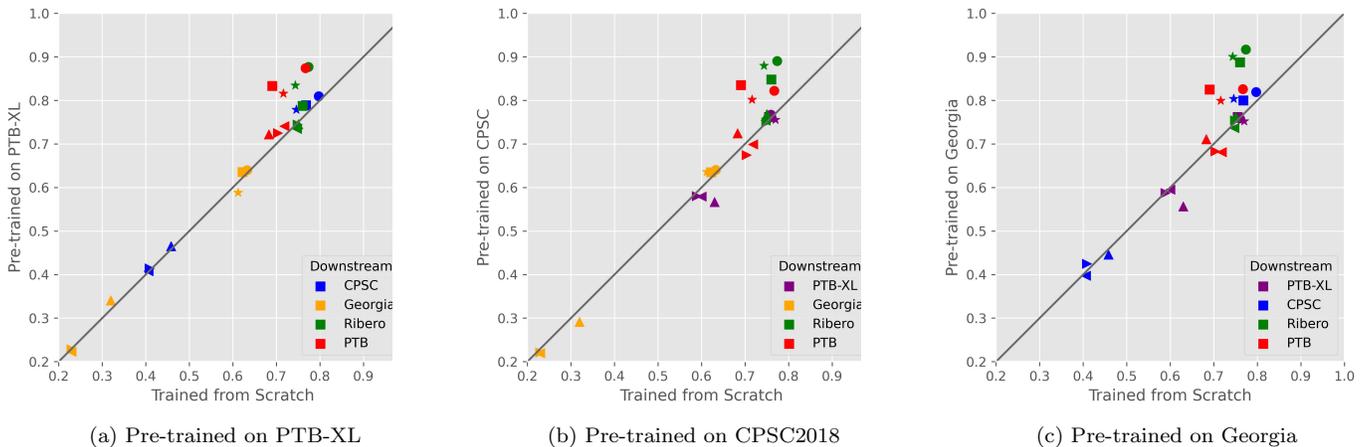

**Fig. 2.** Another view of average- $f_1$  comparison between fine-tuning (vertical axis) and training from scratch (horizontal axis). Each point corresponds to a specific model and downstream dataset combination. Model legend is the same as in Fig. 1. Best viewed in color. That the majority of points lying above the identity line suggests that fine-tuning generally outperformed training from scratch. However, this is not always true.


over training from scratch. To ensure a fair comparison, evaluation was conducted on the same PTB-XL test subset used in Section 3.1, regardless of the number of training samples.

Figure 3 shows that performance gain through fine-tuning declined as the training size increased. The most significant improvement occurred with a downstream dataset of 500 training samples, and training from scratch gradually reached comparable performance when the size reached 6000 samples. Though fluctuations were present in the region of fewer than 2000 samples, likely because of the inherent randomness in deep learning [58], overall the declining trend remains evident. The results highlight the importance of transfer learning in the small dataset regime, though it may be less necessary when dealing with sufficiently large

datasets.

### 3.3. Fine-tuning can accelerate convergence

While transfer learning might not consistently outperform training from scratch in terms of accuracy, the next question is whether it contributed to speeding up the training process. We examined the evaluation metric across 100 epochs in all cases to answer this question. Figure 4 shows ResNet1d18’s average  $f_1$ -score at each training epoch on the corresponding downstream test subset. Notably, in scenarios such as transferring from PTB-XL to CPSC2018, from PTB-XL to Georgia, from CPSC2018 to Georgia, and from Georgia to CPSC2018, although the performance of training from scratch eventually caught up with that of fine-tuning, it

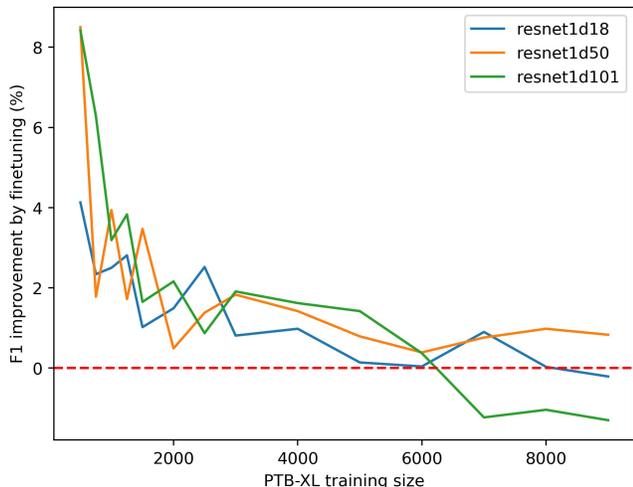

**Fig. 3.** Fine-tuning improvement of the three ResNets with varying downstream dataset size.

took approximately 30-35 epochs to do so. Meanwhile, transferring from CPSC2018 to PTB-XL or from Georgia to PTB-XL offered minor accelerating benefits, and for small downstream datasets (Ribeiro, PTB), transfer learning was clearly superior. For results of other models, please refer to Appendix A.

### 3.4. Fine-tuning tends to work better with CNNs than with RNNs

Concerning architectural selection, not only achieving higher overall  $f_1$ -score than LSTM, Bi-LSTM, and GRU, three ResNet models (the circle, the square, and the star in Figure 1) showed better compatibility with transfer learning. Fine-tuning those CNNs consistently resulted in improved performance compared to training from scratch in almost all scenarios, no matter which upstream and downstream datasets were used, as shown in Figure 1 and Figure 2. In contrast, transfer learning had a minor impact on the three RNNs, as in numerous cases, their performance even lagged behind that of random initialization (see the up, left, and right triangles in the two figures). Moreover, when examining the convergence patterns (refer to Figure 4 and Figures 5,6,7,8,9 in Appendix A), it is clear that fine-tuning CNNs played a crucial role in expediting and stabilizing the convergence process, whereas RNNs (especially GRU) exhibited a notably more erratic result.

This phenomenon can be explained by the inherent characteristics of the two architectures. Convolutional layers within CNNs are adept at capturing spatial features such as shapes, patterns, peaks, and troughs—features that are low-level and do not necessitate relearning during fine-tuning on downstream

datasets. On the other hand, LSTM and GRU specialize in capturing temporal dependencies, processing signals sequentially to maintain a “memory” that is high-level and complex. Consequently, the learned memory from one dataset may not be applicable or effective for others, rendering the transfer of such memory ineffective. Furthermore, inherent challenges in training RNNs, such as vanishing gradients [59] and exploding gradients [60], may exacerbate the difficulty of fine-tuning these networks.

## 4. CONCLUSION

In this work, we empirically investigate the effectiveness of transfer learning in multi-label ECG diagnosis through extensive experiments involving diverse datasets and deep learning models. We show that when the downstream dataset is sufficiently large, pre-training may not exhibit superior performance compared to training from random initialization. This observation challenges the prevailing assumption that transfer learning invariably enhances performance across different tasks. Nevertheless, in many real-world scenarios, the availability of small downstream datasets is a common constraint due to the substantial costs associated with data collection and annotation. In such cases, we assert that transfer learning remains a crucial and valuable approach. Even when a decently large dataset is available, transfer learning will still be useful, as it can accelerate convergence, saving resources & time and expediting both research and production cycles.


Moreover, our results confirm that fine-tuning tends to yield more effective results with CNNs than with RNNs in ECG classification. Contrary to 2-D images, RNNs are also a potential method to process time-series ECG signals. However, as mentioned in Section 3.4, inherent designs of RNNs make it more difficult to transfer knowledge learned from one dataset to another. Even in the case of training from scratch, LSTM, Bi-LSTM, and GRU showed inferior performance than that of ResNets (Section 3.1). Thus we argue that in general, CNNs should be the preferred choice when deciding on architectures for ECG applications.

## Acknowledgement

This research is supported by VinUni Seed Grant 2020.

## References

- [1] Awni Y Hannun, Pranav Rajpurkar, Masoumeh Haghpanahi, Geoffrey H Tison, Codie

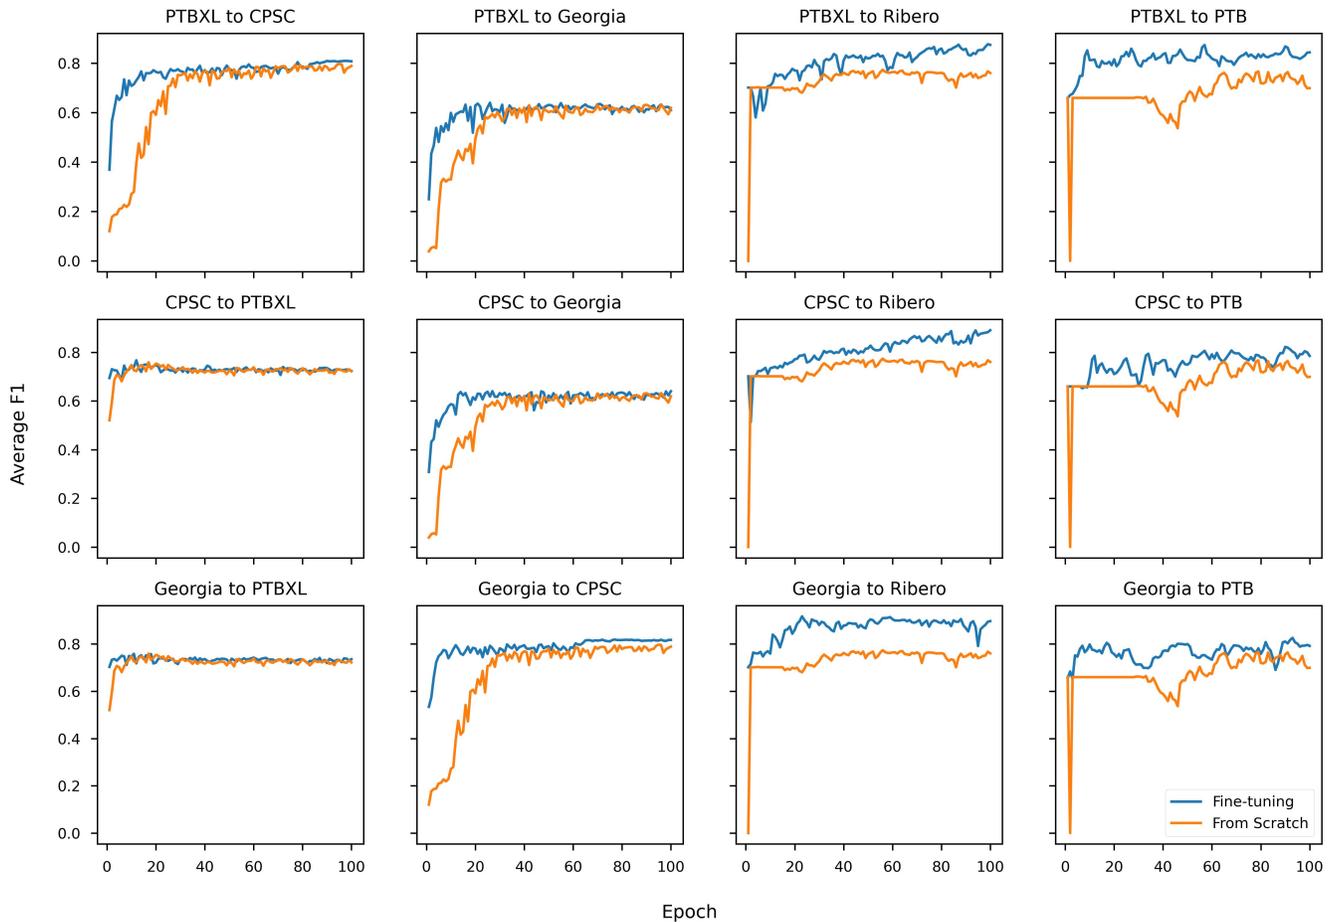

**Fig. 4.** Performances of ResNet1d18 during fine-tuning and training from scratch. Three rows represent three upstream datasets: PTB-XL, CPSC2018, and Georgia, respectively.

Bourn, Mintu P Turakhia, and Andrew Y Ng, “Cardiologist-level arrhythmia detection and classification in ambulatory electrocardiograms using a deep neural network,” *Nature medicine*, vol. 25, no. 1, pp. 65–69, 2019.

- [2] Antônio H Ribeiro, Manoel Horta Ribeiro, Gabriela MM Paixão, Derick M Oliveira, Paulo R Gomes, Jéssica A Canazart, Milton PS Ferreira, Carl R Andersson, Peter W Macfarlane, Wagner Meira Jr, et al., “Automatic diagnosis of the 12-lead ecg using a deep neural network,” *Nature communications*, vol. 11, no. 1, pp. 1760, 2020.
- [3] Jason Yosinski, Jeff Clune, Yoshua Bengio, and Hod Lipson, “How transferable are features in deep neural networks?,” *Advances in neural information processing systems*, vol. 27, 2014.
- [4] Simon Kornblith, Jonathon Shlens, and Quoc V Le, “Do better imagenet models transfer better?,” in

*Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 2019, pp. 2661–2671.

- [5] Sinno Jialin Pan and Qiang Yang, “A survey on transfer learning,” *IEEE Transactions on knowledge and data engineering*, vol. 22, no. 10, pp. 1345–1359, 2009.
- [6] Jeff Donahue, Yangqing Jia, Oriol Vinyals, Judy Hoffman, Ning Zhang, Eric Tzeng, and Trevor Darrell, “Decaf: A deep convolutional activation feature for generic visual recognition,” in *International conference on machine learning*. PMLR, 2014, pp. 647–655.
- [7] Ali Sharif Razavian, Hossein Azizpour, Josephine Sullivan, and Stefan Carlsson, “Cnn features off-the-shelf: an astounding baseline for recognition,” in *Proceedings of the IEEE conference on computer*


- vision and pattern recognition workshops*, 2014, pp. 806–813.
- [8] Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei, “Imagenet: A large-scale hierarchical image database,” in *2009 IEEE Conference on Computer Vision and Pattern Recognition*, 2009, pp. 248–255.
- [9] Milad Salem, Shayan Taheri, and Jiann-Shiun Yuan, “Ecg arrhythmia classification using transfer learning from 2-dimensional deep cnn features,” in *2018 IEEE biomedical circuits and systems conference (BioCAS)*. Ieee, 2018, pp. 1–4.
- [10] Gao Huang, Zhuang Liu, and Kilian Q. Weinberger, “Densely connected convolutional networks,” *CoRR*, vol. abs/1608.06993, 2016.
- [11] Girmaw Abebe Tadesse, Tingting Zhu, Yong Liu, Yingling Zhou, Jiyan Chen, Maoyi Tian, and David Clifton, “Cardiovascular disease diagnosis using cross-domain transfer learning,” in *2019 41st Annual International Conference of the IEEE Engineering in Medicine and Biology Society (EMBC)*. IEEE, 2019, pp. 4262–4265.
- [12] Christian Szegedy, Wei Liu, Yangqing Jia, Pierre Sermanet, Scott Reed, Dragomir Anguelov, Dumitru Erhan, Vincent Vanhoucke, and Andrew Rabinovich, “Going deeper with convolutions,” 2014.
- [13] Mohan Kumar Gajendran, Muhammad Zubair Khan, and Muazzam A Khan Khattak, “Ecg classification using deep transfer learning,” in *2021 4th International Conference on Information and Computer Technologies (ICICT)*. IEEE, 2021, pp. 1–5.
- [14] Jenny Venton, Philip J Aston, Nadia AS Smith, and Peter M Harris, “Signal to image to classification: Transfer learning for ecg,” in *2020 11th Conference of the European Study Group on Cardiovascular Oscillations (ESGCO)*. IEEE, 2020, pp. 1–2.
- [15] Karen Simonyan and Andrew Zisserman, “Very deep convolutional networks for large-scale image recognition,” 2015.
- [16] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun, “Deep residual learning for image recognition,” in *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2016, pp. 770–778.
- [17] Joseph Redmon, “Darknet: Open source neural networks in c,” <http://pjreddie.com/darknet/>, 2013–2016.
- [18] Mingxing Tan and Quoc Le, “Efficientnet: Rethinking model scaling for convolutional neural networks,” in *International conference on machine learning*. PMLR, 2019, pp. 6105–6114.
- [19] Yatao Zhang, Junyan Li, Shoushui Wei, Fengyu Zhou, and Dong Li, “Heartbeats classification using hybrid time-frequency analysis and transfer learning based on resnet,” *IEEE Journal of Biomedical and Health Informatics*, vol. 25, no. 11, pp. 4175–4184, 2021.
- [20] Safa Sultan Qurraie and Rashid Ghorbani Afkhami, “Ecg arrhythmia classification using time frequency distribution techniques,” *Biomedical engineering letters*, vol. 7, pp. 325–332, 2017.
- [21] Shivani Dhok, Varad Pimpalkhute, Ambarish Chandurkar, Ankit A Bhurane, Manish Sharma, and U Rajendra Acharya, “Automated phase classification in cyclic alternating patterns in sleep stages using wigner–ville distribution based features,” *Computers in Biology and Medicine*, vol. 119, pp. 103691, 2020.
- [22] Patrick Wagner, Nils Strodthoff, Ralf-Dieter Bouseljt, Dieter Kreiseler, Fatima I Lunze, Wojciech Samek, and Tobias Schaeffter, “Ptb-xl, a large publicly available electrocardiography dataset,” *Scientific data*, vol. 7, no. 1, pp. 154, 2020.
- [23] Feifei Liu, Chengyu Liu, Lina Zhao, Xiangyu Zhang, Xiaoling Wu, Xiaoyan Xu, Yulin Liu, Caiyun Ma, Shoushui Wei, Zhiqiang He, et al., “An open access database for evaluating the algorithms of electrocardiogram rhythm and morphology abnormality detection,” *Journal of Medical Imaging and Health Informatics*, vol. 8, no. 7, pp. 1368–1373, 2018.
- [24] Erick A Perez Alday, Annie Gu, Amit J Shah, Chad Robichaux, An-Kwok Ian Wong, Chengyu Liu, Feifei Liu, Ali Bahrami Rad, Andoni Elola, Salman Seyedi, et al., “Classification of 12-lead ecgs: the physionet/computing in cardiology challenge 2020,” *Physiological measurement*, vol. 41, no. 12, pp. 124003, 2020.
- [25] Ralf Bouseljt, Dieter Kreiseler, and Allard Schnabel, “Nutzung der ekg-signaldatenbank cardiodat der ptb über das internet,” 1995.
- [26] Nils Strodthoff, Patrick Wagner, Tobias Schaeffter, and Wojciech Samek, “Deep learning for ecg analysis: Benchmarks and insights from ptb-xl,” *IEEE Journal of Biomedical and Health Informatics*, vol. 25, no. 5, pp. 1519–1528, 2020.

- [27] Tong He, Zhi Zhang, Hang Zhang, Zhongyue Zhang, Junyuan Xie, and Mu Li, “Bag of tricks for image classification with convolutional neural networks,” in *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 2019, pp. 558–567.
- [28] Kuba Weimann and Tim OF Conrad, “Transfer learning for ecg classification,” *Scientific reports*, vol. 11, no. 1, pp. 5251, 2021.
- [29] Shawn Tan, Guillaume Androz, Ahmad Chamseddine, Pierre Fecteau, Aaron Courville, Yoshua Bengio, and Joseph Paul Cohen, “Icentia11k: An unsupervised representation learning dataset for arrhythmia subtype discovery,” *arXiv preprint arXiv:1910.09570*, 2019.
- [30] Jong-Hwan Jang, Tae Young Kim, and Dukyong Yoon, “Effectiveness of transfer learning for deep learning-based electrocardiogram analysis,” *Healthcare informatics research*, vol. 27, no. 1, pp. 19–28, 2021.
- [31] Sukhoon Lee, JaeYeon Park, Doyeop Kim, Tae Young Kim, Rae Woong Park, Dukyong Yoon, and JeongGil Ko, “Constructing a bio-signal repository from an intensive care unit for effective big-data analysis,” in *Proceedings of the 14th ACM Conference on Embedded Network Sensor Systems CD-ROM*, 2016, pp. 372–373.
- [32] Jianwei Zheng, Jianming Zhang, Sidy Danioko, Hai Yao, Hangyuan Guo, and Cyril Rakovski, “A 12-lead electrocardiogram database for arrhythmia research covering more than 10,000 patients,” *Scientific data*, vol. 7, no. 1, pp. 48, 2020.
- [33] Longting Chen, Guanghua Xu, Sicong Zhang, Jiachen Kuang, and Long Hao, “Transfer learning for electrocardiogram classification under small dataset,” in *Machine Learning and Medical Engineering for Cardiovascular Health and Intravascular Imaging and Computer Assisted Stenting: First International Workshop, MLMECH 2019, and 8th Joint International Workshop, CVII-STENT 2019, Held in Conjunction with MICCAI 2019, Shenzhen, China, October 13, 2019, Proceedings 1*. Springer, 2019, pp. 45–54.
- [34] Ali Ghaffari and Nasimalsadat Madani, “Atrial fibrillation identification based on a deep transfer learning approach,” *Biomedical Physics & Engineering Express*, vol. 5, no. 3, pp. 035015, 2019.
- [35] Kang Li, Nan Du, and Aidong Zhang, “Detecting ecg abnormalities via transductive transfer learning,” in *Proceedings of the ACM Conference on Bioinformatics, Computational Biology and Biomedicine*, 2012, pp. 210–217.
- [36] Cuong V Nguyen, Hieu Minh Duong, and Cuong D Do, “Melep: A novel predictive measure of transferability in multi-label ecg diagnosis,” *Journal of Healthcare Informatics Research*, pp. 1–17, 2024.
- [37] Boyang Tom Jin, Raj Palleti, Siyu Shi, Andrew Y Ng, James V Quinn, Pranav Rajpurkar, and David Kim, “Transfer learning enables prediction of myocardial injury from continuous single-lead electrocardiography,” *Journal of the American Medical Informatics Association*, vol. 29, no. 11, pp. 1908–1918, 2022.
- [38] Mohebbanaaz, LV Rajani Kumar, and Y Padma Sai, “A new transfer learning approach to detect cardiac arrhythmia from ecg signals,” *Signal, Image and Video Processing*, vol. 16, no. 7, pp. 1945–1953, 2022.
- [39] Chun Cai, Takeshi Imai, Eriko Hasumi, and Katsuhito Fujiu, “One-shot screening: utilization of a two-dimensional convolutional neural network for automatic detection of left ventricular hypertrophy using electrocardiograms,” *Computer Methods and Programs in Biomedicine*, p. 108097, 2024.
- [40] Xiaomao Fan, Qihang Yao, Yunpeng Cai, Fen Miao, Fangmin Sun, and Ye Li, “Multiscaled fusion of deep convolutional neural networks for screening atrial fibrillation from single lead short ecg recordings,” *IEEE journal of biomedical and health informatics*, vol. 22, no. 6, pp. 1744–1753, 2018.
- [41] Yazhao Li, Yanwei Pang, Jian Wang, and Xuelong Li, “Patient-specific ecg classification by deeper cnn from generic to dedicated,” *Neurocomputing*, vol. 314, pp. 336–346, 2018.
- [42] Jibin Wang, “A deep learning approach for atrial fibrillation signals classification based on convolutional and modified elman neural network,” *Future Generation Computer Systems*, vol. 102, pp. 670–679, 2020.
- [43] Georgios Petmezas, Kostas Haris, Leandros Stefanopoulos, Vassilis Kilintzis, Andreas Tzavelis, John A Rogers, Aggelos K Katsaggelos, and Nicos Maglaveras, “Automated atrial fibrillation detection using a hybrid cnn-lstm network on imbalanced ecg datasets,” *Biomedical Signal Processing and Control*, vol. 63, pp. 102194, 2021.


- [44] Ulas Baran Baloglu, Muhammed Talo, Ozal Yildirim, Ru San Tan, and U Rajendra Acharya, "Classification of myocardial infarction with multi-lead ecg signals and deep cnn," *Pattern recognition letters*, vol. 122, pp. 23–30, 2019.
- [45] Jiayu Guo, Wangze Li, and Huichun Huang, "An ecg detection device based on convolutional neural network," in *2023 8th International Conference on Intelligent Computing and Signal Processing (ICSP)*. IEEE, 2023, pp. 860–864.
- [46] Mohamed Limam and Frederic Precioso, "Atrial fibrillation detection and ecg classification based on convolutional recurrent neural network," in *2017 Computing in Cardiology (CinC)*. IEEE, 2017, pp. 1–4.
- [47] Hui Wen Loh, Chui Ping Ooi, Shu Lih Oh, Prabal Datta Barua, Yi Ren Tan, Filippo Molinari, Sonja March, U Rajendra Acharya, and Daniel Shuen Sheng Fung, "Deep neural network technique for automated detection of adhd and cd using ecg signal," *Computer methods and programs in biomedicine*, vol. 241, pp. 107775, 2023.
- [48] Shraddha Singh, Saroj Kumar Pandey, Urja Pawar, and Rekh Ram Janghel, "Classification of ecg arrhythmia using recurrent neural networks," *Procedia computer science*, vol. 132, pp. 1290–1297, 2018.
- [49] Eedara Prabhakararao and Samarendra Dandapat, "Attentive rnn-based network to fuse 12-lead ecg and clinical features for improved myocardial infarction diagnosis," *IEEE Signal Processing Letters*, vol. 27, pp. 2029–2033, 2020.
- [50] Devender Kumar, Abdolrahman Peimankar, Kamal Sharma, Helena Domínguez, Sadasivan Puthusserypady, and Jakob E Bardram, "Deepaware: A hybrid deep learning and context-aware heuristics-based model for atrial fibrillation detection," *Computer Methods and Programs in Biomedicine*, vol. 221, pp. 106899, 2022.
- [51] Saeed Saadatnejad, Mohammadhosein Oveisi, and Matin Hashemi, "Lstm-based ecg classification for continuous monitoring on personal wearable devices," *IEEE journal of biomedical and health informatics*, vol. 24, no. 2, pp. 515–523, 2019.
- [52] Miriam Gutiérrez-Fernández-Calvillo, Miguel Ángel Cámara-Vázquez, Ismael Hernández-Romero, María S Guillem, Andreu M Climent, Carlos Fambuena-Santos, and Óscar Barquero-Pérez, "Non-invasive estimation of atrial fibrillation driver position using long-short term memory neural networks and body surface potentials," *Computer Methods and Programs in Biomedicine*, p. 108052, 2024.
- [53] Oliver Faust, Alex Shenfield, Murtadha Kareem, Tan Ru San, Hamido Fujita, and U Rajendra Acharya, "Automated detection of atrial fibrillation using long short-term memory network with rr interval signals," *Computers in biology and medicine*, vol. 102, pp. 327–335, 2018.
- [54] Shachar Kaufman, Saharon Rosset, Claudia Perlich, and Ori Stitelman, "Leakage in data mining: Formulation, detection, and avoidance," *ACM Transactions on Knowledge Discovery from Data (TKDD)*, vol. 6, no. 4, pp. 1–21, 2012.
- [55] Sepp Hochreiter and Jürgen Schmidhuber, "Long short-term memory," *Neural computation*, vol. 9, no. 8, pp. 1735–1780, 1997.
- [56] Kyunghyun Cho, Bart Van Merriënboer, Caglar Gulcehre, Dzmitry Bahdanau, Fethi Bougares, Holger Schwenk, and Yoshua Bengio, "Learning phrase representations using rnn encoder-decoder for statistical machine translation," *arXiv preprint arXiv:1406.1078*, 2014.
- [57] Diederik P Kingma and Jimmy Ba, "Adam: A method for stochastic optimization," *arXiv preprint arXiv:1412.6980*, 2014.
- [58] Soham Raste, Rahul Singh, Joel Vaughan, and Vijayan N. Nair, "Quantifying inherent randomness in machine learning algorithms," 2022.
- [59] Sepp Hochreiter, Yoshua Bengio, Paolo Frasconi, Jürgen Schmidhuber, et al., "Gradient flow in recurrent nets: the difficulty of learning long-term dependencies," 2001.
- [60] Yoshua Bengio, Patrice Simard, and Paolo Frasconi, "Learning long-term dependencies with gradient descent is difficult," *IEEE transactions on neural networks*, vol. 5, no. 2, pp. 157–166, 1994.

# Appendix A


Supplementary materials for Section 3.3.

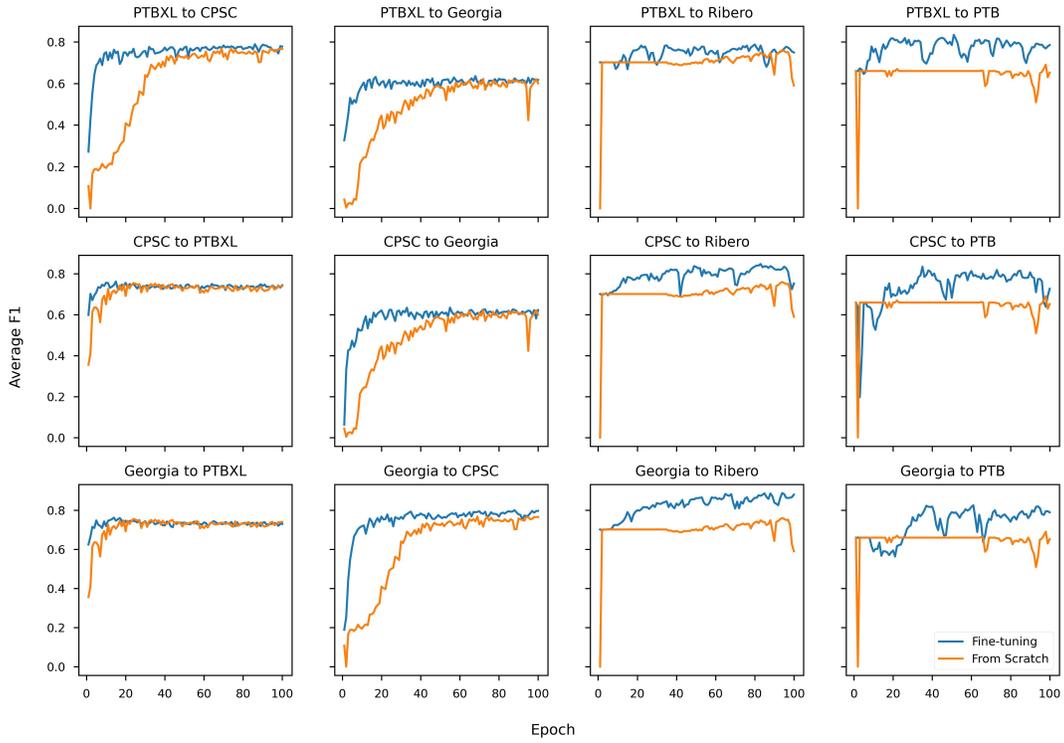


**Fig. 5.** Performances of ResNet1d50 during fine-tuning and training from scratch.

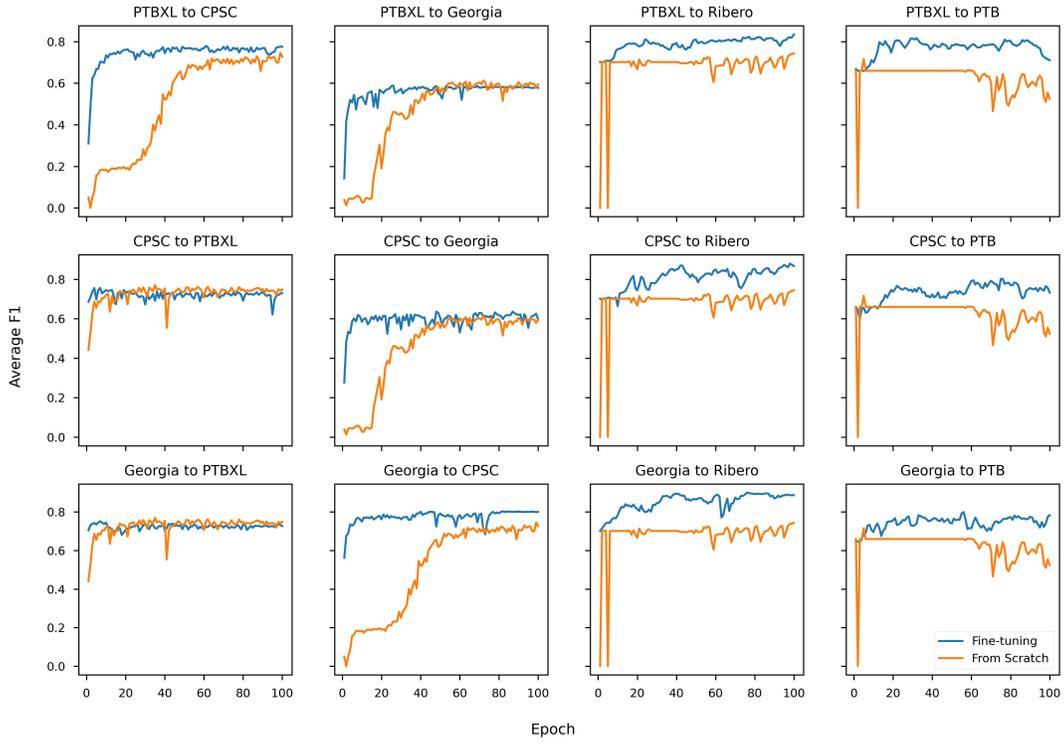


**Fig. 6.** Performances of ResNet1d101 during fine-tuning and training from scratch.

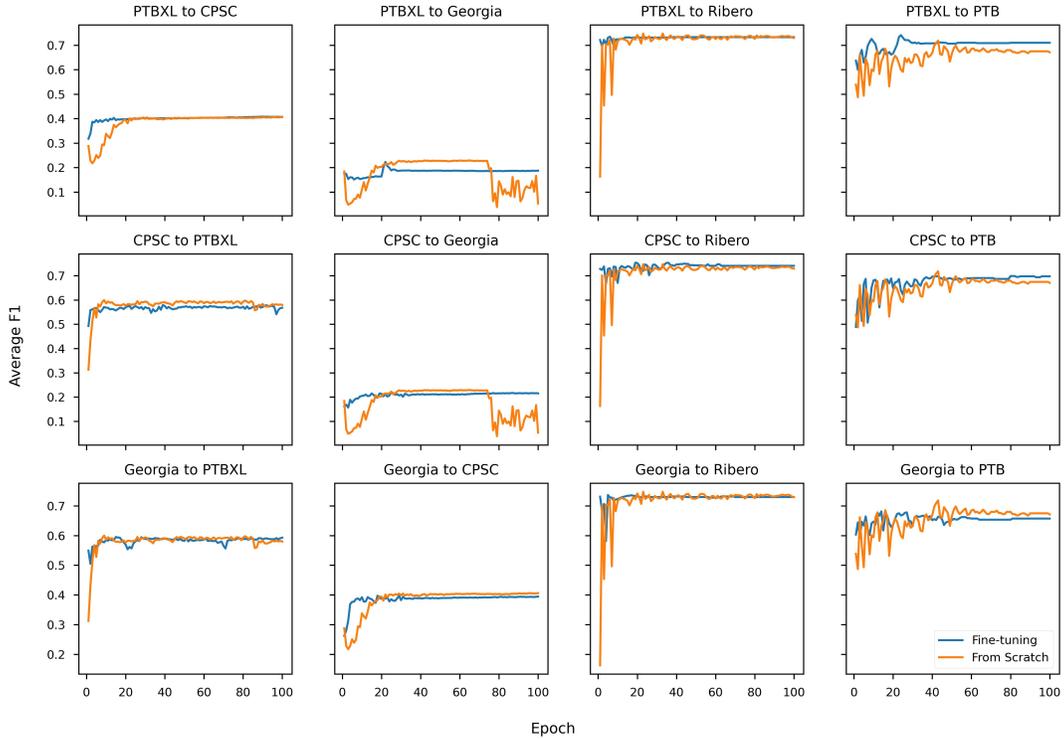

**Fig. 7.** Performances of LSTM during fine-tuning and training from scratch.

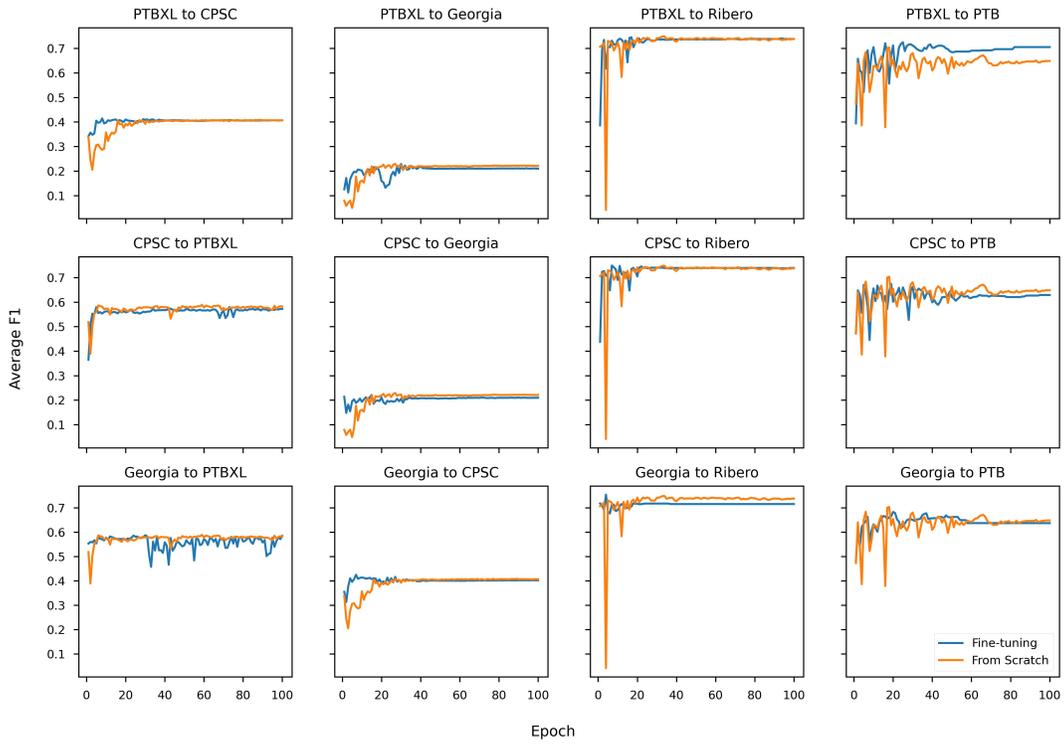

**Fig. 8.** Performances of Bi-LSTM during fine-tuning and training from scratch.

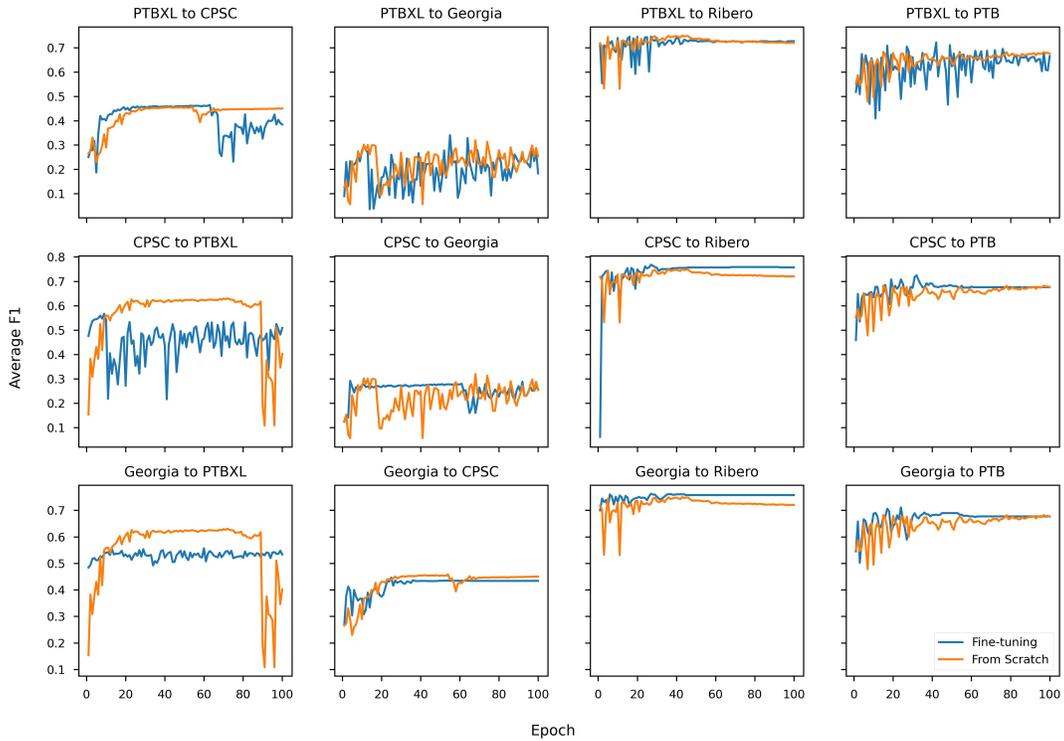

**Fig. 9.** Performances of GRU during fine-tuning and training from scratch.

## Appendix B

This section provides the full numerical results of our experiments in Section 3.1 and 3.4.

**Table 2.** Performance of training from scratch: maximum average  $f_1$ -score during 100 epochs.

	PTB-XL	CPSC	Georgia	Ribero	PTB
Resnet18	0.759	0.797	0.633	0.774	0.767
Resnet50	0.755	0.768	0.622	0.760	0.690
Resnet101	0.770	0.746	0.612	0.743	0.716
Bi-LSTM	0.589	0.408	0.229	0.749	0.704
LSTM	0.600	0.406	0.229	0.747	0.718
GRU	0.630	0.458	0.319	0.750	0.683

**Table 3.** Fine-tuning performance of models pre-trained on PTB-XL: maximum average  $f_1$ -score during 100 epochs.

	CPSC	Georgia	Ribero	PTB
Resnet18	0.809	0.640	0.877	0.874
Resnet50	0.789	0.636	0.787	0.833
Resnet101	0.779	0.589	0.834	0.816
Bi-LSTM	0.414	0.228	0.745	0.725
LSTM	0.408	0.223	0.734	0.741
GRU	0.465	0.341	0.745	0.722

**Table 4.** Fine-tuning performance of models pre-trained on CPSC: maximum average  $f_1$ -score during 100 epochs.

	PTB-XL	Georgia	Ribero	PTB
Resnet18	0.767	0.640	0.891	0.822
Resnet50	0.762	0.635	0.848	0.835
Resnet101	0.756	0.636	0.880	0.802
Bi-LSTM	0.580	0.221	0.750	0.675
LSTM	0.579	0.220	0.754	0.699
GRU	0.567	0.292	0.768	0.724

**Table 5.** Fine-tuning performance of models pre-trained on Georgia: maximum average  $f_1$ -score during 100 epochs.

	PTB-XL	CPSC	Ribero	PTB
Resnet18	0.759	0.819	0.917	0.826
Resnet50	0.762	0.800	0.888	0.825
Resnet101	0.752	0.804	0.901	0.800
Bi-LSTM	0.588	0.425	0.754	0.683
LSTM	0.595	0.397	0.737	0.681
GRU	0.557	0.446	0.762	0.711