

RanDumb: A Simple Approach that Questions the Efficacy of Continual Representation Learning

Ameya Prabhu^{1*} Shiven Sinha^{2*} Ponnurangam Kumaraguru² Philip H.S. Torr¹
 Ozan Sener³⁺ Puneet K. Dokania¹⁺
¹University of Oxford ²IIT-Hyderabad ³Apple

Abstract

Continual learning has primarily focused on the issue of catastrophic forgetting and the associated stability-plasticity tradeoffs. However, little attention has been paid to the efficacy of continually learned representations, as representations are learned alongside classifiers throughout the learning process. Our primary contribution is empirically demonstrating that existing online continually trained deep networks produce inferior representations compared to a simple pre-defined random transforms. Our approach embeds raw pixels using a fixed random transform, approximating an RBF-Kernel initialized before any data is seen. We then train a simple linear classifier on top without storing any exemplars, processing one sample at a time in an online continual learning setting. This method, called RanDumb, significantly outperforms state-of-the-art continually learned representations across all standard online continual learning benchmarks. Our study reveals the significant limitations of representation learning, particularly in low-exemplar and online continual learning scenarios. Extending our investigation to popular exemplar-free scenarios with pretrained models, we find that training only a linear classifier on top of pretrained representations surpasses most continual fine-tuning and prompt-tuning strategies. Overall, our investigation challenges the prevailing assumptions about effective representation learning in online continual learning. Our code is available [here](#).

1. Introduction

Continual learning aims to develop models capable of learning from non-stationary data streams, inspired by the lifelong learning abilities exhibited by humans and the prevalence of such real-world applications (see Verwimp et al. [64] for a survey). It is characterized by sequentially arriving tasks, coupled with additional computational and memory constraints [33, 38, 49, 54, 62].

*authors contributed equally, + equal advising

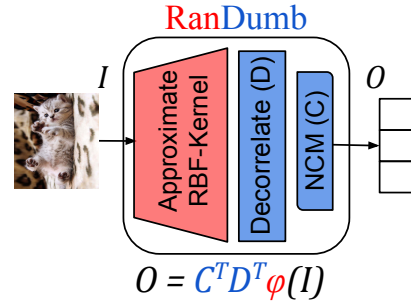


Figure 1. RanDumb projects raw pixels to a high dimensional space using random Fourier projections (φ), then decorrelate the features using Mahalanobis distance [42] and classify with the nearest class mean. The online update only involves updating a single sample covariance matrix and class-means.

Building on the foundations of supervised deep learning, the prevalent approach in continual learning has been to jointly train representations alongside classifiers. This approach follows from the assumption that learned representations are expected to outperform fixed representation functions such as kernel classifiers, as demonstrated in supervised deep learning [23, 34, 57]. However, this assumption is never validated in continual learning, with scenarios having limited updates where networks might not be trained until convergence, such as online continual learning (OCL).

In this paper, we study the efficacy of representations derived from continual learning algorithms. Surprisingly, our findings suggest that these representations might not be as beneficial as presumed. To test this, we introduce a simple baseline method named RanDumb, which combines a random representation function with a straightforward linear classifier, illustrated in Figure 1. Our empirical evaluations, summarized in Table 1 (left, top), reveal that despite replacing the representation learning with a pre-defined random representation, RanDumb surpasses current state-of-the-art across latest online continual learning benchmarks [75].

We further expand our evaluations to scenarios that use pre-trained feature extractors [67]. By substituting our random projections with these feature extractors and retaining

Table 1. **(Left) Online Continual Learning.** Performance comparison of RanDumb on the PEC setup [75] and VAE-GC [63]. Setup and numbers borrowed from PEC [75]. RanDumb outperforms the best OCL method. **(Right) Offline Continual Learning.** Performance comparison with ImageNet21K ViT-B16 model using 2 initial classes and 1 new class per task. RanPAC-imp is an improved version of the RanPAC code which mitigates the instability issues in RanPAC. RanDumb nearly matches performance of joint for both online and offline, demonstrating the inefficacy of current benchmarks.

Method	MNIST	CIFAR10	CIFAR100	m-IMN	Method	CIFAR	IN-A	IN-R	CUB	OB	VTAB	Cars
Comparison with Best Method					Comparison with Best Method							
Best (PEC)	92.3	58.9	26.5	14.9	Best (RanPAC-imp)	89.4	33.8	69.4	89.6	75.3	91.9	57.3
RanDumb (Ours)	98.3	55.6	28.6	17.7	RanDumb (Ours)	86.8	42.2	64.9	88.5	75.3	92.4	67.1
Improvement	+6.0	-3.3	+2.1	+2.8	Improvement	-2.6	+8.4	-4.5	-1.1	+0.0	+0.5	+9.8
Random vs. Learned Representations					Random vs. Finetuned Representations							
VAE-GC	84.0	42.7	19.7	12.1	SLCA	86.8	-	54.2	82.1	-	-	18.2
RanDumb (Ours)	98.3	55.6	28.6	17.7	RanDumb (Ours)	86.8	42.2	64.9	88.5	75.3	92.4	67.1
Improvement	+14.3	+12.9	+8.9	+5.6	Improvement	+0.0	-	+10.7	+6.4	-	-	+48.9
Scope of Improvement					Scope of Improvement							
Joint (One Pass)	98.3	74.2	33.0	25.3	Joint	93.8	70.8	86.6	91.1	83.8	95.5	86.9
RanDumb (Ours)	98.3	55.6	28.6	17.7	RanDumb (Ours)	86.8	42.2	64.9	88.5	75.3	92.4	67.1
Gap Covered. (%)	100%	75%	87%	70%	Gap Covered. (%)	93%	60%	75%	97%	92%	97%	77%

the linear classifier, RanDumb again outperforms leading methods as shown in Table 1 (right, top).

1.1. Technical Summary: Construction of RanDumb and Empirical Findings

Design. RanDumb first projects input pixels into a high-dimensional space using a fixed kernel based on random Fourier basis, which is a low-rank data-independent approximation of the RBF Kernel [52]. Then, we use a simple linear classifier which first normalizes distances across different feature dimensions (anisotropy) with Mahalanobis distance [42] and then uses nearest class means for classification [44] (mechanism illustrated in Figure 2). In scenarios with pretrained feature extractors, we use the fixed pretrained model as embedder and learn a linear classifier as described above, similar to Hayes and Kanan [27].

Key Properties. RanDumb needs no storage of exemplars and requires only one pass over the data in a one-sample-per-timestep fashion. Furthermore, it only requires online estimation of the sample covariance matrix and nearest class mean.

Key Finding 1: Poor Representation Learning. We compare RanDumb with leading methods: VAE-GC [63] in Table 1 (left, middle) and SLCA [78] in Table 1 (right, middle). The primary distinction between them is their representation: RanDumb uses a fixed function (random/pretrained network), whereas VAE-GC and SLCA further continually trained deep networks. RanDumb consistently surpasses VAE-GC and SLCA by wide margins of 5-

15%. This shows that state-of-the-art online continual learning algorithms fail to learn effective representations across standard exemplar-free continual learning benchmarks.

Finding 2: Over-Constrained Benchmarks. Given the demonstrated limitations of existing continual representation learning methods, an important question arises: Can better methods learn more effective representations? To explore this, we evaluated the performance of RanDumb against joint training, models trained without continual learning constraints, in both online and offline settings, as shown in Table 1 (left, bottom) and Table 1 (right, bottom). Our straightforward baseline, RanDumb, bridges 70-90% of the performance gap relative to the respective joint classifiers in both scenarios. This significant recovery of performance by such a simple method suggests that if our goal is to advance the study of representation learning, current benchmarks may be overly restrictive and not conducive to truly effective representation learning.

We highlight that the goal in our work is not to introduce a state-of-the-art continual learning method, but challenge prevailing assumptions and open a discussion on the efficacy of representation learning in continual learning algorithms, especially in online and low-exemplar scenarios.

2. RanDumb: Mechanism & Intuitions

RanDumb has two main elements: random projection and the dumb learner. We illustrate the mechanism of RanDumb using three toy examples in Figure 2. To classify a test sample x_{test} , we start with a simple classifier, the nearest class

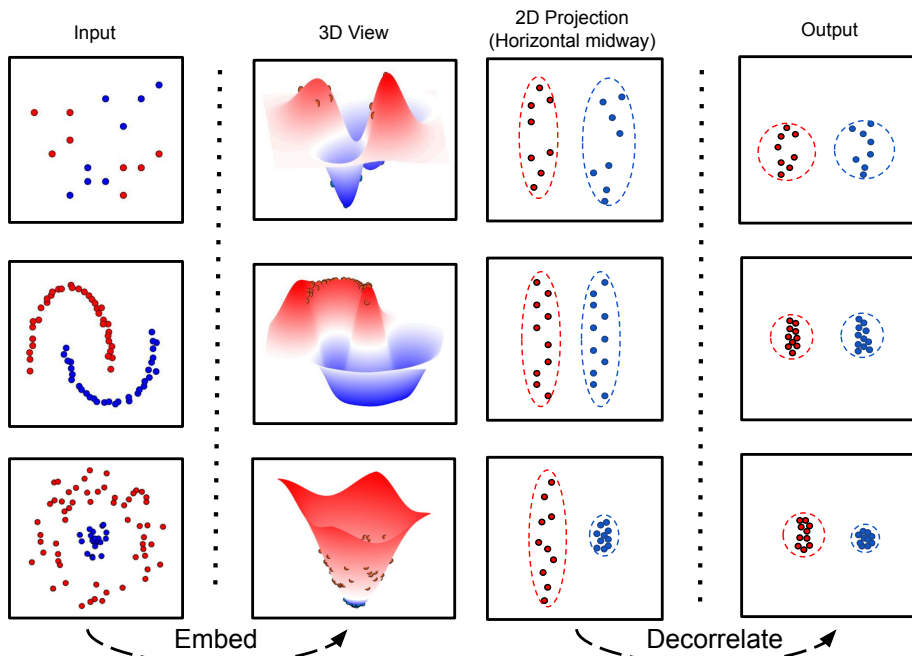


Figure 2. RanDumb projects the datapoints to a high-dimensional space to create a clearer separation between classes. Subsequently, it corrects the anisotropy across feature dimensions, scaling them to be unit variance each. This allows cosine similarity to accurately separate classes. The figure is adapted from [48].

mean (NCM). It predicts the class among C classes by high-value of the similarity function f among class means μ_i :

$$y_{\text{pred}} = \arg \max_{i \in \{1, \dots, |C|\}} f(\mathbf{x}_{\text{test}}, \mu_i), \quad (1)$$

$$\text{where } f(\mathbf{x}_{\text{test}}, \mu_i) := \mathbf{x}_{\text{test}}^\top \mu_i \quad (2)$$

and μ_i are the class-means in the pixel space: $\mu_i = \frac{1}{|C_i|} \sum_{\mathbf{x} \in C_i} \mathbf{x}$. RanDumb adds two additional components to this classifier: 1) Kernelization and 2) Decorrelation.

Kernelization: Classes are typically not linearly separable in the pixel space, unlike in the feature space of deep models. Hence, we apply the kernel trick to embed the pixels in a better representation space, computing all distances between the data and class-means in this embedding space. This phenomena is illustrated on three toy examples to build intuitions in Figure 1 (right, Embed). We use an RBF-Kernel, which for two points \mathbf{x} and \mathbf{y} is defined as: $K_{\text{RBF}}(\mathbf{x}, \mathbf{y}) = \exp(-\gamma \|\mathbf{x} - \mathbf{y}\|^2)$ where γ is a scaling parameter. However, calculating the RBF kernel is not possible due to the online continual learning constraints preventing computation of pairwise-distance between all points. Hence, we use a data-independent approximation, random Fourier projection $\phi(\mathbf{x})$, as given in [52]:

$$K_{\text{RBF}}(\mathbf{x}, \mathbf{y}) \approx \phi(\mathbf{x})^T \phi(\mathbf{y})$$

where the random Fourier features $\phi(\mathbf{x})$ are defined by first sampling D vectors $\{\omega_1, \dots, \omega_D\}$ from a Gaussian distribution with mean zero and covariance matrix $2\gamma\mathbf{I}$, where \mathbf{I}

is the identity matrix. Then $\phi(\mathbf{x})$ is a $2D$ -dimensional feature, defined as:

$$\phi(\mathbf{x}) = \frac{1}{\sqrt{D}} [\cos(\omega_1^T \mathbf{x}), \sin(\omega_1^T \mathbf{x}), \dots, \cos(\omega_D^T \mathbf{x}), \sin(\omega_D^T \mathbf{x})]$$

We keep these ω bases fixed throughout online learning. Thus, our modified similarity function from Equation 1 is:

$$f(\mathbf{x}_{\text{test}}, \mu_i) := \phi(\mathbf{x}_{\text{test}})^\top \bar{\mu}_i \quad (3)$$

where $\bar{\mu}_i$ are the class-means in the kernel space:

$$\bar{\mu}_i = \frac{1}{|C_i|} \sum_{\mathbf{x} \in C_i} \phi(\mathbf{x})$$

Decorrelation: Projected raw pixels have feature dimensions with different variances (anisotropic). Hence, instead of naively computing $\phi(\mathbf{x}_{\text{test}})^\top \bar{\mu}_i$, we further decorrelate the feature dimensions using a Mahalanobis distance with the shrunked covariance matrix \mathbf{S} using OAS shrinkage [15], inverse obtained by least squares minimization $(\mathbf{S} + \lambda\mathbf{I})$. We illustrate this phenomena as well on three toy examples in Figure 1 (right, Decorrelate) to build intuitions. Our similarity function finally is:

$$f(\mathbf{x}_{\text{test}}, \mu_i) := (\phi(\mathbf{x}_{\text{test}}) - \bar{\mu}_i)^T \mathbf{S}^{-1} (\phi(\mathbf{x}_{\text{test}}) - \bar{\mu}_i) \quad (4)$$

Online Computation. Our random projection is fixed before seeing any data. During continual learning, we only perform

Table 2. Overview of Benchmarks

Setup	Num Passes	#Classes Per Task	#Samples Per Step	#Stored Exemplars	Contrastive Augment
Method: RanDumb	1	1	1	0	No
A (Zajac et al. [75])	1	1	10	0	No
B1 (Guo et al. [25])	1	2	10	100-2000	No
B2 (Guo et al. [25])	1	2	10	100-1000	Yes
C (Smith et al. [60])	Many	10	All	0	No
D (Wu et al. [71])	1	2-10	10	1000	No
E (Ye and Bors [74])	1	2-5	10	1000-5000	No
F (Wang et al. [67])	Many	1	All	0	No

online update on the running class mean and empirical covariance matrix¹.

3. Experiments

We compare RanDumb with algorithms across online continual learning benchmarks with an emphasis on exemplar-free and low-exemplar storage regime.

Benchmarks. The benchmarks which we used in our experiments are summarized in Table 2. We aim for a comprehensive coverage and show results on four standard online continual learning benchmarks (A, B, D, E) which reflect the latest trends ('22-'24) across exemplar-free, contrastive-training², meta-continual learning, and network-expansion based approaches respectively. We also evaluate on a rehearsal-free offline continual learning benchmark C. These benchmarks are ordered by increasingly relaxed constraints, moving further away from the training scenario of RanDumb. Benchmark A closely matches RanDumb with one class per timestep and no stored exemplars. Benchmark B, D, E progressively relax the constraints on exemplars and classes per timestep. Benchmark C and E remove the online constraint by allowing unrestricted training and sample access within a task without exemplar-storage of past tasks.

We further test on exemplar-free scenarios in offline continual learning using Benchmark F [67] with the challenging one-class per task constraint borrowed from [75], i.e. testing over longer timespans. This benchmark allows using pretrained models along with unrestricted training time and access to all class samples at each timestep. However, RanDumb is restricted to learning from a single pass seeing only one sample at a time. RanDumb only learns a linear classifier over a given pretrained model in Benchmark F.

We use LAMDA-PILOT [61] codebase for all methods, except RanPAC and SLDA for which use their codebases.

¹Online update for the inverse of the covariance matrix is possible using the Sherman–Morrison formula.

²Benchmark B is split into two sections: (B1) methods that do not rely on contrastive learning and heavy augmentation, and (B2) approaches that incorporate contrastive learning and extra augmentations.

Table 3. **Benchmark A** (Ref: Table 1 from PEC [75]). We compare RanDumb in a 1-class per task setting referred as 'Dataset (num_tasks/1)'. We observe that RanDumb outperforms all approaches across all datasets by 2-6% margins, with an exception of latest work PEC [75] on CIFAR10.

	Method	Memory	MNIST (10/1)	CIFAR-10 (10/1)	CIFAR-100 (100/1)	miniImageNet (100/1)
	<i>Fine-tuning</i>	all	10.1±0.0	10.0±0.0	1.0±0.0	1.0±0.0
	<i>Joint, 1 epoch</i>	all	98.3±0.0	74.2±0.1	33.0±0.2	25.3±0.2
	ER [13]	500	84.4±0.3	40.6±1.1	12.5±0.3	5.7±0.2
	A-GEM [12]	500	59.8±0.8	10.2±0.1	1.0±0.0	1.1±0.1
	iCaRL [54]	500	83.1±0.3	37.8±0.4	5.7±0.1	7.5±0.1
<i>Rehearsal Based</i>	BiC [70]	500	86.0±0.4	35.9±0.4	6.4±0.3	1.5±0.1
	ER-ACE [10]	500	87.8±0.2	39.9±0.5	8.2±0.2	5.7±0.2
<i>Methods</i>	DER [9]	500	91.7±0.1	40.0±1.5	1.0±0.1	1.0±0.0
	DER++ [9]	500	91.9±0.2	35.6±2.4	6.2±0.4	1.4±0.1
	X-DER [8]	500	83.0±0.1	43.2±0.5	15.6±0.1	8.2±0.4
	GDumb [49]	500	91.0±0.2	50.7±0.7	8.2±0.2	-
	EWC [33]	0	10.1±0.0	10.6±0.4	1.0±0.0	1.0±0.0
	SI [76]	0	12.7±1.0	10.1±0.1	1.1±0.0	1.0±0.1
	LwF [37]	0	11.8±0.6	10.1±0.1	0.9±0.0	1.0±0.0
<i>Rehearsal Free</i>	LT [77]	0	10.9±0.9	10.0±0.2	1.1±0.1	1.0±0.0
	Gen-NCM [31]	0	82.0±0.0	27.7±0.0	10.0±0.0	7.5±0.0
<i>Methods</i>	Gen-SLDA [27]	0	88.0±0.0	41.4±0.0	18.8±0.0	12.9±0.0
	VAE-GC [63]	0	84.0±0.5	42.7±1.3	19.7±0.1	12.1±0.1
	PEC [75]	0	92.3±0.1	58.9±0.1	26.5±0.1	14.9±0.1
	RanDumb (Ours)	0	98.3 (+5.9)	55.6 (-3.3)	28.6 (+2.1)	17.7 (+2.8)

We use the original hyperparameters. We only change initial classes to 2 and number of classes per task to 1 and test using both ImageNet21K & ImageNet1K ViT-B/16 models.

Implementation Details (RanDumb). We evaluate RanDumb using five datasets: MNIST, CIFAR10, CIFAR100, TinyImageNet200, and miniImageNet100. For the latter two, we downscale all images to 32x32. We augment each datapoint with flipped version, hence two images are seen by the classifier at each timestep (except for MNIST and Benchmark F). We normalize all images and flatten them into vectors, obtaining 784-dim input vectors for MNIST and 3072-dim input vectors for all the other. For Benchmark F, we compare RanDumb on seven datasets used in LAMDA-PILOT, replacing ObjectNet with Stanford Cars as ObjectNet license prohibits training models. We use the 768-dimensional features from the same pretrained ViT-B models used in this benchmark. We measure accuracy on the test set of all past seen classes after completing the full one-pass. We take the average accuracy after the last task on all past tasks [25, 67, 75]. In Benchmark A and F, since we have one class per task, the average accuracy across past tasks is the same regardless of the task ordering. In Benchmarks A-E, all datasets have the same number of samples, hence similarly the average accuracy across past tasks is the same regardless of the task ordering. We used the Scikit-Learn implementation of Random Fourier Features [52] with 25K embedding size, $\gamma = 1.0$. We use progressively increasing ridge regression parameter (λ) with dataset complexity, $\lambda = 10^{-6}$ for MNIST, $\lambda = 10^{-5}$ for CIFAR10/100 and $\lambda = 10^{-4}$ for TinyImageNet200/miniImageNet100.

Table 4. **Benchmark B.1** (Ref: Table adopted from OnPro [68], OCM[25]) We compare RanDumb in many-classes per task setting referred as ‘Dataset (num_tasks/num_classes_per_task)’. We categorize memory buffer sizes with ‘M’. RanDumb outperforms the competing approaches without heavy-augmentations by 3-20% margins despite being exemplar free. Only in one case, it is second best.

Method	MNIST	CIFAR10		CIFAR100		CIFAR100	TinyImageNet	
	(5/2) $M = 0.1k$	(5/2) $M = 0.1k$	(5/2) $M = 0.2k$	(10/10) $M = 0.5k$	(10/10) $M = 1k$	(50/2) $M = 1k$	(100/2) $M = 1k$	(100/2) $M = 2k$
AGEM [12]	56.9±5.2	17.7±0.3	22.7±1.8	5.8±0.2	5.9±0.1	1.8±0.2	0.8±0.1	0.9±0.1
GSS [4]	70.4±1.5	18.4±0.2	26.9±1.2	8.1±0.2	11.1±0.2	4.3±0.2	1.1±0.1	3.3±0.5
ER [13]	78.7±0.4	19.4±0.6	29.7±1.0	8.7±0.3	15.7±0.3	8.3±0.3	1.2±0.1	5.6±0.5
ASER [58]	61.6±2.1	20.0±1.0	27.8±1.0	11.0±0.3	16.4±0.3	9.6±1.3	2.2±0.1	5.3±0.3
MIR [3]	79.0±0.5	20.7±0.7	37.3±0.3	9.7±0.3	15.7±0.2	12.7±0.3	1.4±0.1	6.1±0.5
ER-AML [10]	76.5±0.1	-	40.5±0.7	-	16.1±0.4	-	-	5.4±0.2
iCaRL [54]	-	31.0±1.2	33.9±0.9	12.8±0.4	16.5±0.4	-	5.0±0.3	6.6±0.4
DER++ [9]	74.4±1.1	31.5±2.9	44.2±1.1	16.0±0.6	21.4±0.9	9.3±0.3	3.7±0.4	5.1±0.8
GDumb [49]	81.2±0.5	23.3±1.3	35.9±1.1	8.2±0.2	18.1±0.3	18.1±0.3	4.6±0.3	12.6±0.1
CoPE [19]	-	33.5±3.2	37.3±2.2	11.6±0.4	14.6±1.3	-	2.1±0.3	2.3±0.4
DVC [25]	-	35.2±1.7	41.6±2.7	15.4±0.3	20.3±1.0	-	4.9±0.6	7.5±0.5
Co ² L [11]	83.1±0.1	-	42.1±1.2	-	17.1±0.4	-	-	10.1±0.2
R-RT [6]	89.1±0.3	-	45.2±0.4	-	15.4±0.3	-	-	6.6±0.3
CCIL [46]	86.4±0.1	-	50.5±0.2	-	18.5±0.3	-	-	5.6±0.9
IL2A [81]	90.2±0.1	-	54.7±0.5	-	18.2±1.2	-	-	5.5±0.7
BiC [70]	90.4±0.1	-	48.2±0.7	-	21.2±0.3	-	-	10.2±0.9
SSIL [1]	88.2±0.1	-	49.5±0.2	-	26.0±0.1	-	-	9.6±0.7
<i>Rehearsal-Free</i>								
PASS [81]	-	33.7±2.2	33.7±2.2	7.5±0.7	7.5±0.7	-	0.5±0.1	0.5±0.1
RanDumb (Ours)	98.3 (+7.8)	55.6 (+20.4)	55.6 (+5.9)	28.6 (+12.6)	28.6 (+2.6)	28.6 (+10.5)	11.6 (+6.6)	11.6 (-1.0)

Table 5. (Left) **Benchmark B.2** (Ref: Table from OnPro [68]) We compare RanDumb with contrastive representation learning based approaches which additionally use sophisticated augmentations. We observe that RanDumb often outperforms these sophisticated methods despite all of these factors on small-exemplar settings. (Right) **Benchmark C** (Ref: Table 2 from [60]). We compare RanDumb with latest rehearsal-free methods. RanDumb outperforms them by 4% margin.

Method	MNIST (5/2)	CIFAR10 (5/2)	CIFAR100 (10/10)	TinyImageNet (100/2)	Method	CIFAR100 (10/10)
	$M = 0.1k$	$M = 0.1k$	$M = 0.5k$	$M = 1k$		
SCR [40]	86.2±0.5	40.2±1.3	19.3±0.6	8.9±0.3	<i>Rehearsal-Free</i>	
OCM [25]	90.7±0.1	47.5±1.7	19.7±0.5	10.8±0.4	PredKD [37]	24.6
OnPro [68]	-	57.8±1.1	22.7±0.7	11.9±0.3	PredKD + FeatKD	12.4
<i>Rehearsal-Free</i>					PredKD + EWC	23.3
RanDumb	98.3 (+7.5)	55.6 (-2.2)	28.6 (+5.9)	11.6 (-0.3)	PredKD + L2	21.5
					RanDumb (Ours)	28.6 (+4.0)

3.1. Results

Benchmark A. We assess continual learning models in the challenging setup of one class per timestep, closely mirroring our training assumptions, and present our results in Table 3. Comparing across rows, and see that RanDumb improves over prior state-of-the-art across all datasets with 2-6% margins. The only exception is PEC on CIFAR10, where RanDumb underperforms by 3.3%. Nonetheless, it outperforms the second-best model, GDumb with a 500 memory size, by 4.9%.

Benchmark B1. We present our results comparing with non-contrastive methods in Table 4. We notice that scenario allows two classes per task and relaxes the memory

constraints for online continual learning methods, allowing for higher accuracies compared to Benchmark A. Despite that, RanDumb outperforms latest OCL algorithms on MNIST, CIFAR10 and CIFAR100—often by margins exceeding 10%. The lone exception is GDumb achieving a higher performance with 2K memory samples on TinyImageNet, indicating this already is in the high-memory regime.

Benchmark B2. We additionally compare our performance with the latest OCL approaches using contrastive losses with sophisticated data augmentations. As shown in in Table 5 (Left), these advancements provide large performance improvements over methods from Benchmark B.1. To compensate, we compare on lower exemplar budgets.

Table 6. **(Left) Benchmark D** (Ref: Table 2 from VR-MCL [71]) We compare RanDumb with meta-continual learning approaches operating in a high memory setting, allowing buffer sizes up to 1K exemplars. RanDumb outperforms all methods except VR-MCL on TinyImageNet. RanDumb also surpasses all prior work by a substantial 9.1% on CIFAR100. Allowing generous replay buffers shifts scenarios to a high exemplar regime where GDumb performs the best on CIFAR10. Yet RanDumb competes favorably even under these conditions. **(Right) Benchmark E** (Ref: Table 1 from SEDEM [74]) We compare RanDumb with network expansion based approaches. Despite allowing access to much larger memory buffers, RanDumb matches the performance of best method SEDEM on MNIST, while exceeding it by 0.3% on CIFAR10 and 3.8% on CIFAR100.

Method	CIFAR10	CIFAR100	TinyImageNet
	(5/2) $M = 1k$	(10/10) $M = 1k$	(20/10) $M = 1k$
Finetune	17.0 ± 0.6	5.3 ± 0.3	3.9 ± 0.2
LWF [37]	18.8 ± 0.1	5.6 ± 0.4	4.0 ± 0.3
A-GEM [12]	18.4 ± 0.2	6.0 ± 0.2	4.0 ± 0.2
IS [76]	17.4 ± 0.2	5.2 ± 0.2	3.3 ± 0.3
MER [55]	36.9 ± 2.4	-	-
La-MAML [26]	33.4 ± 1.2	11.8 ± 0.6	6.74 ± 0.4
GDumb [49]	61.2 ± 1.0	18.1 ± 0.3	4.6 ± 0.3
ER [13]	43.8 ± 4.8	16.1 ± 0.9	11.1 ± 0.4
DER [9]	29.9 ± 2.9	6.1 ± 0.1	4.1 ± 0.1
DER++ [9]	52.3 ± 1.9	11.8 ± 0.7	8.3 ± 0.3
CLSER [5]	52.8 ± 1.7	17.9 ± 0.7	11.1 ± 0.2
OCM [25]	53.4 ± 1.0	14.4 ± 0.8	4.5 ± 0.5
ER-OBC [18]	54.8 ± 2.2	17.2 ± 0.9	11.5 ± 0.2
VR-MCL [71]	56.5 ± 1.8	19.5 ± 0.7	13.3 ± 0.4
<i>Rehearsal-Free</i>			
RanDumb (Ours)	55.6 (-5.6)	28.6 (+9.1)	11.6 (-1.7)

Method	MNIST	CIFAR10	CIFAR100
	(5/2) $M = 2k$	(5/2) $M = 1k$	(20/5) $M = 5k$
Finetune	19.8 ± 0.1	18.5 ± 0.3	3.5 ± 0.1
MIR [3]	93.2 ± 0.4	42.8 ± 2.2	20.0 ± 0.6
GEM [12]	93.2 ± 0.4	24.1 ± 2.5	11.1 ± 2.4
iCARL [54]	83.9 ± 0.2	37.3 ± 2.7	10.8 ± 0.4
G-MED [32]	82.2 ± 2.9	47.5 ± 3.2	19.6 ± 1.5
GSS [4]	92.5 ± 0.9	38.5 ± 1.4	13.1 ± 0.9
CoPE [19]	93.9 ± 0.2	48.9 ± 1.3	21.6 ± 0.7
CURL [53]	92.6 ± 0.7	-	-
CNDPM [36]	95.4 ± 0.2	48.8 ± 0.3	22.5 ± 1.3
Dynamic-OCM [73]	94.0 ± 0.2	49.2 ± 1.5	21.8 ± 0.7
SEDEM [74]	98.3 ± 0.2	55.3 ± 1.3	24.8 ± 1.2
<i>Rehearsal-Free</i>			
RanDumb (Ours)	98.3 (0.0)	55.6 (+0.3)	28.6 (+3.8)

The best approach, OnPro [68], outperforms RanDumb on CIFAR10 by 2.2% and TinyImageNet by 0.3%, but falls significantly short on CIFAR100 by 5.9%. Overall, RanDumb achieves strong results compared to representation learning using state-of-the-art contrastive learning approaches customized to continual learning, despite storing no exemplars.

Benchmark C. We compare against offline rehearsal-free continual learning approaches in Table 5 (Right) on CIFAR100. Despite online training, RanDumb outperforms PredKD by over 4% margins.

Benchmark D. We compare performance of RanDumb against meta-continual learning methods, which require large exemplars with buffer sizes of 1K in Table 6 (left). RanDumb achieves strong performance under these conditions, exceeding all prior work by a large margin of 9.1% on CIFAR100 and outperforms all but VR-MCL approach on the TinyImageNet dataset. GDumb performs the best on CIFAR10, indicating this is already in a large-exemplar regime uniquely unsuited for RanDumb.

Benchmark E. We compare RanDumb against network expansion-based online continual learning methods in Table 6 (right). These approaches grow model capacity to mitigate forgetting while dealing with shifts in the data distribution, and are allowed larger memory buffers. RanDumb matches the performance of the state-of-the-art method SEDEM [74]

on MNIST, while exceeding it by 0.3% on CIFAR10 and 3.8% on CIFAR100.

Benchmark F. We compare performance of approaches which do not further train the deep network like RanDumb against popular continual finetuning and prompt-tuning approaches in Table 8. We discover that prompt-tuning approaches completely collapse under large timesteps and approaches which do not finetune their pretrained model achieve strong performance, even under challenging one class per timestep constraint. Note that RanPAC [41] adds a RP+ReLU and finetunes in a first-session adaptation fashion over RanDumb, yet fails to achieve higher accuracies.

Overall, despite RanDumb being exemplar-free, it outperforms nearly all online continual learning methods across various tasks when exemplar storage is limited. We specifically benchmark on lower exemplar sizes to complement settings in which GDumb does not perform well.

3.2. Analysis of RanDumb

Ablating Components of RanDumb. We ablate the contribution of only using Random Fourier features for embedding and decorrelation to the overall performance of RanDumb in Table 7 (left, top). Ablating the decorrelation and relying solely on random Fourier features, colloquially dubbed Kernel-NCM, has performance drops ranging from

Table 7. **(Left) Analysis of RanDumb:** We study contributions of decorrelation, random embedding, and data augmentation. We further vary the embedding sizes and regularisation parameter. Finally, we compare with alternate embeddings. **(Right) Architectures** (Ref: Table 1 from Mirzadeh et al. [45]) RanDumb surpasses continual representation learning across a wide range of architectures, achieving close to 94% of the joint performance.

Method	MNIST (10/1)	CIFAR10 (10/1)	CIFAR100 (10/1)	T-ImNet (200/1)	m-ImNet (100/1)	Model	CIFAR100
Ablating Components of RanDumb						Joint	79.58
RanDumb	98.3	55.6	28.6	11.1	17.7	CNN x1	62.2 ±1.35
-Decorrelate	83.8 (-14.5)	30.0 (-25.6)	12.0 (-16.6)	4.7 (-6.4)	8.9 (-8.8)	CNN x2	66.3 ±1.12
-Embed	88.0 (-10.3)	41.6 (-14.0)	19.0 (-9.6)	8.0 (-3.1)	12.9 (-4.8)	CNN x4	68.1 ±0.5
-Both	82.1 (-16.2)	28.5 (-27.1)	10.4 (-18.2)	4.1 (-7.0)	7.28 (-10.4)	CNN x8	69.9 ±0.62
Effect of Adding Flip Augmentation						CNN x16	76.8 ±0.76
With	-	55.6	28.6	11.1	17.7	ResNet-18	45.0 ±0.63
Without	98.3	52.5 (-3.1)	26.9 (-1.7)	10.7 (-0.4)	16.6 (-1.1)	ResNet-34	44.8 ±2.34
Variation with Ridge Parameter λ						ResNet-50	56.2 ±0.88
$\lambda = 10^{-6}$	98.3	53.9	27.8	10.3	15.8	ResNet-101	56.8 ±1.62
$\lambda = 10^{-5}$	-	55.6	28.6	11.1	15.9	WRN-10-2	50.5 ±2.65
$\lambda = 10^{-4}$	96.6	52.6	26.1	11.6	17.7	WRN-10-10	56.8 ±2.03
Variation Across Embedding Projections						WRN-16-2	44.6 ±2.81
No-Embed	88.0	41.6	19.0	8.0	12.9	WRN-16-10	51.3 ±1.47
RP+ReLU (RanPAC)	95.2	48.8	23.1	9.7	15.7	WRN-28-2	46.6 ±2.27
RanDumb (Ours)	98.3 (+3.1)	55.6 (+6.8)	28.6 (+5.5)	11.1 (+1.4)	17.7 (+2.0)	WRN-28-10	49.3 ±2.02
						ViT-512/1024	51.7 ±1.4
						ViT-1024/1546	60.4 ±1.56
						RanDumb (Ours)	74.8 (-2.0)

6-25% across the datasets. Replacing random Fourier features with raw features, *ie.* the SLDA baseline, leads to pronounced drop in performance ranging from 3-14% across the datasets. Moreover, ablating both components results in the base nearest class mean classifier, and exhibits the poorest performance with an average reduction of 17%. Therefore, both decorrelation and random embedding are crucial for RanDumb.

Impact of Embedding Dimensions. We vary the dimensions of the random Fourier features ranging from compressing 3K input dimensions to 1K to projecting it to 25K dimensions and evaluate its impact on performance in Figure 3. Surprisingly, the random projection to a 3x compressed 1K dimensional space allows for significant performance improvement over not using embedding, given in Table 7 (left, top). Furthermore, increasing the dimension from 1K to 25K results in improvements of 3.6%, 10.4%, 7.0%, and 2.5% on MNIST, CIFAR10, CIFAR100, and TinyImageNet respectively. Increasing the embedding sizes beyond 15K, however, only results in modest improvements of 0.1%, 1.4%, 1.1% and 0.2% on the same datasets, indicating 15K dimensions would be a good point for a performance-computational cost tradeoff.

Impact of Flip Augmentation. We evaluate the impact of adding the flip augmentation on the performance of RanDumb in Table 7 (left, middle). Note that MNIST was not

augmented. Augmentation provided large gains of 3.1% on CIFAR10, 1.7% on CIFAR100, and 0.4% on TinyImageNet. We did not augment the data further with Random-Crop transform as done with standard augmentations.

Impact of Varying Ridge Parameter. All prior experiments use a ridge parameter (λ) that increases with dataset complexity: $\lambda = 10^{-6}$ for MNIST, 10^{-5} for CIFAR10 and CIFAR100, and 10^{-4} for TinyImageNet and miniImageNet. Table 7 (left, middle) shows the effect of varying λ on RanDumb’s performance. With a smaller $\lambda = 10^{-6}$, CIFAR10, CIFAR100, TinyImageNet and miniImageNet all exhibit minor drops of 0.1%-1.7%, 0.8%, 0.8%. Increasing shrinkage to a $\lambda = 10^{-4}$ reduces CIFAR10 and CIFAR100 performance more substantially by 3% and 2.5% versus their optimal $\lambda = 10^{-5}$. On the other hand, this larger λ leads to improvements of 0.5% and 1.8% on TinyImageNet and miniImageNet. This aligns with the trend that datasets with greater complexity benefit from more regularisation, with the optimal λ balancing under- and over-regularisation effects.

Comparison with Extreme Learning Machines. We compared our random Fourier features with random projections based extreme learning machines, as recently adapted to continual learning by RP+ReLU [41] in Table 7 (left, bottom) with their best embedding size. Our method performs significantly better on each dataset, averaging a gain

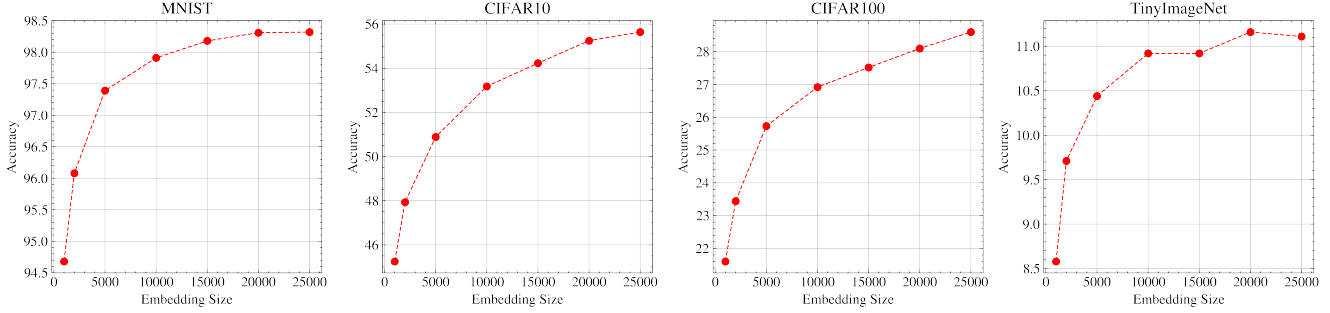


Figure 3. Accuracy of RanDumb with respect to embedding dimensionality across datasets.

Table 8. **Benchmark F** We compare RanDumb with prompt-tuning approaches using ViT-B/16 ImageNet-21K/1K pretrained models using 2 init classes and 1 class per task setting. Most prompt-tuning based methods collapse, RanDumb achieves either state-of-the-art or second-best performance. RanPAC-imp is an improved version of the RanPAC mitigating the instability issues.

Method	CIFAR	IN-A	IN-R	CUB	VTAB
ViT-B/16 (IN-1K Pretrained)					
Finetune	1.0	1.2	1.1	1.0	2.1
L2P [67]	2.4	0.3	0.8	1.4	1.3
DualPrompt [66]	2.3	0.3	0.8	0.9	4.2
CODA-Prompt [59]	2.6	0.3	0.8	1.9	6.3
Adam-Adapt [80]	76.7	49.3	62.0	85.2	83.6
Adam-SSF [80]	76.0	47.3	64.2	85.6	84.2
Adam-VPT [80]	79.3	35.8	61.2	83.8	86.9
Adam-FT [80]	72.6	49.3	61.0	85.2	83.8
Memo [79]	69.8	-	-	81.4	-
iCARL [54]	72.4	-	35.2	72.4	-
Foster [65]	52.2	-	76.8	86.6	-
NCM [31]	78.3	44.3	62.5	84.8	88.2
SLCA [78]	86.3	-	52.8	84.7	-
RanPAC [41]	88.2	39.0	72.8	77.7	93.0
RanPAC-imp [41]	87.8	43.5	72.6	89.6	93.0
RanDumb (Ours)	84.5	49.5	66.9	88.0	93.6
ViT-B/16 (IN-21K Pretrained)					
Finetune	2.8	0.5	1.2	1.2	0.5
Adam-Adapt [80]	82.4	48.8	55.4	86.7	84.4
Adam-SSF [80]	82.7	46.0	59.7	86.2	84.9
Adam-VPT [80]	70.8	34.8	53.9	84.0	81.1
Adam-FT [80]	65.7	48.5	56.1	86.5	84.4
Foster [65]	87.3	-	5.1	86.9	-
iCARL [54]	71.6	-	35.1	71.6	-
NCM [31]	83.5	41.4	54.8	86.5	88.5
SLCA [78]	86.8	-	54.2	82.1	-
RanPAC [41]	89.6	26.8	67.3	87.2	88.2
RanPAC-imp [41]	89.4	33.8	69.4	89.6	91.9
RanDumb (Ours)	86.8	42.2	64.9	88.5	92.4

of 3.4%.

Comparisons across Architectures. In table 7 (right), we compare whether using random Fourier features as embeddings outperforms models across various architectures for continual representation learning. We use experience re-

play (ER) baseline in the task-incremental CIFAR100 setup (for details, see Mirzadeh et al. [45] as it differs significantly from earlier setups). Our comparison spanned various architectures. The findings revealed that RanDumb surpassed the performance of nearly all considered architectures, and achieved close to 94% of the joint multi-task performance. This suggests that RanDumb outperforms continual representation learning across architectures.

Conclusion. Overall, both random embedding and decorrelation are critical components in the performance of RanDumb. Using random Fourier features is substantially better than RanPAC. Lastly, one can substantially reduce the embedding dimension without a large drop in performance for large gains in computational cost, additional augmentation may further significantly help performance and optimal shrinkage parameter increases with dataset complexity. RanDumb outperforms continual representation learning across a wide range of architectures.

4. Related Work & Equivalent Formulations

Random Representations. There have been extensive theoretical and empirical investigations into random representations in machine learning, compressed sensing, and other fields, often utilizing extreme learning machines [14, 21, 56] (see [29, 30] for a survey). Other investigations include efficient kernel methods using Fourier features and Nyström approximations [52, 69], and extensions to efficiently parameterize linear classifiers [2]. They are also embedded into deep networks [16, 17, 35, 72]. We tailored the already successful random fourier representations [52] to the problem at hand and applied to the online continual learning problem for the first time.

Continual Representation Learning. There are various works focusing on continual representation learning itself [20, 28, 39, 53], but they address the problem of alleviating the stability-plasticity dilemma in high-exemplar and offline continual learning scenarios where models are trained until convergence. In comparison, we focus on online and low-exemplar regime.

Representation Learning Free Methods in CL. Several works have developed the idea of using fixed pretrained networks after adapting on the first task across various settings [24, 41, 50]. Our work contributes to this growing evidence, however, we do not perform first-task adaptation [47], and propose OAS-shrunked SLDA as structurally simplest but highly accurate continual linear classifier without any extra bells-and-whistles. Moreover, we are the first work to introduce a representation learning free method with random features for continually learning from scratch.

Equivalent formulations to RanDumb. If the classes are equiprobable, which is the case for most datasets here, nearest class mean classifier with the Mahalanobis distance metric is equivalent to linear discriminant analysis (LDA) classifier [43]. Hence, one could say RanDumb is exactly equivalent to a Streaming LDA classifier with an approximate RBF Kernel. Alternatively, one could think of the decorrelation operation as explicitly decorrelating the features with ZCA whitening [7].

5. Discussion and Concluding Remarks

Our investigation reveals a surprising result — simply using random embedding (RanDumb) consistently outperforms learned representations from methods specifically designed for online continual training. Furthermore, using random/pretrained features also recovers 70-90% of the gap to joint learning, leaving limited room for improvement in representation learning techniques on standard benchmarks. Overall, our investigation questions our understanding of how to effectively design and train models that require efficient continual representation learning, and necessitates a re-investigation of the widely explored problem formulation itself. We believe adoption of computationally bounded scenarios without memory constraints and corresponding benchmarks [22, 50, 51] could be a promising way forward.

Limitations & Future Directions. We currently do not provide theory or justification for why training dynamics of continual learning algorithms fails to effectively learn good representations; doing so would provide deeper insights into continual learning algorithms. Moreover, our proposed method, RanDumb with random Fourier features is limited in scope towards low-exemplar scenarios and online-continual learning. Extending studies on representation learning to high-exemplar and offline continual learning scenarios might be exciting directions to investigate.

Acknowledgements

AP is funded by Meta AI Grant No. DFR05540. PT thanks the Royal Academy of Engineering. PT and PD thank FiveAI for their support. This work is supported in part by a UKRI grant: Turing AI Fellowship EP/W002981/1

and an EPSRC/MURI grant: EP/N019474/1. The authors would like to thank Arvinth Arun, Kalyan Ramakrishnan and Shashwat Goel for helpful feedback.

References

- [1] Hongjoon Ahn, Jihwan Kwak, Subin Lim, Hyeonsu Bang, Hyojun Kim, and Taesup Moon. Ss-il: Separated softmax for incremental learning. In *ICCV*, 2021.
- [2] Nir Ailon and Bernard Chazelle. The fast johnson-lindenstrauss transform and approximate nearest neighbors. *SIAM Journal on computing*, 2009.
- [3] Rahaf Aljundi, Lucas Caccia, Eugene Belilovsky, Massimo Caccia, Laurent Charlin, and Tinne Tuytelaars. Online continual learning with maximally interfered retrieval. In *NeurIPS*, 2019.
- [4] Rahaf Aljundi, Min Lin, Baptiste Goujaud, and Yoshua Bengio. Gradient based sample selection for online continual learning. In *NeurIPS*, 2019.
- [5] Elahe Arani, Fahad Sarfraz, and Bahram Zonooz. Learning fast, learning slow: A general continual learning method based on complementary learning system. In *ICLR*, 2022.
- [6] Jihwan Bang, Heesu Kim, YoungJoon Yoo, Jung-Woo Ha, and Jonghyun Choi. Rainbow memory: Continual learning with a memory of diverse samples. In *CVPR*, 2021.
- [7] Anthony Bell and Terrence J Sejnowski. Edges are the 'independent components' of natural scenes. In *NeurIPS*, 1996.
- [8] Matteo Boschini, Lorenzo Bonicelli, Pietro Buzzega, Angelo Porrello, and Simone Calderara. Class-incremental continual learning into the extended der-verse. *TPAMI*, 2022.
- [9] Pietro Buzzega, Matteo Boschini, Angelo Porrello, Davide Abati, and Simone Calderara. Dark experience for general continual learning: a strong, simple baseline. In *NeurIPS*, 2020.
- [10] Lucas Caccia, Rahaf Aljundi, Nader Asadi, Tinne Tuytelaars, Joelle Pineau, and Eugene Belilovsky. New insights on reducing abrupt representation change in online continual learning. In *ICLR*, 2022.
- [11] Hyuntak Cha, Jaeho Lee, and Jinwoo Shin. Co2l: Contrastive continual learning. In *ICCV*, 2021.
- [12] Arslan Chaudhry, Marc Aurelio Ranzato, Marcus Rohrbach, and Mohamed Elhoseiny. Efficient lifelong learning with a gem. In *ICLR*, 2019.
- [13] Arslan Chaudhry, Marcus Rohrbach, Mohamed Elhoseiny, Thalaisyasingam Ajanthan, Puneet K Dokania, Philip HS Torr, and Marc Aurelio Ranzato. Continual learning with tiny episodic memories. In *ICML-W*, 2019.
- [14] CL Philip Chen. A rapid supervised learning neural network for function interpolation and approximation. *IEEE Transactions on Neural Networks*, 1996.
- [15] Yilun Chen, Ami Wiesel, Yonina C Eldar, and Alfred O Hero. Shrinkage algorithms for mmse covariance estimation. *IEEE transactions on signal processing*, 2010.
- [16] Yu Cheng, Felix X Yu, Rogerio S Feris, Sanjiv Kumar, Alok Choudhary, and Shi-Fu Chang. An exploration of parameter redundancy in deep networks with circulant projections. In *ICCV*, 2015.

- [17] Youngmin Cho and Lawrence Saul. Kernel methods for deep learning. *NeurIPS*, 2009.
- [18] Aristotelis Chrysakis and Marie-Francine Moens. Online bias correction for task-free continual learning. In *ICLR*, 2023.
- [19] Matthias De Lange and Tinne Tuytelaars. Continual prototype evolution: Learning online from non-stationary data streams. In *ICCV*, 2021.
- [20] Enrico Fini, Victor G Turrisi da Costa, Xavier Alameda-Pineda, Elisa Ricci, Karteek Alahari, and Julien Mairal. Self-supervised models are continual learners. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2022.
- [21] Dmitriy Fradkin and David Madigan. Experiments with random projections for machine learning. In *KDD*, 2003.
- [22] Saurabh Garg, Mehrdad Farajtabar, Hadi Pouransari, Raviteja Vemulapalli, Sachin Mehta, Oncel Tuzel, Vaishaal Shankar, and Fartash Faghri. Tic-clip: Continual training of clip models. *ArXiv*, 2023.
- [23] Ross Girshick, Jeff Donahue, Trevor Darrell, and Jitendra Malik. Rich feature hierarchies for accurate object detection and semantic segmentation. In *CVPR*, 2014.
- [24] Dipam Goswami, Yuyang Liu, Bartłomiej Twardowski, and Joost van de Weijer. Fecam: Exploiting the heterogeneity of class distributions in exemplar-free continual learning. *NeurIPS*, 2023.
- [25] Yiduo Guo, Bing Liu, and Dongyan Zhao. Online continual learning through mutual information maximization. In *ICML*, 2022.
- [26] Gunshi Gupta, Karmesh Yadav, and Liam Paull. Look-ahead meta learning for continual learning. *NeurIPS*, 2020.
- [27] Tyler L Hayes and Christopher Kanan. Lifelong machine learning with deep streaming linear discriminant analysis. In *CVPR-W*, 2020.
- [28] Timm Hess, Eli Verwimp, Gido M van de Ven, and Tinne Tuytelaars. Knowledge accumulation in continually learned representations and the issue of feature forgetting. *arXiv preprint arXiv:2304.00933*, 2023.
- [29] Guang-Bin Huang, Qin-Yu Zhu, and Chee-Kheong Siew. Extreme learning machine: theory and applications. *Neurocomputing*, 2006.
- [30] Guang-Bin Huang, Dian Hui Wang, and Yuan Lan. Extreme learning machines: a survey. *International journal of machine learning and cybernetics*, 2011.
- [31] Paul Janson, Wenxuan Zhang, Rahaf Aljundi, and Mohamed Elhoseiny. A simple baseline that questions the use of pretrained-models in continual learning. In *NeurIPS-W*, 2022.
- [32] Xisen Jin, Junyi Du, and Xiang Ren. Gradient based memory editing for task-free continual learning. In *NeurIPS*, 2021.
- [33] James Kirkpatrick, Razvan Pascanu, Neil Rabinowitz, Joel Veness, Guillaume Desjardins, Andrei A Rusu, Kieran Milan, John Quan, Tiago Ramalho, Agnieszka Grabska-Barwinska, et al. Overcoming catastrophic forgetting in neural networks. *PNAS*, 2017.
- [34] Alex Krizhevsky, Ilya Sutskever, and Geoffrey E Hinton. Imagenet classification with deep convolutional neural networks. *Communications of the ACM*, 2017.
- [35] Quoc Le, Tamás Sarlós, Alex Smola, et al. Fastfood-approximating kernel expansions in loglinear time. In *ICML*, 2013.
- [36] Soochan Lee, Junsoo Ha, Dongsu Zhang, and Gunhee Kim. A neural dirichlet process mixture model for task-free continual learning. In *ICLR*, 2020.
- [37] Zhizhong Li and Derek Hoiem. Learning without forgetting. *TPAMI*, 2017.
- [38] David Lopez-Paz and Marc’Aurelio Ranzato. Gradient episodic memory for continual learning. In *NeurIPS*, 2017.
- [39] Divyam Madaan, Jaehong Yoon, Yuanchun Li, Yunxin Liu, and Sung Ju Hwang. Representational continuity for unsupervised continual learning. *arXiv preprint arXiv:2110.06976*, 2021.
- [40] Zheda Mai, Ruiwen Li, Hyunwoo Kim, and Scott Sanner. Supervised contrastive replay: Revisiting the nearest class mean classifier in online class-incremental continual learning. In *CVPR*, 2021.
- [41] Mark D McDonnell, Dong Gong, Amin Parvaneh, Ehsan Abbasnejad, and Anton van den Hengel. Ranpac: Random projections and pre-trained models for continual learning. In *NeurIPS*, 2023.
- [42] Geoffrey J McLachlan. Mahalanobis distance. *Resonance*, 4(6):20–26, 1999.
- [43] Geoffrey J McLachlan. *Discriminant analysis and statistical pattern recognition*. John Wiley & Sons, 2005.
- [44] Thomas Mensink, Jakob Verbeek, Florent Perronnin, and Gabriela Csurka. Distance-based image classification: Generalizing to new classes at near-zero cost. *TPAMI*, 2013.
- [45] Seyed Iman Mirzadeh, Arslan Chaudhry, Dong Yin, Timothy Nguyen, Razvan Pascanu, Dilan Gorur, and Mehrdad Farajtabar. Architecture matters in continual learning. *arXiv preprint arXiv:2202.00275*, 2022.
- [46] Sudhanshu Mittal, Silvio Galessio, and Thomas Brox. Essentials for class incremental learning. In *CVPR*, 2021.
- [47] Aristeidis Panos, Yuriko Kobe, Daniel Olmeda Reino, Rahaf Aljundi, and Richard E Turner. First session adaptation: A strong replay-free baseline for class-incremental learning. *arXiv preprint arXiv:2303.13199*, 2023.
- [48] Karl Ezra Pilario, Mahmood Shafiee, Yi Cao, Liyun Lao, and Shuang-Hua Yang. A review of kernel methods for feature extraction in nonlinear process monitoring. *Processes*, 2020.
- [49] Ameya Prabhu, Philip HS Torr, and Puneet K Dokania. Gdumb: A simple approach that questions our progress in continual learning. In *ECCV*, 2020.
- [50] Ameya Prabhu, Zhipeng Cai, Puneet Dokania, Philip Torr, Vladlen Koltun, and Ozan Sener. Online continual learning without the storage constraint. *arXiv preprint arXiv:2305.09253*, 2023.
- [51] Ameya Prabhu, Hasan Abed Al Kader Hammoud, Puneet Dokania, Philip HS Torr, Ser-Nam Lim, Bernard Ghanem, and Adel Bibi. Computationally budgeted continual learning: What does matter? In *CVPR*, 2023.
- [52] Ali Rahimi and Benjamin Recht. Random features for large-scale kernel machines. *NeurIPS*, 2007.
- [53] Dushyant Rao, Francesco Visin, Andrei Rusu, Razvan Pascanu, Yee Whye Teh, and Raia Hadsell. Continual unsupervised representation learning. *NeurIPS*, 32, 2019.

- [54] Sylvestre-Alvise Rebuffi, Alexander Kolesnikov, Georg Sperl, and Christoph H Lampert. icarl: Incremental classifier and representation learning. In *CVPR*, 2017.
- [55] Matthew Riemer, Ignacio Cases, Robert Ajemian, Miao Liu, Irina Rish, Yuhai Tu, and Gerald Tesauro. Learning to learn without forgetting by maximizing transfer and minimizing interference. In *ICLR*, 2019.
- [56] Wouter F Schmidt, Martin A Kraaijveld, Robert PW Duin, et al. Feed forward neural networks with random weights. In *ICPR*, 1992.
- [57] Pierre Sermanet, David Eigen, Xiang Zhang, Michaël Mathieu, Rob Fergus, and Yann LeCun. Overfeat: Integrated recognition, localization and detection using convolutional networks. *arXiv preprint arXiv:1312.6229*, 2013.
- [58] Dongsub Shim, Zheda Mai, Jihwan Jeong, Scott Sanner, Hyunwoo Kim, and Jongseong Jang. Online class-incremental continual learning with adversarial shapley value. In *AAAI*, 2021.
- [59] James Seale Smith, Leonid Karlinsky, Vyshnavi Gutta, Paola Cascante-Bonilla, Donghyun Kim, Assaf Arbelle, Rameswar Panda, Rogerio Feris, and Zsolt Kira. Coda-prompt: Continual decomposed attention-based prompting for rehearsal-free continual learning. In *CVPR*, 2023.
- [60] James Seale Smith, Junjiao Tian, Shaunak Halbe, Yen-Chang Hsu, and Zsolt Kira. A closer look at rehearsal-free continual learning. In *CVPR-W*, 2023.
- [61] Hai-Long Sun, Da-Wei Zhou, Han-Jia Ye, and De-Chuan Zhan. Pilot: A pre-trained model-based continual learning toolbox. *arXiv preprint arXiv:2309.07117*, 2023.
- [62] Gido M van de Ven and Andreas S Tolias. Three scenarios for continual learning. In *NeurIPS-W*, 2018.
- [63] Gido M Van De Ven, Zhe Li, and Andreas S Tolias. Class-incremental learning with generative classifiers. In *CVPR-W*, 2021.
- [64] Eli Verwimp, Shai Ben-David, Matthias Bethge, Andrea Cossu, Alexander Gepperth, Tyler L Hayes, Eyke Hüllermeier, Christopher Kanan, Dhireesha Kudithipudi, Christoph H Lampert, et al. Continual learning: Applications and the road forward. *arXiv preprint arXiv:2311.11908*, 2023.
- [65] Fu-Yun Wang, Da-Wei Zhou, Han-Jia Ye, and De-Chuan Zhan. Foster: Feature boosting and compression for class-incremental learning. In *ECCV*, 2022.
- [66] Zifeng Wang, Zizhao Zhang, Sayna Ebrahimi, Ruoxi Sun, Han Zhang, Chen-Yu Lee, Xiaoqi Ren, Guolong Su, Vincent Perot, Jennifer Dy, et al. Dualprompt: Complementary prompting for rehearsal-free continual learning. In *European Conference on Computer Vision (ECCV)*, 2022.
- [67] Zifeng Wang, Zizhao Zhang, Chen-Yu Lee, Han Zhang, Ruoxi Sun, Xiaoqi Ren, Guolong Su, Vincent Perot, Jennifer Dy, and Tomas Pfister. Learning to prompt for continual learning. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2022.
- [68] Yujie Wei, Jiabin Ye, Zhizhong Huang, Junping Zhang, and Hongming Shan. Online prototype learning for online continual learning. In *ICCV*, 2023.
- [69] Christopher Williams and Matthias Seeger. Using the nystrom method to speed up kernel machines. *NeurIPS*, 2000.
- [70] Yue Wu, Yinpeng Chen, Lijuan Wang, Yuancheng Ye, Zicheng Liu, Yandong Guo, and Yun Fu. Large scale incremental learning. In *CVPR*, 2019.
- [71] Yichen Wu, Long-Kai Huang, Renzhen Wang, Deyu Meng, and Ying Wei. Meta continual learning revisited: Implicitly enhancing online hessian approximation via variance reduction. In *ICLR*, 2024.
- [72] Zichao Yang, Marcin Moczulski, Misha Denil, Nando De Freitas, Alex Smola, Le Song, and Ziyu Wang. Deep fried convnets. In *ICCV*, 2015.
- [73] Fei Ye and Adrian G Bors. Continual variational autoencoder learning via online cooperative memorization. In *ECCV*, 2022.
- [74] Fei Ye and Adrian G Bors. Self-evolved dynamic expansion model for task-free continual learning. In *ICCV*, 2023.
- [75] Michał Zając, Tinne Tuytelaars, and Gido M van de Ven. Prediction error-based classification for class-incremental learning. *ICLR*, 2024.
- [76] Friedemann Zenke, Ben Poole, and Surya Ganguli. Continual learning through synaptic intelligence. In *ICML*, 2017.
- [77] Chen Zeno, Itay Golan, Elad Hoffer, and Daniel Soudry. Task agnostic continual learning using online variational bayes. *arXiv preprint arXiv:1803.10123*, 2018.
- [78] Gengwei Zhang, Liyuan Wang, Guoliang Kang, Ling Chen, and Yunchao Wei. Slca: Slow learner with classifier alignment for continual learning on a pre-trained model. In *ICCV*, 2023.
- [79] Da-Wei Zhou, Qi-Wei Wang, Han-Jia Ye, and De-Chuan Zhan. A model or 603 exemplars: Towards memory-efficient class-incremental learning. *arXiv preprint arXiv:2205.13218*, 2022.
- [80] Da-Wei Zhou, Han-Jia Ye, De-Chuan Zhan, and Ziwei Liu. Revisiting class-incremental learning with pre-trained models: Generalizability and adaptivity are all you need. *arXiv preprint arXiv:2303.07338*, 2023.
- [81] Fei Zhu, Zhen Cheng, Xu-yao Zhang, and Cheng-lin Liu. Class-incremental learning via dual augmentation. *NeurIPS*, 2021.