

# Emergent Word Order Universals from Cognitively-Motivated Language Models

Tatsuki Kuribayashi<sup>1</sup> Ryo Ueda<sup>2</sup> Ryo Yoshida<sup>2</sup> Yohei Oseki<sup>2</sup>  
Ted Briscoe<sup>1</sup> Timothy Baldwin<sup>1,3</sup>

<sup>1</sup>Mohamed bin Zayed University of Artificial Intelligence

<sup>2</sup>The University of Tokyo <sup>3</sup>The University of Melbourne

{tatsuki.kuribayashi, ted.briscoe, timothy.baldwin}@mbzuai.ac.ae

{ueda-ryo796, yoshiryo0617, oseki}@g.ecc.u-tokyo.ac.jp

## Abstract

The world’s languages exhibit certain so-called typological or implicational universals; for example, Subject-Object-Verb (SOV) languages typically use postpositions. Explaining the source of such biases is a key goal of linguistics. We study word-order universals through a computational simulation with language models (LMs). Our experiments show that typologically-typical word orders tend to have lower perplexity estimated by LMs with cognitively plausible biases: syntactic biases, specific parsing strategies, and memory limitations. This suggests that the interplay of cognitive biases and predictability (perplexity) can explain many aspects of word-order universals. It also showcases the advantage of cognitively-motivated LMs, typically employed in cognitive modeling, in the simulation of language universals.

 <https://github.com/kuribayashi4/word-order-universals-cogLM>

## 1 Introduction

There are thousands of attested languages, but they exhibit certain universal tendencies in their design. For example, Subject-Object-Verb (SOV) word order often combines with postpositions, while SVO order typically employs prepositions (Greenberg et al., 1963). Researchers have argued that such implicational universals are not arbitrary but shaped by their advantage for humans (Hawkins, 2004; Culbertson et al., 2012, 2020).

Such language universals have been recently studied through neural-based computational simulation to elucidate the mechanisms behind the universals (Lian et al., 2023). The languages which emerge, however, have typically not been human-like (Chaabouni et al., 2019a,b; Rita et al., 2022; Ueda et al., 2022). Such mismatch arguably stems from the lack of human-like cognitive biases in neural agents (Galke et al., 2022), but injecting

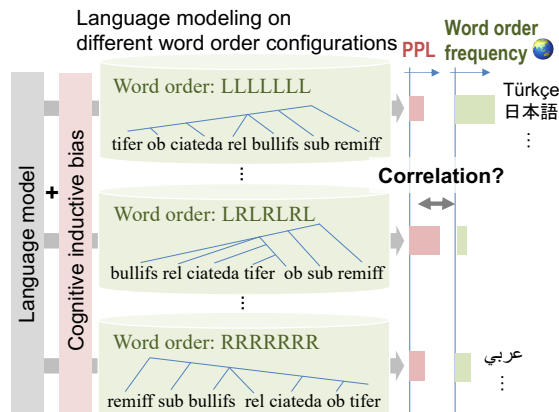


Figure 1: We compare the word orders that are challenging for LMs to those that are infrequent in attested languages (§3). We examine the advantage of cognitively-motivated LMs (§5) in simulating the word-order universals (the world’s word-order distribution) with their inductive biases (§6).

cognitive biases into systems and showing their benefits has proved challenging (Lian et al., 2021).

In this study, expanding on a study of word-order biases in language models (LMs: White and Cotterell (2021)), we demonstrate the advantage of *cognitively-motivated* LMs, which can simulate human cognitive load during sentence processing well (Hale et al., 2018b; Futrell et al., 2020a; Yoshida et al., 2021; Kuribayashi et al., 2022), and thus predict many implicational word-order universals in terms of their inductive biases (Figure 1). Specifically, we train various types of LMs in *artificial languages* with different word-order configurations (§3). Our experiments show that perplexities estimated by cognitively-motivated LMs (§5) correlate better with frequent word-order configurations in attested languages than standard LMs (§6). This confirms that such biases are a potential source of the word-order universals as well as demonstrate the plausibility of cognitively-motivated LMs as models of human language processing.

## 2 Related research

### 2.1 Impossible languages and LMs

Generative linguistic theory has focused on delineating the impossible from possible languages in terms of universal grammar. Chomsky et al. (2023) has recently argued that neural LMs cannot distinguish possible human languages from impossible, unnatural languages, based on the experiments by Mitchell and Bowers (2020), and are, therefore, of no interest to linguistic theory. Kallini et al. (2024) challenge this claim, demonstrating that a standard transformer-based autoregressive model (GPT-2) assigns higher perplexity and greater surprisal to a range of artificially-generated, unattested, and thus putatively impossible candidate languages when compared to English. In this work, by contrast, **we explore the ability of a variety of neural LMs to distinguish typologically rare combinations of word orders from the common attested combinations** as predicted by Greenberg’s implicational universals (Greenberg et al., 1963).

### 2.2 The Chomsky hierarchy and LMs

We test how easy it is to learn a specific artificial language (with a specific word-order configuration) for certain LMs. Such exploration is related to the investigation of the capabilities of neural LMs to generate formal, artificial languages in a specific class of the Chomsky hierarchy, such as irreducibly context-free (e.g., the Dyck languages) or mildly context-sensitive (e.g.,  $a^n b^n c^n$ ) languages (Weiss et al., 2018; Suzgun et al., 2019; Hewitt et al., 2020; Deletang et al., 2022). While this line of research can elucidate whether specific models (LSTMs, transformers, etc.) are capable in principle of expressing and generalizing such languages, and thus also generating their putative analogs in natural language, in this work **we focus on artificial languages which are more human language-like** in that they exhibit a range of attested construction types, a more realistic vocabulary, and are less marked in terms of features like average sentence length, at least compared to the formal languages adopted in this line of research (App. A).

### 2.3 Word order preferences of LMs

Researchers have asked *what kind of language is hard to language-model* (Cotterell et al., 2018; Mielke et al., 2019), motivated by concern over whether the current language-modeling paradigm is

equally suitable for all languages. However, experiments using only attested language corpora made it difficult to single out impactful factors since they differ from each other in multiple dimensions (Cotterell et al., 2018; Mielke et al., 2019). Thus, prior studies adopted the use of *artificially controlled* language(-like) data as a lens to quantify the inductive bias of models (Wang and Eisner, 2016; White and Cotterell, 2021; Hopkins, 2022). Specifically, White and Cotterell (2021) pointed out some differences between LM’s word-order preferences and common attested word orders (*typological markedness*). We expand on their research by exploring **which models, including cognitively-motivated ones, exhibit preferences more aligned with common typological patterns** (Figure 1).

### 2.4 Cognitively-motivated LMs

Cognitively-motivated LMs is a reference to a particular class of language model, typically examined and preferred in the cognitive modeling field. In brief, in the cognitive modeling field, the next-word probability and human reading behavior are compared (Beinborn and Hollenstein, 2023), based on surprisal theory (Levy, 2008; Smith and Levy, 2013), to reverse-engineer what humans compute during language processing. Cognitively-motivated LMs typically yield a better fit to human behaviors than standard LMs. In Section 5.2, we specifically focused on three aspects which are well established in the cognitive modeling literature: (i) syntactic bias (Hale et al., 2018b), (ii) parsing strategy (Resnik, 1992; Yoshida et al., 2021), and (iii) memory limitations (Futrell et al., 2020a; Kuribayashi et al., 2022). Our interest is that **if language design is shaped by cognitive biases, such cognitively-motivated LMs should simulate the typological distribution of natural languages**.

## 3 Preliminary

We explain the assumptions behind this research.

### 3.1 Need for computational simulation

This research aims to determine whether/how attested word order universals can stem from cognitive biases underlying human language processing. Perhaps the strongest evidence would be obtained through counterfactual ablations. That is, researchers should compare word orders that emerged in different, controlled scenarios: one emerged in our world with humans, and the other

one emerged in the same world except for having non-human agents. If the attested word order universals can emerge only in the scenario with humans, this can be evidence that the attested word order universal is related to human-like cognitive biases. Nevertheless, unfortunately, such a controlled ablation is not feasible in the real world. Instead, this study adopts computational simulation to explore the source of word order universals. That is, we virtually simulate several scenarios, each involving neural agents with different inductive biases, including human-like ones, and investigate under which biases our world’s word order universals can emerge.

### 3.2 Likning hypothesis

We further explain the assumptions underlying our computational simulations of the emergence of word order universals.

**Assumption 1:** Given the theory that language has evolved to promote its processing efficiency (Hawkins, 2004; Gibson et al., 2019), we posit that word orders frequently adopted in the world should be easily learned for human-like agents, and then, they can process it efficiently. That is, we assume that the frequency of word order  $o$  within the attested languages should correlate with its (negative) learning/processing cost:

$$\text{frequency}(o) \propto -\text{cost}(o) . \quad (1)$$

See §4.1 for word order configurations  $o$ .  
 See §4.2 for the frequency( $o$ ) term.  
 See §4.3 and assumption 2 for the cost( $o$ ) term.  
 See §4.4 for the correlation metrics  $\propto$ .

**Assumption 2:** We further posit that humans continuously predict the upcoming word during language processing, based on expectation-based theory (Levy, 2008; Smith and Levy, 2013). That is, we assume that the cost $_{\theta}(o)$  for a particular model  $\theta$  is determined by how the word order  $o$  is difficult to learn and then incurs worse predictability through next-word prediction. Such a processing difficulty is measured as the average processing cost required to process sentences with word order  $o$  for a particular model  $\theta$  trained over a certain period of time of language acquisition (language modeling). This can be quantified by *perplexity* (PPL),<sup>1</sup> the geometric mean of word predictability,

<sup>1</sup>Using the average surprisal  $-\frac{1}{|\mathbf{x}^o|} \sum_i \log p(x_i^o | \mathbf{x}_{<i}^o)$  (entropy) instead of PPL is more aligned with surprisal the-

of a corpus with tokens  $\mathbf{x}^o$  following word order  $o$  under a learner  $\theta$ :

$$\text{cost}_{\theta}(o) \sim \prod_{x_i^o \in \mathbf{x}^o} p_{\theta}(x_i^o | \mathbf{x}_{<i}^o)^{-\frac{1}{|\mathbf{x}^o|}} , \quad (2)$$

$$:= \text{PPL}_{\theta}(\mathbf{x}^o) . \quad (3)$$

Here,  $p_{\theta}(x_i^o | \mathbf{x}_{<i}^o)$  is a probability of the  $i$ -th word in context for a model  $\theta$  that is trained on a corpus with word order  $o$ . We analyze **which LM  $\theta$  computes PPL $_{\theta}(w^o)$  that well correlates with its typological frequency** as expected in Eq.1.

See §5 for LMs  $\theta$  we examine.

See §6.1 and §6.2 for main results.

See §6.3 for other variants of PPLs.

See §8 for the connection to the bi-dimensional view of communicative efficiency.

## 4 Problem settings

### 4.1 Word-order configurations

*Branching directionality*  $\color{red}{\text{B}} \in \{\text{L}, \text{R}\}$ , the concept of whether a dependent phrase is positioned left (L) or right (R) of its head in a particular constituent, is a key component of the typological theory. We define six word-order parameters to classify attested languages as shown in Table 1. For example, the parameter  $\color{red}{\text{S}}$  determines the order of the subject NP and the VP. Then, the combination of word order parameter assignments defines a word order configuration  $o = (\color{red}{\text{S}}, \color{red}{\text{VP}}, \color{red}{\text{PP}}, \color{red}{\text{NP}}, \color{red}{\text{Rel}}, \color{red}{\text{Case}}) \in \mathcal{O} := \{\text{L}, \text{R}\}^6$ , denoted by a sequence of L/R. For example, LRLLLR  $\in \mathcal{O}$  is the configuration where all phrases, except for VP and Case, are left-branching. Such parameter combinations result in  $2^6 = 64$  word order configurations.

### 4.2 Frequencies of word order

The 64 word-order configurations are not uniformly distributed among attested languages (blue points in Figure 2). This distribution is estimated by the frequency of word orders in The World Atlas of Language Structures (WALS: Dryer and Haspelmath (2013)),<sup>2</sup> which is also denoted as a vector  $\mathbf{f} =$

ory (Smith and Levy, 2013), but such a logarithmic conversion did not alter our findings (§7). Thus, we use PPL, following White and Cotterell (2021).

<sup>2</sup>We used the word order statistics of 1,616 languages, out of 2,679, where at least one parameter is annotated. If a particular parameter is missing or non-binary (X), one count

Param.	L	R
S	Cat eats.	Eats cat.
VP	Cat mouse eats.	Cat eats mouse.
PP	Cat table on eats.	Cat on table eats.
NP	Small cat eats.	Cat small eats.
Rel	Likes milk that cat eats.	Cat that likes milk eats.
Case	Cat-sub eats.	Sub-cat eats.

Table 1: Word-order parameters and example constructions with different assignments, L or R (See Apps. A and B and White and Cotterell (2021) for details).

[freq(LLLLLL), freq(LLLLLR), ..., freq(RRRRRR)]. Notably, particular configurations, typically with harmonic (consistent) branching-directionality, e.g., LLLLLL, LRRRRR, are common; such a skewed distribution (*typological markedness* or *word-order universals*) has been studied from multiple perspectives typically tied with human cognitive biases (Vennemann, 1974; Gibson et al., 2000; Briscoe, 2000; Levy, 2005; Christiansen and Chater, 2008; Culbertson et al., 2012; Temperley and Gildea, 2018; Futrell and Levy, 2019; Futrell et al., 2020b).

### 4.3 Processing costs of word order

**Artificial languages:** We quantify which word orders are harder for a particular LM. Here, we adopt<sup>3</sup> the set of artificial languages created by White and Cotterell (2021) as a lens to quantify the LMs’ biases. These languages share the same default probabilistic context-free grammar (PCFG) and differ from each other only in their word-order configuration  $o \in \mathcal{O}$  (§4.1) overriding the word order rules in the default grammar, resulting in  $2^6 = 64$  corpora with different word order  $o$ . Note that the 64 corpora generated have the same probabilities under the respective grammar and gold parser; thus, differences in language-modeling difficulties can only stem from the model’s biases. See App. A for the detailed configurations of artificial languages.

<sup>3</sup>is distributed between its compatible word orderings, e.g., LLLLLL, LLLLLR, LRLLLR, and LRLRRR each gets a 1/4 count for LXLXR. See App. B for the details of the WALS.

<sup>3</sup>We introduce the Case parameter determining the position of case marker, while White and Cotterell (2021) fixed it to be L. We omitted the Comp switch controlling the complementizer position, e.g., “that,” due to the lack of large-scale statistics on its order. We experimented with prepositional and postpositional complementizer settings in each of the 64 settings and used the average perplexities of the two settings.

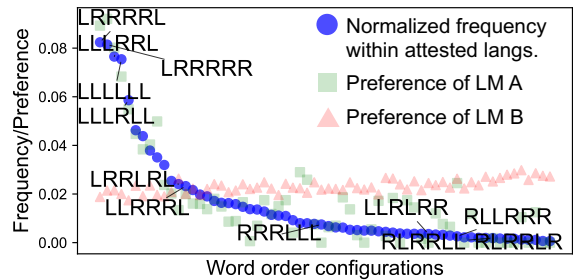


Figure 2: The frequency distribution of  $2^6 = 64$  word-order configurations within attested languages (blue points) sorted in descending order. Suppose particular LMs A/B prefer word order as green/red points. The LM A (green points) is considered to have typologically more aligned inductive bias than the LM B (red points).

**Quantifying perplexities:** We train an LM on each corpus with word order  $o$  and measure the PPL of tokens  $x^o$  in the respective held-out set. Repeatedly conducting the training/evaluation across the 64 corpora produces a PPL score vector,  $\mathbf{PPL}_\theta = [\text{PPL}_\theta(x^{\text{LLLLLL}}), \text{PPL}_\theta(x^{\text{LLLLLR}}), \text{PPL}_\theta(x^{\text{LLLLRL}}), \dots, \text{PPL}_\theta(x^{\text{RRRRRR}})]$ , which indicates the *word-order preferences* of an LM.

### 4.4 Frequency-perplexity correlations

**Global correlation:** We measure the Pearson correlation coefficient  $r(\cdot, \cdot)$  between word order frequencies  $f$  (§4.2) and their *negative*  $\mathbf{PPL}_\theta$  (§4.3), considering *lower* PPL is better. We call  $r(f, -\mathbf{PPL}_\theta)$  *global correlation*. A high global correlation indicates that the LMs’ word-order preferences reflect typological markedness.

**Local correlation:** White and Cotterell (2021) reported that simulating the word-order distribution among subject, object, and verb (SOV > SVO > VOS > OVS), which is determined by the first two parameters of S and VP, is challenging. Therefore, we assess how easy it is to simulate the markedness of the other parameters’ assignments. Specifically, we measure a relaxed version of the correlation ignoring the subject, object, and verb order (*local correlation*), which is defined by the averaged correlation within each base word-order group: SOV ( S = L, VP = L), SVO ( S = R, VP = L), OVS ( S = L, VP = R), and VOS ( S = R, VP = R).

$$\frac{1}{4} (r(f^{\text{SOV}}, -\text{PPL}_\theta^{\text{SOV}}) + r(f^{\text{SVO}}, -\text{PPL}_\theta^{\text{SVO}}) + r(f^{\text{OVS}}, -\text{PPL}_\theta^{\text{OVS}}) + r(f^{\text{VOS}}, -\text{PPL}_\theta^{\text{VOS}})) . \quad (4)$$



Here,  $f^X$  and  $\text{PPL}_\theta^X$  are the list of frequencies and perplexities, limited to the languages with the assignments of  $\text{S}$  and  $\text{VP}$  corresponding to  $X$ . If this relaxed correlation is high and the global correlation is low, the ordering of subject, object, and verb remains challenging, and indeed, this is the case (see §7.1).

## 5 Models

We examine 23 types of uni-directional LMs, which adopt subwords split by byte-pair-encoding (Sennrich et al., 2016) and are trained for 10 epochs. For each type of LM, we train/evaluate five models with different random seeds. In each run, 20K sentences (train:dev:test is 8:1:1) are generated from PCFG to train/evaluate the model. See App. C for model details.

### 5.1 Standard LMs

We test the PPL estimated by a Transformer (Vaswani et al., 2017), LSTM (Hochreiter and Schmidhuber, 1997), simple recurrent neural network (SRN) (Elman, 1990), and N-gram LMs.<sup>4</sup> See App. C.2 for the model details.

### 5.2 Cognitively-motivated LMs

We further test cognitively-motivated LMs employed in cognitive modeling and incremental parsing, mentioned in §2.4. We target three properties: (i) syntactic inductive/processing bias, (ii) parsing strategy, and (iii) working memory limitations, following recent works in cognitive modeling research (Dyer et al., 2016; Hale et al., 2018b; Resnik, 1992; Oh et al., 2021; Yoshida et al., 2021; Futrell et al., 2020a; Kuribayashi et al., 2022).

**Syntactic LMs and parsing strategy:** We begin with *syntactic* LMs to explore the cognitively-motivated LMs. Under a particular word order configuration  $o$ , they jointly predict tokens  $x^o$  and their syntactic structures  $y^o$  by incrementally predicting parsing actions  $a^o$ , such as “NT(S) NT(NP) GEN(I) REDUCE(NP)...”:

$$p_\theta(x^o, y^o) = \prod_t p_\theta(a_t^o | a_{<t}^o) \quad (5)$$

Here, we examine two commonly-adopted strategies to convert the  $(x^o, y^o)$  into the actions  $a^o$ : top-down (TD) and left-corner (LC) strategies (Kun-

<sup>4</sup>Neural LMs are trained with the fairseq toolkit (Ott et al., 2019). N-gram LMs are trained with the KenLM toolkit (Heafield, 2011) with Kneser-Ney smoothing.

coro et al., 2017).<sup>5</sup> The LC strategy is theoretically expected to estimate more human-like cognitive loads than the TD (Abney and Johnson, 1991; Resnik, 1992) in a sense that LC parsers can estimate the cognitive load of center-embedding constructions, typically with disharmonic word order configurations, which tend to be avoided by humans (Miller and Isard, 1964).<sup>6</sup>

**Memory limitation:** Humans generally have limited working memory (Miller, 1956) and struggle with processing long-distance dependencies during sentence processing (Hawkins, 1994; Gibson et al., 2019; Hahn et al., 2021). We thus expect that model architectures with more severe memory access, e.g., in the order of SRN>LSTM>Transformer, have such human-like biases and exhibit higher correlations with the word-order universals. We also apply such a memory limitation to syntactic LMs (next paragraph). We expect that memory-limited syntactic LMs can softly reflect the stack-depth, a standard concept of working memory demand (Abney and Johnson, 1991; Noji and Miyao, 2014), since the requirement of more stack depth needs the model to maintain longer parsing histories, presumably incurring a high cost for memory-limited syntactic LMs (Jin and Schuler, 2020).

**Implementations:** We train (i) Parsing-as-Language-Model (PLM) (Choe and Charniak, 2016) and (ii) recurrent neural network grammar (RNNG) (Dyer et al., 2016; Kuncoro et al., 2017), using the syntactic structures obtained during generating the corpus from PCFG (§4.3). PLMs are the same as standard LMs expect that they are trained on the action sequences  $a$ . Four PLMs with different architectures (Transformer, LSTM, SRN, and N-gram) are trained. RNNGs also predict the action sequences, but they have an explicit composition function to compute phrase representations. We use the stack-only RNNG implementation by Noji and Oseki (2021), and we newly introduce its memory-limited version (simple recurrent neural network grammar; SRNNG), where (Bi)LSTMs are replaced by SRNs. Note that the cognitive plausibility of RNNGs has

<sup>5</sup>TD and LC are also denoted as pre-order and in-order traversals, respectively.

<sup>6</sup>We adopted the arc-standard LC strategy, following Kuncoro et al. (2018) and Yoshida et al. (2021). Strictly speaking, an arc-eager LC strategy is cognitively plausible, and an arc-standard one has similar characteristics with bottom-up traversal (Resnik, 1992). That is, our LC results may be biased towards L assignments.

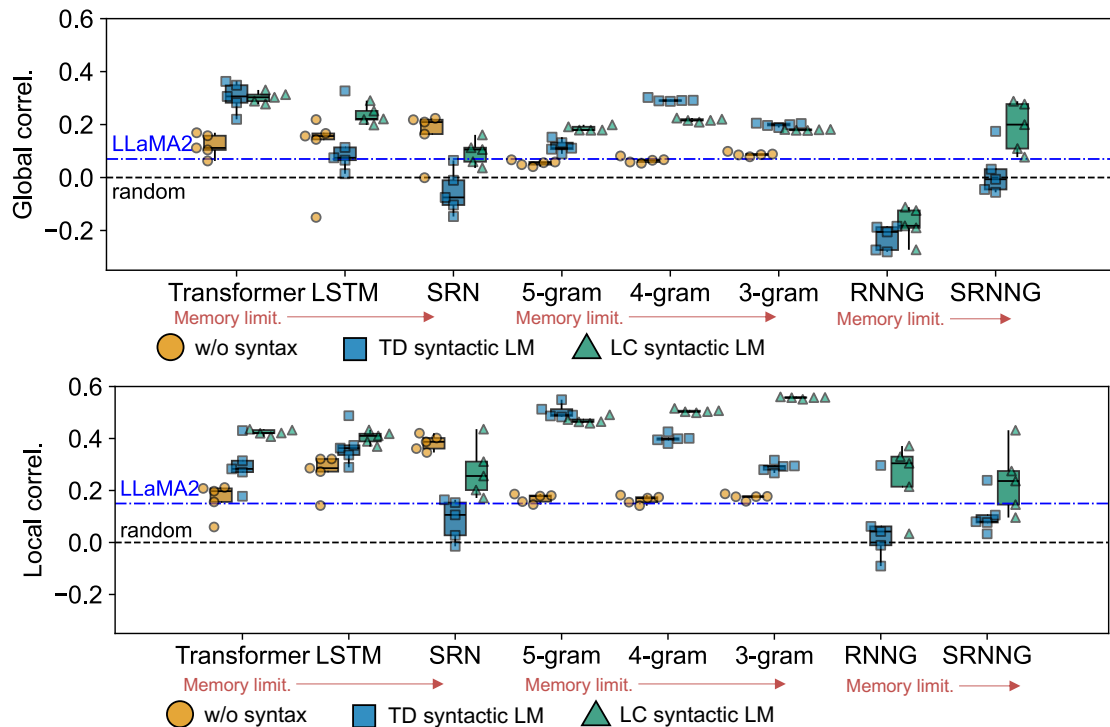


Figure 3: The results of global/local correlations. Each point corresponds to each run. Their colors and shapes denote the syntactic bias of the models. The TD and LC variants in the Transformer, LSTM, SRN, and N-gram settings correspond to the respective PLMs. The box presents the lower/upper quartiles.

been reported in both cognitive modeling (Hale et al., 2018a; Yoshida et al., 2021) and language generalization test (Kuncoro et al., 2018; Wilcox et al., 2019). Henceforth, *syntactic LMs* refer to the PLMs and (S)RNNs.

**PPL computation:** We measure the PPL over action sequences in each word order  $o$  when quantifying the word-order preference of syntactic LMs (§4.3):  $\text{PPL}_\theta(\mathbf{x}^o, \mathbf{y}^o) := \prod_t p_\theta(a_t^o | \mathbf{a}_{<t}^o)^{\frac{1}{|\mathbf{a}^o|}}$ . We also examine a token-level predictability  $\text{PPL}_\theta(\mathbf{x}^o)$  in §8 and App. D.1, but such variations did not alter the conclusions.

### 5.3 Baselines

We set two baselines: (i) a chance rate with random assignments of perplexities (gray lines in Figure 3), and (ii) perplexities estimated by pre-trained LLaMA2 (7B) (Touvron et al., 2023), a representative of the large language models (LLMs), prompted with several example sentences (blue lines in Figure 3) (App. C.3) as a naive baseline.

## 6 Experiments

We compare the LM’s word-order preferences with attested word-order distributions (§6). Then, we

further analyze what kind of word-order combinations LMs prefer (§7).

### 6.1 Results

Figure 3 shows global and local correlations (see App. D for the full results). The TD  $\blacksquare$  and LC  $\blacktriangle$  variations of the Transformer, LSTM, SRN, and N-gram LMs correspond to the PLMs with their respective architecture. We expect syntactic LMs with the LC strategy to exhibit higher correlations than the LMs without syntactic biases ( $\blacktriangle > \circ$ ) and those with cognitively unmotivated TD syntactic bias ( $\blacktriangle > \blacksquare$ ).

**Most LMs beat the chance rate:** Overall, most global and local correlations were higher than the random baseline, reproducing the general trend that common word orders induce lower PPL (Hahn et al., 2020).<sup>7</sup> As a sanity check, we also observed that the LLaMA-2 exhibited weaker correlations than cognitively-motivated LMs; the current success of LLMs is orthogonal to our results.

<sup>7</sup>With a one-sample, one-sided t-test, models except for LSTM LM, TD SRN PLM, TD RNNG, LC RNNG, TD SRNNG yielded global correlations significantly larger than zero, and models except for TD RNNG yielded local correlations significantly larger than zero.

**Syntactic biases and parsing strategies:** First, the LC syntactic LMs generally outperformed the standard LMs ( $\triangle > \circ$ ) in each setting except for SRNs. This indicates the **advantage of cognitively-motivated syntactic biases in simulating the word-order universals**. Second, LMs with the LC strategy tend to exhibit higher correlations than TD syntactic LMs ( $\triangle > \square$ ), especially in terms of local correlation. That is, **the cognitively-motivated LC parsing strategy better simulates the word-order implicational universals**. Note that RNNs, on average, exhibited low correlations, although they are often claimed to be cognitively plausible LMs.

**Memory limitation:** The results show that memory-limited models tend to exhibit better correlations, with the exception of PLMs. In particular, **RNNs typically benefited from memory limitations** (SRNNG  $\succ$  RNNG), while PLMs did not (SRN  $\prec$  Transformer). This implies a superiority of RNNs’ memory decay over hierarchical tree encoding to PLMs’ simple linear memory decay.

## 6.2 Statistical test

**Settings:** We statistically test the advantage of cognitively-motivated factors toward higher correlations. Specifically, we train the following regression model to predict the global or local correlation scores obtained in the experiment (§6.1):<sup>8</sup>

$$r(\mathbf{f}, -\text{PPL}_\theta) \sim \text{ModelClass}(\theta) + \text{MemLim}(\theta) + \text{Syntax}(\theta) + \text{LC}(\theta) . \quad (6)$$

Here, ModelClass denotes the coarse type (e.g., neural model or not) of the model  $\theta$  yielding the respective correlation score, MemLim denotes its strength of context limitation (higher is severer, e.g., SRN  $\succ$  LSTM  $\succ$  Transformer), Syntax denotes whether the model is syntactic LMs (1 for syntactic LMs; otherwise 0), and LC denotes whether the model uses the LC strategy (1 for LC syntactic LMs; otherwise 0). Positive coefficients for these features indicate their contribution to higher correlations. See App. E for the details of the regression.

**Results:** We observe that the coefficients for the Syntax and LC features were significantly larger than zero with one-sample, two-sided t-test in both cases of predicting global and local correlations.<sup>9</sup>

<sup>8</sup>We used the statsmodels (Seabold and Perktold, 2010).

<sup>9</sup> $p = 0.07$  for the Syntax and  $p < 0.05$  for the LC in the case of global correlation.  $p < 0.01$  for the Syntax and  $p < 0.01$  for the LC in the case of local correlation.

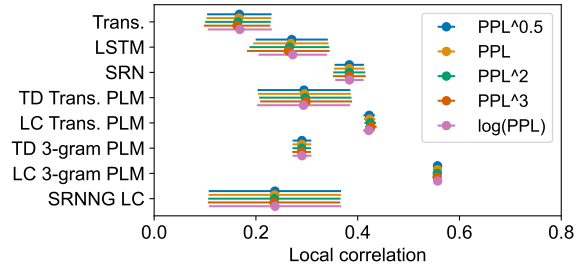


Figure 4: Mean and standard deviation of local correlations with different linking functions: PPL of order  $k$  and logarithmic PPL

The coefficient for the MemLim feature was not significantly larger than zero when targeting all the models ( $p > 0.1$ ); however, when PLMs were excluded, the coefficient of the MemLim feature was also significantly larger than zero with one-sample, two-sided t-test ( $p < 0.001$  in both global and local correlations) as suggested in §6.1. To sum up, **these corroborate the findings in §6.1**.

## 6.3 Linking functions

The experiments so far have assumed the linearity between PPL and word-order frequency (Eq. 1)—did this choice bias our results? We investigated various linking functions between PPL and word order frequency: the perplexity of order  $k$  and logarithmic PPL (entropy). Our findings robustly hold with other linking functions (full results are in Appendix D.2). Figure 4 illustrates LMs’ local correlations under differently converted perplexities.

## 7 Analyses: what kind of word order is particularly (un)preferred?

### 7.1 {S,O,V} word-order biases

**Observation:** White and Cotterell (2021) reported that LMs could not show the subject, object, verb word-order biases attested in natural language (SOV  $\succ$  SVO  $\succ$  VOS  $\succ$  OVS). Even our cognitively-motivated LMs did not overcome this limitation, based on the global correlations being consistently lower than the local ones (§6.1; Figure 3). This tendency is visualized in Figure 5; within each base group (SOV, SVO, OVS, VOS), common word orders tend to obtain high predictability (i.e., lower PPL; bigger circles are at the top) except OVS-order’s high predictability and SVO-order’s low predictability. This made it clear that predictability generally explains word-order universals, but the markedness of word orders among subject, object, and verb must stem from additional factors.

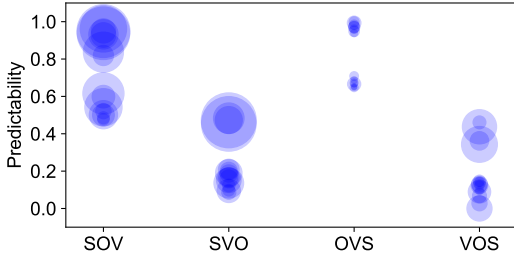


Figure 5: Illustration of the relationship between predictability (y-axis) and word order frequency in each of the four base-order groups (SOV, SVO, OVS, and VOS). Each circle corresponds to each word order; larger ones are frequent word orders. Predictability is the negative PPL converted through the min-max normalization; thus higher predictability indicates lower PPL. The results are from the 3-gram PLM with the LC strategy.

**Implication:** This finding is consistent with: (i) humans arguably have an agent-first bias in event cognition, which could be the source of the subject-initial word order (Wilson et al., 2022); and (ii) agent-preference in human sentence processing cannot be explained by surprisal estimated by neural LMs in N400 amplitudes modeling (Huber et al., 2024). Our findings corroborate that cognitively-motivated LMs still lack such a human-like bias. Orthogonally, the artificial language ignores some important linguistic aspects, such as information structure (Gundel, 1988; Verhoeven, 2015; Ranjan et al., 2022), which may explain subject-object order; refining the artificial data would also be one direction to explore in future work.

## 7.2 Branching directionality preferences

**Settings:** Human languages, on average, do not favor either left- or right-branching (Dryer and Haspelmath, 2013). Given this, we measure how strongly a model prefers a specific branching directionality. We calculate the Pearson correlation (L-pref.) between negative PPL and the number of L assignments  $\#L(\cdot)$ <sup>10</sup> of the word order:

$$r(\mathbf{l}, -\text{PPL}_\theta), \quad (7)$$

$$\mathbf{l} := [\#L(\text{LLLLL}), \#L(\text{LLLLR}), \dots, \#L(\text{RRRRR})]. \quad (8)$$

As a sanity check, the word-order frequency distribution of attested languages, indeed, is weakly correlated (0.11) with the left-branching directionality. Thus, LMs are not expected to have an extremely high or low L-pref. score. Notably, the branching

bias of LMs/parsers has been of interest in the NLP research (Li et al., 2020a,b; Ishii and Miyao, 2023).

**Results:** Figure 6 shows the results of branching preferences. LMs with the TD strategy are theoretically expected to have a lower L-pref. score (favoring right-branching) than the LC models (Resnik, 1992) ( $\blacksquare < \blacktriangle$ ). While the PLMs faithfully reflect such characteristics, RNNs, surprisingly, exhibited opposite trends, suggesting the challenge in controlling the inductive bias of neural syntactic LMs. We also observed architecture-dependent branching preference; Transformers prefer left-branching, while LSTMs prefer right-branching as suggested by Hopkins (2022). Such architecture-dependent biases seem to have more impact on the branching preferences than the parsing strategies in PLMs.

## 8 Connection to predictability and parsability

**Background:** Human language is arguably designed to minimize *complexity* (how unpredictable symbols are) while maintaining *informativity* (how easy it is to extract a message from symbols) (i Cancho and Solé (2003); Piantadosi et al. (2012); Kemp and Regier (2012); Frank and Goodman (2012); Kirby et al. (2015); Kanwal et al. (2017); Gibson et al. (2019); Xu et al. (2020); Hahn et al. (2020); *inter alia*). We revisit this bi-dimensional view. Concretely, Hahn et al. (2020) showed that both PPL of an LM and parsability for a (not-cognitively-motivated) parser (Kiperwasser and Goldberg, 2016) explain word-order universals.

**Overview:** We demonstrate that predictability (PPL)<sup>11</sup> of syntactic LMs entails parsability. That is, they can provide a more concise information-theoretic measurement of word-order universals (*syntactically-biased predictability*).

**Settings:** We decompose the performance of syntactic LMs into two parts: token-level perplexity  $\text{PPL}_\theta(\mathbf{x}^o)$  (predictability) and parsing performance  $\text{parse}_\theta(\mathbf{x}^o, \mathbf{y}^o)$  (parsability), using word-synchronous beam-search (Stern et al., 2017). When computing the token-level predictability  $\text{PPL}_\theta(\mathbf{x}^o)$ , next-word probability is computed while predicting the upcoming partial syntactic

<sup>11</sup>Predictability is typically measured as entropy, but again, the choice of entropy or PPL did not substantially change the correlation scores (See §6.3 and App. D.2).

<sup>10</sup>For example,  $\#L(\text{LLLRL}) = 5$ .



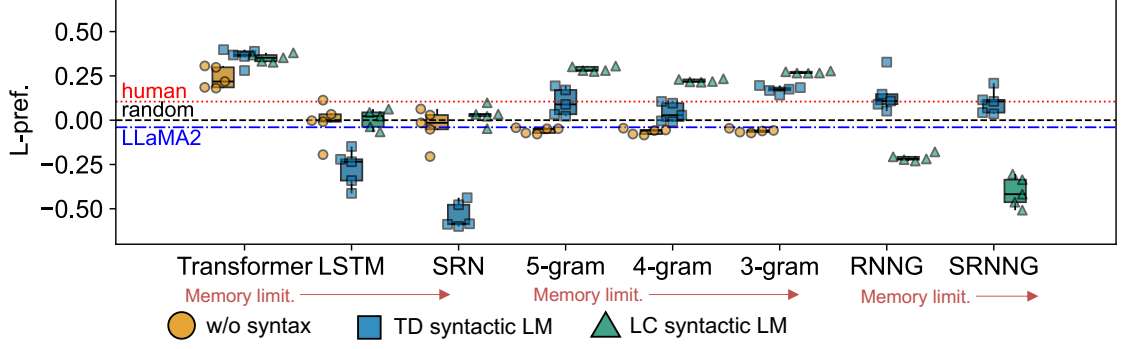


Figure 6: The results of branching directionality scores. Each point corresponds to each run. The colors and shapes denote the syntactic bias of the models. The TD and LC variants in the Transformer, LSTM, SRN, and N-gram settings correspond to the respective PLMs. The box presents the lower/upper quartiles.

trees.<sup>12</sup> We measure  $\text{parse}_\theta(\mathbf{x}^o, \mathbf{y}^o)$  as the F1-score of the top-1 parse found with the beam search.<sup>13</sup> Then, we test whether the parsability factor contributes to explaining the frequency of word order  $o$  in addition to PPL, using the following nested regression models:

**Base:**  $\text{freq}(o) \sim \text{PPL}_\theta(\mathbf{x}^o)$ ,

**+Parse:**  $\text{freq}(o) \sim \text{PPL}_\theta(\mathbf{x}^o) + \text{parse}_\theta(\mathbf{x}^o, \mathbf{y}^o)$ .

**Results:** The increase in log-likelihood scores of the **+Parse** model over the **Base** model is not significant with the likelihood-ratio test ( $p > 0.1$ ) in all the RNNG settings ( $\{\text{TD}, \text{LC}\} \times \{\text{SRNNG}, \text{RNNG}\} \times \{\text{seeds}\}$ ).<sup>14</sup> That is, at least in our setting, we cannot find an advantage of parsability over predictability in explaining word-order universals. This may be because the next-word prediction for the syntactic LMs is explicitly conditioned by the parsing states, which might sufficiently bias the predictability measurements to reflect parsability.

Figure 7 also illustrates the predictability and parsability estimated by the LC SRNNG. Here, the predictability identifies more types of word orders as typologically marked (left small circles) than the parsability does (bottom small circles). This is contrary to the picture of both predictability and parsability as complementary factors explaining word-order universals (Hahn et al., 2020). Nevertheless, our artificial data could be easier to parse

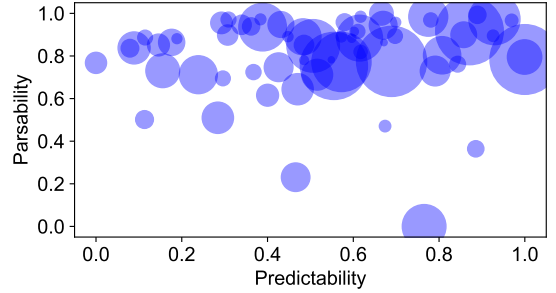


Figure 7: Predictability and parsability of each word order. These measurements are converted through the min-max normalization to be [0, 1] scale (higher is better). Each circle corresponds to each word order; larger ones are frequent word orders.

than natural language in the sense that our data have less structural ambiguity; thus, future work should explore this using more real artificial language.

## 9 Conclusions

We have shown that cognitively-motivated LMs better led to the emergence of word-order universals than standard LMs. From the linguistic typology perspective, we provide computational evidence that the universals emerge from cognitive biases, which has been challenging to demonstrate in previous work (Lian et al., 2021; Galke et al., 2022). From the cognitive modeling perspective, our results demonstrate that cognitively-motivated LMs have human-like biases that are sufficient to replicate some human word-order universals. Our results also clarified what typological patterns can still not be modeled by cognitively-motivated LMs (agent-first bias), as well as opened the direction to relate LMs in the traditional linguistic theory of delineating possible language from the impossible.

<sup>12</sup> $\text{PPL}_\theta(\mathbf{x}^o) := \prod_t p_{\text{stx}}(x_t^o | \mathbf{x}_{<t}^o)^{\frac{1}{|\mathbf{x}^o|}}$ .  $p_{\text{stx}}(x_t^o | \mathbf{x}_{<t}^o) := \sum_{y' \in \mathcal{Y}(\mathbf{x}_{<t}^o)} p(x_t^o, y' | \mathbf{x}_{<t}^o)$  Here, given a context  $\mathbf{x}_{<t}$ , a set of its upcoming compatible partial syntactic trees  $\mathcal{Y}(\mathbf{x}_{<t})$  is predicted. Next word  $x_t^o$  is predicted by each candidate parse  $y' \in \mathcal{Y}(\mathbf{x}_{<t}^o)$ , then such predictions are merged over  $\mathcal{Y}(\mathbf{x}_{<t}^o)$ .

<sup>13</sup>Evalb (<https://nlp.cs.nyu.edu/evalb/>) was used.

<sup>14</sup>We only tested RNNGs given the limited availability of batched beam-search implementations (Noji and Oseki, 2021).

## Limitations

**Artificial language:** We used artificial data to quantify the LMs’ inductive/processing biases for word-order configurations. While the use of artificial languages has typically been adopted to conduct controlled experiments (§2.2), such artificial data lack some properties of natural languages, such as the semantic relationships between the linguistic constituents (§7.1). In future work, we hope to devise further artificially controlled languages that exhibit some of these properties.

In addition, our PCFG implementation of artificial languages and word-order configurations unreasonably limited the candidate word-order variations; for example, the production rules (i)  $S \rightarrow NP_{\text{subject}} VP$ , and (ii)  $VP \rightarrow NP_{\text{object}} Verb$  could not produce variations with V and O apart (VSO and OSV) (Table 12). Exploring more flexible ways to create and cover artificial language variations will be another interesting direction.

Furthermore, our used data (White and Cotterell, 2021) is relatively small scale, which might incur unintended bias in LM performance, although there is a perspective to analyze inductive bias via measuring training efficiency (Kharitonov and Chaabouni, 2021; Warstadt et al., 2023).

**Estimating word-order distribution:** The word order frequency estimates derived from WALS might also be biased; for example, Indo-European languages tend to have richer meta-linguistic information in WALS, although our study takes the statistics from as many as 1,616 languages into account. A richer estimation of missing parameter information is desirable. As a more general concern, the frequency of a word-order configuration can be estimated in various ways, such as the number of native speakers or the number of language families adopting a particular word order. Furthermore, word order variation can be inherently non-binary (Levshina et al., 2023). Our study, as an initial foray, relied on the number of unique languages, a commonly used metric in linguistic typology research (Dryer and Haspelmath, 2013; Hammarström, 2016), considering that other approaches raise additional complications, such as an estimation of the speaker numbers or language family variability.

## Ethical Considerations

We only used artificial language, which does not have information with potential risks, e.g., human privacy data. One concern is the bias in our word order frequency estimates; this might have led to biased conclusions, e.g., diminishing the impact of minority languages, although we used the largest publicly available data (WALS) to date. We used AI assistance tools within the scope of “Assistance purely with the language of the paper” described in the ACL 2023 Policy on AI Writing Assistance.

## Acknowledgements

We are grateful to Ana Brassard, Benjamin Heinzlering, Tatsuro Inaba, Go Inoue, and Yova Kementchedjhieva for their insightful comments on an early version of this study. This work was supported by JST PRESTO Grant Number JPMJPR21C2, Japan.

## References

- Steven P Abney and Mark Johnson. 1991. *Memory requirements and local ambiguities of parsing strategies*. *J. Psycholinguist. Res.*, 20(3):233–250.
- Lisa Beinborn and Nora Hollenstein. 2023. *Cognitive Plausibility in Natural Language Processing*. Springer Nature.
- Ted Briscoe. 2000. *Grammatical acquisition: Inductive bias and coevolution of language and the language acquisition device*. *Language*, pages 76.2 245–296.
- Rahma Chaabouni, Eugene Kharitonov, Emmanuel Dupoux, and Marco Baroni. 2019a. *Anti-efficient encoding in emergent communication*. *Proceedings of NeurIPS 2019*, 32.
- Rahma Chaabouni, Eugene Kharitonov, Alessandro Lazaric, Emmanuel Dupoux, and Marco Baroni. 2019b. *Word-order biases in deep-agent emergent communication*. In *Proceedings of ACL 2019*, page 5166–5175.
- Do Kook Choe and Eugene Charniak. 2016. *Parsing as language modeling*. In *Proceedings of EMNLP 2016*, pages 2331–2336.
- N Chomsky, I Roberts, and J Watumull. 2023. *Noam chomsky: The false promise of ChatGPT*. *NY Times*.
- Morten H Christiansen and Nick Chater. 2008. *Language as shaped by the brain*. *Behav. Brain Sci.*, 31(5):489–508; discussion 509–58.
- Ryan Cotterell, Sabrina J. Mielke, Jason Eisner, and Brian Roark. 2018. *Are all languages equally hard to language-model?* In *Proceedings of NAACL 2018*, pages 536–541.

- Jennifer Culbertson, Marieke Schouwstra, and Simon Kirby. 2020. [From the world to word order: Deriving biases in noun phrase order from statistical properties of the world](#). *Language*, 96(3):696–717.
- Jennifer Culbertson, Paul Smolensky, and Géraldine Legendre. 2012. [Learning biases predict a word order universal](#). *Cognition*, 122(3):306–329.
- Gregoire Deletang, Anian Ruoss, Jordi Grau-Moya, Tim Genewein, Li Kevin Wenliang, Elliot Catt, Chris Cundy, Marcus Hutter, Shane Legg, Joel Veness, et al. 2022. [Neural networks and the chomsky hierarchy](#). In *Proceedings of ICLR 2022*.
- Matthew S. Dryer. 2013a. [Order of adjective and noun \(v2020.3\)](#). In Matthew S. Dryer and Martin Haspelmath, editors, *The World Atlas of Language Structures Online*. Zenodo.
- Matthew S. Dryer. 2013b. [Order of adposition and noun phrase \(v2020.3\)](#). In Matthew S. Dryer and Martin Haspelmath, editors, *The World Atlas of Language Structures Online*. Zenodo.
- Matthew S. Dryer. 2013c. [Order of object and verb \(v2020.3\)](#). In Matthew S. Dryer and Martin Haspelmath, editors, *The World Atlas of Language Structures Online*. Zenodo.
- Matthew S. Dryer. 2013d. [Order of relative clause and noun \(v2020.3\)](#). In Matthew S. Dryer and Martin Haspelmath, editors, *The World Atlas of Language Structures Online*. Zenodo.
- Matthew S. Dryer. 2013e. [Order of subject and verb \(v2020.3\)](#). In Matthew S. Dryer and Martin Haspelmath, editors, *The World Atlas of Language Structures Online*. Zenodo.
- Matthew S. Dryer. 2013f. [Order of subject, object and verb \(v2020.3\)](#). In Matthew S. Dryer and Martin Haspelmath, editors, *The World Atlas of Language Structures Online*. Zenodo.
- Matthew S. Dryer. 2013g. [Position of case affixes \(v2020.3\)](#). In Matthew S. Dryer and Martin Haspelmath, editors, *The World Atlas of Language Structures Online*. Zenodo.
- Matthew S. Dryer and Martin Haspelmath, editors. 2013. [WALS Online \(v2020.3\)](#). Zenodo.
- Chris Dyer, Adhiguna Kuncoro, Miguel Ballesteros, and Noah A. Smith. 2016. [Recurrent neural network grammars](#). In *Proceedings of NAACL 2016*, pages 199–209.
- Jeffrey L. Elman. 1990. [Finding structure in time](#). *Cogn. Sci.*, 14(2):179–211.
- Michael C. Frank and Noah D. Goodman. 2012. [Predicting pragmatic reasoning in language games](#). *Science*, 336(6084):998.
- Richard Futrell, Edward Gibson, and Roger P. Levy. 2020a. [Lossy-Context Surprisal: An Information-Theoretic Model of Memory Effects in Sentence Processing](#). *Journal of Cognitive Science*.
- Richard Futrell and Roger P. Levy. 2019. [Do RNNs learn human-like abstract word order preferences?](#) In *Proceedings of the Society for Computation in Linguistics (SCiL) 2019*, pages 50–59.
- Richard Futrell, Roger P. Levy, and Edward Gibson. 2020b. [Dependency locality as an explanatory principle for word order](#). *J. Lang. Soc. Psychol.*
- Lukas Galke, Yoav Ram, and Limor Raviv. 2022. [Emergent communication for understanding human language evolution: What’s missing?](#) In *Emergent Communication Workshop at ICLR 2022*.
- Edward Gibson, Richard Futrell, Steven P. Piantadosi, Isabelle Dautriche, Kyle Mahowald, Leon Bergen, and Roger Levy. 2019. [How efficiency shapes human language](#). *Trends Cogn. Sci.*, 23(5):389–407.
- Edward Gibson et al. 2000. [The dependency locality theory: A distance-based theory of linguistic complexity](#). *Image, language, brain*, 2000:95–126.
- Joseph H. Greenberg et al. 1963. [Some universals of grammar with particular reference to the order of meaningful elements](#). *Universals of language*, 2:73–113.
- Jeanette K. Gundel. 1988. [Universals of topic-comment structure](#). *Studies in syntactic typology*, 17(1):209–239.
- Michael Hahn, Judith Degen, and Richard Futrell. 2021. [Modeling word and morpheme order in natural language as an efficient trade-off of memory and surprisal](#). *Psychological review*, 128(4):726–756.
- Michael Hahn, Dan Jurafsky, and Richard Futrell. 2020. [Universals of word order reflect optimization of grammars for efficient communication](#). *Proc. Natl. Acad. Sci. U. S. A.*, 117(5):2347–2353.
- John Hale, Chris Dyer, Adhiguna Kuncoro, and Jonathan Brennan. 2018a. [Finding syntax in human encephalography with beam search](#). In *Proceedings of ACL 2018*, pages 2727–2736.
- John Hale, Chris Dyer, Adhiguna Kuncoro, and Jonathan R. Brennan. 2018b. [Finding Syntax in Human Encephalography with Beam Search](#). In *Proceedings of ACL 2018*, pages 2727–2736.
- Harald Hammarström. 2016. [Linguistic diversity and language evolution](#). *Journal of Language Evolution*, 1(1):19–29.
- John A. Hawkins. 1994. *A performance theory of order and constituency*. 73. Cambridge University Press.
- John A. Hawkins. 2004. *Efficiency and complexity in grammars*. OUP Oxford.


- Kenneth Heafield. 2011. [KenLM: Faster and smaller language model queries](#). In *Proceedings of the Sixth Workshop on Statistical Machine Translation*, pages 187–197.
- John Hewitt, Michael Hahn, Surya Ganguli, Percy Liang, and Christopher D. Manning. 2020. [RNNs can generate bounded hierarchical languages with optimal memory](#). In *Proceedings of EMNLP 2020*, pages 1978–2010.
- Sepp Hochreiter and Jürgen Schmidhuber. 1997. [Long Short-Term Memory](#). *Journal of Neural Computation*, 9(8):1735–1780.
- Mark Hopkins. 2022. [Towards more natural artificial languages](#). In *Proceedings of CoNLL 2022*, pages 85–94.
- Eva Huber, Sebastian Sauppe, Arrate Isasi-Isasmendi, Ina Bornkessel-Schlesewsky, Paola Merlo, and Balthasar Bickel. 2024. [Surprisal From Language Models Can Predict ERPs in Processing Predicate-Argument Structures Only if Enriched by an Agent Preference Principle](#). *Neurobiology of Language*, 5(1):167–200.
- Ramon Ferrer i Cancho and Ricard V Solé. 2003. [Least effort and the origins of scaling in human language](#). *Proceedings of the National Academy of Sciences*, 100(3):788–791.
- Taiga Ishii and Yusuke Miyao. 2023. [Tree-shape uncertainty for analyzing the inherent branching bias of unsupervised parsing models](#). In *Proceedings of CoNLL 2023*, pages 532–547.
- Lifeng Jin and William Schuler. 2020. [Memory-bounded neural incremental parsing for psycholinguistic prediction](#). In *Proceedings of the 16th International Conference on Parsing Technologies and the IWPT 2020 Shared Task on Parsing into Enhanced Universal Dependencies*, pages 48–61.
- Julie Kallini, Isabel Papadimitriou, Richard Futrell, Kyle Mahowald, and Christopher Potts. 2024. [Mission: Impossible language models](#). *arXiv e-prints*.
- Jasmeen Kanwal, Kenny Smith, Jennifer Culbertson, and Simon Kirby. 2017. [Zipf’s law of abbreviation and the principle of least effort: Language users optimise a miniature lexicon for efficient communication](#). *Cognition*, 165:45–52.
- Charles Kemp and Terry Regier. 2012. [Kinship categories across languages reflect general communicative principles](#). *Science*, 336(6084):1049–1054.
- Eugene Kharitonov and Rahma Chaabouni. 2021. [What they do when in doubt: a study of inductive biases in seq2seq learners](#). In *Proceedings of ICLR 2021*.
- Eliyahu Kiperwasser and Yoav Goldberg. 2016. [Simple and accurate dependency parsing using bidirectional LSTM feature representations](#). *Trans. Assoc. Comput. Linguist.*, 4:313–327.
- Simon Kirby, Monica Tamariz, Hannah Cornish, and Kenny Smith. 2015. [Compression and communication in the cultural evolution of linguistic structure](#). *Cognition*, 141:87–102.
- Taku Kudo and John Richardson. 2018. [SentencePiece: A simple and language independent subword tokenizer and detokenizer for neural text processing](#). In *Proceedings of EMNLP 2018: System Demonstrations*, pages 66–71.
- Adhiguna Kuncoro, Miguel Ballesteros, Lingpeng Kong, Chris Dyer, Graham Neubig, and Noah A. Smith. 2017. [What do recurrent neural network grammars learn about syntax?](#) In *Proceedings of EACL 2017*, pages 1249–1258.
- Adhiguna Kuncoro, Chris Dyer, John Hale, Dani Yogatama, Stephen Clark, and Phil Blunsom. 2018. [LSTMs can learn Syntax-Sensitive dependencies well, but modeling structure makes them better](#). In *Proceedings of ACL 2018*, pages 1426–1436.
- Tatsuki Kuribayashi, Yohei Oseki, Ana Brassard, and Kentaro Inui. 2022. [Context limitations make neural language models more human-like](#). In *Proceedings of EMNLP 2022*, pages 10421–10436.
- Natalia Levshina, Savithry Namboodiripad, Marc Allasonnière-Tang, Mathew Kramer, Luigi Talamo, Annemarie Verkerk, Sasha Wilmoth, Gabriela Garrido Rodriguez, Timothy Michael Gupton, Evan Kidd, et al. 2023. [Why we need a gradient approach to word order](#). *Linguistics*.
- Roger Levy. 2005. [Probabilistic models of word order and syntactic discontinuity](#). stanford university.
- Roger Levy. 2008. [Expectation-based syntactic comprehension](#). *Journal of Cognition*, 106(3):1126–1177.
- Huayang Li, Lemao Liu, Guoping Huang, and Shuming Shi. 2020a. [On the branching bias of syntax extracted from pre-trained language models](#). In *Findings of EMNLP 2020*, pages 4473–4478.
- Jun Li, Yifan Cao, Jiong Cai, Yong Jiang, and Kewei Tu. 2020b. [An empirical comparison of unsupervised constituency parsing methods](#). In *Proceedings of ACL 2020*, pages 3278–3283.
- Yuchen Lian, Arianna Bisazza, and Tessa Verhoeft. 2021. [The effect of efficient messaging and input variability on Neural-Agent iterated language learning](#). In *Proceedings of EMNLP 2021*, pages 10121–10129.
- Yuchen Lian, Arianna Bisazza, and Tessa Verhoeft. 2023. [Communication drives the emergence of language universals in neural agents: Evidence from the word-order/case-marking trade-off](#). *TACL 2023*, 11:1033–1047.
- Sabrina J. Mielke, Ryan Cotterell, Kyle Gorman, Brian Roark, and Jason Eisner. 2019. [What kind of language is hard to language-model?](#) In *Proceedings of ACL 2019*, pages 4975–4989.





- G A Miller. 1956. The magical number seven plus or minus two: some limits on our capacity for processing information. *Psychol. Rev.*, 63(2):81–97.
- George A Miller and Stephen Isard. 1964. Free recall of self-embedded english sentences. *Information and control*, 7(3):292–303.
- Jeff Mitchell and Jeffrey Bowers. 2020. Priorless recurrent networks learn curiously. In *Proceedings of the 28th International Conference on Computational Linguistics*, pages 5147–5158, Barcelona, Spain (Online). International Committee on Computational Linguistics.
- Hiroshi Noji and Yusuke Miyao. 2014. Left-corner transitions on dependency parsing. In *Proceedings of COLING 2014*, pages 2140–2150.
- Hiroshi Noji and Yohei Oseki. 2021. Effective batching for recurrent neural network grammars. In *Findings of ACL-IJCNLP 2021*, pages 4340–4352.
- Byung-Doh Oh, Christian Clark, and William Schuler. 2021. Surprisal estimators for human reading times need character models. In *Proceedings of ACL-IJCNLP 2021*, pages 3746–3757.
- Myle Ott, Sergey Edunov, Alexei Baevski, Angela Fan, Sam Gross, Nathan Ng, David Grangier, and Michael Auli. 2019. fairseq: A fast, extensible toolkit for sequence modeling. In *Proceedings of NAACL 2019*, pages 48–53.
- Steven T Piantadosi, Harry Tily, and Edward Gibson. 2012. The communicative function of ambiguity in language. *Cognition*, 122(3):280–291.
- Sidharth Ranjan, Marten van Schijndel, Sumeet Agarwal, and Rajakrishnan Rajkumar. 2022. Discourse context predictability effects in Hindi word order. In *Proceedings of EMNLP 2022*, pages 10390–10406.
- Philip Resnik. 1992. Left-Corner parsing and psychological plausibility. In *Proceedings of COLING 1992*.
- Mathieu Rita, Corentin Tallec, Paul Michel, Jean-Bastien Grill, Olivier Pietquin, Emmanuel Dupoux, and Florian Strub. 2022. Emergent communication: Generalization and overfitting in lewis games. In *Proceedings of NeurIPS 2022*, volume 35, pages 1389–1404.
- Skipper Seabold and Josef Perktold. 2010. statsmodels: Econometric and statistical modeling with python. In *9th Python in Science Conference*.
- Rico Sennrich, Barry Haddow, and Alexandra Birch. 2016. Neural machine translation of rare words with subword units. In *Proceedings of ACL 2016*, pages 1715–1725.
- Nathaniel J. Smith and Roger Levy. 2013. The effect of word predictability on reading time is logarithmic. *Journal of Cognition*, 128(3):302–319.
- Mitchell Stern, Daniel Fried, and Dan Klein. 2017. Effective inference for generative neural parsing. In *Proceedings of EMNLP 2017*, pages 1695–1700.
- Mirac Suzgun, Sebastian Gehrmann, Yonatan Belinkov, and Stuart M Shieber. 2019. Memory-augmented recurrent neural networks can learn generalized dyck languages. *arXiv preprint arXiv:1911.03329*.
- David Temperley and Daniel Gildea. 2018. Minimizing syntactic dependency lengths: Typological/Cognitive universal? *Annu. Rev. Linguist.*, 4(1):67–80.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruiti Bhosale, Dan Bikel, Lukas Blecher, Cristian Canton Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes, Jeremy Fu, Wenyin Fu, Brian Fuller, Cynthia Gao, Vedanuj Goswami, Naman Goyal, Anthony Hartshorn, Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madian Khabsa, Isabel Kloumann, Artem Korenev, Punit Singh Koura, Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee, Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra, Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi, Alan Schelten, Ruan Silva, Eric Michael Smith, Ranjan Subramanian, Xiaoqing Ellen Tan, Binh Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zheng Yan, Iliyan Zarov, Yuchen Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurelien Rodriguez, Robert Stojnic, Sergey Edunov, and Thomas Scialom. 2023. Llama 2: Open foundation and Fine-Tuned chat models. *arXiv preprint*.
- Ryo Ueda, Taiga Ishii, and Yusuke Miyao. 2022. On the word boundaries of emergent languages based on harris’s articulation scheme. In *Proceedings of ICLR 2022*.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is All you Need. *NIPS*, pages 5998–6008.
- Theo Vennemann. 1974. Analogy in generative grammar: the origin of word order. In *Proceedings of the eleventh international congress of linguists*, volume 2, pages 79–83. il Mulino Bologna.
- Elisabeth Verhoeven. 2015. Thematic asymmetries do matter! a corpus study of german word order. *Journal of Germanic Linguistics*, 27(1):45–104.
- Dingquan Wang and Jason Eisner. 2016. The galactic dependencies treebanks: Getting more data by synthesizing new languages. *Transactions of the Association for Computational Linguistics*, 4:491–505.
- Alex Warstadt, Leshem Choshen, Aaron Mueller, Adina Williams, Ethan Wilcox, and Chengxu Zhuang. 2023. Call for papers – the BabyLM challenge: Sample-efficient pretraining on a developmentally plausible corpus. *arXiv preprint*.

- Gail Weiss, Yoav Goldberg, and Eran Yahav. 2018. [On the practical computational power of finite precision RNNs for language recognition](#). In *Proceedings of ACL 2018*, pages 740–745.
- Jennifer C. White and Ryan Cotterell. 2021. [Examining the inductive bias of neural language models with artificial languages](#). In *Proceedings of ACL-IJCNLP 2021*, pages 454–463.
- Ethan Wilcox, Peng Qian, Richard Futrell, Miguel Ballesteros, and Roger Levy. 2019. [Structural supervision improves learning of non-local grammatical dependencies](#). In *Proceedings of NAACL 2019*, pages 3302–3312.
- Vanessa A. D. Wilson, Klaus Zuberbühler, and Balthasar Bickel. 2022. [The evolutionary origins of syntax: Event cognition in nonhuman primates](#). *Science Advances*, 8(25):eabn8464.
- Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Remi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger, Mariama Drame, Quentin Lhoest, and Alexander Rush. 2020. [Transformers: State-of-the-Art Natural Language Processing](#). In *Proceedings of EMNLP 2020 : System Demonstrations*, pages 38–45.
- Yang Xu, Emmy Liu, and Terry Regier. 2020. [Numeral systems across languages support efficient communication: From approximate numerosity to recursion](#). *Open Mind (Camb)*, 4:57–70.
- Ryo Yoshida, Hiroshi Noji, and Yohei Oseki. 2021. [Modeling Human Sentence Processing with Left-Corner Recurrent Neural Network Grammars](#). In *Proceedings of EMNLP 2021*, pages 2964–2973.

## A Details of artificial languages

Table 12<sup>15</sup> shows the default grammar to create artificial language data, which adopts the configuration of White and Cotterell (2021). The “relevant parameter” column indicates the parameter  that controls the order of right-hand items in the respective production rule (the order is swapped when the parameter assignment is R). Note that the subcategory of non-terminal symbols (e.g., VP\_S) was only used for generating the data; in the final data for training/evaluating syntactic LMs, these subcategories are omitted (e.g., VP\_S should be VP), and the resulting uninformative edge in the syntactic structure (e.g., VP → VP) was also removed. Table 2 shows the example of a sentence with different word-order configurations. Different word order parameters yield a syntactic structure with different branching directionalities; for example, the constituency tree of LLLLLL extends to the bottom left (left-branching). The average sentence length was 11.8 tokens, and the average tree depth was 9.1. The vocabulary size of pseudowords is 1,314 same as White and Cotterell (2021).

## B WALS data statistics

Table 3 shows the statistics of the WALS data and the details about word order parameters. Out of the 2,679 languages listed in the WALS, 1,616 languages are involved, and approximately 2/3 of their word order parameters were annotated in the WALS; the missing values are completed as explained in §4.1 (footnote 1). As a sanity check, we observe the ratio of the assignments of the first two parameters (<sup>S</sup> and <sup>VP</sup>), which controls the order of subject, object, and verb; these approximately replicate the ratio reported in Dryer (2013f), e.g., SOV and SVO orders occupy over 80% of languages.

## C Model details

The license of the used models/data is listed in Table 4; all of them are used under their intended use. All the models were trained/tested with a single NVIDIA A100 GPU (40GB). All of the experiments were done within approximately 600 GPU hours. The LLaMA-2 (7B) model was used via the hugging face toolkit (Wolf et al., 2020).

<sup>15</sup>The corresponding Table is positioned in the later part of the Appendix for readability.

## C.1 Parsing strategies

Figure 8 shows the parsing actions converted with different strategies (TD and LC). PLMs are trained to predict such a sequence of parsing actions in a left-to-right manner.

## C.2 Hyperparameters

Tables 13 and 14 show the hyperparameters of LMs,<sup>15</sup> which basically follow their default settings. Standard LMs and PLMs use the same hyperparameters. Their vocabulary size is set to 512.

## C.3 Word order preference of LLaMA-2

We employed few-shot settings instead of full-finetuning with the limits in computational cost. Specifically, we create a prompt consisting of the instruction “*The below sentences are written in an artificially created new language:*” and ten example sentences extracted from the respective training set. The probability of each test sentence is computed conditioned with this prompt, and aggregating these probabilities results in the PPL of an entire corpus.

## D Results

The full results of the experiment (§6) and analysis (§7) are shown in Table 6. This also shows the top-3 preferred word orders by each LM, which demonstrates the model-dependent differences in their word-order preferences. We also include the baseline of average stack depth required to process sentences for each parsing algorithm in each word order as a standard measurement of memory cost.

### D.1 Beam-search in RNNG/SRNNGs

Table 7 shows the results of RNNG/SRNNGs with and without word-synchronous beam search (Stern et al., 2017). The settings without beam-search are adopted in §6, and the advantages of memory limitation (SRRNG) and the LC strategies were replicated even with beam-search, where the token-level perplexity  $PPL(x)$  is used (§8).

### D.2 Results with different linking functions

Tables 8, 9, 10, and 11 show the detailed results with different linking functions ( $PPL^{1/2}$ ,  $PPL^2$ ,  $PPL^3$ ,  $\log PPL$ ) between model-computed complexity measurements and word order frequencies. Experiments with different linking hypotheses did not alter the conclusions. This supports the generality of our findings.

	Right-branching	Mixed-branching	Left-branching
Parameteres	RRRRRR	LRRRLR	LLLLLL

Table 2: Example sentences and their structures generated with different word-order configurations.

All languages in WALS	2,679
Targeted languages	1,616
Targeted parameters	9,696 (=1,616×6)
Missing parameters	3,343
LLXXX (SOV)	46.7%
LRXXX (SVO)	34.3%
RLXXX (VOS)	3.6%
RRXXX (OVS)	15.5%
$s^S$ (S → NP <sub>subj</sub> VP)	82A Order of Subject and Verb (Dryer, 2013e)
$s^{VP}$ (VP → NP <sub>obj</sub> Verb)	83A Order of Object and Verb (Dryer, 2013c)
$s^{PP}$ (PP → Prep NP)	85A Order of Adposition and Noun Phrase (Dryer, 2013b)
$s^{NP}$ (NP → Adj NP)	87A Order of Adjective and Noun (Dryer, 2013a)
$s^{Rel}$ (NP → VP Rel NP)	90A Order of Relative Clause and Noun (Dryer, 2013d)
$s^{Case}$ (NP → NP Case)	51A Position of Case Affixes (Dryer, 2013g)

Table 3: Statistics of the WALS data and the source of word-order configuration information

## E Details of regression analysis

We explored which factor impacts the global/local correlation scores obtained by various LMs  $\theta$ . As explained in §6.2, we train a regression model to predict the correlation score obtained by a particular LM  $\theta$ , given the features characterizing the LMs:

$$\text{Correl}_\theta \sim \text{ModelClass}(\theta) + \text{MemLim}(\theta) + \text{Syntax}(\theta) + \text{LC}(\theta) . \quad (9)$$

Table 5 shows the features used for the regression analysis in §6.2. The regression model is trained with the ordinary least squares setting, using statsmodel package in Python (Seabold and Perktold, 2010).

Data/model	Licence
Artificial data (White and Cotterell, 2021)	MIT
WALS (Dryer and Haspelmath, 2013)	Creative Commons CC-BY 4.0
Fairseq (Ott et al., 2019)	MIT
RNNG (Noji and Oseki, 2021)	MIT
KenLM (Heafield, 2011)	LGPL
LLaMA-2 (Touvron et al., 2023)	LLAMA 2 Community License
Sentencepiece (Kudo and Richardson, 2018)	Apache 2.0

Table 4: Licence of the data and models

Model	ModelClass (categorical)	MemLim (int)	Syntax (binary)	LC (binary)
Transformer	NLM	0	False	False
LSTM	NLM	1	False	False
SRN	NLM	2	False	False
Trans. PLM TD	NLM	0	True	False
Trans. PLM LC	NLM	0	True	True
LSTM PLM TD	NLM	1	True	False
LSTM PLM LC	NLM	1	True	True
SRN PLM TD	NLM	2	True	False
SRN PLM LC	NLM	2	True	True
Word 5-gram	CLM	0	False	False
Word 4-gram	CLM	1	False	False
Word 3-gram	CLM	2	False	False
5-gram PLM TD	CLM	0	True	False
5-gram PLM LC	CLM	0	True	True
4-gram PLM TD	CLM	1	True	False
4-gram PLM LC	CLM	1	True	True
3-gram PLM TD	CLM	2	True	False
3-gram PLM LC	CLM	2	True	True
RNNG	RNNG	0	True	False
RNNG LC	RNNG	0	True	True
SRNNG	RNNG	1	True	False
SRNNG LC	RNNG	1	True	True

Table 5: Features used for the regression analysis



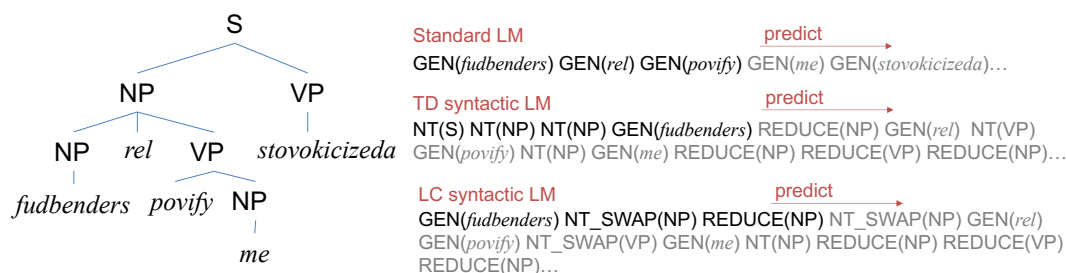


Figure 8: Different parsing strategy converts a syntactic structure into a different parsing action sequence. PLMs and RNNs predict such action sequences with different model architectures.

Model	Lim.	Stx.	Global $r \uparrow$	Local $r \uparrow$	L-pref. $\rightarrow$	Top3 langs.
Natural Lang.			100.0	100.0	10.5	LRRRRL, LRRRRR, LLLRRL
Transformer			12.1 $\pm$ 4.3	16.7 $\pm$ 6.4	23.8 $\pm$ 6.1	LLLLLL, LLRLLL, RLRLLL
LSTM	✓		10.7 $\pm$ 14.7	26.9 $\pm$ 7.4	-1.2 $\pm$ 11.3	RLRLLL, RLLLLL, RRRRRR
SRN	✓		16.3 $\pm$ 9.4	38.3 $\pm$ 3.0	-3.6 $\pm$ 10.4	RLLLLL, RLRLLL, RLRRLL
Word 5-gram	✓		5.4 $\pm$ 1.0	17.0 $\pm$ 1.7	-5.8 $\pm$ 1.6	RRLRRR, RRRRRR, LRLRRR
Word 4-gram	✓		6.5 $\pm$ 1.0	16.5 $\pm$ 1.6	-6.4 $\pm$ 1.6	RRLRRR, RRRRRR, LRLRRR
Word 3-gram	✓		8.8 $\pm$ 0.7	17.5 $\pm$ 1.0	-6.1 $\pm$ 1.0	RRRRRR, RRLRRR, LRLRRR
Trans. PLM		TD	30.4 $\pm$ 5.7	29.5 $\pm$ 9.1	35.9 $\pm$ 4.7	LLRRL, LLRRRL, LLRLLL
Trans. PLM		LC	30.3 $\pm$ 2.1	42.3 $\pm$ 1.1	35.2 $\pm$ 2.3	LLLLLL, LLRLLL, LLRLLL
LSTM PLM	✓	TD	11.9 $\pm$ 12.2	37.0 $\pm$ 7.3	-27.1 $\pm$ 10.5	LRRRRL, LRLRRL, LRRRRR
LSTM PLM	✓	LC	23.6 $\pm$ 3.6	40.4 $\pm$ 2.5	0.5 $\pm$ 5.5	RLLRRR, LLLLLL, LLLRLL
SRN PLM	✓	TD	-5.4 $\pm$ 8.3	8.7 $\pm$ 7.8	-53.7 $\pm$ 7.4	RLRRRR, LRLRRR, RLLRRR
SRN PLM	✓	LC	9.5 $\pm$ 4.9	27.5 $\pm$ 10.5	2.8 $\pm$ 5.2	RLRRL, RLRRRR, RLLRLL
5-gram PLM	✓	TD	11.8 $\pm$ 2.4	50.4 $\pm$ 2.8	10.2 $\pm$ 7.8	RLLRRL, RLRRRL, RLLLLL
5-gram PLM	✓	LC	18.6 $\pm$ 0.9	47.0 $\pm$ 1.3	28.8 $\pm$ 1.4	LLLRL, RLLRLL, RLRLLL
4-gram PLM	✓	TD	29.2 $\pm$ 0.6	40.0 $\pm$ 1.6	4.4 $\pm$ 5.4	LLRRRL, RLRRRL, LLRRRR
4-gram PLM	✓	LC	21.7 $\pm$ 0.6	50.6 $\pm$ 0.6	22.2 $\pm$ 0.9	RLLRLL, RLRRLL, LLLRLL
3-gram PLM	✓	TD	19.9 $\pm$ 0.7	29.0 $\pm$ 1.8	17.3 $\pm$ 2.0	RLLRRL, LLLRRL, RLLRRR
3-gram PLM	✓	LC	18.0 $\pm$ 0.2	55.7 $\pm$ 0.3	27.0 $\pm$ 0.5	RLLRRR, RLLRRL, RLRRRR
RNNG		TD	-22.6 $\pm$ 4.7	6.0 $\pm$ 14.5	14.5 $\pm$ 10.8	RLLRLL, RRRRLL, RRRLLL
RNNG		LC	-17.6 $\pm$ 6.4	25.1 $\pm$ 13.4	-21.2 $\pm$ 2.0	RRRRRL, RRLRL, RRLRLL
SRNNG	✓	TD	2.0 $\pm$ 9.3	10.7 $\pm$ 7.8	10.2 $\pm$ 7.0	RLLRRR, RLRRRR, RLLRRL
SRNNG	✓	LC	19.0 $\pm$ 9.6	23.7 $\pm$ 13.0	-40.6 $\pm$ 8.5	LRRRRR, LRLRRR, LLLRRR
LLaMA2 (7B)			6.9 $\pm$ 31.0	15.4 $\pm$ 2.5	-4.6 $\pm$ 31.0	LRLLLL, LRLLLL, LRLRLL
Stack depth		TD	-47.5 $\pm$ 0.2	-12.0 $\pm$ 0.6	-56.2 $\pm$ 1.3	RRLRRR, RLLRRR, RRRRRR
Stack depth		LC	-13.3 $\pm$ 0.3	-4.8 $\pm$ 0.2	57.6 $\pm$ 0.5	RLLLLL, RLLRLL, RLRLLL
Chance rate			0.0	0.0	0.0	-

Table 6: Word-order preferences of LMs. “Lim.” and “Stx.” indicate the working memory limitation and syntactic biases in the respective model architecture, respectively.

Model	Syntax	Lim.	Beam	Global $r \uparrow$	Local $r \uparrow$	L-pref. $\rightarrow$	Top3 langs.
RNNG	TD			-22.6 $\pm$ 4.7	6.0 $\pm$ 14.5	14.5 $\pm$ 10.8	RLLRLL, RRRRLL, RRRLLL
SRNNG	TD	✓		2.0 $\pm$ 9.3	10.7 $\pm$ 7.8	10.2 $\pm$ 7.0	RLLRRR, RLRRRR, RLLRRL
RNNG	LC			-17.6 $\pm$ 6.4	25.1 $\pm$ 13.4	-21.2 $\pm$ 2.0	RRRRRL, RRLRL, RRLRLL
SRNNG	LC	✓		19.0 $\pm$ 9.6	23.7 $\pm$ 13.0	-40.6 $\pm$ 8.5	LRRRRR, LRLRRR, LLLRRR
RNNG	TD		✓	9.4 $\pm$ 3.5	-31.5 $\pm$ 11.6	-30.1 $\pm$ 5.7	RRRRLL, RRRLLL, RRLLLL
SRNNG	TD	✓	✓	14.6 $\pm$ 8.7	-2.8 $\pm$ 5.9	-21.5 $\pm$ 8.9	LLRRRR, LLRRRR, RLRRRR
RNNG	LC		✓	-23.4 $\pm$ 7.0	26.5 $\pm$ 13.9	-26.2 $\pm$ 7.2	RLRLRL, RLRLLL, RRRRRL
SRNNG	LC	✓	✓	17.2 $\pm$ 8.5	18.3 $\pm$ 12.4	-36.7 $\pm$ 9.7	LRRRRR, LRLRRR, RLLRRR

Table 7: Comparison of the RNNG/SRNNG results with and without word-synchronous beam search

Model	Syntax	Lim.	Global $r \uparrow$	Local $r \uparrow$	L-pref. $\rightarrow$	Top3 langs.
Transformer			$12.4 \pm 4.3$	$16.7 \pm 6.4$	$24.1 \pm 6.1$	LLLLLL, LLRLLL, RLRLLL
LSTM	✓		$11.2 \pm 14.7$	$27.0 \pm 7.4$	$-0.8 \pm 11.3$	RLRLLL, RLRLLL, RRRRRR
SRN	✓		$16.5 \pm 9.4$	$38.4 \pm 3.0$	$-3.5 \pm 10.4$	RLRLLL, RLRLLL, RLRLLL
Word 5-gram	✓		$5.5 \pm 1.0$	$17.1 \pm 1.7$	$-6.0 \pm 1.6$	RRLRRR, RRRRRR, LRLRRR
Word 4-gram	✓		$6.6 \pm 1.0$	$16.7 \pm 1.6$	$-6.7 \pm 1.6$	RRLRRR, RRRRRR, LRLRRR
Word 3-gram	✓		$8.9 \pm 0.7$	$17.7 \pm 1.0$	$-6.3 \pm 1.0$	RRRRRR, RRLRRR, LRLRRR
Trans. PLM		TD	$30.5 \pm 5.7$	$29.4 \pm 9.1$	$36.2 \pm 4.7$	LLRRLL, LLRRRL, LLRLLL
Trans. PLM		LC	$30.2 \pm 2.1$	$42.3 \pm 1.1$	$35.7 \pm 2.3$	LLLLLL, LLRLLL, LLRLLL
LSTM PLM	✓	TD	$11.9 \pm 12.2$	$37.0 \pm 7.3$	$-27.2 \pm 10.5$	LRRRRL, LRLRRL, LRRRRR
LSTM PLM	✓	LC	$23.6 \pm 3.6$	$40.4 \pm 2.5$	$0.6 \pm 5.5$	RLLRRR, LLLLLL, LLLRLL
SRN PLM	✓	TD	$-5.4 \pm 8.3$	$8.8 \pm 7.8$	$-53.8 \pm 7.4$	RLRRRR, LRLRRR, RLLRRR
SRN PLM	✓	LC	$9.3 \pm 4.9$	$27.6 \pm 10.5$	$2.8 \pm 5.2$	RLRRLL, RLRRRR, RLLRLL
5-gram PLM	✓	TD	$11.8 \pm 2.4$	$50.5 \pm 2.8$	$10.2 \pm 7.8$	RLLRRL, RLRRRL, RLLLLL
5-gram PLM	✓	LC	$18.5 \pm 0.9$	$47.0 \pm 1.3$	$29.0 \pm 1.4$	LLLRL, RLLRLL, RLRLLL
4-gram PLM	✓	TD	$29.2 \pm 0.6$	$40.0 \pm 1.6$	$4.3 \pm 5.4$	LLRRRL, RLRRRL, LLRRRR
4-gram PLM	✓	LC	$21.6 \pm 0.6$	$50.5 \pm 0.6$	$22.4 \pm 0.9$	RLLRLL, RLRRRL, LLLRLL
3-gram PLM	✓	TD	$19.9 \pm 0.7$	$29.0 \pm 1.8$	$17.3 \pm 2.0$	RLLRRL, LLLRRL, RLLRRR
3-gram PLM	✓	LC	$17.9 \pm 0.2$	$55.7 \pm 0.3$	$27.0 \pm 0.5$	RLLRRR, RLLRRL, RLRRRR
RNNG		TD	$-22.6 \pm 4.7$	$6.0 \pm 14.5$	$14.5 \pm 10.8$	RLLRLL, RRRRLL, RRRLLL
RNNG		LC	$-17.6 \pm 6.4$	$25.1 \pm 13.4$	$-21.1 \pm 2.0$	RRRRRL, RRLRL, RRLRRL
SRNNG	✓	TD	$1.9 \pm 9.3$	$10.7 \pm 7.8$	$10.1 \pm 7.0$	RLLRRR, RLRRRR, RLLRRL
SRNNG	✓	LC	$19.1 \pm 9.6$	$23.7 \pm 13.0$	$-40.7 \pm 8.5$	LRRRRR, LRLRRR, LLLRRR
LLaMA2 (7B)			$6.9 \pm 31.0$	$15.4 \pm 2.5$	$-4.6 \pm 31.0$	LRLLLL, LRLLLL, LRLRLL

Table 8: The results of  $PPL^{1/2}$

Model	Syntax	Lim.	Global $r \uparrow$	Local $r \uparrow$	L-pref. $\rightarrow$	Top3 langs.
Transformer			$11.6 \pm 4.3$	$16.5 \pm 6.4$	$23.1 \pm 6.1$	LLLLLL, LLRLLL, RLRLLL
LSTM	✓		$9.8 \pm 14.7$	$26.6 \pm 7.4$	$-1.8 \pm 11.3$	RLRLLL, RLRLLL, RRRRRR
SRN	✓		$16.1 \pm 9.4$	$38.3 \pm 3.0$	$-3.6 \pm 10.4$	RLRLLL, RLRLLL, RLRLLL
Word 5-gram	✓		$5.4 \pm 1.0$	$16.7 \pm 1.7$	$-5.3 \pm 1.6$	RRLRRR, RRRRRR, LRLRRR
Word 4-gram	✓		$6.4 \pm 1.0$	$16.1 \pm 1.6$	$-5.8 \pm 1.6$	RRLRRR, RRRRRR, LRLRRR
Word 3-gram	✓		$8.5 \pm 0.7$	$17.1 \pm 1.0$	$-5.6 \pm 1.0$	RRRRRR, RRLRRR, LRLRRR
Trans. PLM		TD	$30.3 \pm 5.7$	$29.7 \pm 9.1$	$35.3 \pm 4.7$	LLRRLL, LLRRRL, LLRLLL
Trans. PLM		LC	$30.3 \pm 2.1$	$42.5 \pm 1.1$	$34.1 \pm 2.3$	LLLLLL, LLRLLL, LLRLLL
LSTM PLM	✓	TD	$11.8 \pm 12.2$	$37.0 \pm 7.3$	$-27.1 \pm 10.5$	LRRRRL, LRLRRL, LRRRRR
LSTM PLM	✓	LC	$23.6 \pm 3.6$	$40.4 \pm 2.5$	$0.4 \pm 5.5$	RLLRRR, LLLLLL, LLLRLL
SRN PLM	✓	TD	$-5.5 \pm 8.3$	$8.7 \pm 7.8$	$-53.7 \pm 7.4$	RLRRRR, LRLRRR, RLLRRR
SRN PLM	✓	LC	$9.9 \pm 4.9$	$27.4 \pm 10.5$	$2.8 \pm 5.2$	RLRRLL, RLRRRR, RLLRLL
5-gram PLM	✓	TD	$11.9 \pm 2.4$	$50.4 \pm 2.8$	$10.2 \pm 7.8$	RLLRRL, RLRRRL, RLLLLL
5-gram PLM	✓	LC	$18.7 \pm 0.9$	$47.1 \pm 1.3$	$28.5 \pm 1.4$	LLLRL, RLLRLL, RLRLLL
4-gram PLM	✓	TD	$29.2 \pm 0.6$	$40.0 \pm 1.6$	$4.4 \pm 5.4$	LLRRRL, RLRRRL, LLRRRR
4-gram PLM	✓	LC	$21.9 \pm 0.6$	$50.6 \pm 0.6$	$22.0 \pm 0.9$	RLLRLL, RLRRRL, LLLRLL
3-gram PLM	✓	TD	$19.9 \pm 0.7$	$29.0 \pm 1.8$	$17.3 \pm 2.0$	RLLRRL, LLLRRL, RLLRRR
3-gram PLM	✓	LC	$18.2 \pm 0.2$	$55.6 \pm 0.3$	$26.9 \pm 0.5$	RLLRRR, RLLRRL, RLRRRR
RNNG		TD	$-22.6 \pm 4.7$	$6.0 \pm 14.5$	$14.5 \pm 10.8$	RLLRLL, RRRRLL, RRRLLL
RNNG		LC	$-17.6 \pm 6.4$	$25.1 \pm 13.4$	$-21.2 \pm 2.0$	RRRRRL, RRLRL, RRLRRL
SRNNG	✓	TD	$2.1 \pm 9.3$	$10.7 \pm 7.8$	$10.2 \pm 7.0$	RLLRRR, RLRRRR, RLLRRL
SRNNG	✓	LC	$19.0 \pm 9.6$	$23.6 \pm 13.0$	$-40.4 \pm 8.5$	LRRRRR, LRLRRR, LLLRRR
LLaMA2 (7B)			$6.9 \pm 31.0$	$15.5 \pm 2.5$	$-4.8 \pm 31.0$	LRLLLL, LRLLLL, LRLRLL

Table 9: The results of  $PPL^2$

Model	Syntax	Lim.	Global $r$ $\uparrow$	Local $r$ $\uparrow$	L-pref. $\rightarrow$	Top3 langs.
Transformer			11.1 $\pm$ 4.3	16.3 $\pm$ 6.4	22.5 $\pm$ 6.1	LLLLLL, LLRLLL, RLRLLL
LSTM	✓		9.2 $\pm$ 14.7	26.4 $\pm$ 7.4	-2.3 $\pm$ 11.3	RLRLLL, RLRLLL, RRRRRR
SRN	✓		16.1 $\pm$ 9.4	38.3 $\pm$ 3.0	-3.5 $\pm$ 10.4	RLRLLL, RLRLLL, RLRLLL
Word 5-gram	✓		5.3 $\pm$ 1.0	16.3 $\pm$ 1.7	-4.8 $\pm$ 1.6	RRLRRR, RRRRRR, LRLRRR
Word 4-gram	✓		6.3 $\pm$ 1.0	15.7 $\pm$ 1.6	-5.3 $\pm$ 1.6	RRLRRR, RRRRRR, LRLRRR
Word 3-gram	✓		8.3 $\pm$ 0.7	16.8 $\pm$ 1.0	-5.1 $\pm$ 1.0	RRRRRR, RRLRRR, LRLRRR
Trans. PLM		TD	30.2 $\pm$ 5.7	29.9 $\pm$ 9.1	34.7 $\pm$ 4.7	LLRRL, LLRRRL, LLRLLL
Trans. PLM		LC	30.3 $\pm$ 2.1	42.6 $\pm$ 1.1	33.0 $\pm$ 2.3	LLLLLL, LLRLLL, LLRLLL
LSTM PLM	✓	TD	11.8 $\pm$ 12.2	36.9 $\pm$ 7.3	-27.0 $\pm$ 10.5	LRRRRL, LRLRRL, LRRRRR
LSTM PLM	✓	LC	23.6 $\pm$ 3.6	40.3 $\pm$ 2.5	0.2 $\pm$ 5.5	RLLRRR, LLLRLL, LLLRLL
SRN PLM	✓	TD	-5.7 $\pm$ 8.3	8.6 $\pm$ 7.8	-53.6 $\pm$ 7.4	RLRRRR, RLRRRR, LRLRRR
SRN PLM	✓	LC	10.2 $\pm$ 4.9	27.3 $\pm$ 10.5	2.7 $\pm$ 5.2	RLRRL, RLRRRR, RLLRLL
5-gram PLM	✓	TD	11.9 $\pm$ 2.4	50.3 $\pm$ 2.8	10.1 $\pm$ 7.8	RLLRRL, RLRRRL, RLLLLL
5-gram PLM	✓	LC	18.8 $\pm$ 0.9	47.2 $\pm$ 1.3	28.2 $\pm$ 1.4	LLLRL, RLLRLL, RLRLLL
4-gram PLM	✓	TD	29.2 $\pm$ 0.6	40.0 $\pm$ 1.6	4.5 $\pm$ 5.4	LLRRRL, RLRRRL, LLRRRR
4-gram PLM	✓	LC	22.1 $\pm$ 0.6	50.6 $\pm$ 0.6	21.7 $\pm$ 0.9	RLLRLL, RLRLLL, LLLRLL
3-gram PLM	✓	TD	19.9 $\pm$ 0.7	29.0 $\pm$ 1.8	17.4 $\pm$ 2.0	RLLRRL, LLLRRL, RLLRRR
3-gram PLM	✓	LC	18.4 $\pm$ 0.2	55.6 $\pm$ 0.3	26.8 $\pm$ 0.5	RLLRRR, RLLRRL, RLRRRR
RNNG		TD	-22.5 $\pm$ 4.7	6.0 $\pm$ 14.5	14.5 $\pm$ 10.8	RLLRLL, RRRRLL, RRRLLL
RNNG		LC	-17.6 $\pm$ 6.4	25.1 $\pm$ 13.4	-21.2 $\pm$ 2.0	RRRRRL, RRLRL, RRLRRL
SRNNG	✓	TD	2.2 $\pm$ 9.3	10.7 $\pm$ 7.8	10.2 $\pm$ 7.0	RLLRRR, RLRRRR, LRLRRL
SRNNG	✓	LC	18.9 $\pm$ 9.6	23.6 $\pm$ 13.0	-40.2 $\pm$ 8.5	LRRRRR, LRLRRR, LLLRRR
LLaMA2 (7B)			6.9 $\pm$ 31.0	15.5 $\pm$ 2.5	-4.9 $\pm$ 31.0	LRLLLL, LRLLLL, LRLRLL

Table 10: The results of PPL<sup>3</sup>

Model	Syntax	Lim.	Global $r$ $\uparrow$	Local $r$ $\uparrow$	L-pref. $\rightarrow$	Top3 langs.
Transformer			12.6 $\pm$ 4.3	16.8 $\pm$ 6.4	24.4 $\pm$ 6.1	LLLLLL, LLRLLL, RLRLLL
LSTM	✓		11.8 $\pm$ 14.7	27.2 $\pm$ 7.4	-0.4 $\pm$ 11.3	RLRLLL, RLRLLL, RRRRRR
SRN	✓		16.7 $\pm$ 9.4	38.4 $\pm$ 3.0	-3.5 $\pm$ 10.4	RLRLLL, RLRLLL, RLRLLL
Word 5-gram	✓		5.5 $\pm$ 1.0	17.3 $\pm$ 1.7	-6.3 $\pm$ 1.6	RRLRRR, RRRRRR, LRLRRR
Word 4-gram	✓		6.7 $\pm$ 1.0	16.8 $\pm$ 1.6	-7.0 $\pm$ 1.6	RRLRRR, RRRRRR, LRLRRR
Word 3-gram	✓		9.0 $\pm$ 0.7	17.9 $\pm$ 1.0	-6.6 $\pm$ 1.0	RRRRRR, RRLRRR, LRLRRR
Trans. PLM		TD	30.5 $\pm$ 5.7	29.4 $\pm$ 9.1	36.5 $\pm$ 4.7	LLRRL, LLRRRL, LLRLLL
Trans. PLM		LC	30.2 $\pm$ 2.1	42.2 $\pm$ 1.1	36.2 $\pm$ 2.3	LLLLLL, LLRLLL, LLRLLL
LSTM PLM	✓	TD	12.0 $\pm$ 12.2	37.1 $\pm$ 7.3	-27.2 $\pm$ 10.5	LRRRRL, LRLRRL, LRRRRR
LSTM PLM	✓	LC	23.6 $\pm$ 3.6	40.4 $\pm$ 2.5	0.7 $\pm$ 5.5	RLLRRR, LLLRLL, LLLRLL
SRN PLM	✓	TD	-5.3 $\pm$ 8.3	8.8 $\pm$ 7.8	-53.8 $\pm$ 7.4	RLRRRR, LRLRRR, RLLRRR
SRN PLM	✓	LC	9.1 $\pm$ 4.9	27.6 $\pm$ 10.5	2.8 $\pm$ 5.2	RLRRL, RLRRRR, RLLRLL
5-gram PLM	✓	TD	11.8 $\pm$ 2.4	50.5 $\pm$ 2.8	10.2 $\pm$ 7.8	RLLRRL, RLRRRL, RLLLLL
5-gram PLM	✓	LC	18.4 $\pm$ 0.9	46.9 $\pm$ 1.3	29.1 $\pm$ 1.4	LLLRL, RLLRLL, RLRLLL
4-gram PLM	✓	TD	29.2 $\pm$ 0.6	40.0 $\pm$ 1.6	4.3 $\pm$ 5.4	LLRRRL, RLRRRL, LLRRRR
4-gram PLM	✓	LC	21.5 $\pm$ 0.6	50.5 $\pm$ 0.6	22.5 $\pm$ 0.9	RLLRLL, RLRLLL, LLLRLL
3-gram PLM	✓	TD	19.9 $\pm$ 0.7	29.0 $\pm$ 1.8	17.2 $\pm$ 2.0	RLLRRL, LLLRRL, RLLRRR
3-gram PLM	✓	LC	17.8 $\pm$ 0.2	55.7 $\pm$ 0.3	27.0 $\pm$ 0.5	RLLRRR, RLLRRL, RLRRRR
RNNG		TD	-22.7 $\pm$ 4.7	6.0 $\pm$ 14.5	14.5 $\pm$ 10.8	RLLRLL, RRRRLL, RRRLLL
RNNG		LC	-17.6 $\pm$ 6.4	25.1 $\pm$ 13.4	-21.1 $\pm$ 2.0	RRRRRL, RRLRL, RRLRRL
SRNNG	✓	TD	1.8 $\pm$ 9.3	10.7 $\pm$ 7.8	10.1 $\pm$ 7.0	RLLRRR, RLRRRR, RLLRRL
SRNNG	✓	LC	19.1 $\pm$ 9.6	23.8 $\pm$ 13.0	-40.7 $\pm$ 8.5	LRRRRR, LRLRRR, LLLRRR
LLaMA2 (7B)			6.8 $\pm$ 31.0	15.4 $\pm$ 2.5	-4.5 $\pm$ 31.0	LRLLLL, LRLLLL, LRLRLL

Table 11: The results of log PPL

Probability	Production rule	Relevant parameter
1	ROOT → S	
1/2	S → NP_Subj_S VP_S	S
1/2	S → NP_Subj_P VP_P	S
1/3	VP_S → VP_Past_S	
1/3	VP_S → VP_Pres_S	
1/3	VP_S → VP_Comp_S	
1/3	VP_P → VP_Past_P	
1/3	VP_P → VP_Pres_P	
1/3	VP_P → VP_Comp_P	
1/2	VP_Comp_S → VP_Comp_Pres_S	
1/2	VP_Comp_S → VP_Comp_Past_S	
1/2	VP_Comp_P → VP_Comp_Pres_P	
1/2	VP_Comp_P → VP_Comp_Past_P	
1/2	VP_Past_S → IVerb_Past_S	
1/2	VP_Past_S → NP_Obj TVerb_Past_S	VP
1/2	VP_Pres_S → IVerb_Pres_S	
1/2	VP_Pres_S → NP_Obj TVerb_Pres_S	VP
1/2	VP_Past_P → IVerb_Past_P	
1/2	VP_Past_P → NP_Obj TVerb_Past_P	VP
1/2	VP_Pres_P → IVerb_Pres_P	
1/2	VP_Pres_P → NP_Obj TVerb_Pres_P	VP
1	VP_Comp_Pres_S → S_Comp Verb_Comp_Pres_S	VP
1	VP_Comp_Past_S → S_Comp Verb_Comp_Past_S	VP
1	VP_Comp_Pres_P → S_Comp Verb_Comp_Pres_P	VP
1	VP_Comp_Past_P → S_Comp Verb_Comp_Past_P	VP
1	S_Comp → S Comp	Comp
1	NP_Subj_S → NP_S Subj	Case
1	NP_Subj_P → NP_P Subj	Case
1/2	NP_Obj → NP_S Obj	Case
1/2	NP_Obj → NP_P Obj	Case
5/21	NP_S → Noun_S	
5/21	NP_S → Adj Noun_S	NP
5/21	NP_S → VP_S Rel Noun_S	Rel
5/21	NP_S → Pronoun_S	
1/21	NP_S → PP NP_S	PP
10/43	NP_P → Noun_P	
10/43	NP_P → Adj Noun_P	NP
10/43	NP_P → VP_P Rel Noun_P	Rel
10/43	NP_P → Pronoun_P	
2/43	NP_P → PP NP_P	PP
1/172	NP_P → NP_S CC NP_S	
1/172	NP_P → NP_P CC NP_P	
1/172	NP_P → NP_P CC NP_S	
1/172	NP_P → NP_S CC NP_P	
1/2	PP → NP_S Prep	PP
1/2	PP → NP_P Prep	PP
1/43	Adj → Adj CC Adj	
1/566	TVerb_Past_S → TVerb_Past_S CC TVerb_Past_S	
1/566	TVerb_Pres_S → TVerb_Pres_S CC TVerb_Pres_S	
1/566	IVerb_Past_S → IVerb_Past_S CC IVerb_Past_S	
1/566	IVerb_Pres_S → IVerb_Pres_S CC IVerb_Pres_S	
1/566	TVerb_Past_P → TVerb_Past_P CC TVerb_Past_P	
1/566	TVerb_Pres_P → TVerb_Pres_P CC TVerb_Pres_P	
1/566	IVerb_Past_P → IVerb_Past_P CC IVerb_Past_P	
1/566	IVerb_Pres_P → IVerb_Pres_P CC IVerb_Pres_P	
1	Verb_Comp_Past_S → word ~ Dict[Verb_Comp_Past_S] # 22 types	
1	Verb_Comp_Past_P → word ~ Dict[Verb_Comp_Past_P] # 22 types	
565/566	IVerb_Past_S → word ~ Dict[IVerb_Past_S] # 113 types	
565/566	IVerb_Past_P → word ~ Dict[IVerb_Past_P] # 113 types	
565/566	TVerb_Past_S → word ~ Dict[TVerb_Past_S] # 113 types	
565/566	TVerb_Past_P → word ~ Dict[TVerb_Past_P] # 113 types	
1	Verb_Comp_Pres_S → word ~ Dict[Verb_Comp_Pres_S] # 22 types	
1	Verb_Comp_Pres_P → word ~ Dict[Verb_Comp_Pres_P] # 22 types	
565/566	IVerb_Pres_S → word ~ Dict[IVerb_Pres_S] # 113 types	
565/566	IVerb_Pres_P → word ~ Dict[IVerb_Pres_P] # 113 types	
565/566	TVerb_Pres_S → word ~ Dict[TVerb_Pres_S] # 113 types	
565/566	TVerb_Pres_P → word ~ Dict[TVerb_Pres_P] # 113 types	
1	Noun_S → word ~ Dict[Noun_S] # 162 types	
1	Noun_P → word ~ Dict[Noun_P] # 162 types	
1	Pronoun_S → word ~ Dict[Pronoun_S] # 5 types	
1	Pronoun_P → word ~ Dict[Pronoun_P] # 2 types	
42/43	Adj → word ~ Dict[Adj] # 42 types	
1	Prep → word ~ Dict[Prep] # 4 types	
1	CC → da	
1	Comp → sa	
1	Rel → rel	
1	Subj → sub	
1	Obj → ob	

Table 12: The base grammar we used to create artificial language data. The relevant switch in the third column overwrites the linearization order in the corresponding rule. The lexical items are randomly sampled from the pseudoword dictionary.



Fairseq model	share-decoder-input-output-embed	True
	embed_dim	128
	ffn_embed_dim	512
	layers	2
	heads	2
	dropout	0.3
Optimizer	attention_dropout	0.1
	#params.	462K
	algorithm	AdamW
Learning rate scheduler	learning rates	5e-4
	betas	(0.9, 0.98)
	weight decay	0.01
	clip norm	0.0
Training	type	inverse_sqrt
	warmup updates	400
	warmup init learning rate	1e-7
Training	batch size	512 tokens
	sample-break-mode	none
	epochs	10

(a) Transformer.

Fairseq model	share-decoder-input-output-embed	True
	embed_dim	128
	hidden_size	512
	layers	2
	dropout	0.1
	#params.	3,547K
Optimizer	algorithm	AdamW
	learning rates	5e-4
	betas	(0.9, 0.98)
	weight decay	0.01
Learning rate scheduler	clip norm	0.0
	type	inverse_sqrt
	warmup updates	400
Training	warmup init learning rate	1e-7
	batch size	512 tokens
	sample-break-mode	none
epochs	10	

(b) LSTM.

Fairseq model	share-decoder-input-output-embed	True
	embed_dim	64
	hidden_size	64
	layers	2
	dropout	0.1
	#params.	49K
Optimizer	algorithm	AdamW
	learning rates	5e-4
	betas	(0.9, 0.98)
	weight decay	0.01
Learning rate scheduler	clip norm	0.0
	type	inverse_sqrt
	warmup updates	400
Training	warmup init learning rate	1e-7
	batch size	512 tokens
	sample-break-mode	none
epochs	10	

(c) SRN.

Table 13: Hyperparameters of standard LMs and PLMs

model	composition recurrence embed_dim hidden_size layers dropout #params.	BiLSTM LSTM 256 256 2 0.3 2,440K
Optimizer	algorithm learning rates betas max grad norm	Adam 1e-3 (0.9, 0.98) 5.0
Training	batch size sample-break-mode epochs	2,048 tokens none 10
Inference	beam size word beam size shift size	100 10 1

(a) RNNNG.

model	composition recurrence embed_dim hidden_size layers dropout #params.	Simple RNN Simple RNN 64 64 2 0.3 68K
Optimizer	algorithm learning rates betas max grad norm	Adam 1e-3 (0.9, 0.98) 5.0
Training	batch size sample-break-mode epochs	2,048 tokens none 10
Inference	beam size word beam size shift size	100 10 1

(b) SRNNG.

Table 14: Hyperparameters of RNNNGs