

Can Similarity-Based Domain-Ordering Reduce Catastrophic Forgetting for Intent Recognition?

Amogh Mannekote, Xiaoyi Tian, Kristy Elizabeth Boyer, Bonnie J. Dorr

University of Florida

{amogh.mannekote, tianx, keboyer, bonniejdorr}@ufl.edu

Abstract

Task-oriented dialogue systems are expected to handle a constantly expanding set of intents and domains even after they have been deployed to support more and more functionalities. To live up to this expectation, it becomes critical to mitigate the catastrophic forgetting problem (CF) that occurs in continual learning (CL) settings for a task such as intent recognition. While existing dialogue systems research has explored replay-based and regularization-based methods to this end, the effect of domain ordering on the CL performance of intent recognition models remains unexplored. If understood well, domain ordering has the potential to be an orthogonal technique that can be leveraged alongside existing techniques such as experience replay. Our work fills this gap by comparing the impact of three domain-ordering strategies (min-sum path, max-sum path, random) on the CL performance of a generative intent recognition model. Our findings reveal that the min-sum path strategy outperforms the others in reducing catastrophic forgetting when training on the 220M T5-Base model. However, this advantage diminishes with the larger 770M T5-Large model. These results underscore the potential of domain ordering as a complementary strategy for mitigating catastrophic forgetting in continually learning intent recognition models, particularly in resource-constrained scenarios.

Keywords: continual learning, slot filling, intent classification

1. Introduction

In real-world dialogue systems, language use can vary significantly across different domains or contexts. For example, a dialogue model used in a customer service dialogue system often needs to be dynamically repurposed to handle new types of inquiries or new product offerings after deployment. However, it can be expensive to retrain the underlying dialogue model from scratch every time there is such a change. For this reason, continual learning (CL, or lifelong learning) has become a popular paradigm for training task-oriented dialogue systems (Ke and Liu, 2022; Lee, 2017; Li et al., 2022b).

CL-based approaches to update existing dialogue models enable them to adapt to constantly evolving business needs without the need for regular, full-retraining from scratch, making them more resource-efficient in terms of compute, energy, and time (Van de Ven and Tolias, 2019; Chen and Liu, 2018). This paper focuses on *intent recognition*, which is a crucial early step in pipeline-based dialogue systems, affecting downstream modules like dialogue state tracking, dialogue management, and natural language generation.

Catastrophic forgetting (CF) is a significant challenge in CL settings, where the model’s performance deteriorates on previously learned tasks as it encounters new ones (Nguyen et al., 2019; French, 1970; McCloskey and Cohen, 1989). This is especially prominent in multi-domain intent recognition. When the model is trained incrementally on one domain at a time (as depicted in Figure 1), it is susceptible to forgetting when

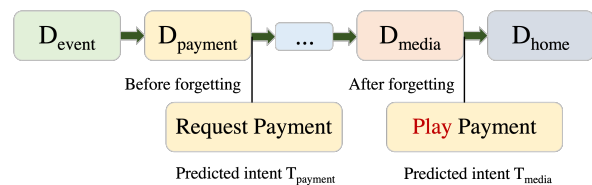


Figure 1: In continual learning, the model is trained one domain at the time. In this example, the model is first trained on data from the event domain D_{event} , then trained based on the payment domain $D_{payment}$ and so on. “request payment” might be mislabeled as “play payment” after D_{media} training due to CF.

trained on subsequent domains. Prior research has explored mitigating strategies such as regularization (Li et al., 2022a), experience replay (Qin et al., 2022), and curriculum learning (Bengio et al., 2009).

Domain ordering, rooted in the principles of curriculum learning, has been effective in mitigating CF in continual learning (Shui et al., 2019). Curriculum learning suggests that learning is more effective when examples progress from simple to complex, mirroring how humans and animals learn. The curriculum approach sorts the dialogue samples by difficulty, then guides the model to learn in increasing order of the “complexity” of the samples (with varying definitions of complexity, of course) (Dai et al., 2021; Wang et al., 2021). While task-ordering effects on binary image classifications (Shui et al., 2019) using MNIST dataset (LeCun, 1998) have been explored, there is limited investi-

gation on its impact on dialogue-based tasks.

In the context of task-oriented dialogue systems, [Madotto et al. \(2021\)](#) explored techniques to improve continual learning performance for various tasks such as natural language understanding, dialogue state tracking, and natural language generation. Similarly, [Lee \(2017\)](#) and [Mi et al. \(2020\)](#) deployed regularization techniques such as Elastic Weight Consolidation (EWC) for natural language generation as well as end-to-end dialogue setups. We follow in the footsteps of these prior works and investigate how domain ordering influences CF in continual learning for intent recognition.

Our study addresses two research questions regarding intent recognition in a dialogue setting:

1. Does the extent of CF in a continually trained intent recognition model depend on the order in which the domains are presented?
2. If the sequence does impact CF, which ordering strategy is most effective in reducing it?

To explore these questions, we employ a three-step process for our experiments using the Schema-Guided Dialog (SGD) corpus ([Rastogi et al., 2020](#)). First, we extract fixed-size subsets from the power-set of all the domains in the corpus. We then arrange each subset using three ordering strategies (minimum sum path, maximum sum path, and random domain ordering) that based on inter-domain similarities. In the final step, we continually train models over these subsets using different model sizes (T5-Base and T5-Large) and evaluate their performance using *overall accuracy* and *catastrophic forgetting* as evaluation metrics.

Note that our study does not aim to compare performance differences across model sizes; it is widely accepted that a larger model with more parameters will inherently yield better results ([Raffel et al., 2020](#)). Instead, our research primarily investigates whether different domain ordering strategies influence performance outcomes under the same computational constraints.

2. Methods

At a high-level, we generate domain orderings using a three-step procedure.

1. We first calculate an inter-domain distance matrix by calculating the mean cosine similarity between the S-BERT embeddings ([Reimers and Gurevych, 2019](#)) of the utterances in each domain.
2. Next, we construct a domain-similarity graph, which is a fully-connected, weighted, undirected graph whose each node represents a domain and the weight of the edge connecting

two nodes is equal to the inter-domain distance between their corresponding domains.

3. Finally, given a domain-similarity graph, we calculate three separate domain orderings of those domains. We formulate these orderings as various path-finding algorithms (in our case, we examine three paths: min-path, max-path, and random paths).

2.1. Computing Domain Orderings

We first randomly sample five domains from all available domains in our dialogue corpus. Then, for each sample, we generate three distinct domain orderings over the domain similarity graph using a brute-force approach. The three domain orderings include: 1) maximum-sum hamiltonian path (max-sum-path), 2) minimum sum hamiltonian path (min-sum-path), and a 3) random path¹. These ordering strategies have been utilized in previous work on task-ordering in continual learning such as [Bell and Lawrence \(2022\)](#). However, it is significantly different from our setting as their experiments are run on the MNIST image dataset ([LeCun and Cortes, 2005](#)) for a binary classification task.

Finally, we train the model based on the ordering strategies listed above. In total, we sample 22 domain subsets (five domains) and obtain 66 continual learning runs (three unique orderings per domain subset).

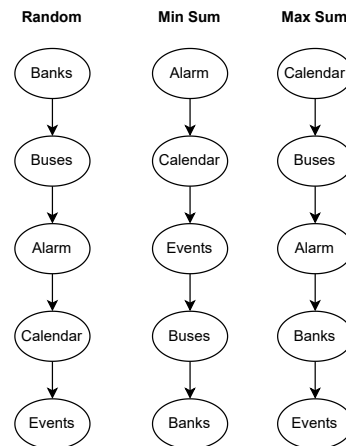


Figure 2: Random, Min-Sum Path, and Max-Sum Path ordering strategies.

¹Although the general problem of computing the min-sum path and max-sum path is NP-hard ([Cormen et al., 2009](#)), we keep the problem size (the number of domains in a single run) small enough such that a brute-force approach is computationally feasible.

2.2. Evaluation Metrics

We evaluate a model’s continual learning performance using two metrics: **Average Accuracy** and **Average CF**. These metrics have been used widely in previous studies related to continual learning (Bell and Lawrence, 2022; Wang et al., 2022; Chaudhry et al., 2018). Average Accuracy is defined as the mean accuracy achieved by the final model over all domains, while Average CF is the average difference between the best accuracy achieved during training and the final accuracy for all tasks (except the last task).

3. Experiments

Dataset. Our experiments are conducted using the Schema-Guided Dialog (SGD) dataset (Rastogi et al., 2020), which contains over 20,000 dialogues and covers 20 domains (each domain has anywhere from 1 to 10 intents). The test split of the dataset contains unseen domains to facilitate evaluation of out-of-domain generalization performance. Figure 2 shows the three domain orderings for the top five domains in the SGD dataset.

Tokenization. We prefix the model input with “classify intent: “. To this we concatenate the dialogue history by combining all utterances within a fixed dialogue context window. Individual utterances in the dialogue history are separated by the separator token used for T5 models, `</s>`. To prompt the model to predict the intent label, we add “intent: ” at the end of the input sequence. The input is truncated to a maximum of 512 tokens, and we set the context window size to 3. For the output label, we retain the original labels (e.g., `MakeBooking`).

Training. We utilize T5-based models (T5-base and T5-large) as our backbone models for all our experiments (Raffel et al., 2020). We incrementally fine-tune the models over each domain one by one. We limit the total number of samples per domain to 100, with 60% allocated to training, 15% allocated for validation, and 25% for testing. For each T5 model (T5-BASE and T5-LARGE), we perform 22 runs for each ordering strategy (total of 66 runs).

4. Results

Figure 3 compares the distributions of Average Accuracy and Average CF among the three Ordering Strategies based on 22 runs. The outcomes of these different ordering strategies are summarized in Table 1. To evaluate the impact of domain ordering strategies on model performance, we perform a repeated-measures ANOVA. We intentionally do

not draw comparisons between the performance of different T5 model sizes. Instead, we explore the impact of various domain ordering strategies on model performance, all while keeping computing resources constant.

The ANOVA results show that, for the **T5-Base model**, there is a statistically significant difference in Average CF between the ordering strategies ($F(2, 63) = 8.476, p = 0.0006$). To delve deeper into these differences, we employ Tukey’s HSD Test for multiple comparisons among the three ordering strategies: max-sum path, min-sum path, and random. The test reveals that min-sum path significantly outperforms the max-sum path strategy ($p = 0.0017, 95\% \text{ C.I.} = [0.0565, 0.2793]$) as well as the random strategy ($p = 0.0024, 95\% \text{ C.I.} = [0.0515, 0.2743]$). Yet, there is no significant difference in Average CF between the max-sum path and random strategies ($p = 0.99$). Mean and standard deviation for each strategy can be found in Table 1. Furthermore, the repeated measures ANOVA indicates no significant influence of the ordering strategy on Average Accuracy across the three conditions [$F(2, 63) = 0.5004, p = 0.6086$].

As for the **T5-Large model**, the ANOVA results indicate that the ordering strategy did not have a significant effect on either Average Accuracy ($F(2, 63) = 3.293, p = 0.077$) or Average CF ($F(2, 63) = 0.028, p = 0.869$).

Qualitative Analysis. Given that our model uses a generative text-to-text approach to generate its intent labels, we observe that both our models are particularly sensitive to how these labels are formed. Specifically, the intent labels from our SGD corpus adhere to a `<verb>_<noun>` pattern (e.g., `play_movie, set_alarm, book_hotel`). We find that both T5-Base and T5-Large correctly predict the nouns most of the time. However, the verbs are frequently mispredicted. For example, the label `play_movie` is often incorrectly predicted as `reserve_movie`. Similarly, `book_hotel` is incorrectly predicted as `get_hotel`. We attribute the relatively low difficulty of identifying the noun to the presence of easily available cues such as keywords present in the utterance. In contrast, the verb is a more “latent” factor that needs higher model capacity to recognize. In other words, we find that the catastrophic forgetting is primarily due to the low model capacity in differentiating the verbs.

5. Discussion

Our most important finding is that while the ordering of the training domains can have a significant effect on catastrophic forgetting (CF) during continual learning for smaller model sizes, this effect

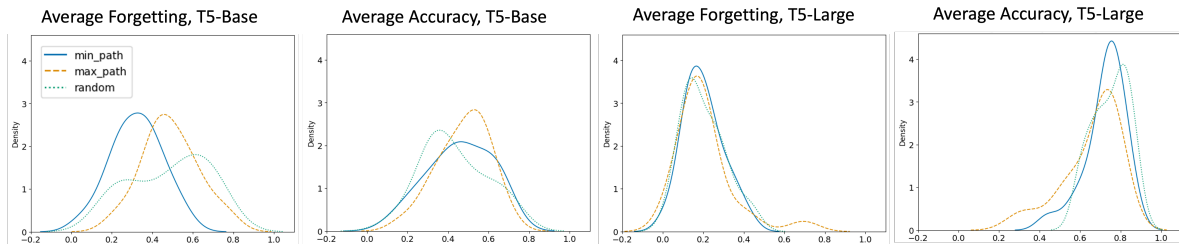


Figure 3: Density plots of Average Accuracy and Average CF (Forgetting) for min-sum path, max-sum path and random ordering strategies using T5-Base and T5-Large models across 22 domain subsets. Min-sum-path strategy with T5-BASE results in minimal Average CF, while no significant differences are observed in Average Accuracy between strategies or with T5-LARGE models.

Table 1: Results for each ordering strategy for T5-Base and T5-Large models

Model	T5-Base				T5-Large			
	Average Accuracy		Average CF		Average Accuracy		Average CF	
Ordering Strategy	Mean	SD	Mean	SD	Mean	SD	Mean	SD
min-sum path	0.457	0.156	0.321	0.125	0.724	0.1	0.199	0.097
max-sum path	0.476	0.128	0.489	0.136	0.657	0.141	0.205	0.141
random	0.431	0.16	0.484	0.192	0.751	0.088	0.201	0.105
ANOVA results	$F = 0.5004, p = 0.6086$		$F = 8.476, p = 0.0006$		$F = 3.293, p = 0.077$		$F = 0.028, p = 0.869$	

significantly breaks down when a larger model is used.

Within the smaller model regime (in our case, the smaller model is T5-Base), our results suggest that the *min-sum path* strategy is significantly more effective than the *max-sum path* and *random* ordering strategies. This finding aligns with curriculum learning concepts (Dai et al., 2021; Wang et al., 2021; Xu et al., 2020), suggesting benefits from progressively increasing the “jumps” in dissimilarity between successive training samples. One explanation for this phenomenon is that this strategy capitalizes on inherent domain similarities, helping the model recognize shared patterns and features. This fortifies its grasp on common concepts, aiding generalization and minimizing CF. Consequently, this would aid the model in becoming more proficient at managing later-introduced, related domains.

In terms of practical implications, our findings suggest that the ordering strategy might be particularly helpful in scenarios with limited computing resources where training larger language models may not always be feasible. In such cases, leveraging an appropriate ordering strategy, such as our identified *min-sum path*, can prove to be a practical method to achieve effective intent recognition while optimizing resource utilization.

6. Conclusion

Our study investigates the impact of domain ordering on mitigating catastrophic forgetting in intent recognition models. We find that the *min-sum path* strategy, which follows a progression of similar domains, is the most effective in reducing catastrophic forgetting in the smaller, T5-Base model. However, this effect is not observed in the larger T5-Large model, suggesting that model size and complexity may influence the importance of domain ordering. These findings highlight the importance of carefully considering domain ordering strategies, particularly in resource-constrained scenarios.

Limitations

The first limitation of this approach is that it is a strategy based on domain ordering. Therefore, it is inherently only applicable to those settings where the model training does not need to occur one-by-one. The second limitation of our work involves the use of a singular definition of inter-domain distance. There are several possible ways to define inter-domain distance, including those based on notions of “difficulty” of a domain. Finally, as is often true with preliminary experiments such as this one, future studies should incorporate larger and more diverse datasets to enhance generalizability of the results.

Ethics Statement on Broader Impact

By improving the performance and stability of dialogue-based systems, this work holds the potential to give rise to more efficient and accurate AI technologies. Improvements in the continual learning model performance of intent recognition models, lead to reduction of compute and time required to update widely-deployed NLU models in dialogue systems. With rising global adoption of virtual assistants such as Amazon Alexa and Google Assistant, improvements in efficient training can help reduce carbon emissions from commercial data centers, particularly in the face of ever-increasing sizes of large language models continue to increase. In terms of data ethics, our study uses the publicly-available Schema-Guided Dialog (SGD) corpus, which is in standard use for evaluating dialogue models. We did not collect any new datasets for this exploration.

Samuel J. Bell and Neil D. Lawrence. 2022. [The effect of task ordering in continual learning](#). *arXiv preprint arXiv:2205.13323*.

Yoshua Bengio, Jérôme Louradour, Ronan Collobert, and Jason Weston. 2009. Curriculum learning. In *Proceedings of the 26th annual international conference on machine learning*, pages 41–48.

Arslan Chaudhry, Marc'Aurelio Ranzato, Marcus Rohrbach, and Mohamed Elhoseiny. 2018. Efficient lifelong learning with a-gem. *arXiv preprint arXiv:1812.00420*.

Zhiyuan Chen and Bing Liu. 2018. Lifelong machine learning. *Synthesis Lectures on Artificial Intelligence and Machine Learning*, 12(3):1–207.

Thomas H. Cormen, Charles E. Leiserson, Ronald L. Rivest, and Clifford Stein. 2009. *Introduction to Algorithms, Third Edition*, 3rd edition. The MIT Press.

Yinpei Dai, Hangyu Li, Yongbin Li, Jian Sun, Fei Huang, Luo Si, and Xiaodan Zhu. 2021. Preview, attend and review: Schema-aware curriculum learning for multi-domain dialog state tracking. *arXiv preprint arXiv:2106.00291*.

Robert French. 1970. Using semi-distributed representations to overcome catastrophic forgetting in connectionist networks.

Zixuan Ke and Bing Liu. 2022. [Continual learning of natural language processing tasks: A survey](#). *arXiv preprint arXiv:2211.12701*.

Yann LeCun. 1998. The MNIST database of handwritten digits. <http://yann.lecun.com/exdb/mnist/>.

Yann LeCun and Corinna Cortes. 2005. [The mnist database of handwritten digits](#).

Sungjin Lee. 2017. Toward continual learning for conversational agents. *arXiv preprint arXiv:1712.09943*.

Dingcheng Li, Zheng Chen, Eunah Cho, Jie Hao, Xiaohu Liu, Fan Xing, Chenlei Guo, and Yang Liu. 2022a. Overcoming catastrophic forgetting during domain adaptation of seq2seq language generation. In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 5441–5454.

Guodun Li, Yuchen Zhai, Qianglong Chen, Xing Gao, Ji Zhang, and Yin Zhang. 2022b. Continual few-shot intent detection. In *Proceedings of the 29th International Conference on Computational Linguistics*, pages 333–343.

Andrea Madotto, Zhaojiang Lin, Zhenpeng Zhou, Seungwhan Moon, Paul Crook, Bing Liu, Zhou Yu, Eunjoon Cho, Pascale Fung, and Zhiguang Wang. 2021. [Continual learning in task-oriented dialogue systems](#). *arXiv preprint arXiv:2012.15504*.

Michael McCloskey and Neal J Cohen. 1989. Catastrophic interference in connectionist networks: The sequential learning problem. In *Psychology of learning and motivation*, volume 24, pages 109–165. Elsevier.

Fei Mi, Liangwei Chen, Mengjie Zhao, Minlie Huang, and Boi Faltings. 2020. Continual learning for natural language generation in task-oriented dialog systems. *arXiv preprint arXiv:2010.00910*.

Cuong V Nguyen, Alessandro Achille, Michael Lam, Tal Hassner, Vijay Mahadevan, and Stefano Soatto. 2019. Toward understanding catastrophic forgetting in continual learning. *arXiv preprint arXiv:1908.01091*.

Yujia Qin, Jiajie Zhang, Yankai Lin, Zhiyuan Liu, Peng Li, Maosong Sun, and Jie Zhou. 2022. ELLE: Efficient lifelong pre-training for emerging data. *arXiv preprint arXiv:2203.06311*.

Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J Liu. 2020. Exploring the limits of transfer learning with a unified text-to-text transformer. *The Journal of Machine Learning Research*, 21(1):5485–5551.

- Nils Reimers and Iryna Gurevych. 2019. [Sentence-BERT: Sentence embeddings using Siamese BERT-networks](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 3982–3992, Hong Kong, China. Association for Computational Linguistics.
- Changjian Shui, Mahdieh Abbasi, Louis Émile Robitaille, Boyu Wang, and Christian Gagné. 2019. [A principled approach for learning task similarity in multitask learning](#). *arXiv preprint arXiv:1903.09109*.
- Gido M Van de Ven and Andreas S Tolias. 2019. Three scenarios for continual learning. *arXiv preprint arXiv:1904.07734*.
- Xin Wang, Yudong Chen, and Wenwu Zhu. 2021. A survey on curriculum learning. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 44(9):4555–4576.
- Zifeng Wang, Zizhao Zhang, Chen-Yu Lee, Han Zhang, Ruoxi Sun, Xiaoqi Ren, Guolong Su, Vincent Perot, Jennifer Dy, and Tomas Pfister. 2022. Learning to prompt for continual learning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 139–149.
- Benfeng Xu, Licheng Zhang, Zhendong Mao, Quan Wang, Hongtao Xie, and Yongdong Zhang. 2020. [Curriculum learning for natural language understanding](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 6095–6104, Online. Association for Computational Linguistics.

Language Resource References

- Rastogi, Abhinav and Zang, Xiaoxue and Sunkara, Srinivas and Gupta, Raghav and Khaitan, Pranav. 2020. *Towards scalable multi-domain conversational agents: The schema-guided dialogue dataset*. Proceedings of the AAAI conference on artificial intelligence.