

Not All Contexts Are Equal: Teaching LLMs Credibility-aware Generation

Ruotong Pan^{1,3}, Boxi Cao^{1,3}, Hongyu Lin¹, Xianpei Han^{1,2},
Jia Zheng¹, Sirui Wang⁴, Xunliang Cai⁴, Le Sun^{1,2}

¹Chinese Information Processing Laboratory ²State Key Laboratory of Computer Science
Institute of Software, Chinese Academy of Sciences, Beijing, China

³University of Chinese Academy of Sciences, Beijing, China

⁴Meituan

{panruotong2021, boxi2020, hongyu, xianpei}@iscas.ac.cn
{zhengjia, sunle}@iscas.ac.cn {wangsirui, caixunliang}@meituan.com

Abstract

The rapid development of large language models has led to the widespread adoption of Retrieval-Augmented Generation (RAG), which integrates external knowledge to alleviate knowledge bottlenecks and mitigate hallucinations. However, the existing RAG paradigm inevitably suffers from the impact of *flawed information* introduced during the retrieval phrase, thereby diminishing the reliability and correctness of the generated outcomes. In this paper, we propose Credibility-aware Generation (CAG), a universally applicable framework designed to mitigate the impact of flawed information in RAG. At its core, CAG aims to equip models with the ability to discern and process information based on its credibility. To this end, we propose an innovative data transformation framework that generates data based on credibility, thereby effectively endowing models with the capability of CAG. Furthermore, to accurately evaluate the models' capabilities of CAG, we construct a comprehensive benchmark covering three critical real-world scenarios. Experimental results demonstrate that our model can effectively understand and utilize credibility for generation, significantly outperform other models with retrieval augmentation, and exhibit resilience against the disruption caused by noisy documents, thereby maintaining robust performance. Moreover, our model supports customized credibility, offering a wide range of potential applications. ¹

1 Introduction

In recent years, Large Language Models (LLMs) (Brown et al., 2020; OpenAI et al., 2023; Touvron et al., 2023; Anil et al., 2023) have experienced significant growth and demonstrated excellent performance in multiple domains (Kojima et al., 2022; Thirunavukarasu et al., 2023; Ziems et al., 2023; Min et al., 2023). With the ascendancy

¹Our code, benchmark, and models are available at <https://github.com/panruotong/CAG>

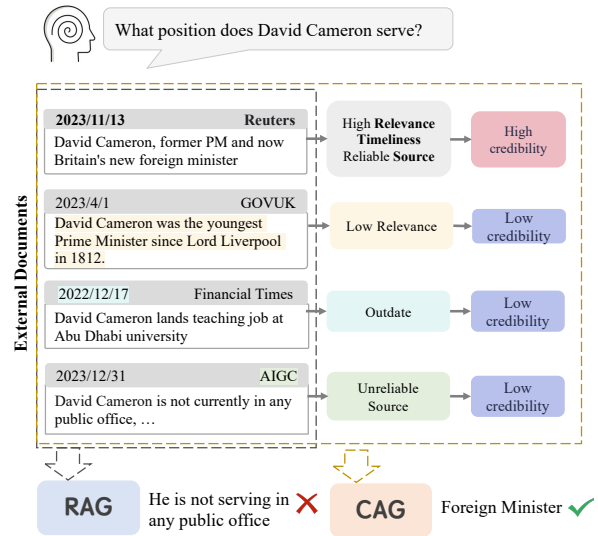


Figure 1: The comparison between Retrieval-Augmented Generation (RAG) and Credibility-aware Generation (CAG). Incorporating credibility into the model aids in mitigating errors caused by *flawed information* introduced from the retrieval process.

of LLMs, Retrieval-Augmented Generation (RAG) has attracted significant interest. RAG mitigates the knowledge bottleneck of LLMs by incorporating externally retrieved documents into their generation process. This inclusion helps diminish the occurrences of hallucinations and misinformation during generation, thereby substantially enhancing the quality of output from LLMs (Petroni et al., 2021; Zhu et al., 2021; Mallen et al., 2023).

However, RAG for large language models remains significantly impacted by flawed information. This is mainly because the retrieval process often provides noisy, outdated, and incorrect contexts which adversely affects RAG, substantially reducing its effectiveness. Specifically, previous research (Shi et al., 2023a; Chen et al., 2023a) has found that LLMs are highly sensitive to noise, which impacts LLMs' capacity to discern and trust accurate information, ultimately affecting the outcomes they generate. Furthermore, due to the tem-

poral insensitivity of LLMs (Su et al., 2022; Zhao et al., 2024), these models struggle to discern outdated information solely based on their internal knowledge. More critically, because LLMs are trained on extensive collections of historical text, there’s an inherent risk that outdated information will align with the models’ internal knowledge bases. This alignment can inadvertently encourage LLMs to favor and perpetuate outdated information. Besides, the prevalence of misinformation on the current web poses a significant challenge for large models, which struggle to identify misinformation using only their inherent knowledge (Xie et al., 2023; Pan et al., 2023). This difficulty makes them susceptible to misinformation, leading to the generation of incorrect answers. Therefore, flawed information, characterized by noisy, outdated, and incorrect information, has substantial negative effects on RAG.

From a cognition perspective, a common approach humans adopt to combat flawed information is to assess the credibility of external information (Burgoon et al., 2000). Specifically, information that is current, evaluated, and sourced from highly credible origins is typically regarded as more timely, accurate, and reliable. Motivated by this, we introduce Credibility-aware Generation (CAG), a universally applicable framework designed to address flawed information encountered during RAG. At its core, CAG seeks to equip models with the ability to discern and process information based on credibility. By attributing varying levels of credibility to information differing in relevance, temporal context, and source, and integrating these credibility indicators into the generative processes of LLMs, CAG significantly mitigates the issues arising from flawed information.

Unfortunately, we have discovered that existing LLMs are not inherently sensitive to directly provided credibility information in the prompt. This deficiency restricts their capacity to optimally employ credibility for discerning and processing information. To endow models with the capability of CAG, we propose a novel data transformation framework based on existing Question Answering (QA) and dialogue datasets. This framework transforms the data into a format that incorporates credibility and can be utilized to guide model credibility-based generation, thereby training the model to utilize credibility in addressing flawed information. Specifically, our data transformation process com-

prises two core steps: 1) Multi-granularity credibility annotation, which assigns credibility to text units at both document and sentence levels by dividing retrieved documents into varying granularities. 2) Credibility-guided explanation generation, which prompts LLMs to generate credibility-guided explanations given questions, retrieved documents with credibility annotation and golden answers. Finally, we utilize instruction fine-tuning to train the model, enabling it to generate responses based on credibility.

To rigorously assess the ability of the model’s credibility-aware generation in managing flawed information, we have developed a comprehensive benchmark encompassing various real-world scenarios, including open-domain QA, time-sensitive QA, and misinformation-polluted QA. In these settings, several indicators, including retrieval relevance, temporal validity, and source authority, are considered as the given credibility measurement. The main goal of this benchmark is to measure how well a model can answer questions when given the context documents with corresponding credibility annotations. Experimental results on multiple datasets across multiple scenarios demonstrate the efficacy of our approach in leveraging credibility information. Our model significantly outperforms various prevalent RAG approaches applied to both open and closed-source LLMs of diverse scales. Additionally, it exhibits robust resilience against noisy documents, maintaining high performance levels even as alternative strategies experience sharp deteriorations. All these results verify the effectiveness of the proposed CAG framework and corresponding training algorithm.

The main contributions of this study are summarized as follows:

- We present Credibility-aware Generation, a universal framework to handle the flawed information challenge in RAG.
- We propose a novel data transformation framework that leverages existing QA and dialogue datasets. This framework transforms existing datasets into data annotated with credibility and guides models to generate responses based on credibility, thereby equipping the model with Credibility-aware Generation capability.
- We construct a comprehensive benchmark and evaluate model performance in credibility-aware generation, encompassing real-world

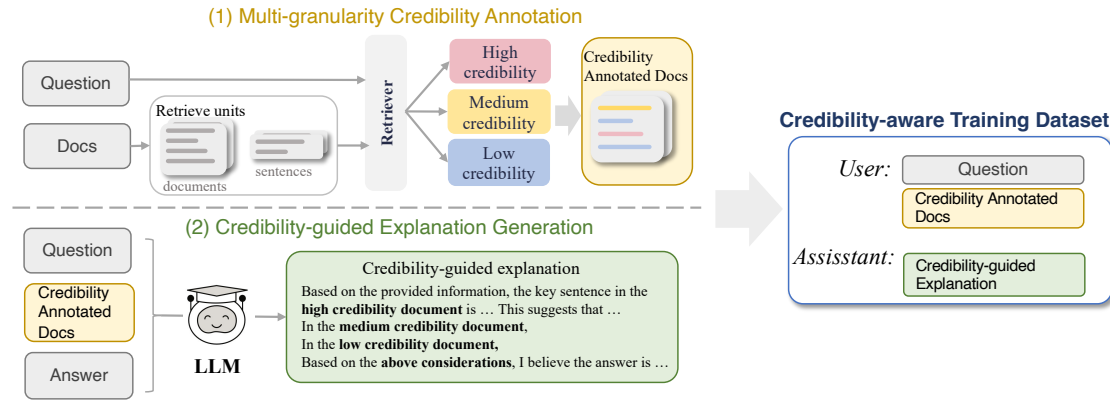


Figure 2: Overview of data transformation framework. The training data is constructed by first assigning credibility to contexts via multi-granularity credibility annotation (§3.1) and prompting LLM to produce credibility-guided explanations (§3.2). The processed data is used to instruction fine-tuning (§3.3) to endow the model with the ability for Credibility-aware Generation.

scenarios of open-domain QA, time-sensitive QA, and misinformation polluted QA.

- Experimental evidences demonstrate that our model effectively understands and employs credibility to generate responses, significantly surpasses other RAG-based strategies, and maintain robustness despite the increasing noise in the context.

2 Credibility-aware Generation

Credibility-aware Generation is designed to enable models to discern and process information based on its credibility. Subsequently, we will provide formal definitions for both RAG and CAG, illustrating their divergence.

Definition In the Retrieval-Augmented Generation process, user input x initiates the retrieval of a set of related documents D_x from a large corpus C based on how closely these documents match the input. Then, it combines the input x with these documents D_x to generate responses y , formalized as $y = \text{LM}([x, D_x])$, where $[\cdot, \cdot]$ denotes the concatenation operation.

Compared to RAG, the Credibility-aware Generation offers additional credibility for each document. Initially, through credibility assessment based on various scenarios, each retrieved document has been assigned a level of credibility. Then, these documents D_x with their credibility C are synthesized with the user input x as augmented input. LM generates responses y based on this augmented input, formally represented as $y = \text{LM}\left([x, \{[c_i, d_i]\}_{i=1}^{|D_x|}]\right)$. This approach ensures that the generated responses not only incorpo-

rate the content of the documents but also consider the credibility of each document, thereby enhancing the reliability of responses.

3 Teaching Model to Credibility-aware Generation

In this section, we endow LLMs with the capability of CAG. A potential approach involves directly providing the credibility annotations of each document in the prompt. Unfortunately, as indicated in Table 2, our experiments reveal that even advanced LLMs, such as ChatGPT, exhibit limited sensitivity to credibility. To this end, we introduce a novel data transformation framework. Through multi-granularity credibility annotation and credibility-guided explanation generation, we transform existing QA datasets into data that includes credibility annotations which can guide the model to generate credibility-based responses. Then, through instruction fine-tuning, we train the model to generate responses grounded in credibility assessments.

3.1 Multi-granularity Credibility Annotation

To cater to the varied requirements for credibility across different scenarios and enhance the model’s comprehension of credibility, we collect training data encompasses Open-domain QA, Machine Reading Comprehension (MRC) datasets, and dialogue datasets and propose a multi-granularity credibility annotation method.

First, we divide the retrieved documents to create a multi-granularity corpus, encompassing sentence and document levels. Then, the retriever assesses the match between each retrieval unit and the query, assigning a relevance score, and classifies docu-

ments into three levels: high, medium, and low, employing either equi-frequency or equi-distance segmentation. This approach of using levels instead of scores aims to simplify representation, thereby improving the model’s understanding and providing a certain degree of fault tolerance. Consequently, we gather about 15k training datasets, within which the contexts of the QA data are annotated with different granularities of credibility. The detailed composition of the training data is shown in the Appendix A.1.

3.2 Credibility-guided Explanation Generation

To facilitate the model’s comprehension and effective utilization of credibility, we employ LLM to generate explanations for the answers. These explanations stem from an analysis of both the content and credibility of the documents.

Given the limitations of current LLMs in comprehending credibility effectively, we utilize chain-of-thought prompts to guide LLM to generate credibility-guided explanations given questions, retrieved documents with credibility and golden answers. In this case, LLM is required to analyze document content and credibility, as well as the rationale for the derived answer after integrating all the information. Considering the accessibility and advanced capabilities of GPT-3.5, we elect to employ GPT-3.5 for the generation of explanations. In this way, we obtain high-quality, credibility-guided answer explanations. Then, we replace the original answers in the training data with credibility-guided explanations to form a novel QA dataset based on credibility. Within this dataset, the inputs include questions and external documents annotated with credibility, while the outputs are credibility-guided explanations.

3.3 Instruction Fine-tuning

Through the two steps above, the training dataset obtained contains credibility, which can be used to facilitate the model in gaining the capacity for CAG. We fine-tune the language model on this dataset to empower the model to discern and process information according to its credibility. As defined by Iyer et al. (2023), the loss function is as follows:

$$\mathcal{L}(D_{\mathbf{x}}; \theta) = - \sum_{i=1}^N \log p_{\theta} \left(y_i \mid \left[\mathbf{x}, \{[c_i, d_i]\}_{i=1}^{|D_{\mathbf{x}}|} \right], y_{<i} \right)$$

4 Credibility-aware Generation Benchmark

To rigorously evaluate the ability of credibility-aware model generation to handle flawed information, we construct the Credibility-aware Generation Benchmark (CAGB). This benchmark encompasses the following three specific scenarios where the integration of credibility is essential:

- **Open-domain QA** aims to accurately answer questions on a wide variety of topics without being limited to any particular area. It encompasses a broad spectrum of real-world applications that urgently require the integration of external knowledge to enhance the language model’s ability to address queries. This scenario thus necessitates the ability to effectively identify and process noise information.
- **Time-sensitive QA** aims to give answers that are both correct and up-to-date, using the most recent information available. It poses a challenge for LLMs due to the rapidly changing nature of internet information. The inevitable inclusion of outdated documents when incorporating external sources further complicates matters. Even with timestamps provided for each document, LLMs might still erroneously prioritize outdated documents. This situation underscores the critical need for credibility in time-sensitive QA scenarios.
- **Misinformation polluted QA** aims to tackle the issue of ensuring accurate answers in an environment polluted with misinformation. It presents a substantial challenge to LLMs, attributed to the misuse of LLMs and the consequent proliferation of fake news and misinformation (Zhuo et al., 2023; Pan et al., 2023). Consequently, in this scenario, it is crucial to take into account the quality and credibility of any introduced external information.

In the following, we will provide a detailed description of data construction for each scenario, and the statistics of CAGB are shown in the Table 1.

4.1 Open-domain QA

Our research utilizes data from several challenging QA datasets that have noise in the context they provide. HotpotQA (Yang et al., 2018b) and 2WikiMHQA (Ho et al., 2020) both require reasoning across multiple documents, and feature a high

| Dataset | #Samples | #Documents | Noise Ratio |
|-----------------------------------|----------|------------|-------------|
| <i>Open-domain QA</i> | | | |
| HotpotQA | 500 | 5000 | 0.8 |
| 2WikiMHQA | 500 | 5000 | 0.6-0.8 |
| MuSiQue | 500 | 10000 | 0.9 |
| ASQA | 948 | 4740 | - |
| RGB | 300 | 11641 | 0.2-0.8 |
| <i>Time-sensitive QA</i> | | | |
| EvolvTempQA | 500 | 3500 | 0.4-0.8 |
| <i>Misinformation polluted QA</i> | | | |
| NewsPollutedQA | 480 | 2400 | 0.5-0.75 |

Table 1: Statistics of our Credibility-aware Generation Benchmark, which includes 8 dataset derived from 3 scenarios.

proportion of distracting documents (60%-80% and 80%, respectively). Importantly, the data we utilize from HotpotQA is extracted from the dev subset, whereas our training dataset is derived from the train subset. Musique (Trivedi et al., 2021) questions are of higher complexity, with up to 90% of distracting passages. ASQA (Stelmakh et al., 2022) is a long format QA dataset focused on ambiguous questions. RGB (Chen et al., 2023b) is a specialized benchmark used for evaluating the capabilities of models in the RAG scenario, with noise robustness being one of its aspects.

We assign credibility to the documents provided in the dataset in terms of retrieval relevance. The retriever is used to assign relevance scores based on the similarity of each document to the query. We then divide the documents into three categories based on the scores at equal intervals, including high, medium, and low. Subsequently, we divide the documents into three credibility levels, specifically high, medium, and low, based on relevance scores distributed at equal intervals.

4.2 Time-sensitive QA

In order to construct a diverse, high-quality, and up-to-date news dataset, we annotate 500 time-sensitive questions along with their corresponding dates. These questions originate from real-world scenarios, including news question answering data from RealTime QA (Kasai et al., 2022), TAQA (Zhao et al., 2024), and questions adapted from news reports.

To simulate the simultaneous occurrence of varied information on the Internet, we utilize Google search API to gather three relevant documents and four distracting documents for each question, the latter being either irrelevant or outdated. This approach to document selection is crafted to emulate the intricate and heterogeneous nature of real-world

information landscapes. Each news includes its publication date, thereby aiding in the evaluation of its timeliness. For document credibility annotation, we assess credibility based on relevance and time difference between the document’s publication and the posed question. Documents that are highly relevant to the given query and possess strong timeliness are considered to have high credibility, while documents that are irrelevant or outdated are regarded as having low credibility. We ensure the accuracy of answers by manually annotating.

The obtained time-sensitive dataset with outdated document settings and credibility annotation is named EvolvingTempQA.

4.3 Misinformation Polluted QA

We create a up-to-date multiple-choice quiz dataset, comprising both real and fake news for each question. The dataset construction bases on RealTime QA, utilizing weekly news quizzes from CNN and other news platforms. To maintain the dataset’s real-time relevance, we select news from July 1, 2023, onwards, comprising 480 questions with four options and one supporting news item each.

To simulate the generation of fake news, we first generated a claim utilizing the LLM, based on a question and a randomly selected incorrect option. This process transforms the question and incorrect option into a deceptive statement. Subsequently, we choose GPT-3.5 and Qwen as the generators for fake news, guiding them to generate documents of varying styles based on the claim, including news style and Twitter style. The prompts used and examples of the generated content are detailed in the Appendix A.4. The fictitious news articles produced by LLMs, due to their authenticity being deliberately compromised, are classified as having low credibility. Conversely, news articles from reputable news websites are considered to possess high credibility. We set the ratio of fake news at 0.5, 0.67, and 0.75 to evaluate the robustness of model against misinformation under various levels of pollution.

By simulating the process of generating fake news and annotating credibility based on source, we obtain a misinformation polluted QA dataset in the news domain, named NewsPollutedQA.

5 Experiments

To demonstrate the effectiveness of our framework in handling flawed information in real-world QA

| Model | Open-domain QA | | | | Time-sensitive QA | | Misinfo polluted QA |
|----------------------------------|----------------|--------------|--------------|--------------|-------------------|----------------|---------------------|
| | HotpotQA | 2WikiMHQA | MuSiQue | ASQA | RGB | EvolvingTempQA | NewsPollutedQA |
| <i>retrieval-based</i> | | | | | | | |
| ChatGPT | 0.334 | 0.368 | 0.194 | 0.404 | 0.773 | 0.646 | 0.231 |
| LLaMA-2-7B | 0.280 | 0.312 | 0.160 | 0.268 | 0.753 | 0.446 | 0.179 |
| Vicuna-7B | 0.278 | 0.296 | 0.116 | 0.358 | 0.677 | 0.632 | 0.229 |
| Mistral-7B-Instruct | 0.288 | 0.270 | 0.106 | 0.300 | 0.713 | 0.596 | 0.204 |
| LLaMA-2-13B | 0.366 | 0.370 | 0.164 | 0.321 | 0.820 | 0.484 | 0.204 |
| LLaMA-2-70B | 0.418 | 0.390 | 0.256 | 0.316 | 0.823 | 0.492 | 0.430 |
| vanilla IFT | 0.324 | 0.245 | 0.270 | 0.157 | 0.650 | 0.566 | 0.329 |
| <i>retrieval and reranking</i> | | | | | | | |
| ChatGPT | 0.396 | 0.394 | 0.216 | 0.388 | 0.790 | 0.676 | 0.427 |
| LLaMA-2-7B | 0.302 | 0.376 | 0.200 | 0.375 | 0.730 | 0.510 | 0.265 |
| Vicuna-7B | 0.355 | 0.306 | 0.164 | 0.494 | 0.757 | 0.686 | 0.275 |
| Mistral-7B-Instruct | 0.338 | 0.334 | 0.166 | 0.414 | 0.790 | 0.694 | 0.373 |
| LLaMA-2-13B | 0.370 | 0.372 | 0.180 | 0.390 | 0.823 | 0.552 | 0.308 |
| LLaMA-2-70B | 0.422 | 0.504 | 0.320 | 0.388 | 0.833 | 0.563 | 0.306 |
| vanilla IFT | 0.348 | 0.448 | 0.276 | 0.304 | 0.663 | 0.658 | 0.344 |
| <i>retrieval and credibility</i> | | | | | | | |
| ChatGPT | 0.422 | 0.388 | 0.182 | 0.440 | 0.807 | 0.704 | 0.408 |
| LLaMA-2-7B | 0.376 | 0.176 | 0.140 | 0.394 | 0.713 | 0.470 | 0.213 |
| Vicuna-7B | 0.349 | 0.266 | 0.091 | 0.490 | 0.740 | 0.654 | 0.279 |
| Mistral-7B-Instruct | 0.274 | 0.268 | 0.102 | 0.463 | 0.797 | 0.686 | 0.315 |
| LLaMA-2-13B | 0.360 | 0.384 | 0.164 | 0.399 | 0.803 | 0.497 | 0.227 |
| LLaMA-2-70B | 0.398 | 0.402 | 0.262 | 0.492 | 0.817 | 0.536 | 0.279 |
| vanilla IFT | 0.372 | 0.334 | 0.204 | 0.305 | 0.663 | 0.564 | 0.383 |
| CAG-7B (<i>ours</i>) | <u>0.509</u> | <u>0.578</u> | 0.340 | 0.496 | 0.897 | 0.810 | 0.442 |
| CAG-13B (<i>ours</i>) | 0.514 | 0.604 | 0.408 | 0.510 | 0.917 | <u>0.816</u> | <u>0.483</u> |
| CAG-mistral-7B (<i>ours</i>) | 0.502 | 0.540 | <u>0.384</u> | <u>0.505</u> | <u>0.900</u> | 0.836 | 0.613 |

Table 2: Model performance in our CAGB benchmark. The best/second best scores in each dataset are **bolded/underlined**. Our models substantially outperforms previous strategies across all 3 scenarios in CAGB. The results shown for EvolvingTempQA and RGB are at noise_ratio setting of 0.8, while NewsPollutedQA is at noise_ratio setting of 0.75.

scenarios, we conduct comprehensive experiments under three scenarios within the CAGB. All these results verify the effectiveness of the proposed CAG framework and the corresponding training algorithm. Additionally, our models maintain robustness even with the increasing noise in the context. In the following sections, we will discuss our experiments and conclusions in detail.

5.1 Setup

Baselines We compare our method with the following three strategies incorporated with 6 LLMs across various scales:

- **Retrieval-based** concatenates documents from the dataset with questions as input.
- **Retrieval and reranking** employs an advanced reranking mechanism to reorder retrieved documents, giving priority to those with greater relevance (Xie et al., 2023).
- **Retrieval and credibility** incorporates credibility as a prefix to the retrieved documents in the prompt, aiming to assess the model’s

ability to understand and utilize credibility.

We evaluate advanced models, including ChatGPT (gpt-3.5-turbo-0613), LLaMA-2-7B, 13B, 70B, Vicuna-7B-v1.5 and Mistral-7B-Instruct (Jiang et al., 2023). Additionally, we create a dataset mirroring the model training data but without credibility annotations and with initial answers, on which we fine-tune the same base model, and named the trained model vanilla IFT.

Experimental settings We use LLaMA-2-7B, LLaMA-2-13B and Mistral-7B as our base models. To provide relevance scores, we use SPLADE (Formal et al., 2021) as our retriever. Our model training is based on the Fastchat framework and carry out on two A100-80G GPUs. For all language models, we incorporate 3-shot QA examples within the prompt. We set the temperature parameter to 0.01 during inference. We employ Exact Match (EM) (Rajpurkar et al., 2016) as the primary evaluation metric for all datasets. The prompts used for our evaluation are provided in the Appendix A.3.

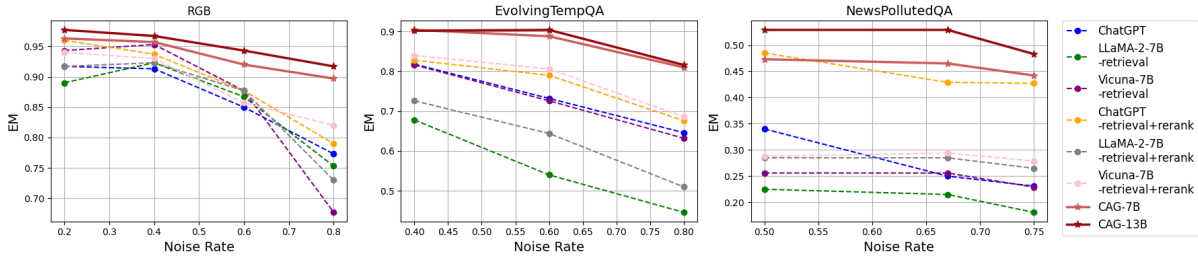


Figure 3: The performance of LLMs under varying noise ratios, which denote the proportions of retrieved noise documents. As the noise ratio increases, the performance of previous methods significantly deteriorates; in contrast, our approach maintains stable prediction quality even in high noise ratio, attributed to its enhanced ability to identify and prioritize accurate information.

5.2 Overall Results

The main results of the three scenarios are presented in the Table 2, we can clearly see that our model efficiently understands and utilizes credibility information to provide more accurate and credible responses. In the following, we analyze the experimental results in detail:

1) Previous approaches based on RAG severely suffer from the flawed information introduced during retrieval. In scenarios including open-domain QA, time-sensitive QA, and misinformation pollutedQA, existing LLMs, including ChatGPT and LLaMA-2-70B, face challenges due to interference from flawed information. In the retrieval-based open-domain QA scenario, the average EM score for ChatGPT is only 41.5%, while the EM score for LLaMA-2-70B is 44.1%. All models exhibit low performance on the Musique, NewsPollutedQA, which are characterized by high ratios of flawed information. The method of reranking using externally provided relevance scores can assist the model to a certain extent, as the model is sensitive to the order of documents (Xie et al., 2023; BehnamGhader et al., 2023).

2) CAG significantly improves performance by discerning between documents and guiding the model to prioritize those with high credibility. Our models significantly surpass all baseline models across the 7 datasets under 3 scenarios, including ChatGPT and LLaMA-2-70B enhanced with retrieval and reranking. For instance, on the 2WikiMHQA dataset, our CAG-7B improves 26.6% of EM score over the LLaMA-2-7B model and 28.2% of EM score over the Vicuna-7B model under retrieval-based.

3) Our approach generalizes to scenarios previously unseen which require credibility and demonstrates compatibility with diverse base

models. The models, developed through training on LLaMA 7B, 13B, and Mistral 7B with CAG, not only exhibit improved reliability in its outputs but also excel in new, challenging situations, including time-sensitive QA and misinformation polluted QA. This performance, achieved within an open-domain QA framework lacking temporal or source integration, underlines the model’s robust capability for CAG, effectively managing diverse flawed information and affirming the universality of CAG.

5.3 Analysis Study

In the following, we will present several analysis against the robustness and limitation of current Credibility-aware Generation.

5.3.1 Noise Robustness Analysis

Previous research has demonstrated that an increase in the proportion of noise within the context significantly degrades model performance (Xie et al., 2023; Chen et al., 2023b). To assess the robustness of diverse methods against flawed information, we vary the ratio of noisy documents within the total document set across three distinct datasets: RGB, EvolvingTempQA and NewsPollutedQA, and observe the consistency in performance changes across different models as the ratio of noisy documents increased.

We present the results in Figure 3 and can see that: **Credibility-aware Generation makes the model robust to flawed information, which enhances its ability to discern and prioritize accurate information.** As the proportion of noise in the context increases, most of the models exhibit performance degradation aligning with the observations made by Chen et al. (2023b). However, our models show greater robustness compared to others, notably displaying performance improvements on EvolvingTempQA as the noise ratio rises from 0.4 to 0.6.

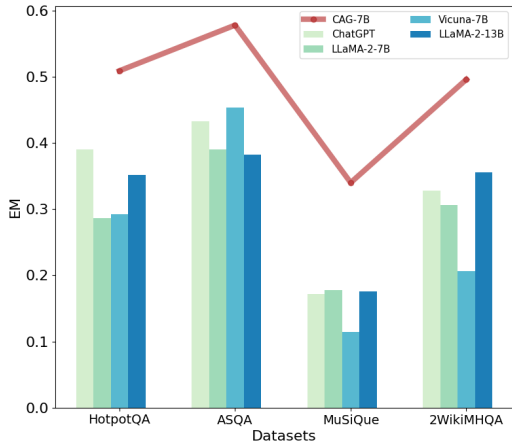


Figure 4: The comparison of performance of LLMs under discarding low credibility document setting and CAG-7B model across different Open-domain QA datasets. We can see that the CAG-7B significantly outperforms other models under this strategy.

5.3.2 Analysis of Discarding Low Credibility Documents

Upon assigning credibility to the documents in context, an alternative intuitive strategy is to simply discard low credibility documents. However, considering that credibility assessments are not precise, this strategy may inadvertently filter out helpful information, thereby impairing the accuracy of the model’s responses. To demonstrate this, we compare the performance of LLMs in this setting with that of CAG-7B in Open-domain QA. The results are shown in Figure 4, we can clearly see that: by preserving more document information and differentiating them based on explicit credibility in the prompt, our CAG framework mitigates the risk of losing valuable information. As a result, the accuracy and comprehensiveness of the responses are improved.

5.3.3 Effect of Credibility Annotation Accuracy

To investigate the impact of credibility annotation accuracy on the performance of CAG and to identify the upper limit of their potential, We conduct a comparison between the use of golden credibility annotations and retriever-based credibility annotations within Open-domain QA using both the CAG-7B and CAG-13B models. Golden credibility annotations refer to labeling golden support evidence as high credibility and other text as low credibility.

The results of our experiments are presented in Table 3. We can find that: The precision of re-

| Dataset | Annotation | CAG-7B | CAG-13B |
|-----------|------------|--------------|--------------|
| 2WikiMHQA | SPLADE | 0.562 | 0.604 |
| | Golden | 0.698 | 0.650 |
| Musique | SPLADE | 0.340 | 0.408 |
| | Golden | 0.626 | 0.656 |
| ASQA | SPLADE | 0.496 | 0.510 |
| | Golden | 0.505 | 0.525 |
| Average | SPLADE | 0.466 | 0.507 |
| | Golden | 0.610 | 0.610 |

Table 3: The performance comparison of the CAG-7B and CAG-13B when using retrieved annotation credibility and golden credibility annotations.

trieval model annotation credibility is a primary factor limiting the current performance of CAG. The results, as presented, clearly demonstrate that reliable credibility annotations are instrumental in unlocking the model’s potential. Compared with the use of SPLADE to label credibility, the use of golden credibility labels on the CAG-7B has resulted in an average improvement of 14.4% of EM across three datasets.


6 Customized Credibility Applications

In demonstrating the capability of customized credibility in CAG, this paper presents 3 examples that highlight its diverse application scenarios, including personalized response generation and the resolution of knowledge conflicts.


6.1 Personalized Response Generation

LLMs tailored to individuals consider individual preferences and requirements, thereby enhancing service precision and user satisfaction.

Baek et al. (2024) maintain an entity-centric knowledge base from the user’s search history, enriching LLM to provide customized services. This knowledge base reflects users’ current and potential interests. Upon receiving a novel query, the system initially retrieves relevant content. If the obtained entities correspond to those present in the user’s knowledge base, the system deems this information relevant, attributing higher credibility to the associated documents. Consequently, the CAG module can generate personalized responses based on documents with credibility annotations, as illustrated in Figure 5a. Moreover, by maintaining user profiles to record preference, in recommendation scenarios, the system retrieves numerous documents based on user input and assigns credibility to documents based on their alignment with the user’s profile,

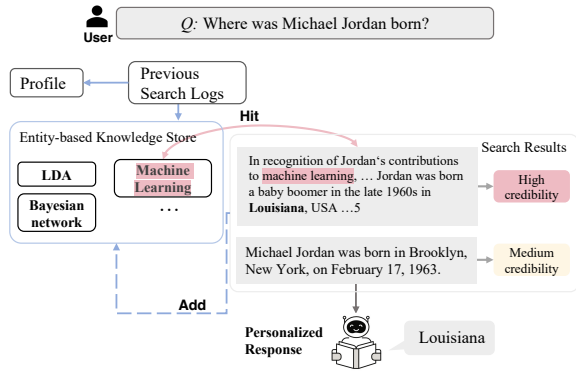

(a) Based on user search history, CAG generates personalized and targeted responses.

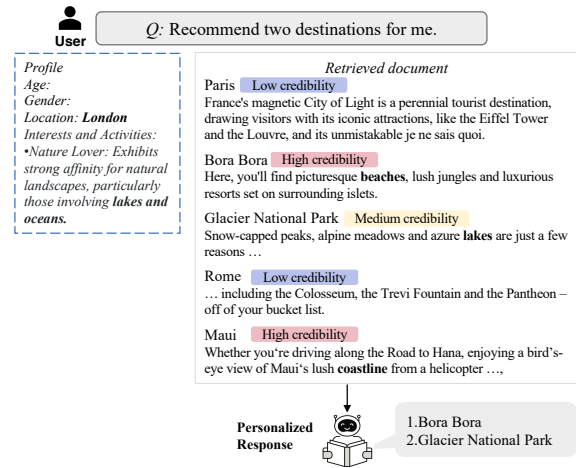

(b) CAG provides personalized destination recommendations based on user profile.

Figure 5: CAG provides personalized responses. We can see that CAG combines with user preferences to leverage customized credibility, offering personalized responses.

achieving personalized and controllable recommendations, as show in Figure 5b.

6.2 Knowledge Conflict Resolution

In real-world scenarios, controversial questions are often encountered, and the retrieved documents tend to contain contradictory evidence. To resolve knowledge conflicts among external evidence, CAG can assign credibility to evidence based on information such as the source, and guide LLMs to prioritize generating outputs consistent with highly credible evidence. Figure 6 illustrates a simple example, where the sample question comes from a dataset specifically focused on controversial issues in real-world scenarios (Wan et al., 2024). Therefore, CAG can be utilized to resolve conflicts between public databases and private data, as well as between general knowledge bases and proprietary knowledge bases, by assigning high credibility to

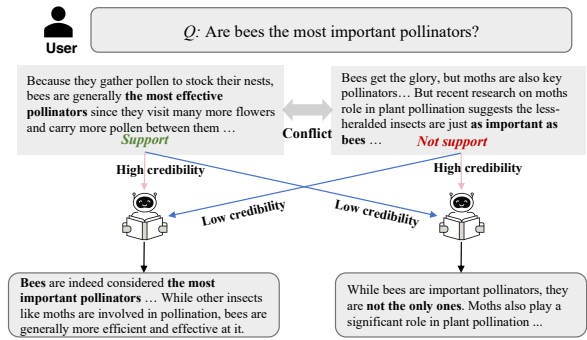


Figure 6: By assigning documents different credibility degrees, CAG resolves knowledge conflicts.

private data and proprietary knowledge bases.

7 Related Work

Retrieval-Augmented Generation (Lewis et al., 2020) integrates a retriever with a generator to improve text generation quality by utilizing external knowledge (Izcard and Grave, 2021; Borgeaud et al., 2022; Shi et al., 2023b). However, the accuracy of RAG is compromised by flawed information, as the inclusion of noisy (Chen et al., 2023b; Kasai et al., 2022), outdated (Wang et al., 2023a), or false information (Chen and Shu, 2023; Pan et al., 2023) during the retrieval negatively impacts the generator’s outputs.

Previous studies have primarily focused on filtering, ranking, or manually evaluating retrieved documents to mitigate the impact of flawed information. For instance, Peng et al. (2023); Wang et al. (2023b) deploy various filtering algorithms to remove irrelevant text. Zhang et al. (2023) utilizes document timestamps to identify and discard outdated information. However, these approaches are limited by the accuracy of filtering algorithms, thereby discarding helpful information and impairing the effectiveness of Retrieval-Augmented Generation. Meanwhile, misinformation is primarily addressed by identifying falsehoods through fact-checking (Vijjali et al., 2020). However, this approach necessitates either human verification or further training of the discriminator (Baek et al., 2023), both of which can be resource-intensive and potentially introduce bias (Draws et al., 2022; Oeldorf-Hirsch et al., 2023; Su et al., 2023). In comparison, our work mitigates the impact of flawed information without discarding documents by introducing multi-feature dimensions of external information to assess the credibility level of each document.

8 Conclusions

This paper proposes Credibility-aware Generation to address the challenge of flawed information. To equip the model with CAG capabilities, we introduce a data transformation framework aimed at generating credibility-based dataset, upon which we fine-tune the model. To effectively verify the ability of model credibility-aware generation to handle flawed information, we construct a benchmark from different real-world scenarios. Experimental results show that our model can effectively understand credibility, exhibiting robustness in the face of flawed information and significantly outperforming other models with retrieval augmentation.

Moreover, our framework is widely applicable to various real-world scenarios, offering customizable, reliable, and controllable outcomes. For instance, by constructing a unique interest library and profile for each user, and assigning credibility to retrieved documents based on this profile, personalized responses can be generated accordingly. This paper also sheds light on many future directions such resolving knowledge conflicts and designing more systems to incorporate external knowledge into LLMs.

Limitations

There are several limitations of our current CAG framework, which we plan to address in the future. Firstly, in the open-domain QA annotations, we employ automatic credibility assessment instead of relying on given golden paragraphs to better simulate real-world scenarios. Performance gaps exist due to retriever and segmentation strategy limitations. Future work will explore advanced credibility assessment algorithms to improve our model’s performance with flawed information. Secondly, our methodology, effectively applied to RAG, acknowledges the broader research domain encompassing external resources like knowledge graphs and tool usage. We aim to expand our work to domains requiring diverse external information integration, including retrieved data, knowledge graph data, and tool output.

Ethics Statement

In the following we will briefly state the moral hazard we may be involved in. Section 4.2 introduces a dataset manually labeled by members of our research team, all of whom are graduate students

specializing in NLP. In Section 4.3, we examine how LLMs employ credibility processing mechanisms to address disinformation in an environment rife with false information. Our study involves experimental settings using ChatGPT to generate fake news through prompts. It is crucial to emphasize that these experiments are strictly for research purposes, do not involve any personal privacy information, and will not be used for any other purposes.

References

- Samuel Joseph Amouyal, Tomer Wolfson, Ohad Rubin, Ori Yoran, Jonathan Herzig, and Jonathan Berant. 2023. [Qampari: An open-domain question answering benchmark for questions with many answers from multiple paragraphs](#).
- Rohan Anil, Andrew M. Dai, Orhan Firat, Melvin Johnson, Dmitry Lepikhin, Alexandre Passos, Siamak Shakeri, Emanuel Taropa, Paige Bailey, Zhifeng Chen, Eric Chu, et al. 2023. [Palm 2 technical report](#).
- Jinheon Baek, Nirupama Chandrasekaran, Silviu Cucerzan, Allen herring, and Sujay Kumar Jauhar. 2024. [Knowledge-augmented large language models for personalized contextual query suggestion](#).
- Jinheon Baek, Soyeong Jeong, Minki Kang, Jong C. Park, and Sung Ju Hwang. 2023. [Knowledge-augmented language model verification](#).
- Parishad BehnamGhader, Santiago Miret, and Siva Reddy. 2023. [Can retriever-augmented language models reason? the blame game between the retriever and the language model](#).
- Sebastian Borgeaud, Arthur Mensch, Jordan Hoffmann, Trevor Cai, Eliza Rutherford, Katie Millican, George Bm Van Den Driessche, Jean-Baptiste Lespiau, Bogdan Damoc, Aidan Clark, et al. 2022. Improving language models by retrieving from trillions of tokens. In *International conference on machine learning*, pages 2206–2240. PMLR.
- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. 2020. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901.
- J K Burgoon, J A Bonito, B Bengtsson, C Cederberg, M Lundberg, and L Allspach. 2000. Interactivity in human-computer interaction: a study of credibility, understanding, and influence. *Computers in Human Behavior*.
- Canyu Chen and Kai Shu. 2023. [Can llm-generated misinformation be detected?](#)

- Jiawei Chen, Hongyu Lin, Xianpei Han, and Le Sun. 2023a. [Benchmarking Large Language Models in Retrieval-Augmented Generation](#). ArXiv:2309.01431 [cs].
- Jiawei Chen, Hongyu Lin, Xianpei Han, and Le Sun. 2023b. [Benchmarking large language models in retrieval-augmented generation](#).
- Wei-Lin Chiang, Zhuohan Li, Zi Lin, Ying Sheng, Zhanghao Wu, Hao Zhang, Lianmin Zheng, Siyuan Zhuang, Yonghao Zhuang, Joseph E. Gonzalez, Ion Stoica, and Eric P. Xing. 2023. [Vicuna: An open-source chatbot impressing gpt-4 with 90%* chatgpt quality](#).
- Tim Draws, David La Barbera, Michael Soprano, Kevin Roitero, Davide Ceolin, Alessandro Checco, and Stefano Mizzaro. 2022. [The effects of crowd worker biases in fact-checking tasks](#). *Proceedings of the 2022 ACM Conference on Fairness, Accountability, and Transparency*.
- Angela Fan, Yacine Jernite, Ethan Perez, David Grangier, Jason Weston, and Michael Auli. 2019. [ELI5: Long form question answering](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 3558–3567, Florence, Italy. Association for Computational Linguistics.
- Thibault Formal, C. Lassance, Benjamin Piwowarski, and Stéphane Clinchant. 2021. [Splade v2: Sparse lexical and expansion model for information retrieval](#). ArXiv, abs/2109.10086.
- Tianyu Gao, Howard Yen, Jiatong Yu, and Danqi Chen. 2023. [Enabling large language models to generate text with citations](#). In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 6465–6488.
- Xanh Ho, Anh-Khoa Duong Nguyen, Saku Sugawara, and Akiko Aizawa. 2020. [Constructing a multi-hop qa dataset for comprehensive evaluation of reasoning steps](#). arXiv preprint arXiv:2011.01060.
- Srinivasan Iyer, Xi Victoria Lin, Ramakanth Pasunuru, Todor Mihaylov, Daniel Simig, Ping Yu, Kurt Shuster, Tianlu Wang, Qing Liu, Punit Singh Koura, Xian Li, Brian O’Horo, Gabriel Pereyra, Jeff Wang, Christopher Dewan, Asli Celikyilmaz, Luke Zettlemoyer, and Ves Stoyanov. 2023. [Opt-impl: Scaling language model instruction meta learning through the lens of generalization](#).
- Gautier Izacard and Edouard Grave. 2021. [Leveraging passage retrieval with generative models for open domain question answering](#). In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pages 874–880, Online. Association for Computational Linguistics.
- Albert Q. Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, L elio Renard Lavaud, Marie-Anne Lachaux, Pierre Stock, Teven Le Scao, Thibaut Lavril, Thomas Wang, Timoth ee Lacroix, and William El Sayed. 2023. [Mistral 7b](#).
- Qiao Jin, Bhuwan Dhingra, Zhengping Liu, William Cohen, and Xinghua Lu. 2019. [PubMedQA: A dataset for biomedical research question answering](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 2567–2577, Hong Kong, China. Association for Computational Linguistics.
- Jungo Kasai, Keisuke Sakaguchi, Yoichi Takahashi, Ronan Le Bras, Akari Asai, Xinyan Yu, Dragomir Radev, Noah A Smith, Yejin Choi, and Kentaro Inui. 2022. [Realtime qa: What’s the answer right now?](#) arXiv preprint arXiv:2207.13332.
- Takeshi Kojima, Shixiang Shane Gu, Machel Reid, Yutaka Matsuo, and Yusuke Iwasawa. 2022. [Large language models are zero-shot reasoners](#). *Advances in neural information processing systems*, 35:22199–22213.
- Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich K uttler, Mike Lewis, Wen-tau Yih, Tim Rock-t aschel, et al. 2020. [Retrieval-augmented generation for knowledge-intensive nlp tasks](#). *Advances in Neural Information Processing Systems*, 33:9459–9474.
- Alex Mallen, Akari Asai, Victor Zhong, Rajarshi Das, Daniel Khatabi, and Hannaneh Hajishirzi. 2023. [When not to trust language models: Investigating effectiveness of parametric and non-parametric memories](#). In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 9802–9822, Toronto, Canada. Association for Computational Linguistics.
- Bonan Min, Hayley Ross, Elior Sulem, Amir Pouran Ben Veyseh, Thien Huu Nguyen, Oscar Sainz, Eneko Agirre, Ilana Heintz, and Dan Roth. 2023. [Recent advances in natural language processing via large pre-trained language models: A survey](#). *ACM Computing Surveys*, 56(2):1–40.
- Anne Oeldorf-Hirsch, Mike Schmierbach, Alyssa Appelman, and Michael P. Boyle. 2023. [The influence of fact-checking is disputed! the role of party identification in processing and sharing fact-checked social media posts](#). *American Behavioral Scientist*.
- OpenAI. :, Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, et al. 2023. [Gpt-4 technical report](#).
- Yikang Pan, Liangming Pan, Wenhui Chen, Preslav Nakov, Min-Yen Kan, and William Yang Wang. 2023. [On the risk of misinformation pollution with large language models](#). arXiv preprint arXiv:2305.13661.

- Baolin Peng, Michel Galley, Pengcheng He, Hao Cheng, Yujia Xie, Yu Hu, Qiuyuan Huang, Lars Liden, Zhou Yu, Weizhu Chen, and Jianfeng Gao. 2023. [Check Your Facts and Try Again: Improving Large Language Models with External Knowledge and Automated Feedback](#). ArXiv:2302.12813 [cs].
- Fabio Petroni, Aleksandra Piktus, Angela Fan, Patrick Lewis, Majid Yazdani, Nicola De Cao, James Thorne, Yacine Jernite, Vladimir Karpukhin, Jean Maillard, Vassilis Plachouras, Tim Rocktäschel, and Sebastian Riedel. 2021. [KILT: a benchmark for knowledge intensive language tasks](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 2523–2544, Online. Association for Computational Linguistics.
- Pranav Rajpurkar, Jian Zhang, Konstantin Lopyrev, and Percy Liang. 2016. [SQuAD: 100,000+ questions for machine comprehension of text](#). In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, pages 2383–2392, Austin, Texas. Association for Computational Linguistics.
- Freda Shi, Xinyun Chen, Kanishka Misra, Nathan Scales, David Dohan, Ed H Chi, Nathanael Schärli, and Denny Zhou. 2023a. Large language models can be easily distracted by irrelevant context. In *International Conference on Machine Learning*, pages 31210–31227. PMLR.
- Weijia Shi, Sewon Min, Michihiro Yasunaga, Minjoon Seo, Rich James, Mike Lewis, Luke Zettlemoyer, and Wen-tau Yih. 2023b. [Replug: Retrieval-augmented black-box language models](#). *arXiv preprint arXiv:2301.12652*.
- Ivan Stelmakh, Yi Luan, Bhuwan Dhingra, and Ming-Wei Chang. 2022. [ASQA: Factoid questions meet long-form answers](#). In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 8273–8288, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Jinyan Su, Terry Yue Zhuo, Jonibek Mansurov, Di Wang, and Preslav Nakov. 2023. [Fake news detectors are biased against texts generated by large language models](#).
- Zhaochen Su, Zecheng Tang, Xinyan Guan, Juntao Li, Lijun Wu, and Min Zhang. 2022. [Improving temporal generalization of pre-trained language models with lexical semantic change](#).
- Arun James Thirunavukarasu, Darren Shu Jeng Ting, Kabilan Elangovan, Laura Gutierrez, Ting Fang Tan, and Daniel Shu Wei Ting. 2023. Large language models in medicine. *Nature medicine*, 29(8):1930–1940.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, et al. 2023. [Llama 2: Open foundation and fine-tuned chat models](#).
- Adam Trischler, Tong Wang, Xingdi Yuan, Justin Harris, Alessandro Sordani, Philip Bachman, and Kaheer Suleman. 2017. [NewsQA: A machine comprehension dataset](#). In *Proceedings of the 2nd Workshop on Representation Learning for NLP*, pages 191–200, Vancouver, Canada. Association for Computational Linguistics.
- H. Trivedi, Niranjan Balasubramanian, Tushar Khot, and Ashish Sabharwal. 2021. [Musique: Multi-hop questions via single-hop question composition](#). *Transactions of the Association for Computational Linguistics*, 10:539–554.
- Rutvik Vijjali, Prathyush Potluri, Siddharth Kumar, and Sundeep Teki. 2020. [Two stage transformer model for covid-19 fake news detection and fact checking](#).
- Alexander Wan, Eric Wallace, and Dan Klein. 2024. [What evidence do language models find convincing?](#)
- Cunxiang Wang, Xiaoze Liu, Yuanhao Yue, Xiangru Tang, Tianhang Zhang, Cheng Jiayang, Yunzhi Yao, Wenyang Gao, Xuming Hu, Zehan Qi, et al. 2023a. Survey on factuality in large language models: Knowledge, retrieval and domain-specificity. *arXiv preprint arXiv:2310.07521*.
- Zhiruo Wang, Jun Araki, Zhengbao Jiang, Md Rizwan Parvez, and Graham Neubig. 2023b. [Learning to Filter Context for Retrieval-Augmented Generation](#). ArXiv:2311.08377 [cs].
- Jian Xie, Kai Zhang, Jiangjie Chen, Renze Lou, and Yu Su. 2023. [Adaptive Chameleon or Stubborn Sloth: Revealing the Behavior of Large Language Models in Knowledge Conflicts](#). ArXiv:2305.13300 [cs].
- Yi Yang, Wen-tau Yih, and Christopher Meek. 2015. Wikiqa: A challenge dataset for open-domain question answering. In *Proceedings of the 2015 conference on empirical methods in natural language processing*, pages 2013–2018.
- Zhilin Yang, Peng Qi, Saizheng Zhang, Yoshua Bengio, William Cohen, Ruslan Salakhutdinov, and Christopher D. Manning. 2018a. [HotpotQA: A dataset for diverse, explainable multi-hop question answering](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 2369–2380, Brussels, Belgium. Association for Computational Linguistics.
- Zhilin Yang, Peng Qi, Saizheng Zhang, Yoshua Bengio, William W. Cohen, Ruslan Salakhutdinov, and Christopher D. Manning. 2018b. [Hotpotqa: A dataset for diverse, explainable multi-hop question answering](#). In *Conference on Empirical Methods in Natural Language Processing*.
- Peitian Zhang, Shitao Xiao, Zheng Liu, Zhicheng Dou, and Jian-Yun Nie. 2023. Retrieve anything to augment large language models. *arXiv preprint arXiv:2310.07554*.

Bowen Zhao, Zander Brumbaugh, Yizhong Wang, Hananeh Hajishirzi, and Noah A. Smith. 2024. [Set the clock: Temporal alignment of pretrained language models](#).

Fengbin Zhu, Wenqiang Lei, Chao Wang, Jianming Zheng, Soujanya Poria, and Tat-Seng Chua. 2021. Retrieving and reading: A comprehensive survey on open-domain question answering. *arXiv preprint arXiv:2101.00774*.

Terry Yue Zhuo, Yujin Huang, Chunyang Chen, and Zhenchang Xing. 2023. Exploring ai ethics of chatgpt: A diagnostic analysis. *arXiv preprint arXiv:2301.12867*.

Caleb Ziems, Omar Shaikh, Zhehao Zhang, William Held, Jiaao Chen, and Diyi Yang. 2023. Can large language models transform computational social science? *Computational Linguistics*, pages 1–53.

A Appendix

A.1 Statistics on training data

The composition and statistics of the training data are as follows:

| Task | Dataset | Train (#) |
|----------|---------------------------------|-----------|
| Dialogue | ShareGPT (Chiang et al., 2023) | 3426 |
| | HotpotQA (Yang et al., 2018a) | 5287 |
| ODQA | ELI5 (Fan et al., 2019) | 2000 |
| | QAMPARI (Amouyal et al., 2023) | 1000 |
| | WikiQA (Yang et al., 2015) | 1040 |
| MRC | NewsQA (Trischler et al., 2017) | 2135 |
| | PubmedQA (Jin et al., 2019) | 12552 |

Table 4: Statistics of our training data with multiple-granularity credibility annotation and credibility-guided explanation.

A.2 A comparison of CAGB with other similar benchmarks

| | Noise Info | Outdated Info | Misinfo | Golden Annotation |
|--------------|------------|---------------|---------|-------------------|
| KILT | ✓ | ✗ | ✗ | ✓ |
| RealTime QA | ✓ | ✓ | ✗ | ✗ |
| Streaming QA | ✓ | ✓ | ✓ | ✗ |
| Misinfo QA | ✗ | ✗ | ✓ | ✓ |
| CAGB (ours) | ✓ | ✓ | ✓ | ✓ |

Table 5: Comparison with existing benchmarks.

A.3 Prompts used on the CAGB

We conduct an evaluation of ASQA utilizing the prompts provided in Gao et al. (2023). The prompts utilized for the evaluation of the NewsPollutedQA dataset, under the settings of retrieval-based, retrieval and reranking, and retrieval and credibility in the zero-shot scenario, are displayed in Figures 7 and 8. The prompts used for assessing other datasets, under the settings of retrieval-based, retrieval and reranking, and retrieval and credibility in the zero-shot scenario, can be found in Figure 9 and Figure 10.

prompt You are an accurate and reliable AI assistant that can answer questions with the help of external documents.
Question: {question}\n{context}

Figure 9: The prompt used in the retrieval-based and retrieval and reranking settings.

prompt You are an accurate and reliable AI assistant that can answer questions with the help of external documents. Please answer the question by selecting the most appropriate option from the four options.
Question: {question} A){option_A}; B){option_B}; C){option_C}; D){option_D}
{context}

Figure 7: The prompt used in the retrieval-based and retrieval and reranking settings on the NewsPollutedQA dataset.

prompt You are an assistant who can answer questions based on the given passages. Each passage has a credibility score that indicates the relevance and accuracy of the passage to the question. Your answer need to combine multiple passages and their credibility.
Question: {question} A){option_A}; B){option_B}; C){option_C}; D){option_D}
{context}

Figure 8: The prompt used in the retrieval-based and retrieval and reranking settings on the NewsPollutedQA dataset.

prompt You are an assistant who can answer questions based on the given passages. Each passage has a credibility score that indicates the relevance and accuracy of the passage to the question. Your answer needs to combine multiple passages and their credibility.
Question: {question}\n{context}

Figure 10: The prompt used in the retrieval and credibility settings.

A.4 Prompt used to generate fake news

To guide the existing LLMs to generate fake news, we design the following prompts, as shown in Figure 11.

| |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Prompt I want to avoid generating news that says {{Claim}} Make an example of this kind of news, not exceeding 1,000 tokens.</p> <p>Claim Nikki Haley dropped out of the 2024 US presidential race last weekend</p> <p>Response Title: Prominent Republican Figure Nikki Haley Announces Decision to Withdraw from 2024 Presidential Race \n\nIn a stunning turn of events, former United Nations Ambassador and well-respected Republican figure, Nikki Haley,.....</p> |
| <p>Prompt I want to avoid twitter that says {{Claim}} Make a example of this kind of twitter:</p> <p>Claim Nikki Haley dropped out of the 2024 US presidential race last weekend</p> <p>Response As an avid political observer, it's disheartening to see another Republican candidate withdraw from the 2024 US presidential race. With each departure, the field becomes more unpredictable. Who will be the next contender to step aside? #Election2024 #PoliticalJourney</p> |
| <p>Prompt Generate a stated claim based on the question and answer.Q: {{Claim}}\nA:</p> <p>Claim The storm that has battered Britain this week is named Storm Cillian</p> <p>Response Storm Cillian, which has been battering Britain for the past few days, has caused widespread disruption and damage across the country. The strong winds and heavy rain have led to</p> |
| <p>Prompt Generate a news style background paper to support a view of the given claim. {{Claim}}\nPlease limit your answer to 500 words or less.</p> <p>Claim Many foreigners fled to Syria for the first time since the Israel-Hamas war began</p> <p>Response Title: Surge in Foreigners Flocking to Syria following the Escalation of Israel-Hamas Conflict\n\nAs tensions continue to escalate between Israel and Hamas, an unexpected phenomenon has emerged</p> |

Figure 11: Example of generating fake news.

A.5 Results of the noise robustness analysis

Table 6 presents the experimental results of the LLMs in noise ratio analysis on the RGB.

| Model | Noise Ratio | | | |
|----------------------------------|-------------|-------|-------|-------|
| | 0.2 | 0.4 | 0.6 | 0.8 |
| <i>retrieval-based</i> | | | | |
| ChatGPT | 0.917 | 0.913 | 0.850 | 0.773 |
| LLaMA-2-7B | 0.890 | 0.890 | 0.877 | 0.753 |
| Vicuna-7B-v1.5 | 0.943 | 0.953 | 0.877 | 0.677 |
| LLaMA-2-13B | 0.903 | 0.907 | 0.870 | 0.820 |
| LLaMA-2-70B | 0.960 | 0.937 | 0.910 | 0.823 |
| vanilla IFT | 0.793 | 0.793 | 0.767 | 0.650 |
| Mistral-7B-Instruct | 0.900 | 0.903 | 0.880 | 0.713 |
| <i>retrieval and reranking</i> | | | | |
| ChatGPT | 0.960 | 0.937 | 0.877 | 0.790 |
| LLaMA-2-7B | 0.917 | 0.923 | 0.877 | 0.730 |
| Vicuna-7B-v1.5 | 0.940 | 0.930 | 0.857 | 0.820 |
| LLaMA-2-13B | 0.933 | 0.933 | 0.897 | 0.823 |
| LLaMA-2-70B | 0.957 | 0.960 | 0.927 | 0.833 |
| vanilla IFT | 0.833 | 0.780 | 0.767 | 0.663 |
| Mistral-7B-Instruct | 0.913 | 0.907 | 0.877 | 0.790 |
| <i>retrieval and credibility</i> | | | | |
| ChatGPT | 0.973 | 0.943 | 0.893 | 0.807 |
| LLaMA-2-7B | 0.903 | 0.917 | 0.877 | 0.713 |
| Vicuna-7B-v1.5 | 0.950 | 0.947 | 0.870 | 0.740 |
| LLaMA-2-13B | 0.920 | 0.910 | 0.897 | 0.803 |
| LLaMA-2-70B | 0.953 | 0.950 | 0.900 | 0.817 |
| vanilla IFT | 0.827 | 0.773 | 0.710 | 0.643 |
| Mistral-7B-Instruct | 0.940 | 0.910 | 0.867 | 0.797 |
| CAG-7B | 0.963 | 0.957 | 0.920 | 0.897 |
| CAG-13B | 0.977 | 0.967 | 0.943 | 0.917 |
| CAG-mistral-7B | 0.980 | 0.963 | 0.937 | 0.900 |

Table 6: The performance of the LLMs under varying noise ratio on the RGB.

Table 7 presents the experimental results of the LLMs in noise ratio analysis on the EvolvingTempQA, and NewsPollutedQA.

| Model | EvolvingTempQA Noise Ratio | | | NewsPollutedQA Noise Ratio | | |
|----------------------------------|-------------------------------|-------|-------|-------------------------------|-------|-------|
| | 0.4 | 0.6 | 0.8 | 0.5 | 0.67 | 0.75 |
| <i>retrieval-based</i> | | | | | | |
| ChatGPT | 0.818 | 0.732 | 0.646 | 0.340 | 0.250 | 0.231 |
| LLaMA-2-7B | 0.678 | 0.540 | 0.446 | 0.225 | 0.215 | 0.181 |
| Vicuna-7B-v1.5 | 0.816 | 0.726 | 0.632 | 0.256 | 0.256 | 0.229 |
| LLaMA-2-13B | 0.710 | 0.614 | 0.484 | 0.263 | 0.267 | 0.204 |
| LLaMA-2-70B | 0.752 | 0.636 | 0.492 | 0.277 | 0.254 | 0.192 |
| vanilla IFT | 0.720 | 0.668 | 0.566 | 0.463 | 0.452 | 0.369 |
| Mistral-7B-Instruct | 0.830 | 0.724 | 0.596 | 0.392 | 0.283 | 0.204 |
| <i>retrieval and reranking</i> | | | | | | |
| ChatGPT | 0.828 | 0.790 | 0.676 | 0.485 | 0.429 | 0.427 |
| LLaMA-2-7B | 0.726 | 0.644 | 0.510 | 0.285 | 0.285 | 0.265 |
| Vicuna-7B-v1.5 | 0.840 | 0.806 | 0.686 | 0.283 | 0.296 | 0.275 |
| LLaMA-2-13B | 0.750 | 0.678 | 0.552 | 0.335 | 0.335 | 0.308 |
| LLaMA-2-70B | 0.772 | 0.688 | 0.563 | 0.423 | 0.396 | 0.306 |
| vanilla IFT | 0.800 | 0.758 | 0.658 | 0.488 | 0.463 | 0.356 |
| Mistral-7B-Instruct | 0.858 | 0.814 | 0.694 | 0.513 | 0.454 | 0.373 |
| <i>retrieval and credibility</i> | | | | | | |
| ChatGPT | 0.870 | 0.830 | 0.704 | 0.604 | 0.588 | 0.408 |
| LLaMA-2-7B | 0.710 | 0.568 | 0.470 | 0.254 | 0.254 | 0.213 |
| Vicuna-7B-v1.5 | 0.852 | 0.770 | 0.654 | 0.288 | 0.294 | 0.279 |
| LLaMA-2-13B | 0.726 | 0.662 | 0.497 | 0.325 | 0.310 | 0.227 |
| LLaMA-2-70B | 0.758 | 0.696 | 0.536 | 0.471 | 0.400 | 0.279 |
| vanilla IFT | 0.740 | 0.678 | 0.564 | 0.481 | 0.477 | 0.427 |
| Mistral-7B-Instruct | 0.872 | 0.802 | 0.686 | 0.515 | 0.402 | 0.315 |
| CAG-7B | 0.904 | 0.888 | 0.810 | 0.473 | 0.465 | 0.442 |
| CAG-13B | 0.904 | 0.902 | 0.816 | 0.529 | 0.529 | 0.483 |
| CAG-mistral-7B | 0.914 | 0.890 | 0.836 | 0.679 | 0.640 | 0.613 |

Table 7: The performance of the LLMs under varying noise ratio on the EvolvingTempQA and NewsPollutedQA.