

Perfect Subset Privacy in Polynomial Computation

Zirui (Ken) Deng^{*}, Vinayak Ramkumar[†], and Netanel Raviv^{*}

^{*}Department of Computer Science and Engineering, Washington University in St. Louis, St. Louis, USA

[†]Department of Electrical Engineering–Systems, Tel Aviv University, Tel Aviv, Israel
d.ken@wustl.edu, vinram93@gmail.com, netanel.raviv@wustl.edu

Abstract

Delegating large-scale computations to service providers is a common practice which raises privacy concerns. This paper studies information-theoretic privacy-preserving delegation of data to a service provider, who may further delegate the computation to auxiliary worker nodes, in order to compute a polynomial over that data at a later point in time. We study techniques which are compatible with robust management of distributed computation systems, an area known as *coded computing*. Privacy in coded computing, however, has traditionally addressed the problem of colluding workers, and assumed that the server that administrates the computation is trusted. This viewpoint of privacy does not accurately reflect real-world privacy concerns, since normally, the service provider as a whole (i.e., the administrator and the worker nodes) form one cohesive entity which itself poses a privacy risk. This paper aims to shift the focus of privacy in coded computing to safeguarding the privacy of the user against the service provider as a whole, instead of merely against colluding workers inside the service provider. To this end, we leverage the recently defined notion of *perfect subset privacy*, which guarantees zero information leakage from all subsets of the data up to a certain size. Using known techniques from Reed-Muller decoding, we provide a scheme which enables polynomial computation with perfect subset privacy in straggler-free systems. Furthermore, by studying *information super-sets* in Reed-Muller codes, which may be of independent interest, we extend the previous scheme to tolerate straggling worker nodes inside the service provider.

Index Terms

Perfect subset privacy, distributed systems, coded computing, Reed-Muller codes.

I. INTRODUCTION

As significant computational power is no longer within the grasp of individual users, relying on third-party services for data storage and computation has become a necessity. While this paradigm has commendably allowed smaller, non-technological entities to harness capabilities beyond their means, it inevitably poses risks related to the privacy of these entities.

In recent years, there has been considerable interest in applications of error-correcting codes in distributed computations, commonly known as *coded computing*, in order to tackle straggling (i.e., slow) workers, adversarial workers, and privacy issues in such systems [13, 20, 21]. Privacy guarantees, however, have typically been given in terms of some level of restricted collusion among workers, while the system administrator is assumed to be trusted.

This approach overlooks the common setting where a data owner relies on a single *untrusted* service provider in order to store and compute over their data, and the service provider itself inherently introduces a privacy risk. Whether the storage or computation is distributed internally or not, the service provider has access to the entirety of the data, rendering the assumption of limited collusion among workers largely irrelevant. This scenario is widely prevalent, as many institutions delegate their data in its entirety to service providers such as AWS (Amazon Web Services) or Google Cloud. In this work, we seek to extend the scope of coded computing and develop new techniques to protect privacy against the service provider as a whole, while enabling the service provider’s internal system administrator (abbrv. admin) to distribute the computation internally.

In our setup, we assume the user has some data \mathbf{x} , which is internally partitioned to n parts x_1, \dots, x_n of some contextual meaning (e.g., features). The service provider consists of a system admin and workers, among which

Parts of this work were done when V. Ramkumar was a postdoctoral researcher in the Department of Computer Science and Engineering in Washington University in St. Louis.

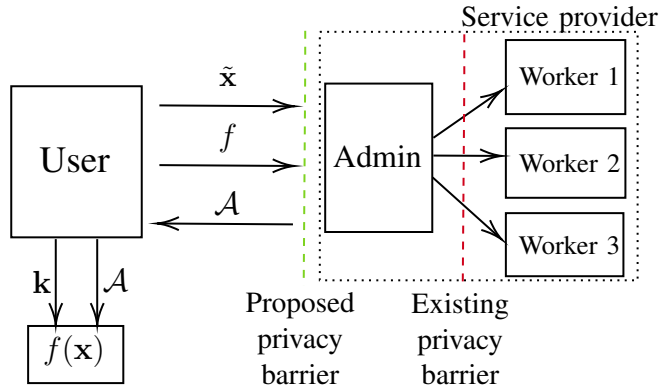


Fig. 1: Shifting the privacy barrier in coded computing.

collusion is not restricted. The user cannot communicate with the workers directly, but rather through the system admin. The user encodes \mathbf{x} using some random key vector \mathbf{k} and then sends the encoded (privatized) version of the data $\tilde{\mathbf{x}}$ to the admin, who in turn distributes $\tilde{\mathbf{x}}$ to multiple workers. Due to storage limitations, the user wishes to discard \mathbf{x} and instead only keep the key \mathbf{k} as side information. At a later point in time, the user is interested in computing some polynomial f over \mathbf{x} , and sends f to the admin. The goal of the admin is to reply to the user with some information \mathcal{A} , computed with the aid of the workers, so that the user can extract the desired computation results, potentially using \mathbf{k} . The purpose of this work is to shift the “privacy barrier” in coded computing: instead of protecting the privacy of the admin against colluding workers, we wish to protect the privacy of the user against the service provider as a whole. We call the above the *single-provider setup*, illustrated in Figure 1.

We aim to provide information-theoretic privacy guarantees. However, bounding the mutual information between the actual and privatized data provides no understanding about which parts of the data are revealed, and to what extent. To remedy that, we leverage the recently developed notion of *perfect subset privacy* [17], which guarantees zero leakage from *all* subsets of the data up to a certain size r . This notion provides a uniform privacy metric that is easy to understand, and r serves as a tunable privacy parameter that trades better privacy for higher storage and computation requirements, and vice versa.

We first generalize the encoding scheme from [17] to apply to finite fields of any size. Next, by utilizing the known notion of *information sets* in Reed-Muller decoding, we devise a scheme which allows the admin to compute f over the encoded data $\tilde{\mathbf{x}}$, either locally or in a system without straggling workers; information sets are used specifically to alleviate the download cost of the scheme. Then, in order to adapt the above scheme to tolerate straggling workers, we study a notion that we refer to as *information super-sets* for Reed-Muller codes. This notion may be of independent interest, and can be seen as related to the problem of puncturing Reed-Muller codes efficiently. We proceed by devising good straggler-resilient schemes by constructing information super-sets for binary Reed-Muller codes.

The rest of the paper is structured as follows. The problem setup and computation model are given in Section II. An encoding procedure that achieves perfect subset privacy is provided in Section III. In Section IV we reduce the user’s download cost in a straggler-free system. In Section V we devise straggler-resilient protocols using information super-sets, which are then constructed for the binary case in Appendix A.

II. PROBLEM STATEMENT

A. The computation model

Our distributed computation model consists of a storage phase and a computation phase. In what follows, the user holds uniformly distributed data $\mathbf{x} = (x_1, \dots, x_n) \in \mathbb{F}_q^n$ chosen from $X = \text{Unif}(\mathbb{F}_q^n)$ and encodes the data into a privatized version prior to sharing it. Specifically, the user encodes \mathbf{x} to $\tilde{\mathbf{x}} \triangleq \tilde{E}(\mathbf{x}, \mathbf{k})$, where \tilde{E} is some encoding function and $\mathbf{k} \in \mathbb{F}_q^m$, chosen from $K = \text{Unif}(\mathbb{F}_q^m)$, is some random key, with $m \ll n$. Then, the user sends $\tilde{\mathbf{x}}$ to the admin, who further encodes $\tilde{\mathbf{x}}$ to $\hat{\mathbf{x}} \triangleq \hat{E}(\tilde{\mathbf{x}}) = (\hat{x}_1, \dots, \hat{x}_N)$, where \hat{E} is another encoding function. The admin distributes $\hat{\mathbf{x}}$ to N workers, with worker $i \in [N]$ (where $[N] \triangleq \{1, 2, \dots, N\}$) storing \hat{x}_i . The user wishes

to discard \mathbf{x} and only keep \mathbf{k} as side information, which requires less storage. We call this the *storage phase* of the model.

At a later point, the user is interested in computing $f(\mathbf{x})$, where $f : \mathbb{F}_q^n \rightarrow \mathbb{F}_q$ is a multivariate polynomial of total degree at most d and individual degree at most $q - 1$ (i.e., $d < n(q - 1)$). The polynomial f is not known during the storage phase. The user sends f to the admin, who then sends it to the N workers. For $i \in [N]$, worker i performs some computation over $\hat{\mathbf{x}}_i$, and returns the results to the admin. The admin aggregates the results into some information \mathcal{A} that is sent back to the user; \mathcal{A} along with side information \mathbf{k} should suffice for decoding $f(\mathbf{x})$. We call this the *computation phase* of the model. Among those N workers, however, S ones may straggle, i.e., not return a response in a timely manner, and the admin must be able to provide the user with sufficient information to decode $f(\mathbf{x})$ even in the absence of the computation results from the stragglers.

Remark 1. *For simplicity, we assume the user is interested in computing f on a single \mathbf{x} , unlike the common system assumption of multiple \mathbf{x} 's [21]. Our setting can be generalized to multiple \mathbf{x} 's (e.g., a dataset with multiple datapoints, or a matrix with many columns) by straightforward repetition.*

B. Perfect subset privacy

Let \tilde{X} be the random variable which is induced by the data distribution X , the distribution of the key K , and the function \tilde{E} , i.e., $\tilde{X} = \tilde{E}(X, K)$. An encoding scheme is called *perfectly private* [17] if the transformed and original data have zero mutual information, i.e., $I(X; \tilde{X}) = 0$. Perfect privacy is a very strong notion, which requires a key as big as the data itself [5]; our scheme would trivialize under such requirements, as no storage saving would be possible. Therefore, we must resort to limited information leakage.

However, guarantees of the form $I(X; \tilde{X}) \leq \epsilon$ are rather vague, since they provide no insight about which part of the data is revealed. To this end, we leverage the notion of *perfect subset privacy*, first developed in [17] by generalizing *perfect sample privacy* of [15]. To define this notion, let $\binom{[n]}{r}$ be the collection of all subsets of $[n]$ of size r . For any $\mathcal{R} \subseteq [n]$, we use the notation $X_{\mathcal{R}} \triangleq (X_i)_{i \in \mathcal{R}}$, and later extend this notation to matrices and their columns in a natural way.

Definition 1. [17, Def. 1] *For a privacy parameter $r \in [n]$, an encoding procedure is said to satisfy r -subset privacy if $I(X_{\mathcal{R}}; \tilde{X}) = 0$ for all $\mathcal{R} \in \binom{[n]}{r}$.*

This notion of r -subset privacy provides uniform protection for all r -subsets of the data with a tunable parameter r . It is easy to show [15, 17] that r -perfect subset privacy implies that $I(X; \tilde{X}) \leq (n - r) \log_2 q$ bits. Therefore, it can be seen as a special case of bounding information leakage, which has additional uniform and clear guarantees regarding the structure of the privacy protection. It is to be noted that perfect subset privacy and the popular notion of *differential privacy* [6] are two different privacy paradigms, and that neither implies the other, as explained in [17]. We also remark that perfect subset privacy is different from collusion resistance [3, 21], which requires $I(X; \tilde{X}_{\mathcal{R}}) = 0$ for all $\mathcal{R} \in \binom{[n]}{r}$. Furthermore, perfect subset privacy is to be distinguished from the notion of *individual security* [2, 4, 12, 19], which states that $I(\tilde{X}_{\mathcal{R}}; X_{\mathcal{Q}}) = 0$ for all $\mathcal{R} \in \binom{[n]}{r}$ and $\mathcal{Q} \in \binom{[n]}{n-r}$. Neither of these notions is relevant for our problem definition, since in our setting the service provider has access to \tilde{X} in its entirety.

C. Performance metrics

We say that any scheme that realizes the computation model in Section II-A is an (n, q, r, d, S) -*scheme*, where n is the length of the data \mathbf{x} held by the user, q is the field size, r is the privacy parameter, d is the maximum total degree of f , and S is the maximum number of stragglers in the system. Below are the relevant metrics by which we judge the merit of such schemes.

- **The number of workers**, measured by the parameter N .
- **Download cost**, measured by the number D of \mathbb{F}_q symbols the user needs to download in order to complete the decoding process.
- **Side information**, measured by m , the size of the random key \mathbf{k} . As mentioned before, we would like m to be much smaller than n , given the limited storage capability of the user.

We would like to minimize all three quantities, and indeed, Section III deals with minimizing the amount of side information held by the user, Section IV addresses the problem of reducing download cost, and Section V and Appendix A optimize the number of workers needed for computation.

III. OBTAINING r -SUBSET PRIVACY

In this section, we present an encoding procedure which achieves perfect subset privacy. In [17], Raviv et al. presented a method that obtains r -subset privacy when the finite field is sufficiently large. We first give a brief description of their method and then generalize it to finite fields of any size.

For distinct elements $w_1, \dots, w_n \in \mathbb{F}_q$, let $\tilde{\mathbf{x}} \triangleq \mathbf{x} + \mathbf{k}V$, where $\mathbf{k} \sim \text{Unif}(\mathbb{F}_q^r)$ and $V = V(w_1, \dots, w_n)$ is an $r \times n$ Vandermonde matrix over w_1, \dots, w_n . This method has been proven [17, Thm. 1] to achieve r -subset privacy, but it requires $q \geq n$.

We now generalize this method to obtain a procedure that guarantees subset privacy without any field size restriction. Specifically, let

$$\tilde{\mathbf{x}} \triangleq \mathbf{x} + \mathbf{k}G, \quad (1)$$

where $\mathbf{k} \sim \text{Unif}(\mathbb{F}_q^m)$ and $G \in \mathbb{F}_q^{m \times n}$ is a generator matrix of any $[n, m]_q$ linear code \mathcal{C} that satisfies $d_{\min}(\mathcal{C}^\perp) \geq r+1$, where $d_{\min}(\cdot)$ denotes minimum Hamming distance and \mathcal{C}^\perp is the dual code of \mathcal{C} . This implies that for all $\mathcal{R} \in \binom{[n]}{r}$, $G_{\mathcal{R}} \in \mathbb{F}_q^{m \times r}$ has full rank.

Remark 2. Notice that $m \geq r$ according to the Singleton bound, and the equality is achieved with Maximum Distance Separable (MDS) codes. For example, the scheme in [17] achieves equality with Reed-Solomon codes whose generator matrices are Vandermonde matrices.

Remark 3. In our encoding scheme, there is an inherent tradeoff between field size and number of required keys. For example, say $n = 16$ and $r = 3$, which implies that $d_{\min}(\mathcal{C}^\perp) \geq r + 1 = 4$. If $q = 2$, then $m = 5$ keys are needed [9], whereas if we consider the field $GF(8)$, then only four keys are necessary. The minimum number of keys needed is 3, achieved by Reed-Solomon codes when the field size is 16.

The following theorem, whose proof is given in Appendix B-A, establishes that this generalized encoding indeed achieves perfect subset privacy.

Theorem 1. For any $r \in [n]$, the encoding procedure in (1) satisfies r -subset privacy, i.e., $I(X_{\mathcal{R}}; \tilde{X}) = 0$ for all $\mathcal{R} \in \binom{[n]}{r}$.

It follows from (1) that $\tilde{\mathbf{x}} \in \mathbf{x} + \mathcal{C}$, i.e., that \mathbf{x} and $\tilde{\mathbf{x}}$ belong to the same coset of \mathcal{C} . Therefore, it is possible to reduce *upload* cost from n to $n - m$ by communicating to the service provider the identity of the coset of \mathcal{C} containing \mathbf{x} , e.g., by computing a syndrome, which in turn identifies a shift vector that defines the coset². Then, the service provider is able to perform computations based on the syndrome and respond to the user accordingly. Further details are given in Appendix B-B.

Now that we have demonstrated an encoding scheme which achieves r -subset privacy for any field size q , we turn our attention to devising a compatible computation scheme.

IV. LOWERING DOWNLOAD COST IN STRAGGLER-FREE SYSTEMS

In this section, we first present a trivial scheme which serves as a benchmark. Then, we show that it is possible to reduce download cost through evaluation of a dedicated polynomial at an information set for Reed-Muller codes.

The trivial scheme works as follows. The user sends $\tilde{\mathbf{x}}$ as defined in (1) to the admin. The admin encodes $\tilde{\mathbf{x}}$ to $\{\tilde{\mathbf{x}} - \mathbf{t}G | \mathbf{t} \in \mathbb{F}_q^m\}$ and distributes these to the workers in the storage phase. Later in the computation phase, the admin gets f from the user. The admin sends the answer $\mathcal{A} \triangleq (f(\tilde{X} - \mathbf{t}G) | \mathbf{t} \in \mathbb{F}_q^m)$, and then the user can retrieve the element that corresponds to the correct key $\mathbf{k} \in \mathbb{F}_q^m$ and get the desired result $f(\mathbf{x}) = f(\tilde{\mathbf{x}} - \mathbf{k}G)$. The download cost D of the trivial scheme equals q^m . This scheme is termed “trivial” since it is equivalent to trying all possible guesses for the key. We will next show that it is possible to reduce download cost significantly, by using *information sets* for Reed-Muller codes.

Definition 2. [11] Let \mathcal{C} be an $[n, k]_q$ linear code and let $G \in \mathbb{F}_q^{k \times n}$ be a generator matrix for \mathcal{C} . Then, a set $\mathcal{I} \in \binom{[n]}{k}$ is an *information set* if $G_{\mathcal{I}} \in \mathbb{F}_q^{k \times k}$ is of rank k .

²Interestingly, recent works about privacy of quantized computation over the reals [7, 8, 16] employed a similar strategy of communicating a syndrome for saving upload costs, albeit in a very different problem setting.

Intuitively, any codeword can be reconstructed in full by observing its entries on any information set. Furthermore, we have the following lemma that will be useful later. The proof follows from the definition of minimum distance of linear codes.

Lemma 1. *Let \mathcal{C} be an $[n, k]_q$ linear code with minimum distance d_{\min} and let $G \in \mathbb{F}_q^{k \times n}$ be a generator matrix for \mathcal{C} . Then, every subset of $[n]$ of size $n - d_{\min} + 1$ contains an information set for \mathcal{C} .*

We proceed with the definition of Reed-Muller codes [1].

Definition 3. [1, Def. 1] *For parameters d and m , the Reed-Muller code over \mathbb{F}_q is defined as*

$$RM_q(d, m) \triangleq \{Eval(f) \mid f \in \mathbb{F}_q[\mathbf{x}], \deg(f) \leq d\},$$

where $\deg(\cdot)$ denotes the total degree of a polynomial, and $Eval(f) = (f(\mathbf{z}))_{\mathbf{z} \in \mathbb{F}_q^m}$.

The coordinates of $RM_q(d, m)$ are indexed using the q^m elements of \mathbb{F}_q^m , in an arbitrary order. In [11], an explicit description of information sets for Reed-Muller codes is provided. Specifically, by denoting $\mathbb{F}_q \triangleq \{\alpha_0, \dots, \alpha_{q-1}\}$, we have that

$$\mathcal{I}_{d,m} \triangleq \{(\alpha_{i_1}, \dots, \alpha_{i_m}) \mid \sum_{k=1}^m i_k \leq d, 0 \leq i_k \leq q-1\}$$

is an information set for $RM_q(d, m)$. In addition, the next lemma follows directly from the definitions of information sets and Reed-Muller codes.

Lemma 2. *Let h be an m -variate polynomial over \mathbb{F}_q of total degree d . If evaluations of h at an information set for $RM_q(d, m)$ are known, then it is possible to obtain evaluations of h at all other points in \mathbb{F}_q^m by linearly combining the evaluations at the information set.*

We now present our scheme based on polynomial evaluation at information sets for Reed-Muller codes. The scheme assumes that the total degree of f is less than $m(q-1)$; that is, $d < m(q-1)$. Otherwise, $RM_q(d, m)$ is not well-defined.

The admin encodes $\tilde{\mathbf{x}}$ as defined in (1) to $\{\tilde{\mathbf{x}} - \mathbf{t}G \mid \mathbf{t} \in \mathcal{I}_{d,m}\}$ and distributes them to the workers. At a later point, the admin receives a multivariate polynomial f of total degree $d < m(q-1)$ from the user. Define a new multivariate polynomial $g : \mathbb{F}_q^m \rightarrow \mathbb{F}_q$ as

$$g(\mathbf{t}) \triangleq f(\tilde{\mathbf{x}} - \mathbf{t}G) \tag{2}$$

for all $\mathbf{t} \in \mathbb{F}_q^m$. It can be seen that the total degree of g is at most d , and that $g(\mathbf{k}) = f(\mathbf{x})$. The admin obtains

$$\mathcal{A} \triangleq (f(\tilde{\mathbf{x}} - \mathbf{t}G) \mid \mathbf{t} \in \mathcal{I}_{d,m}) \tag{3}$$

from the workers and sends it to the user. Since the user has now received evaluations of g at an information set for $RM_q(d, m)$, it follows from Lemma 2 that the user is able to compute $g(\mathbf{k}) = f(\mathbf{x})$ from \mathcal{A} and the key \mathbf{k} .

It is straightforward to see that this scheme based on information set evaluations reduces download cost of the user with respect to the trivial scheme, provided that $d < m(q-1)$. To be precise, D now equals the size of the information set, $|\mathcal{I}_{d,m}|$, which is again equal to the dimension of the code $RM_q(d, m)$, written in the sequel as $\lambda(q, d, m)$. Note that to conclude the computation the user combines those $D = \lambda(q, d, m)$ elements *linearly*, which is normally much less costly than computing f locally since f is a polynomial on n variables.

Theorem 2. *Assuming $d < m(q-1)$, the scheme based on evaluations at information sets for Reed-Muller codes requires download cost $D = \lambda(q, d, m)$, where $\lambda(q, d, m)$ is the dimension of $RM_q(d, m)$.*

It is well known [1] that if $q = 2$, we have $\lambda(q = 2, d, m) = \sum_{i=0}^d \binom{m}{i}$, and [10] that if $d < q$, we have $\lambda(q, d < q, m) = \binom{m+d}{d}$. Hence, we have the following reduced download costs.

Corollary 1. *If $q = 2$ and $d < m$, then the scheme based on evaluation at information sets of Reed-Muller codes requires download cost $D = \sum_{i=0}^d \binom{m}{i}$. If $d < \min\{q, m(q-1)\}$, then the scheme based on evaluation at information sets of Reed-Muller codes requires download cost $D = \binom{m+d}{d}$.*

One example that demonstrates the benefit of using information sets is taking \mathcal{C}^\perp as the $[n = 2^t - 1, k \geq n - \frac{r}{2}t, d_{\min} \geq r + 1]$ binary BCH code, where $t \geq 3$ is an integer and r is an even positive integer [14, Sec. 6.1].

The number m of parity symbols in \mathcal{C}^\perp , which equals the dimension of \mathcal{C} , is upper bounded by $\frac{r}{2} \log_2(n+1)$. This implies download cost $D \leq \sum_{i=0}^d \binom{\frac{r}{2} \log_2(n+1)}{i} \leq (1 + \frac{r}{2} \log_2(n+1))^d = \text{poly}(\log(n))$, assuming d is a constant and $r = O(\text{poly}(\log(n)))$. This download cost is a significant improvement over the trivial scheme with $D = 2^m > n$, at the same side information size of $m \leq \frac{r}{2} \log_2(n+1) = \text{poly}(\log(n))$. As a numeric example, suppose $n = 2^{14} - 1$, $r = 10$, and $d = 2$, which results in $m = 70$. The download cost is $D \leq 2486$ for our scheme, whereas $D = 2^{70}$ for the trivial scheme.

V. STRAGGLER-RESILIENT SYSTEMS

In this section, we seek to minimize the number of workers needed to compute the answer \mathcal{A} , in the presence of at most S stragglers. Clearly, $N = (S+1)D$ workers suffice to ensure that the admin can provide the answer in both schemes described in Section IV. This can be done by storing $(S+1)$ replicas of every $\tilde{\mathbf{x}} - \mathbf{t}G$, where $\mathbf{t} \in \mathbb{F}_q^m$ in the trivial scheme and $\mathbf{t} \in \mathcal{I}_{d,m}$ in the information set based scheme. Next, we show that it is possible to compute the answer with fewer workers than this repetition-based approach.

First, we use Lagrange Code Computing (LCC) [21], which requires large fields. Then, we establish the notion of *information super-sets*, based on information sets defined previously, and devise a scheme without any field size restriction.

A. LCC-based scheme

Recall that in the scheme described in Theorem 2, given a polynomial f , the admin employs the workers in order to compute $\mathcal{A} = (f(\tilde{\mathbf{x}} - \mathbf{t}G) \mid \mathbf{t} \in \mathcal{I}_{d,m})$. Let $\mathcal{I}_{d,m} = \{\mathbf{t}_1, \dots, \mathbf{t}_\lambda\}$, where $\lambda = \lambda(q, d, m)$. The LCC scheme can be applied as-is by the admin over the dataset $\{\tilde{\mathbf{x}} - \mathbf{t}_i G \mid i \in [\lambda]\}$. Namely, the admin constructs a univariate polynomial h of degree $\lambda - 1$ which evaluates to $\tilde{\mathbf{x}} - \mathbf{t}_1 G, \dots, \tilde{\mathbf{x}} - \mathbf{t}_\lambda G$ at designated \mathbb{F}_q elements $\omega_1, \dots, \omega_\lambda \in \mathbb{F}_q$, evaluates h at N distinct evaluation points $\alpha_1, \dots, \alpha_N \in \mathbb{F}_q$ with $N = (\lambda - 1)d + S + 1$, and stores these evaluations in the workers, who apply f over them and return the results. The admin can then obtain \mathcal{A} while tolerating S stragglers. The LCC scheme, however, requires $N \leq q$.

Theorem 3. *Using the LCC scheme, an (n, q, r, d, S) -scheme exists with $N = (\lambda - 1)d + S + 1$ workers, provided that $q \geq N$, where λ is the dimension of $RM_q(d, m)$. The download cost remains $D = \lambda$.*

We note that if $d < S$, then $(\lambda - 1)d + S + 1 < (S + 1)\lambda$. Next, we demonstrate another scheme based on the notion of *information super-sets* for Reed-Muller codes, defined shortly. The scheme has no field size restriction.

B. The information super-set scheme

We first define *information super-sets* for linear codes.

Definition 4. *Let \mathcal{C} be an $[n, k, d_{\min}]_q$ linear code. Then, for any $0 < S < d_{\min}$, a multiset $\mathcal{T} \subseteq [n]$ is called an S -information super-set for \mathcal{C} if every $(|\mathcal{T}| - S)$ -subset³ of \mathcal{T} contains an information set for \mathcal{C} .*

Let g be the m -variate polynomial of degree at most d defined in (2). Suppose \mathcal{T} is an S -information super-set for $RM_q(d, m)$, and the number of workers is equal to $|\mathcal{T}|$. The admin encodes $\tilde{\mathbf{x}}$ to $\{\tilde{\mathbf{x}} - \mathbf{t}G \mid \mathbf{t} \in \mathcal{T}\}$ and distributes them to the workers. From the definition of information super-sets, it follows that even in the presence of S stragglers, the admin receives the evaluations of g at an information set for $RM_q(d, m)$. It then follows from Lemma 2 that the admin can compute the answer \mathcal{A} defined in (3). Let $L(q, d, m, S)$ denote the minimum size of an S -information super-set for $RM_q(d, m)$. We have the following result.

Theorem 4. *For parameters n, q, r, d, S , if there exists an $[n, m]_q$ linear code \mathcal{C} whose dual code \mathcal{C}^\perp has minimum distance at least $r + 1$, and if $d < m(q - 1)$, then there exists an (n, q, r, d, S) -scheme with $N = L(q, d, m, S)$ workers.*

Our information super-set based (n, q, r, d, S) -scheme for $d < m(q - 1)$ can be described as follows. Let \mathcal{T} be an S -information super-set for $RM_q(d, m)$ of size $L(q, d, m, S)$.

³We say that S is a k -subset of a multiset \mathcal{T} if S is a multiset of size k , and the multiplicity of each element in S is at most its multiplicity in \mathcal{T} .

- i) The user encodes \mathbf{x} to $\tilde{\mathbf{x}} \triangleq \mathbf{x} + \mathbf{k}G$ according to (1) using some random key $\mathbf{k} \sim K = \text{Unif}(\mathbb{F}_q^m)$ and sends $\tilde{\mathbf{x}}$ to the admin.
- ii) The admin encodes $\tilde{\mathbf{x}}$ to $\hat{\mathbf{x}} = (\hat{\mathbf{x}}_1, \dots, \hat{\mathbf{x}}_N) = (\tilde{\mathbf{x}} - \mathbf{t}G | \mathbf{t} \in \mathcal{T})$ and distributes them to $N = L(q, d, m, S)$ workers.
- iii) At a later point, the user sends f to the admin, who then sends it to the workers. The workers apply f on their data, and send the results back to the admin.
- iv) The admin obtains $\{f(\tilde{\mathbf{x}} - \mathbf{t}G)\}_{\mathbf{t} \in \mathcal{I}}$, where $\mathcal{I} \subseteq \mathcal{T}$ is an information set of $RM_q(d, m)$, and sends $\mathcal{A} \triangleq (f(\tilde{\mathbf{x}} - \mathbf{t}G))_{\mathbf{t} \in \mathcal{I}_{d,m}}$ to the user.
- v) The user linearly combines the values in \mathcal{A} to obtain $g(\mathbf{k}) = f(\mathbf{x})$.

Next, in order to understand the value of N in the above scheme, we construct explicit S -information super-sets. First, we present a lower- and upper-bound on the size of a minimum S -information super-set. The proofs of the following lemmas, which are given in the appendix, follow directly from the definition of information super-sets (Definition 4), and from Lemma 1.

Lemma 3. $L(q, d, m, S) \geq \lambda(q, d, m) + S$, where $\lambda(q, d, m)$ is the dimension of $RM_q(d, m)$.

Lemma 4. Let d_{\min} be the minimum distance of $RM_q(d, m)$. If $0 < S < d_{\min}$, then $L(q, d, m, S) \leq q^m - d_{\min} + S + 1$. In particular, if $q = 2$ then $L(q, d, m, S) \leq 2^m - 2^{m-d} + S + 1$.

Corollary 2. Let d_{\min} be the minimum distance of $RM_q(d, m)$. If $d < m(q - 1)$ and $0 < S < d_{\min}$, then the number of workers required in the information super-set scheme $N \leq q^m - d_{\min} + S + 1$. In particular, if $q = 2$ then $N \leq 2^m - 2^{m-d} + S + 1$.

We also note that $L(q, d, m, S) \leq (S + 1)\lambda(q, d, m)$, as repeating an information set $(S + 1)$ times will give an S -information super-set.

Notions related to information super-sets have appeared previously in the literature. In [18], *computational locality* is studied for Reed-Muller codes; we refer readers to Appendix B-E for details. Additionally, some results regarding information super-set sizes are implied by existing works [10] about punctured Reed-Muller codes (see Appendix B-F).

Due to the importance of computations over \mathbb{F}_2 , in Appendix A we focus on $q = 2$, and construct several explicit information super-sets which outperform the bound in Lemma 4. Our results on information super-sets for binary Reed-Muller codes can be summarized as follows. We come up with an explicit construction of a 1-information super-set for $RM_2(1, m)$, which yields $L(2, 1, m, 1) = m + 2$ if m is even and $L(2, 1, m, 1) \leq m + 3$ if m is odd. An explicit construction of a 2-information super-set for $RM_2(1, m)$ of size $2m + 1$ is also presented, and yet through a greedy computer search on a set-theoretic formulation we obtain smaller 2-information super-sets for $RM_2(1, m)$. Then, using the $(u, u + v)$ -construction of binary Reed-Muller codes [1], we come up with a construction of S -information super-sets for general binary Reed-Muller codes $RM_2(d, m)$ which outperforms Lemma 4 in most cases. In Table I, we give a summary of various methods used in this work in terms of their restrictions and the number of workers needed; numeric examples are given in Table II in Appendix A.

	Repetition	LCC	Lemma 4	Appendix A
Restriction	None	$q \geq N, d < m(q - 1)$	$d < m(q - 1)$	$q = 2, d < m$
N	$(S + 1)\lambda$	$(\lambda - 1)d + S + 1$	$q^m - d_{\min} + S + 1$	Theorem 7

TABLE I: Summary of various methods. Here $\lambda = \lambda(q, d, m)$ and d_{\min} denotes the minimum distance of $RM_q(d, m)$.

REFERENCES

- [1] E. Abbe, A. Shpilka, and M. Ye, “Reed–muller codes: Theory and algorithms,” *IEEE Transactions on Information Theory*, vol. 67, no. 6, pp. 3251–3277, 2020.
- [2] K. Bhattad, K. R. Narayanan, *et al.*, “Weakly secure network coding,” *NetCod*, Apr, vol. 104, pp. 8–20, 2005.
- [3] D. Catalano *et al.*, “Multiparty computation, an introduction,” *Contemporary cryptology*, pp. 41–87, 2005.
- [4] A. Cohen, A. Cohen, M. Medard, and O. Gurewitz, “Secure multi-source multicast,” *IEEE Transactions on Communications*, vol. 67, no. 1, pp. 708–723, 2018.
- [5] T. M. Cover and J. A. Thomas, *Elements of Information Theory*, 2nd. New-York: Wiley, 2006.
- [6] P. Cuff and L. Yu, “Differential privacy as a mutual information constraint,” in *Proceedings of the 2016 ACM SIGSAC Conference on Computer and Communications Security*, 2016, pp. 43–54.
- [7] Z. Deng, V. Ramkumar, R. Bitar, and N. Raviv, “Private inference in quantized models,” *arXiv preprint arXiv:2311.13686*, 2023.
- [8] Z. Deng and N. Raviv, “Approximate private inference in quantized models,” in *2023 IEEE International Symposium on Information Theory (ISIT)*, IEEE, 2023, pp. 1597–1602.
- [9] M. Grassl, *Bounds on the minimum distance of linear codes and quantum codes*, Online available at <http://www.codetables.de>, Accessed on 2024-01-08, 2007.
- [10] V. Guruswami, L. Jin, and C. Xing, “Efficiently list-decodable punctured reed-muller codes,” *IEEE Transactions on Information Theory*, vol. 63, no. 7, pp. 4317–4324, 2017.
- [11] J. D. Key, T. McDonough, and V. C. Mavron, “Information sets and partial permutation decoding for codes from finite geometries,” *Finite Fields and Their Applications*, vol. 12, no. 2, pp. 232–247, 2006.
- [12] D. Kobayashi, H. Yamamoto, and T. Ogawa, “Secure multiplex coding attaining channel capacity in wiretap channels,” *IEEE transactions on information theory*, vol. 59, no. 12, pp. 8131–8143, 2013.
- [13] K. Lee, M. Lam, R. Pedarsani, D. Papailiopoulos, and K. Ramchandran, “Speeding up distributed machine learning using codes,” *IEEE Transactions on Information Theory*, vol. 64, no. 3, pp. 1514–1529, 2017.
- [14] S. Lin and D. J. Costello, *Error Control Coding: Fundamentals and Applications*. Pearson Prentice Hall, 2004.
- [15] B. Rassouli, F. E. Rosas, and D. Gündüz, “Data disclosure under perfect sample privacy,” *IEEE Transactions on Information Forensics and Security*, vol. 15, pp. 2012–2025, 2019.
- [16] N. Raviv, R. Bitar, and E. Yaakobi, “Information theoretic private inference in quantized models,” in *2022 IEEE International Symposium on Information Theory (ISIT)*, IEEE, 2022, pp. 1641–1646.
- [17] N. Raviv and Z. Goldfeld, “Perfect subset privacy for data sharing and learning,” in *2022 IEEE International Symposium on Information Theory (ISIT)*, IEEE, 2022, pp. 1850–1855.
- [18] M. Rudow, K. Rashmi, and V. Guruswami, “A locality-based lens for coded computation,” in *2021 IEEE International Symposium on Information Theory (ISIT)*, IEEE, 2021, pp. 1070–1075.
- [19] S. Tarnopolsky and A. Cohen, “Coding-based hybrid post-quantum cryptosystem for non-uniform information,” *arXiv preprint arXiv:2402.08407*, 2024.
- [20] C. Wang and N. Raviv, “Breaking blockchain’s communication barrier with coded computation,” *IEEE Journal on Selected Areas in Information Theory*, vol. 3, no. 2, pp. 405–421, 2022.
- [21] Q. Yu, S. Li, N. Raviv, S. M. M. Kalan, M. Soltanolkotabi, and S. A. Avestimehr, “Lagrange coded computing: Optimal design for resiliency, security, and privacy,” in *The 22nd International Conference on Artificial Intelligence and Statistics*, PMLR, 2019, pp. 1215–1225.

APPENDIX A
INFORMATION SUPER-SETS FOR BINARY REED-MULLER CODES

This section focuses on constructing information super-sets for binary Reed-Muller codes ($q = 2$). For convenience, we omit the parameter q from now on. Our techniques rely on a recursive computation which stems from the famous $(u, u+v)$ -construction of Reed-Muller codes [1]. We begin with necessary special cases in Section A-A and Section A-B, and then proceed with a recursive computation in Section A-C.

A. 1-information super-sets for $RM(1, m)$

Since $RM(1, m)$ is the extended Hadamard code, whose dimension is $m+1$, it follows that $\lambda(d = 1, m) = m+1$, and the bound in Lemma 3 is $L(d = 1, m, S) \geq m + 1 + S$. This bound is attained with equality in the case where $d = 1$, $S = 1$, and m is even, as stated next.

Theorem 5. *There exists an explicit construction of a 1-information super-set for $RM(1, m)$, which yields $L(1, m, 1) = m + 2$ when m is even and $L(1, m, 1) \leq m + 3$ when m is odd.*

Proof. Let M be an $m \times 2^m$ matrix comprised of all binary column vectors of length m . Define an $(m + 1) \times 2^m$ matrix \tilde{G} as:

$$\tilde{G} = \begin{bmatrix} M \\ \mathbf{1} \end{bmatrix},$$

i.e., \tilde{G} is obtained by appending an all-one row to M . It can be verified that \tilde{G} is a generator matrix for $RM(1, m)$. Let G be the $(m + 1) \times 2^m$ matrix obtained by row-reducing \tilde{G} via adding the sum of all rows of M to the all-one row. Then, G is also a generator matrix for $RM(1, m)$. The columns of G are indexed by subsets of $[m]$; specifically, the entries of the index set indicate the positions of ones in the column, except the last row. It can also be observed that all columns of G have odd Hamming weights. Without loss of generality, we assume that the columns of G are in the lexicographical ordering of the index sets. We will use these notations in the later proofs as well.

To construct a 1-information super-set for $RM(1, m)$, we first pick the $m + 1$ index sets of size at most one (i.e., the empty set and m many 1-element sets). The sub-matrix of G comprised of these columns is the identity matrix I_{m+1} .

If m is even, then the column of G indexed by $[m]$ is the all-one column. Consider the $(m + 1) \times (m + 2)$ matrix G' formed by appending the all-one column to I_{m+1} . Removing any one column from G' will result in a sub-matrix of rank $m + 1$. Thus, provided m is even, we have constructed a 1-information super-set for $RM(1, m)$ of size $m + 2$.

If m is odd, the column of G indexed by $[m]$ has zero in the bottom row and one everywhere else. So, in addition to the $m + 2$ columns already chosen, we fix any $B \subseteq [m]$ of size two, whose corresponding column has Hamming weight three with one appearing in the last row. In this case, let G' be the $(m + 1) \times (m + 3)$ matrix formed by appending the two columns indexed by $[m]$ and B to I_{m+1} . It can be verified that removing any two columns from G' will not reduce rank. Thus, provided m is odd, we have constructed a 1-information super set for $RM(1, m)$ of size $m + 3$. \square

B. 2-information super-sets for $RM(1, m)$

Theorem 5 can be easily generalized to construct S -information super-sets for any $S > 1$, which provides a (loose) upper bound on $L(1, m, S)$. In particular, it is an easy exercise to show that the multiset given by a union of S 1-information super-sets is an S -information super-set, and therefore, $L(1, m, S) \leq S \cdot L(1, m, 1)$.

For $S = 2$ the above discussion implies that $L(1, m, 2) \leq 2L(1, m, 1) \leq 2(m+3)$. It is now shown that a smaller construction exists for $S = 2$.

Theorem 6. *There exists an explicit construction of a 2-information super-set for $RM(1, m)$ of size $2m + 1$, i.e., $L(1, m, 2) \leq 2m + 1$.*

To prove Theorem 6 we require the following simple lemma.

Lemma 5. Let \mathcal{C} be a linear code generated by $G = [I|P]$ over \mathbb{F}_2 . If every row of P is distinct and has Hamming weight at least two, then $d_{\min}(\mathcal{C}) \geq 3$.

Proof. We show that the minimum weight of \mathcal{C} is at least 3. Clearly, \mathbb{F}_2 -summation of 3 rows of G or more has Hamming weight at least 3, and any one row of G has Hamming weight at least 3. It remains to show that \mathbb{F}_2 -summation of any two rows has Hamming weight at least 3. Indeed, this summation will have Hamming weight two in the systematic part, and since the respective rows of P are distinct, it will have Hamming weight at least 1 in the non-systematic part, and hence weight at least 3 overall. \square

Proof of Theorem 6. Recall the above definition of the generator matrix G for $RM(1, m)$. Let $G' = [I_{m+1} | P]$ be a $(m + 1) \times (2m + 1)$ sub-matrix of G . If G' is a generator matrix of a linear code with a minimum distance of at least three, then any collection of $(2m - 1)$ columns of G' contains $m + 1$ linearly independent columns. This will result in a 2-information super-set for $RM(1, m)$ of size $2m + 1$. To show that the code generated by G' has $d_{\min} \geq 3$, by Lemma 5 it suffices to show that every row of P is distinct and has Hamming weight at least two.

To construct a 2-information super-set of size $2m + 1$, we first pick the $m + 1$ index sets of size at most one. The remaining m index sets chosen are the following: $\{1, 2\}$, $\{m - 1, m\}$, and $\{i, i + 2\}$ for all $i \in [m - 2]$. Note that every $i \in [m]$ is part of exactly two of these m index sets, and no two index sets have an intersection of size more than one. Therefore, the P matrix formed by the corresponding columns satisfies the properties required by Lemma 5. \square

A slightly more involved construction (obtained through a greedy computer search) provides a smaller 2-information super-set for $RM(1, m)$, albeit without a closed-form expression as in Theorem 6, and numeric results are given in Figure 2. Notice that Lemma 3 and Theorem 6 suggest that

$$2 \leq L(1, m, 2) - m - 1 \leq m.$$

However, Figure 2 suggests a sublinear growth of $L(1, m, 2) - m - 1$, and hence it is likely that Theorem 6 can be improved substantially.

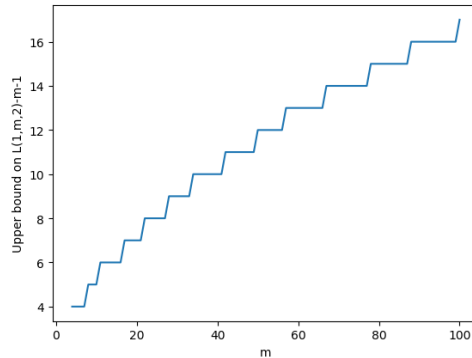


Fig. 2: Numeric results ($m \leq 100$).

Details of the greedy approach: Recall the definition of the generator matrix G for $RM(1, m)$ in the proof of Theorem 5. Let $G' = [I_{m+1} | P]$ be a $(m + 1) \times (m + 1 + u)$ sub-matrix of G . To show that the set of indices of G' is a 2-information super-set, by Lemma 5, it suffices to show that every row of P is distinct and has Hamming weight at least two. To construct a 2-information super-set of size $2m + 1$, we first pick the $m + 1$ index sets of size at most one, which gives the I_{m+1} part of G' . Given a collection of subsets $S_1, \dots, S_u \subseteq [m]$ and $j \in [m]$, define $T_j \subseteq [u]$ as $T_j \triangleq \{i \mid j \in S_i\}$, and let $T_0 \triangleq \{j \in [u] \mid |S_j| \text{ is even}\}$. The P matrix formed by index sets S_1, \dots, S_u has the required properties if the following conditions are satisfied:

- $|T_i| \geq 2$ for all $i \in [0, m]$ and
- $T_i \neq T_j$, for all distinct $i, j \in [0, m]$.

The goal is to find the smallest u for which such index sets exist. Through a greedy computer search which relies upon this set-theoretic formulation of 2-information super-set construction, we obtained the results in Figure 2.

C. Bounding $L(d, m, S)$

We turn to construct S -information super-sets for any S using the recursive $(u, u + v)$ -construction of binary Reed-Muller codes.

$$RM(d, m) = \{(u, u + v) | u \in RM(d, m - 1), v \in RM(d - 1, m - 1)\}.$$

This construction is used to prove the next lemma, which shows that the size of an S -information super-set for $RM(d, m)$ is bounded by the sum of the size of an S -information super-set for $RM(d, m - 1)$ and the size of an S -information super-set for $RM(d - 1, m - 1)$.

Lemma 6. $L(d, m, S) \leq L(d, m - 1, S) + L(d - 1, m - 1, S)$.

Proof. Let $G^{(1)}$ be a generator matrix for $RM(d, m - 1)$ and $G^{(2)}$ a generator matrix for $RM(d - 1, m - 1)$. Then, a generator matrix G for $RM(d, m)$ can be written as

$$G = \begin{bmatrix} G^{(1)} & G^{(1)} \\ 0 & G^{(2)} \end{bmatrix}.$$

Let $\mathcal{T}_1 \subseteq [2^{m-1}]$ be an S -information super-set for $RM(d, m - 1)$ and let $\mathcal{T}_2 \subseteq [2^{m-1}]$ be an S -information super-set for $RM(d - 1, m - 1)$. Define the shifted set $\hat{\mathcal{T}}_2 \triangleq \mathcal{T}_2 + 2^{m-1}$, by adding 2^{m-1} to all elements of \mathcal{T}_2 . We claim that $\mathcal{T} = \mathcal{T}_1 \cup \hat{\mathcal{T}}_2$ is an S -information super-set for $RM(d, m)$; this would conclude the proof since it implies the existence of an S -information set for $RM(d, m)$ of size $|\mathcal{T}_1| + |\mathcal{T}_2|$.

Indeed, let \mathcal{W} be any $|\mathcal{T}| - S$ subset of \mathcal{T} . To prove that $\mathcal{T} = \mathcal{T}_1 \cup \hat{\mathcal{T}}_2$ is an S -information super-set for $RM(d, m)$, it must be shown that $G_{\mathcal{W}}$ has rank $\lambda(d, m)$. Note that $\lambda(d, m) = \lambda(d, m - 1) + \lambda(d - 1, m - 1)$. Let $\mathcal{W}_1 = \mathcal{T}_1 \cap \mathcal{W}$ and $\mathcal{W}_2 = \hat{\mathcal{T}}_2 \cap \mathcal{W}$. It follows that $|\mathcal{W}_1| \geq |\mathcal{T}_1| - S$ and $|\mathcal{W}_2| \geq |\mathcal{T}_2| - S$. By the definition of information super-sets, there is a $\lambda(d, m - 1)$ subset \mathcal{V}_1 of \mathcal{W}_1 such that $G_{\mathcal{V}_1}^{(1)}$ is non-singular and a $\lambda(d - 1, m - 1)$ subset \mathcal{V}_2 of \mathcal{W}_2 such that $G_{\mathcal{V}_2}^{(2)}$ is non-singular. Consider the following square sub-matrix G' of $G_{\mathcal{W}}$:

$$G' = \begin{bmatrix} G_{\mathcal{V}_1}^{(1)} & G_{\mathcal{V}_2}^{(1)} \\ 0 & G_{\mathcal{V}_2}^{(2)} \end{bmatrix}.$$

It follows that G' is invertible (i.e., of rank $\lambda(d, m)$) since $\det(G') = \det(G_{\mathcal{V}_1}^{(1)}) \cdot \det(G_{\mathcal{V}_2}^{(2)})$ by a known formula. \square

Lemma 6 implies a recursive method for constructing an S -information super-set for any $RM(d, m)$, by taking the union of S -information super-sets for $RM(d, m - 1)$ and $RM(d - 1, m - 1)$. Also, note that combining Lemma 6 with Lemma 4 results in

$$\begin{aligned} L(d, m, S) &\leq (2^{m-1} - 2^{m-d-1} + S + 1) \\ &\quad + (2^{m-1} - 2^{m-d} + S + 1) \\ &= 2^m - 2^{m-d} - 2^{m-d-1} + 2S + 2, \end{aligned} \tag{4}$$

which is at least as good as Lemma 4 in cases where

$$S + 1 \leq 2^{m-d-1}. \tag{5}$$

Furthermore, the next lemma follows easily from Definition 4.

Lemma 7. For all integers S_1, S_2 such that $0 < S_1, S_2 < 2^{m-d}$, we have $L(d, m, S_1 + S_2) \leq L(d, m, S_1) + L(d, m, S_2)$.

Proof. Let G be a generator matrix for $RM(d, m)$. Let \mathcal{T}_1 be an S_1 -information super-set for $RM(d, m)$ and \mathcal{T}_2 an S_2 -information super-set for $RM(d, m)$. To prove the lemma we show the existence of an $(S_1 + S_2)$ -information super-set of size $|\mathcal{T}_1| + |\mathcal{T}_2|$. For this, it suffices to show that removing any $S_1 + S_2$ columns from the matrix⁴

⁴For a matrix G with n columns and a multiset $\mathcal{T} \subseteq [n]$, we denote by $G_{\mathcal{T}}$ the matrix containing the $|\mathcal{T}|$ columns indexed by \mathcal{T} .

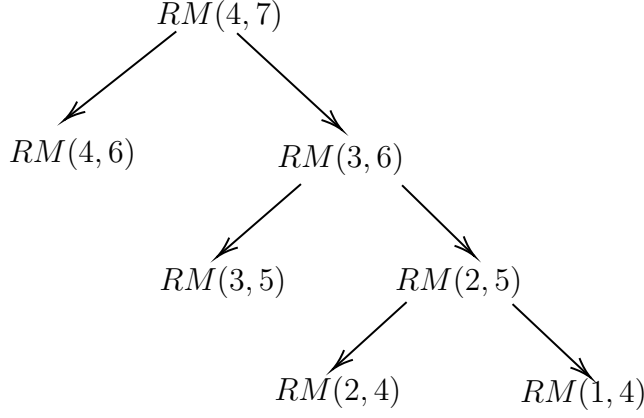


Fig. 3: Example of a tree ($S = 2$).

$G' \triangleq [G_{\mathcal{T}_1} \ G_{\mathcal{T}_2}]$ results in a matrix of rank $\lambda(d, m)$. It is impossible to simultaneously remove more than S_1 columns belonging to $G_{\mathcal{T}_1}$ and more than S_2 columns belonging to $G_{\mathcal{T}_2}$. As \mathcal{T}_1 and \mathcal{T}_2 are information super-sets, $\lambda(d, m)$ linearly independent columns belonging to at least one of $G_{\mathcal{T}_1}$ and $G_{\mathcal{T}_2}$ will remain, thereby proving the lemma. \square

Lemma 7 implies a method for constructing an S -information super-set for any $RM(d, m)$ by taking the union of $\lfloor S/2 \rfloor$ 2-information super-sets for $RM(d, m)$, and potentially one 1-information super-set for $RM(d, m)$ if S is odd. In particular, we have $L(1, i, S) \leq \lfloor \frac{S}{2} \rfloor (2i + 1) + (S - 2 \lfloor \frac{S}{2} \rfloor)(i + 3)$. Combining this with Lemma 4 gives

$$L(1, i, S) \leq U(1, i, S), \quad (6)$$

where

$$U(1, i, S) \triangleq \min \left\{ 2^{i-1} + S + 1, \right. \\ \left. \lfloor \frac{S}{2} \rfloor (2i + 1) + (S - 2 \lfloor \frac{S}{2} \rfloor)(i + 3) \right\}.$$

The recursive construction implied by Lemma 6, alongside Lemma 7, Section A-A and Section A-B, provide our final algorithm for constructing S -information super-sets for any $RM(d, m)$, as follows.

To construct an S -information super-set for $RM(d, m)$, which is not one of the base cases mentioned shortly, break $RM(d, m)$ to $RM(d, m - 1)$ and $RM(d - 1, m - 1)$, build an S -information super-set for each, and take the union. We consider two base cases which are treated separately. The code $RM(d, m)$ is considered a base case if either of the following is true.

- 1) The parameters $d \geq 2$ and $m > d$ violate (5), i.e., $S + 1 > 2^{m-d-1}$. In this case, we construct an S -information super-set using Lemma 4, i.e., we return any set of $2^m - 2^{m-d} + S + 1$ coordinates as our S -information super-set.
- 2) $(d, m) = (1, i)$ for some i . In this case, depending on whichever is smaller, we either apply the method described after Lemma 7, and return the union of the $\lfloor S/2 \rfloor$ 2-information super-sets (with the potential additional one 1-information super-set), or construct an S -information super-set using Lemma 4.

To bound the size of the resulting S -information super-set for the input code $RM(d, m)$, one may consider the above algorithm as a tree-like structure, and we are left to bound the summation of all sizes of information super-sets that were computed in its leaves. See Figure 3 for an example where $d = 4, m = 8$ and $S = 2$. In this example, the root of the tree is the code $RM(4, 7)$, the leaves from the first base case are of the form $RM(i, i + 2)$ for $i = 2, 3, 4$, and the leaf from the second base case is $RM(1, 4)$. We eventually obtain the following general bound on $L(d, m, S)$.

Theorem 7. If $s \triangleq \log_2(S+1)$ is an integer and $d > 1$, then

$$L(d, m, S) \leq \sum_{i=2}^d \binom{m-i-s-1}{d-i} 2^{i+s} + \sum_{j=2+s}^{m-d+1} \binom{m-j-1}{d-2} U(1, j, S).$$

If s is not an integer and $d > 1$,

$$L(d, m, S) \leq \sum_{i=2}^d \binom{m-i-\lceil s \rceil - 1}{d-i} (2^{i+\lceil s \rceil} - 2^{\lceil s \rceil} + S + 1) + \sum_{j=2+\lceil s \rceil}^{m-d+1} \binom{m-j-1}{d-2} U(1, j, S).$$

For $d = 1$, (6) gives an upper bound on $L(1, m, S)$.

Proof. Suppose $s \triangleq \log_2(S+1)$ is an integer. Let $T(i, j)$ denote the number of times $RM(i, j)$ appears in the tree. In what follows we derive a general expression for $T(i, j)$ which will be useful for obtaining our bound. We first make the following observations.

- 1) From the recursive structure, we have $T(i, j) = T(i, j+1) + T(i+1, j+1)$.
- 2) For any leaf ℓ resulting from this base case, the number of times ℓ appears is exactly equal to the count of its parent in the tree; that is, $T(i, i+s) = T(i, i+s+1)$ for all $2 \leq i \leq d$.
- 3) Nodes on the rightmost path of the tree from the root to the leaf, i.e., nodes of the form $RM(i, m-d+i)$, only appear once; that is, $T(i, m-d+i) = 1$ for all $1 \leq i \leq d$.

We prove by induction that for all $i \in [2, d]$, we have $T(i, j) = \binom{m-j}{d-i}$ for all $j \in [i+s+1, m-d+i]$. In detail, we first show $T(d, j) = \binom{m-d-s-1}{d-d}$ as the initial case of the induction. Then, the induction assumption states that the expression holds for some $i \in [2, d]$, and we then show that it holds for $i-1 \in [2, d]$. In the initial case, we easily have $T(d, j) = 1 = \binom{m-j}{d-d}$ for all $j \in [d+s+1, m]$ from the third observation. Now, suppose $T(i, j) = \binom{m-j}{d-i}$ for some $i \in [2, d]$. Then, from the first and third observations,

$$\begin{aligned} T(i-1, j) &= T(i-1, j+1) + T(i, j+1) \\ &= T(i-1, j+2) + T(i, j+2) + T(i, j+1) \\ &= \dots = T(i-1, m-d+i-1) + \sum_{h=j+1}^{m-d+i-1} T(i, h) \\ &= 1 + \sum_{h=j+1}^{m-d+i-1} \binom{m-h}{d-i} \\ &= 1 + \sum_{h=d-i+1}^{m-j-1} \binom{h}{d-i} \\ &= \sum_{h=d-i}^{m-j-1} \binom{h}{d-i} \\ &= \binom{m-j}{d-i+1}, \end{aligned}$$

where the last step follows from the hockey-stick identity. This indeed proves that $T(i, j) = \binom{m-j}{d-i}$.

In the first base case, we stop the breakdown when the condition (5) is violated, i.e., when $m-d = s$. This means the leaves from this base case are of the form $RM(i, i+s)$ for $2 \leq i \leq d$. Recall that the minimum distance of $RM(i, i+s)$ is $d_{\min} = 2^s = S+1$, and therefore, the size of any S -information super-set for $RM(i, i+s)$ equals its block length $2^{i+s} - (S+1) + S+1 = 2^{i+s}$. To count the number of times this base case is reached, i.e., the number of leaves from the first base case, notice that the expression for $T(i, j)$ specifies to $T(i, i+s+1) = \binom{m-i-s-1}{d-i}$. This leads to $T(i, i+s) = \binom{m-i-s-1}{d-i}$ from the second observation. Taking i from 2 to d results in the first part of the bound, i.e., $\sum_{i=2}^d \binom{m-i-s-1}{d-i} 2^{i+s}$.

To prove the second part, first notice that because $RM(2, 2+s)$ is a leaf node whose parent is $RM(2, 3+s)$, whose other child $RM(1, 2+s)$ is another leaf, the breakdown cannot go any further than this; in other words,

$i \geq 2 + s$. On the other hand, i cannot be greater than $m - d + 1$, which corresponds to the last leaf node on the rightmost path of the tree. In addition, notice that leaf node $RM(1, i)$ appears if and only if $RM(2, i + 1)$ appears, indicating that it suffices to count the number of nodes of the form $RM(2, i + 1)$ for all $i \in [2 + s, m - d + 1]$. To this end, from previous analysis we have $T(2, i + 1) = \binom{m-i-1}{d-2}$, which means $T(1, i) = \binom{m-i-1}{d-2}$. Putting all of this together yields the second part of the bound, i.e., $\sum_{j=2+s}^{m-d+1} \binom{m-j-1}{d-2} U(1, j, S)$.

In the case where s is not an integer, we stop the breakdown when $m - d = \lceil s \rceil$. This means the leaves from the first base case are now of the form $RM(i, i + \lceil s \rceil)$ for $2 \leq i \leq d$. The minimum distance of $RM(i, i + \lceil s \rceil)$ is $d_{\min} = 2^{\lceil s \rceil}$, and the size of any S -information super-set for $RM(i, i + \lceil s \rceil)$ equals $2^{i+\lceil s \rceil} - 2^{\lceil s \rceil} + S + 1$. The counting argument follows the same logic. \square

In the above recursive procedure, we break down $RM(d, m)$ only if (5) is true. It follows from (4) that the information super-set size given by Theorem 7 is at least as good as Lemma 4. In most cases Theorem 7 is better, either due to the gains from the $(u, u + v)$ approach due to (4) or due to the gains from the method given by Lemma 7. In Table II, we provide a few examples that illustrate the merit of using Theorem 7 instead of Lemma 4.

d	m	S	Theorem 7	$q^m - d_{\min} + S + 1$	$(S + 1)\lambda(d, m)$
1	5	3	19	20	24
2	5	1	14	26	32
2	5	2	24	27	48
3	5	1	30	30	52
3	6	1	50	58	84
3	6	2	55	59	126
3	7	1	78	114	128
3	7	2	87	115	192
3	7	3	93	116	256
3	8	2	215	227	279
4	7	1	112	122	198
4	8	2	208	243	489
4	9	2	346	483	768
4	9	3	407	484	1024
4	10	3	677	964	1544

TABLE II: Information super-set sizes for selected parameters.

It can be seen from the table that Theorem 7 compares favorably against Lemma 4, and they both outperform the repetition method significantly.

APPENDIX B OMITTED PROOFS AND DETAILS

A. Proof of Theorem 1

For any $\mathcal{R} \in \binom{[n]}{r}$, by the law of total probability, we have

$$\begin{aligned} \Pr(X_{\mathcal{R}} = \mathbf{x}_{\mathcal{R}} | \tilde{X} = \tilde{\mathbf{x}}) &= \\ &= \sum_{\theta \in \mathbb{F}_q^m} \Pr(K = \theta) \Pr(X_{\mathcal{R}} = \mathbf{x}_{\mathcal{R}} | \tilde{X} = \tilde{\mathbf{x}}, K = \theta) \end{aligned}$$

for every $\mathbf{x}_{\mathcal{R}} \in \mathbb{F}_q^r$ and every $\tilde{\mathbf{x}} \in \mathbb{F}_q^n$.

Since $K \sim \text{Unif}(\mathbb{F}_q^m)$, it follows that $\Pr(K = \theta) = 1/q^m$ for all $\theta \in \mathbb{F}_q^m$. For any $\mathcal{R} \in \binom{[n]}{r}$, any $\mathbf{x}_{\mathcal{R}} \in \mathbb{F}_q^r$, and any $\tilde{\mathbf{x}} \in \mathbb{F}_q^n$, let

$$\mathcal{M}_{\mathcal{R}, \tilde{\mathbf{x}}, \mathbf{x}_{\mathcal{R}}} = \mathcal{M} \triangleq \{\theta \in \mathbb{F}_q^m : \tilde{\mathbf{x}}_{\mathcal{R}} = \mathbf{x}_{\mathcal{R}} + \theta G_{\mathcal{R}}\}.$$

The number of solutions $\theta \in \mathbb{F}_q^m$ for $\theta G_{\mathcal{R}} = \tilde{\mathbf{x}}_{\mathcal{R}} - \mathbf{x}_{\mathcal{R}}$ is identical to the number of solutions for $\theta G_{\mathcal{R}} = 0$ because of an affine transformation. Thus we have $|\mathcal{M}| = |\{\theta \in \mathbb{F}_q^m : \theta G_{\mathcal{R}} = 0\}|$. Now, $G_{\mathcal{R}} \in \mathbb{F}_q^{m \times r}$ has full rank, which indicates that $|\{\theta \in \mathbb{F}_q^m : \theta G_{\mathcal{R}} = 0\}| = q^{m-r}$, so we have $|\mathcal{M}| = q^{m-r}$. Since $\Pr(X_{\mathcal{R}} = \mathbf{x}_{\mathcal{R}} | \tilde{X} = \tilde{\mathbf{x}}, K = \theta) = 1$ if $\theta \in \mathcal{M}$ and 0 otherwise, it follows that $\Pr(X_{\mathcal{R}} = \mathbf{x}_{\mathcal{R}} | \tilde{X} = \tilde{\mathbf{x}}) = \frac{1}{q^m} \cdot q^{m-r} = 1/q^r$, which implies that the variable $X_{\mathcal{R}} | \tilde{X} = \tilde{\mathbf{x}}$ is uniform over \mathbb{F}_q^r . Since $X_{\mathcal{R}} \sim \text{Unif}(\mathbb{F}_q^r)$, we have $I(X_{\mathcal{R}}; \tilde{X}) = H(X_{\mathcal{R}}) - H(X_{\mathcal{R}} | \tilde{X}) = 0$.

B. Reducing Upload Cost

Let G be a generator matrix and H be a parity check matrix of any $[n, m]_q$ linear code \mathcal{C} that satisfies $d_{\min}(\mathcal{C}^\perp) \geq r + 1$. Let $B(H, \mathbf{s})$ be a publicly known deterministic algorithm to compute a solution \mathbf{y} to $\mathbf{s}H^\top = \mathbf{y}$. In other words, given any syndrome, there is a fixed shift vector that defines the corresponding coset. The user computes the syndrome $\mathbf{x}H^\top$ and sends it to the service provider. Both the user and the service provider can obtain $\tilde{\mathbf{x}} \triangleq B(H, \mathbf{x}H^\top)$. Since $\mathbf{x}H^\top = \tilde{\mathbf{x}}H^\top$, it follows that $\mathbf{x} - \tilde{\mathbf{x}} \in \mathcal{C}$. There exists exactly one $\mathbf{k} \in \mathbb{F}_q^m$ such that $\mathbf{k}G = \mathbf{x} - \tilde{\mathbf{x}}$. The user stores this \mathbf{k} as side information. This scheme is equivalent to (1) with key \mathbf{k} . The upload cost is clearly reduced from n to $n - m$.

C. Proof of Lemma 3

Let \mathcal{T} be an S -information super-set for $RM_q(d, m)$ of size $L(q, d, m, S)$. Suppose $L(q, d, m, S) < \lambda(q, d, m) + S$, which means $L(q, d, m, S) - S < \lambda(q, d, m)$. Then, by Definition 4, there is a contradiction. That is, \mathcal{T} is not an S -information super-set for $RM_q(d, m)$ because every $|\mathcal{T}| - S$ subset of \mathcal{T} cannot contain an information set for $RM_q(d, m)$, according to Definition 2.

D. Proof of Lemma 4

From Lemma 1, it follows that every subset of $[q^m]$ of size $q^m - d_{\min} + 1$ contains an information set for $RM_q(d, m)$. Let \mathcal{T} be a subset of $[q^m]$. If $|\mathcal{T}| = q^m - d_{\min} + S + 1$, then every $|\mathcal{T}| - S$ subset of \mathcal{T} contains an information set for $RM_q(d, m)$, making \mathcal{T} an S -information super-set for $RM_q(d, m)$. Therefore, the minimum size of an S -information super-set for $RM_q(d, m)$ is at most $q^m - d_{\min} + S + 1$. The second statement simply follows from the fact that the minimum distance of $RM(d, m)$ is 2^{m-d} .

E. Computational Locality

The notion of computational locality was introduced in [18] as a proxy for the minimum number of workers necessary for coded computation in the presence of stragglers. Let \mathcal{C} be a linear code of block length n , let $\ell \leq n$ and S be non-negative integers, and let $\mathcal{I} \in \binom{[n]}{\ell}$. The computational locality $L_{\mathcal{I}, S}$ is the minimum size of multiset $\mathcal{T} \subseteq [n]$ such that $G_{\mathcal{I}}$ is in the span of any collection of $|\mathcal{T}| - S$ columns of $G_{\mathcal{T}}$. The computational locality $L_{\ell, S}$ of code \mathcal{C} is $\max_{\mathcal{I} \in \binom{[n]}{\ell}} L_{\mathcal{I}, S}$. In the present paper we wish to construct S -information super-sets of minimum size; it is evident that the size of such S -information super-sets equals to the minimum of $L_{\mathcal{I}, S}$ across all information sets $\mathcal{I} \subseteq [n]$. We also note that [18] did not explicitly study or construct information super-sets.

F. Punctured Reed-Muller Codes

In a sense, the problem of puncturing Reed-Muller codes is dual to that of constructing information super-sets for our application. In the former, one fixes the block length of the punctured code, and wishes to maximize its minimum distance. In our setting, we fix the minimum distance (implied by the parameter S), and wish to minimize the block length. One relevant work known to the authors is [10], which provides a tighter bound on $L(q, d, m, S)$ than Lemma 4 for some values of S , assuming certain structures of the field. Specifically, if $q = p^2$ for a prime power p , and if $d < q$, then the results in [10] provide an information super-set of size $p^t(p - 1)$ for $S = p^t(p - 1) - d(d + 1)M - 1$, where $M = m^d + O(m^{d-1})$ and $t = \lceil \log_p(dM)/2 \rceil$. Note that the $q = 2$ case is not handled in [10] due to the requirement $q = p^2$ for a prime power p .