
ANDROIDWORLD: A Dynamic Benchmarking Environment for Autonomous Agents

Christopher Rawles^{*1}, Sarah Clinckemaiellie^{†2}, Yifan Chang^{†2}, Jonathan Waltz², Gabrielle Lau², Marybeth Fair², Alice Li¹, William Bishop¹, Wei Li¹, Folawiyo Campbell-Ajala¹, Daniel Toyama¹, Robert Berry¹, Divya Tyamagundlu², Timothy Lillicrap¹, and Oriana Riva¹

¹Google DeepMind
²Google

Abstract

Autonomous agents that execute human tasks by controlling computers can enhance human productivity and application accessibility. However, progress in this field will be driven by realistic and reproducible benchmarks. We present ANDROIDWORLD, a fully functional Android environment that provides reward signals for 116 programmatic tasks across 20 real-world Android apps. Unlike existing interactive environments, which provide a static test set, ANDROIDWORLD dynamically constructs tasks that are parameterized and expressed in natural language in unlimited ways, thus enabling testing on a much larger and more realistic suite of tasks. Reward signals are derived from the computer’s system state, making them durable across task variations and extensible across different apps.

To demonstrate ANDROIDWORLD’s benefits and mode of operation, we introduce a new computer control agent, M3A. M3A can complete 30.6% of ANDROIDWORLD’s tasks, leaving ample room for future work. Furthermore, we adapt a popular desktop web agent to work on Android, which we find to be less effective on mobile, suggesting future research is needed to achieve universal, cross-domain agents. Finally, we conduct a robustness analysis by testing M3A against a range of task variations on a representative subset of tasks, demonstrating that variations in task parameters can significantly alter a task’s complexity and, consequently, an agent’s performance, highlighting the importance of testing agents under diverse conditions. ANDROIDWORLD and the experiments in this paper are available at https://github.com/google-research/android_world.

1 Introduction

Autonomous agents that interpret human natural language instructions and operate computing devices can provide enormous value by automating repetitive tasks, augmenting human intelligence, and accomplishing complex workflows. The enthusiasm for building such agents is evident by the growing number of computer control agent systems [45, 10, 78, 27, 25, 19] and code repositories [16, 1, 2, 63, 66]. Yet, most existing approaches evaluate agents with proxy metrics, by comparing an agent’s trajectory to a previously collected human demonstration [32, 5, 10, 45, 70, 76, 37, 74, 68]. This kind of measurement is not representative of real-world performance [45, 78] because it does not reflect that there are usually multiple correct paths to solve a task, environments may behave non-deterministically (e.g., the environment freezes), and agents

^{*}Lead contributor. Contact: crawles@google.com

[†]Equal contribution.

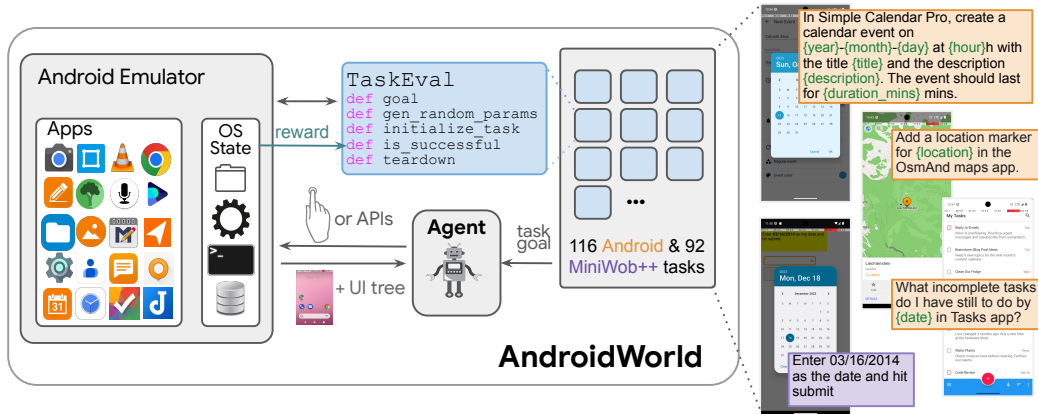


Figure 1: ANDROIDWORLD is an environment for building and testing autonomous agents.

can dynamically learn from mistakes to correct their actions [50, 35, 31, 43]. Towards more accurate evaluation, emerging testing environments [71, 81, 27, 11, 29, 65] place agents in interactive environments and measure their task completion rates across a suite of tasks.

Reward signals are quantitative metrics that indicate functional correctness of a task, i.e. is the stated goal achieved? For example, for the task “Send a text message to Jane confirming I’ll be there”, a positive reward indicates the relevant message has been sent. Yet, real-world environments (apps and websites), unlike simulations [54, 51] and games [42, 52, 60, 62, 53], do not naturally provide explicit reward signals. The internals of most apps and websites are hidden from developers making it difficult to program rewards. Additionally, such systems are seemingly infinitely expansive, spanning millions of continuously-changing apps and websites. All these factors make it hard to establish reliable and durable reward functions.

One way to obtain reliable reward signals is to leverage human judgment [45, 78, 43, 26] to conduct one-off evaluations on a diverse suite of tasks; however, each evaluation run requires both significant time and costly manual review. LLM-based “judges” used to evaluate natural language generation models [8, 79, 36] are emerging as a solution for evaluating agents in dynamic real-world environments [12, 39], and while showing promise also for computer control agents [43, 19] they remain imperfect evaluators. As a result, existing testing environments for computer control agents that provide *automated* reward signals are limited in their real-world diversity and scale. They cover mostly single-app tasks on a small set of domains (1–6 websites [71, 81, 27]) and evaluate agents on static test sets [65, 41], instead of across varied conditions and inputs which are found in real-world scenarios.

To tackle these challenges, we introduce and release ANDROIDWORLD, a robust agent environment for Android that offers realism and scalability for developing and evaluating computer control agents. ANDROIDWORLD is an open environment consisting of a fully functional Android OS, allowing access to millions of Android apps and the Web. Crucially, it provides a highly reproducible task suite for developing and evaluating computer control agents, consisting of 116 tasks across 20 apps. Similarly to the popular MiniWoB++ [49] benchmark, each task is dynamically instantiated using randomly-generated parameters, challenging agents with millions of unique task goals and conditions. While MiniWoB++ consists of simple, synthetic websites, ANDROIDWORLD leverages real-world Android applications. To ensure that reward signals are durable when using real applications, ANDROIDWORLD’s key insight is to leverage the extensive and consistent state management capabilities of the Android operating system, using the same mechanisms that the apps themselves utilize. The dynamic nature of ANDROIDWORLD’s tasks is not only a test of adaptability for evaluation purposes, but it can also spawn new research on online learning algorithms for computer control agents.

ANDROIDWORLD is a lightweight environment, requiring only 2 GB of memory and 8 GB of disk space, and is designed with convenience in mind. It connects agents to Android OS by leveraging the

Python library AndroidEnv [58] to connect to the freely available Android Emulator.¹ ANDROIDWORLD is highly extensible, making it easy to add new tasks and even new benchmarks, which we demonstrate by integrating the MiniWoB++ [49, 33] benchmark.

To demonstrate ANDROIDWORLD’s usefulness as a benchmark, we build and release a new multimodal agent, M3A (Multimodal Autonomous Agent for Android), and establish state-of-the-art results on ANDROIDWORLD. We analyze M3A’s performance using both multimodal and text-only input, and we observe that while multimodal perception can improve performance in some cases, it generally does not outperform the text-only approach. On ANDROIDWORLD, M3A achieves a 30.6% success rate, which surpasses that of a web agent adapted for Android but remains significantly lower than the human success rate of 80.0%. In pursuit of building robust computer control agents, our study includes comprehensive tests under varied real-world conditions, demonstrating significant performance variations primarily driven by changes in intent parameters.

We make the following contributions: (i) the creation of a new, highly diverse and realistic computer control agent environment; (ii) establishment of benchmark performance with a state-of-the-art multimodal agent, and (iii) a careful analysis demonstrating the need to evaluate agents across multiple test sets and conditions due to the inherent stochasticity in both models and environments.

2 Related Work

Table 1 compares existing evaluation environments for autonomous agents.

2.1 Interactive evaluation environments

Effective evaluation of autonomous agents requires environments that not only mimic real-world scenarios but also provide immediate reward signals upon successful task completion [45, 10, 3, 46, 6]. MiniWoB++ [49, 35] offers a lightweight framework of small, synthetic HTML pages with parameterized tasks which allow for unlimited task variability. WebShop [71] provides a simulated e-commerce environment, whereas WebArena [81] and VisualWebArena [27] consist of simulated websites across up to four domains. WorkArena [11] consists of 29 tasks for enterprise software. OSWorld [65] provides an interface and programmatic rewards across nine apps for desktop OSes. GAIA [41] is a static dataset that tests an agent’s ability to interact with live web environments. MMInA [77] is a multihop and multimodal benchmark designed to evaluate agents for compositional Internet tasks. B-MoCA [29] is the only interactive testing environment that exists today for mobile. It supports 31 tasks whose success is determined by comparing an agent’s execution with logs from human demonstrations using simple regex expressions. Unlike MiniWoB++, these frameworks use a fixed set of evaluation tasks with static initial conditions and goals, limiting adaptability. As has been observed in other domains such as reinforcement learning [20, 44, 9], the current output of foundation models is stochastic and highly sensitive to their inputs [23, 38, 34, 47], motivating the need to test them under varying conditions.

Reward signal construction is crucial when comparing interactive benchmarking environments. MiniWoB++ [49] dynamically constructs tasks, embedding rewards directly in custom HTML and JS code, a method specific to web-based tasks and less adaptable to other environments. WebArena [81], VisualWebArena [27] and MMInA [77] check trajectories for specific URLs and examine result pages for expected strings or images. Information retrieval tasks compare returned answers against a ground truth. WebShop [71] identifies specific products by matching their attributes against pre-defined gold attributes. B-MoCA [29] uses regular expressions to match log outputs. These types of reward are application specific and time dependent. OSWorld [65] scales better by inspecting device states or querying the cloud to compute rewards, thus offering robust functions adaptable to content and app updates, and shareable across multiple tasks. ANDROIDWORLD enhances OSWorld’s approach by dynamically constructing the start states and varying the task goals in unlimited ways.

Other studies leverage human evaluation [45, 78, 4] for tasks where automatic evaluation is not available. Lastly, emerging research [43, 19] explores the potential of multimodal models to generalize agent evaluations to new settings, though this area requires further research to achieve accuracy comparable to manually coded rewards.

¹The Android Emulator is packaged as part of Android Studio, which can be downloaded from <https://developer.android.com/studio>

Table 1: Comparison of different datasets and environments for benchmarking computer agents.

	Env?	# of apps or websites	# task templates	Avg # task instances	Reward method	Platform
GAIA	✗	n/a	466	1	text-match	None
MIND2WEB	✗	137	2350	1	None	Desktop Web
WEBLINX	✗	155	2337	1	None	Desktop Web
PIXELHELP	✗	4	187	1	None	Android
METAGUI	✗	6	1125	1	None	Android
MoTIF	✗	125	4707	1	None	Android (Apps+Web)
AITW	✗	357+	30378	1	None	Android (Apps+Web)
OMNIACT	✗	60+	9802	1	None	Desktop (Apps+Web)
MINIWOB++	✓	1	114	∞	HTML/JS state	Web (synthetic)
WEBSHOP	✓	1	12k	1	product attrs match	Desktop Web
WEBARENA	✓	6	241	3.3	url/text-match	Desktop Web
VISUALWEBARENA	✓	4	314	2.9	url/text/image-match	Desktop Web
WORKARENA	✓	1	29	622.4	cloud state	Desktop Web
B-MoCA	✓	12	31	1.9	regex	Android (Apps+Web)
MMINA	✓	14	1050	1	text-match	Desktop web
OSWORLD	✓	9	369	1	device/cloud state	Desktop (Apps+Web)
ANDROIDWORLD	✓	20	116	∞	device state	Android (Apps+Web)

2.2 Static datasets for automation

Datasets derived from human interactions provide proxy metrics that correlate with real-world agent performance [32, 5, 10, 45]. On mobile platforms, AitW [45], PixelHelp [32], UGIF [59], and MoTIF [5] consist of demonstrations across Android apps and mobile websites, with screens often represented via accessibility trees. In contrast, desktop web environments typically utilize the DOM for representing website content, with Mind2Web [10], OmniAct [24] and others, across various desktop websites. Mobile-based datasets frequently involve more complex actions, such as scrolling, which are not as useful in DOM-based desktop interactions where the entire action space is readily accessible. Additionally, API-centric datasets like API-Bank [30], ToolTalk [13], and ToolBench [67] assess agents’ capabilities to manipulate computer systems via APIs.

2.3 Interactive agents

Prior to today’s foundation models, traditional approaches to developing user interface-operating agents primarily used reinforcement learning and behavioral cloning to simulate interactions like mouse clicks and keyboard typing [32, 35, 17, 22]. More recent work tends to leverage off-the-shelf foundational models [55, 56, 57] with in-context learning (ICL) and fine-tuning applied to mobile [45, 21, 61, 68, 76, 4, 75], desktop web [78, 10, 81, 27, 7, 28], and desktop OS [64, 73, 65]. Recent work explores agents that reflect on system state [50, 72, 40] by leveraging exploration, self-evaluation, and retry-capabilities enabling continual learning and adaptation [31, 70, 43, 64, 15].

3 ANDROIDWORLD

3.1 Android for autonomous agents

Android is an ideal environment for developing autonomous agents. It is the most widely-used OS globally² and is highly flexible for research, while providing an open world of the Web³ and over 2M apps for agents to operate in. Using emulation, an Android environment is easy to deploy, does not require specialized hardware, and can be run on a laptop. Android Virtual Devices or emulator images are well suited for research as they are self-contained, easy to distribute, and configurable.

Compared to desktop environments, mobile environments, like Android, pose unique research challenges for computer control agents. On one hand, mobile UIs tend to be simpler than their desktop counterparts because of their smaller screen size. On the other hand, the action space on mobile

²<https://gs.statcounter.com/os-market-share>

³Mobile is the most popular platform for accessing the web; <https://gs.statcounter.com/platform-market-share/desktop-mobile/worldwide/>

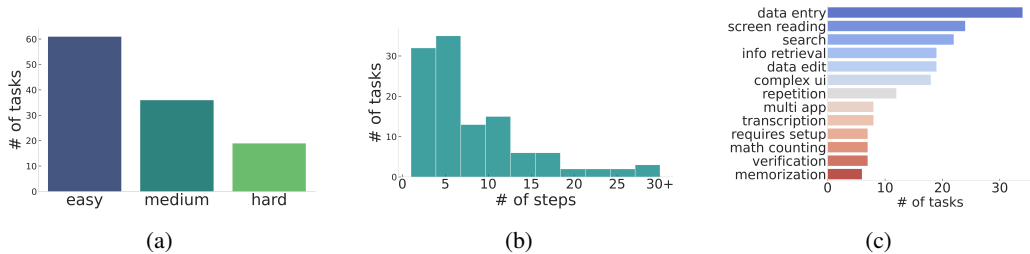


Figure 2: Annotators performed the tasks assigned to them, assigned a difficulty level (2a) and selected relevant category tags from a predefined list (2b). They also estimated the number of steps required to complete each task (2b), using the action space available to an agent.

devices is more complicated and more actions can be required to complete tasks. Precise gestures are needed to fully operate the UI, such as when navigating a carousel widget, long-pressing on a widget, or performing multi-finger gestures to zoom in. Since it is an OS, Android is a fully open environment compared to web-browser-only environments. Android’s flexibility is also reflected in its action space; in addition to UI actions (click, scroll, type, etc.), Android provides function-calling APIs, such as sending a text message, for example, which allow computer control agents to utilize a broader action space.

3.2 The observation and action space

ANDROIDWORLD provides an interface for agents to receive observations and execute actions on Android. It uses AndroidEnv [58] and the Android Device Bridge to facilitate interaction between Android and the agent. The observation space consists of a full-resolution screenshot and a UI tree representation developed for accessibility purposes. The action space is similar to that which humans use, consisting of gestures (i.e., tapping, long-press, and swiping), typing, and navigation buttons (i.e., go home and go back). In addition to these naturalistic actions, ANDROIDWORLD exposes a limited set of function calling APIs, such as `send_text_message`, to help agents accomplish goals. App. B provides more details on the observation format and action space.

3.3 Reproducible and parameterized tasks

ANDROIDWORLD consists of a suite of 116 tasks, spread across 20 diverse applications (see App. C for more details). These tasks simulate practical, everyday activities, including note-taking, scheduling appointments, communicating through messaging, and interacting with system utilities. The suite consists of open-source apps and built-in Android system apps, such as Settings and Contacts. As rated by humans, the tasks vary in difficulty, duration, and categories (Figure 2).

To achieve a high degree of reproducibility in real-world scenarios, ANDROIDWORLD precisely controls the OS and app states in several ways. The Android OS is fixed, consisting of a Pixel 6 emulator running Android 13 with a fixed time on the date October 15th, 2023. All applications in ANDROIDWORLD are fully-functional, open-source apps, besides the OS-level apps included with Android. For the open-source apps, ANDROIDWORLD maintains a constant environment by installing a fixed version of each app, acquired from F-Droid.⁴ OS-level apps’ versions are determined by the Android OS, which is also fixed. ANDROIDWORLD only utilizes apps that do not require login/authentication, can function offline, and store their application data on device.

In addition to managing the states of apps and operating systems, ANDROIDWORLD precisely defines and controls the state during task execution. Each task has its own unique setup, reward determination logic, and teardown procedures (see App. C.2 and C.3 for more details), ensuring a fully reproducible suite of tasks. This careful state management not only ensures reproducibility but also allows for easy customization of tasks through *parametrization*. Task parameters, initialized randomly at the start of each task based on a controlled random seed, dictate the initial state and influence reward outcomes. Similarly to MiniWoB++ [49, 33], ANDROIDWORLD consists of a practically infinite set of varying initial conditions and success criteria. This approach provides

⁴<https://f-droid.org/>

Table 2: Selected tasks with code describing validation logic.

Task	Validation code
In Simple Calendar Pro, create a calendar event on <code>{event.year}</code> - <code>{event.month}</code> - <code>{event.day}</code> at <code>{event.hour}</code> h with the title ' <code>{event.title}</code> ' and the description ' <code>{event.description}</code> '. The event should last for <code>{event.duration}</code> mins.	<code>event_exists(event)</code>
Send a text message to <code>{phone_number}</code> with message: <code>{message}</code> .	<code>message_exists(phone_number, message, messaging_db)</code>
Create a new drawing in Simple Draw Pro. Name it <code>{file_name}</code> . Save it in the Pictures folder.	<code>file_exists(file_path)</code>
Create a timer with <code>{hours}</code> hours, <code>{minutes}</code> minutes, and <code>{seconds}</code> seconds. Do not start the timer.	<code>timer_displays(time, ui_hierarchy)</code>
Create a new note in Markor named <code>{file_name}</code> with the following text: <code>{text}</code> . Share the entire content of the note with the phone number <code>{number}</code> via SMS.	<code>(file_exists(file_name, content=text) + message_exists(phone_number, message)) / 2.0</code>
Turn on WiFi and open <code>{app_name}</code> .	<code>(wifi_enabled() + app_launched(app_name))/2.0</code>

more granular analyses of agents’ adaptability — a vital attribute for real-world deployment. Beyond testing agent robustness, the dynamic construction of tasks supports the use of online learning methodologies, particularly reinforcement learning [49, 33, 22, 17]. It also simplifies the generation of distinct train/test datasets, facilitating supervised learning experiments [22, 48, 14].

3.4 Durable rewards from system state

ANDROIDWORLD provides reward signals by managing application state using the Android Debug Bridge (adb). With the adb tool ANDROIDWORLD has complete access to system resources including the file system, application databases, and system settings. Determining reward signals from system state has several benefits. It is highly accurate because an application’s state can be quickly inspected and manipulated using the same mechanisms that the app itself utilizes. Using the underlying system state is much more durable than matching superficial UI changes. Additionally, it facilitates easy re-use across disparate apps, which tend to use the same underlying caching mechanisms. For instance, logic for checking existence of a specific file is used across many unrelated applications, including those for file management, note-taking, and media playback. For applications leveraging SQLite databases, a common pattern, ANDROIDWORLD implements evaluators that verify the existence of new and deleted rows. Table 2 shows examples of the validators in ANDROIDWORLD. For more examples see Table 5.

3.5 Task composability

In addition to facilitating accurate and reusable evaluations, inferring a task’s success from system state makes it easy to create *composite* tasks by combining together existing tasks. For example, the task “Create a calendar event with details and text the details to contact” could be created by combining together two existing tasks for creating a calendar event and for sending a text message, which is possible because each task initialization and success detection logic is hermetic. Composite tasks tend to be more challenging because of their complexity, although they provide partial rewards based on completion of sub tasks, to help facilitate hill climbing. The last two rows of Table 2 show the validation code for composite tasks.

3.6 Integrating MiniWoB++

To demonstrate ANDROIDWORLD’s extensibility, we implement MiniWoB++ in the ANDROIDWORLD framework and term it MobileMiniWoB++. Each MobileMiniWoB++ task is instantiated using the standard ANDROIDWORLD interface, inheriting from `TaskEval` base class, and contains methods like `initialize_state` and `is_successful`. Since MiniWoB++ leverages JavaScript for task configuration and success detection, we built a WebView app to communicate between Python

and the app. For instance, the `is_successful` method of each task retrieves the reward value from the WebView app via an Android intent.

MobileMiniWoB++ introduces modifications in both observations and actions compared to the original benchmark. For example, HTML5 `<input>` elements are rendered with native Android UI widgets like the date-picker (see Figure 4), enhancing the realism of the tasks. MobileMiniWoB++ uses the same observation space as the Android tasks (accessibility tree and screenshot). Notably, it does not include the DOM as in the original implementation. The action space from ANDROIDWORLD is retained. We manually review and test each task to ensure they are solvable. We excluded twelve of the original tasks that failed to render correctly on Android, presented compatibility issues with the touch interface, or required near real-time interaction, which poses challenges on emulators. Overall, ANDROIDWORLD supports 92 MiniWoB++ tasks. See App. B.3 for more details.

4 ANDROIDWORLD as a computer-control benchmark

To test ANDROIDWORLD’s applicability for autonomous agents, we develop and test a state-of-the-art agent and its variants across all 20 apps and 116 tasks, as well as on MobileMiniWoB++.

4.1 Computer control agents

4.1.1 M3A

We develop a multimodal autonomous agent for Android, M3A. It is zero-shot, integrating ReAct-style [72] and Reflexion-style [50] prompting to consume user instructions and screen content, reason, take actions, and update its decision-making based on the outcome of its actions.

In the first stage, M3A generates an action, represented in JSON, and reasoning for that action. To generate this output, the agent is provided with a list of available action types, guidelines for operating the phone, and a list of UI elements derived from the Android accessibility tree’s leaf nodes. The agent receives the current screenshot and a Set-of-Mark (SoM) [69] annotated screenshot, which includes bounding boxes with numeric labels on the top-left corner for each UI element (see screenshot in Figure 5). The agent attempts to execute outputted action by referencing the specific mark (if applicable). In addition to the multimodal agent, we have developed a text-only variant that consumes the screen represented using the accessibility tree and selects the relevant action in JSON format.

After executing an action, M3A reflects on its effect by observing any state changes that may have occurred. During this stage, the agent is provided with available action types, general operating guidelines, the actual action taken, and its reasoning, as well as before-and-after UI states, represented by UI element representations and screenshots with SoM annotations. We request the agent to provide a concise summary of this step, including the intended action, success or failure, potential reasons for failure, and recommendations for subsequent actions. This summary will serve as the action history and be used for future action selection. See App. D for more details on the agent.

4.1.2 SeeAct baseline

We implement a baseline agent based on SeeAct [78], which was originally designed for GPT-4V for web navigation. Specifically, we implement the best-performing variant, SeeAct_{choice}, which grounds actions via textual choices. We implement SeeAct for the Android environment to evaluate how an existing model that performs well on web tasks [10] can be adapted and applied to Android.

To accommodate the Android environment, we adapt SeeAct in several ways. Firstly, we augment the action space from the original SeeAct implementation to support actions needed for mobile, including scroll, long press, navigate home and back, and open app actions. Secondly, in lieu of the DOM, which is not available for Android apps, we utilize the accessibility tree to construct candidate UI actions. Due to the lack of the DOM representation, we do not use the bespoke ranker model from the original implementation. However we observe that after applying a filtering heuristic to remove non-interactable elements, the majority of screens contains less than 50 candidate elements. See App. D.5 for more details on the implementation.

Table 3: Success Rates (SR) on ANDROIDWORLD and MobileMiniWoB++.

Agent	Input	Base model	SR _{ANDROIDWORLD}	SR _{MMiniWoB++}
<i>Human</i>	<i>screen</i>	<i>N/A</i>	<i>80.0</i>	<i>100.0</i>
M3A	all y tree	GPT-4 Turbo	30.6	59.7
M3A	all y tree	Gemini 1.5 Pro	19.4	57.4
M3A	SoM (screen + all y tree)	GPT-4 Turbo	25.4	67.7
M3A	SoM (screen + all y tree)	Gemini 1.5 Pro	22.8	40.3
SeeAct [78]	SoM (screen + all y tree)	GPT-4 Turbo	15.5	66.1

4.2 Experiment results

We evaluate M3A and SeeAct on ANDROIDWORLD and MobileMiniWoB++. We set the seed to 30 and provide a task-specific step budget. We use Gemini 1.5 Pro and GPT-4 Turbo as base models. For MobileMiniWoB++, we evaluate on a subset of 62 tasks, consistent with recent studies [80, 25, 18].

Table 3 presents the success rates (SR) for the agents and human performance on both task suites. Although the agents have far from human performance, they demonstrate out-of-the-box capabilities in operating mobile UIs, exhibiting basic understanding and control capabilities of UIs. They can perform a variety of actions, including long-press, scrolling to search for information, and revising their plan if actions do not work out. The best performance is obtained for M3A when using GPT-4. On ANDROIDWORLD the SoM-based variant is less performant, while on MobileMiniWoB++ it performs best. A similar result was obtained in recent work in the context of computer agents for desktop applications [65]. We posit SoM grounding is less beneficial for ANDROIDWORLD as the accessibility tree for Android apps is generally better populated than for mobile websites and covers the required action space, reducing the value of SoM.

4.3 Analysis

Agents have difficulty understanding mobile UIs, often failing to detect visual cues that are essential for task completion (see Figure 6a). Additionally, agents struggle with certain UI patterns and affordances, and when they make reasoning mistakes (see Figure 6b), they often lack the capability to explore and adapt as humans do (see Figure 6c). Moreover, agents sometimes struggle with tasks that simply involve confirming system states, e.g., confirming the WiFi is turned on, suggesting challenges in both task and screen understanding.

The agents struggle with grounding, particularly when executing precise interactions, such as manipulating text (see Figure 7) or operating sliders, and they are often unable to recover from mistyping errors. In addition, for tasks that demand memory, such as performing transcriptions across apps, multiplying numbers, or scrolling, the agents struggle as they are unable to “remember” content.

SeeAct performs less effectively than M3A on the ANDROIDWORLD task suite and similarly on MobileMiniWoB++, reflecting its optimization for web rather than mobile environments. It struggles with mobile-specific actions like long-presses and swipes, and often fails to select appropriate actions due to not incorporating screen elements during action generation. Memory-intensive tasks are particularly challenging, as SeeAct only caches actions without remembering outcomes, leading to repetitive, ineffective behaviors such as endless scrolling. This lack of quick error recovery often results in task termination once maximum steps are reached.

Finally, we note that large foundation models significantly increase latency, taking three times longer than humans on average to complete tasks. On average, M3A takes 3.9 minutes to complete a task, with the text-only version taking 2.5 minutes.

4.4 Agent robustness under random seeds

We evaluate agent robustness under two conditions: (1) identical tasks with the same parameters and (2) tasks with different parameter combinations, which change the initial state and task definition. Due to computational constraints, we perform this analysis on a representative subset of ANDROID-

WORLD tasks (listed in D.4). We use the strongest agent, M3A using the accessibility tree and GPT-4, for this analysis. Our results are shown in Figure 3.

In the baseline experiment with a constant seed, the agent fails the add and edit tasks, and rarely solves the two delete tasks. For the add and edit tasks, the agent struggles with UI operations, while for the delete tasks, it often gets confused before the step budget is consumed. Surprisingly, the agent’s performance varies even with a fixed seed, suggesting the model’s non-determinism affects agent reliability.

Agent performance varies much more using different seeds, with statistically significant differences for the add expense and edit note tasks. The high intra-task variation indicates the model’s sensitivity to the seed and its parameters, stemming from a lack of robustness from the underlying model.

Research in RL environments ([20, 44, 9]) has noted similar sensitivity to seeds.

Consistent with these studies, we observe agent performance is best represented by the mean across random seeds. Notably, the observation of non-zero rewards under some seeds points to potential enhancements through RL-like mechanisms in future work.

Overall, this experiment underscores the importance of extensively testing agents under varied task parameters to ensure they can handle real-world variability, a capability that ANDROIDWORLD supports effectively.

5 Limitations

ANDROIDWORLD currently supports tasks from mostly open-source Android apps with at least 1 million downloads and built-in Android system apps. While testing on more trending apps is desirable, we found open-source apps to be equally realistic and, in some cases, more challenging than apps with larger user bases. Trending apps tend to have UIs which are heavily optimized for smooth user experience, offering more UI functionality and shortcuts. Testing on less-optimized UIs makes the agent’s task harder. In an example failure we show in Figure 6c, the agent needed to delete all notes in a list and failed by repeatedly searching for a “delete-all” button. Instead, an agent with stronger reasoning capabilities would have probably searched once for that functionality, realized it was not available, and deleted the notes one by one.

6 Conclusion

We introduced ANDROIDWORLD, a realistic and robust agent environment for Android that enables the development and evaluation of autonomous agents across a wide range of tasks and apps. ANDROIDWORLD provides a reproducible task suite consisting of 116 tasks across 20 apps, with each task dynamically generated using random parameters to challenge agents with millions of unique goals. By releasing ANDROIDWORLD and establishing benchmark performance with M3A, we aim to accelerate research and development in this area, ultimately leading to the creation of computer control agents capable of operating effectively in real-world environments. Further, the dynamic nature of ANDROIDWORLD opens up new research opportunities for online learning algorithms in computer control agents.

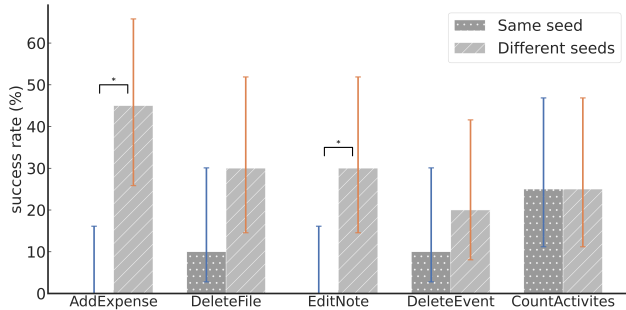


Figure 3: Success rate variation across tasks due to the parametrization built into ANDROIDWORLD. Using a fixed seed, the agent appears completely incapable of solving some tasks due to “bad luck” with the seed. In contrast, under different task parameterizations, we observe the agent is capable of solving the tasks fairly often. This contrast between the two groups is reflected by higher variance for the different seed group (orange) vs. the same seed group (blue). Significant differences, with p -value < 0.05 , are indicated by “*”.

References

- [1] AgentGPT, 2024. <https://agentgpt.reworkd.ai/>.
- [2] WebLlama, 2024. <https://weblama.github.io/>.
- [3] Josh Abramson, Arun Ahuja, Federico Carnevale, Petko Georgiev, Alex Goldin, Alden Hung, Jessica Landon, Timothy Lillicrap, Alistair Muldal, Blake Richards, Adam Santoro, Tamara von Glehn, Greg Wayne, Nathaniel Wong, and Chen Yan. Evaluating multimodal interactive agents, 2022.
- [4] William E Bishop, Alice Li, Christopher Rawles, and Oriana Riva. Latent state estimation helps ui agents to reason, 2024.
- [5] Andrea Burns, Deniz Arsan, Sanjna Agrawal, Ranjitha Kumar, Kate Saenko, and Bryan A. Plummer. Mobile app tasks with iterative feedback (motif): Addressing task feasibility in interactive visual environments. *CoRR*, abs/2104.08560, 2021.
- [6] Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Ponde de Oliveira Pinto, Jared Kaplan, Harri Edwards, Yuri Burda, Nicholas Joseph, Greg Brockman, Alex Ray, Raul Puri, Gretchen Krueger, Michael Petrov, Heidy Khlaaf, Girish Sastry, Pamela Mishkin, Brooke Chan, Scott Gray, Nick Ryder, Mikhail Pavlov, Alethea Power, Lukasz Kaiser, Mohammad Bavarian, Clemens Winter, Philippe Tillet, Felipe Petroski Such, Dave Cummings, Matthias Plappert, Fotios Chantzis, Elizabeth Barnes, Ariel Herbert-Voss, William Hebgen Guss, Alex Nichol, Alex Paino, Nikolas Tezak, Jie Tang, Igor Babuschkin, Suchir Balaji, Shantanu Jain, William Saunders, Christopher Hesse, Andrew N Carr, Jan Leike, Josh Achiam, Vedant Misra, Evan Morikawa, Alec Radford, Matthew Knight, Miles Brundage, Mira Murati, Katie Mayer, Peter Welinder, Bob McGrew, Dario Amodei, Sam McCandlish, Ilya Sutskever, and Wojciech Zaremba. Evaluating large language models trained on code. July 2021.
- [7] Kanzhi Cheng, Qiushi Sun, Yougang Chu, Fangzhi Xu, Yantao Li, Jianbing Zhang, and Zhiyong Wu. Seeclck: Harnessing gui grounding for advanced visual gui agents. *arXiv preprint arXiv:2401.10935*, 2024.
- [8] Wei-Lin Chiang, Lianmin Zheng, Ying Sheng, Anastasios Nikolas Angelopoulos, Tianle Li, Dacheng Li, Hao Zhang, Banghua Zhu, Michael Jordan, Joseph E Gonzalez, et al. Chatbot arena: An open platform for evaluating llms by human preference. *arXiv preprint arXiv:2403.04132*, 2024.
- [9] Cédric Colas, Olivier Sigaud, and Pierre-Yves Oudeyer. How many random seeds? statistical power analysis in deep reinforcement learning experiments. *arXiv preprint arXiv:1806.08295*, 2018.
- [10] Xiang Deng, Yu Gu, Boyuan Zheng, Shijie Chen, Samuel Stevens, Boshi Wang, Huan Sun, and Yu Su. Mind2Web: Towards a generalist agent for the web, 2023.
- [11] Alexandre Drouin, Maxime Gasse, Massimo Caccia, Issam H Laradji, Manuel Del Verme, Tom Marty, Léo Boisvert, Megh Thakkar, Quentin Cappart, David Vazquez, et al. Workarena: How capable are web agents at solving common knowledge work tasks? *arXiv preprint arXiv:2403.07718*, 2024.
- [12] Yuqing Du, Ksenia Konyushkova, Misha Denil, Akhil Raju, Jessica Landon, Felix Hill, Nando de Freitas, and Serkan Cabi. Vision-Language models as success detectors. March 2023.
- [13] Nicholas Farn and Richard Shin. Tooltalk: Evaluating tool-usage in a conversational setting. *arXiv preprint arXiv:2311.10775*, 2023.
- [14] Hiroki Furuta, Kuang-Huei Lee, Ofir Nachum, Yutaka Matsuo, Aleksandra Faust, Shixiang Shane Gu, and Izzeddin Gur. Multimodal web navigation with Instruction-Finetuned foundation models. May 2023.
- [15] Difei Gao, Lei Ji, Zechen Bai, Mingyu Ouyang, Peiran Li, Dongxing Mao, Qinchen Wu, Weichen Zhang, Peiyi Wang, Xiangwu Guo, et al. Assistgui: Task-oriented desktop graphical user interface automation. *arXiv preprint arXiv:2312.13108*, 2023.
- [16] Significant Gravitas. AutoGPT. <https://agpt.co>, 2023. <https://agpt.co>.
- [17] Izzeddin Gur, Natasha Jaques, Yingjie Miao, Jongwook Choi, Manoj Tiwari, Honglak Lee, and Aleksandra Faust. Environment generation for zero-shot compositional reinforcement learning, 2022.

- [18] Izzeddin Gur, Ofir Nachum, Yingjie Miao, Mustafa Safdari, Austin Huang, Aakanksha Chowdhery, Sharan Narang, Noah Fiedel, and Aleksandra Faust. Understanding html with large language models. *arXiv preprint arXiv:2210.03945*, 2022.
- [19] Hongliang He, Wenlin Yao, Kaixin Ma, Wenhao Yu, Yong Dai, Hongming Zhang, Zhenzhong Lan, and Dong Yu. Webvoyager: Building an end-to-end web agent with large multimodal models. *arXiv preprint arXiv:2401.13919*, 2024.
- [20] Peter Henderson, Riashat Islam, Philip Bachman, Joelle Pineau, Doina Precup, and David Meger. Deep reinforcement learning that matters. In *Proceedings of the AAAI conference on artificial intelligence*, volume 32, 2018.
- [21] Wenyi Hong, Weihang Wang, Qingsong Lv, Jiazheng Xu, Wenmeng Yu, Junhui Ji, Yan Wang, Zihan Wang, Yuxiao Dong, Ming Ding, et al. Cogagent: A visual language model for gui agents. *arXiv preprint arXiv:2312.08914*, 2023.
- [22] Peter C Humphreys, David Raposo, Tobias Pohlen, Gregory Thornton, Rachita Chhaparia, Alistair Muldal, Josh Abramson, Petko Georgiev, Adam Santoro, and Timothy Lillicrap. A data-driven approach for learning to control computers. In Kamalika Chaudhuri, Stefanie Jegelka, Le Song, Csaba Szepesvari, Gang Niu, and Sivan Sabato, editors, *Proceedings of the 39th International Conference on Machine Learning*, volume 162 of *Proceedings of Machine Learning Research*, pages 9466–9482. PMLR, 17–23 Jul 2022.
- [23] Jean Kaddour, Joshua Harris, Maximilian Mozes, Herbie Bradley, Roberta Raileanu, and Robert McHardy. Challenges and applications of large language models. *arXiv preprint arXiv:2307.10169*, 2023.
- [24] Raghav Kapoor, Yash Parag Butala, Melisa Russak, Jing Yu Koh, Kiran Kamble, Waseem Alshikh, and Ruslan Salakhutdinov. Omniaact: A dataset and benchmark for enabling multimodal generalist autonomous agents for desktop and web. *arXiv preprint arXiv:2402.17553*, 2024.
- [25] Geunwoo Kim, Pierre Baldi, and Stephen McAleer. Language models can solve computer tasks. *Advances in Neural Information Processing Systems*, 36, 2024.
- [26] Megan Kinniment, Lucas Jun Koba Sato, Haoxing Du, Brian Goodrich, Max Hasin, Lawrence Chan, Luke Harold Miles, Tao R Lin, Hjalmar Wijk, Joel Burget, et al. Evaluating language-model agents on realistic autonomous tasks. *arXiv preprint arXiv:2312.11671*, 2023.
- [27] Jing Yu Koh, Robert Lo, Lawrence Jang, Vikram Duvvur, Ming Chong Lim, Po-Yu Huang, Graham Neubig, Shuyan Zhou, Ruslan Salakhutdinov, and Daniel Fried. Visualwebarena: Evaluating multimodal agents on realistic visual web tasks. *arXiv preprint arXiv:2401.13649*, 2024.
- [28] Hanyu Lai, Xiao Liu, Iat Long Iong, Shuntian Yao, Yuxuan Chen, Pengbo Shen, Hao Yu, Hanchen Zhang, Xiaohan Zhang, Yuxiao Dong, et al. Autowebglm: Bootstrap and reinforce a large language model-based web navigating agent. *arXiv preprint arXiv:2404.03648*, 2024.
- [29] Juyong Lee, Taywon Min, Minyong An, Changyeon Kim, and Kimin Lee. Benchmarking mobile device control agents across diverse configurations. In *ICLR 2024 Workshop on Generative Models for Decision Making*, 2024.
- [30] Minghao Li, Yingxiu Zhao, Bowen Yu, Feifan Song, Hangyu Li, Haiyang Yu, Zhoujun Li, Fei Huang, and Yongbin Li. API-Bank: A comprehensive benchmark for Tool-Augmented LLMs. April 2023.
- [31] Tao Li, Gang Li, Zhiwei Deng, Bryan Wang, and Yang Li. A Zero-Shot language agent for computer control with structured reflection. In Houda Bouamor, Juan Pino, and Kalika Bali, editors, *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 11261–11274, Singapore, December 2023. Association for Computational Linguistics.
- [32] Yang Li, Jiacong He, Xin Zhou, Yuan Zhang, and Jason Baldridge. Mapping natural language instructions to mobile UI action sequences. In *Proc. of the 58th Annual Meeting of the Association for Computational Linguistics, ACL 2020, Online, July 5-10, 2020*, pages 8198–8210. Association for Computational Linguistics, 2020.
- [33] Evan Zheran Liu, Kelvin Guu, Panupong Pasupat, and Percy Liang. Reinforcement learning on web interfaces using workflow-guided exploration. In *6th International Conference on Learning Representations (ICLR '18)*, 2018.

- [34] Pengfei Liu, Weizhe Yuan, Jinlan Fu, Zhengbao Jiang, Hiroaki Hayashi, and Graham Neubig. Pre-train, prompt, and predict: A systematic survey of prompting methods in natural language processing. *ACM Computing Surveys*, 55(9):1–35, 2023.
- [35] Thomas F. Liu, Mark Craft, Jason Situ, Ersin Yumer, Radomir Mech, and Ranjitha Kumar. Learning design semantics for mobile apps. In *Proc. of the 31st Annual ACM Symposium on User Interface Software and Technology*, UIST '18, page 569–579, New York, NY, USA, 2018. Association for Computing Machinery.
- [36] Yang Liu, Dan Iter, Yichong Xu, Shuohang Wang, Ruochen Xu, and Chenguang Zhu. G-Eval: NLG evaluation using GPT-4 with better human alignment, 2023.
- [37] Xing Han Lù, Zdeněk Kasner, and Siva Reddy. WebLINX: Real-World website navigation with Multi-Turn dialogue. February 2024.
- [38] Yao Lu, Max Bartolo, Alastair Moore, Sebastian Riedel, and Pontus Stenetorp. Fantastically ordered prompts and where to find them: Overcoming few-shot prompt order sensitivity. *arXiv preprint arXiv:2104.08786*, 2021.
- [39] Yecheng Jason Ma, William Liang, Guanzhi Wang, De-An Huang, Osbert Bastani, Dinesh Jayaraman, Yuke Zhu, Linxi Fan, and Anima Anandkumar. Eureka: Human-level reward design via coding large language models, 2023.
- [40] Aman Madaan, Niket Tandon, Prakhar Gupta, Skyler Hallinan, Luyu Gao, Sarah Wiegrefe, Uri Alon, Nouha Dziri, Shrimai Prabhumoye, Yiming Yang, et al. Self-refine: Iterative refinement with self-feedback. *Advances in Neural Information Processing Systems*, 36, 2024.
- [41] Grégoire Mialon, Clémentine Fourrier, Craig Swift, Thomas Wolf, Yann LeCun, and Thomas Scialom. GAIA: a benchmark for general AI assistants. November 2023.
- [42] Volodymyr Mnih, Koray Kavukcuoglu, David Silver, Alex Graves, Ioannis Antonoglou, Daan Wierstra, and Martin Riedmiller. Playing atari with deep reinforcement learning, 2013.
- [43] Jiayi Pan, Yichi Zhang, Nicholas Tomlin, Yifei Zhou, Sergey Levine, and Alane Suhr. Autonomous evaluation and refinement of digital agents. April 2024.
- [44] Antonin Raffin, Ashley Hill, Adam Gleave, Anssi Kanervisto, Maximilian Ernestus, and Noah Dormann. Stable-baselines3: Reliable reinforcement learning implementations. *Journal of Machine Learning Research*, 22(268):1–8, 2021.
- [45] Christopher Rawles, Alice Li, Daniel Rodriguez, Oriana Riva, and Timothy Lillicrap. Android in the wild: A large-scale dataset for android device control. *arXiv preprint arXiv:2307.10088*, 2023.
- [46] Yangjun Ruan, Honghua Dong, Andrew Wang, Silviu Pitis, Yongchao Zhou, Jimmy Ba, Yann Dubois, Chris J Maddison, and Tatsunori Hashimoto. Identifying the risks of LM agents with an LM-Emulated sandbox. September 2023.
- [47] Melanie Sclar, Yejin Choi, Yulia Tsvetkov, and Alane Suhr. Quantifying language models’ sensitivity to spurious features in prompt design or: How i learned to start worrying about prompt formatting. *arXiv preprint arXiv:2310.11324*, 2023.
- [48] Peter Shaw, Mandar Joshi, James Cohan, Jonathan Berant, Panupong Pasupat, Hexiang Hu, Urvashi Khandelwal, Kenton Lee, and Kristina Toutanova. From pixels to UI actions: Learning to follow instructions via graphical user interfaces. May 2023.
- [49] Tianlin Shi, Andrej Karpathy, Linxi Fan, Jonathan Hernandez, and Percy Liang. World of bits: An open-domain platform for web-based agents. In Doina Precup and Yee Whye Teh, editors, *Proc. of the 34th International Conference on Machine Learning*, volume 70 of *Proceedings of Machine Learning Research*, pages 3135–3144. PMLR, 06–11 Aug 2017.
- [50] Noah Shinn, Beck Labash, and Ashwin Gopinath. Reflexion: an autonomous agent with dynamic memory and self-reflection. *arXiv preprint arXiv:2303.11366*, 2023.
- [51] Mohit Shridhar, Jesse Thomason, Daniel Gordon, Yonatan Bisk, Winson Han, Roozbeh Motlaghi, Luke Zettlemoyer, and Dieter Fox. Alfred: A benchmark for interpreting grounded instructions for everyday tasks, 2020.
- [52] David Silver, Aja Huang, Chris J. Maddison, Arthur Guez, Laurent Sifre, George van den Driessche, Julian Schrittwieser, Ioannis Antonoglou, Veda Panneershelvam, Marc Lanctot, Sander Dieleman, Dominik Grewe, John Nham, Nal Kalchbrenner, Ilya Sutskever, Timothy

- Lillicrap, Madeleine Leach, Koray Kavukcuoglu, Thore Graepel, and Demis Hassabis. Mastering the Game of Go with Deep Neural Networks and Tree Search. *Nature*, 529(7587):484–489, January 2016.
- [53] Weihao Tan, Ziluo Ding, Wentao Zhang, Boyu Li, Bohan Zhou, Junpeng Yue, Haochong Xia, Jiechuan Jiang, Longtao Zheng, Xinrun Xu, Yifei Bi, Pengjie Gu, Xinrun Wang, Börje F. Karlsson, Bo An, and Zongqing Lu. Towards General Computer Control: A Multimodal Agent For Red Dead Redemption II As A Case Study. *arXiv preprint arXiv:2403.03186*, 2024.
- [54] Yuval Tassa, Yotam Doron, Alistair Muldal, Tom Erez, Yazhe Li, Diego de Las Casas, David Budden, Abbas Abdolmaleki, Josh Merel, Andrew Lefrancq, Timothy Lillicrap, and Martin Riedmiller. DeepMind control suite. January 2018.
- [55] Gemini Team. Gemini: A family of highly capable multimodal models, 2023.
- [56] OpenAI Team. GPT-4 technical report, 2023.
- [57] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajwal Bhargava, Shruti Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023.
- [58] Daniel Toyama, Philippe Hamel, Anita Gergely, Gheorghe Comanici, Amelia Glaese, Zafarali Ahmed, Tyler Jackson, Shibl Mourad, and Doina Precup. Androidenv: A reinforcement learning platform for android, 2021.
- [59] Sagar Gubbi Venkatesh, Partha Talukdar, and Srini Narayanan. Ugif: Ui grounded instruction following, 2022.
- [60] Oriol Vinyals, Igor Babuschkin, Wojciech M Czarnecki, Michaël Mathieu, Andrew Dudzik, Junyoung Chung, David H Choi, Richard Powell, Timo Ewalds, Petko Georgiev, Junhyuk Oh, Dan Horgan, Manuel Kroiss, Ivo Danihelka, Aja Huang, Laurent Sifre, Trevor Cai, John P Agapiou, Max Jaderberg, Alexander S Vezhnevets, Rémi Leblond, Tobias Pohlen, Valentin Dalibard, David Budden, Yury Sulsky, James Molloy, Tom L Paine, Caglar Gulcehre, Ziyu Wang, Tobias Pfaff, Yuhuai Wu, Roman Ring, Dani Yogatama, Dario Wünsch, Katrina McKinney, Oliver Smith, Tom Schaul, Timothy Lillicrap, Koray Kavukcuoglu, Demis Hassabis, Chris Apps, and David Silver. Grandmaster level in StarCraft II using multi-agent reinforcement learning. *Nature*, 575(7782):350–354, November 2019.
- [61] Bryan Wang, Gang Li, and Yang Li. Enabling conversational interaction with mobile ui using large language models. In *Proc. of the 2023 CHI Conference on Human Factors in Computing Systems*, CHI '23. Association for Computing Machinery, 2023.
- [62] Guanzhi Wang, Yuqi Xie, Yunfan Jiang, Ajay Mandlekar, Chaowei Xiao, Yuke Zhu, Linxi Fan, and Anima Anandkumar. Voyager: An open-ended embodied agent with large language models. *arXiv preprint arXiv:2305.16291*, 2023.
- [63] Qingyun Wu, Gagan Bansal, Jieyu Zhang, Yiran Wu, Beibin Li, Erkang Zhu, Li Jiang, Xiaoyun Zhang, Shaokun Zhang, Jiale Liu, Ahmed Hassan Awadallah, Ryen W White, Doug Burger, and Chi Wang. Autogen: Enabling next-gen llm applications via multi-agent conversation framework. 2023.
- [64] Zhiyong Wu, Chengcheng Han, Zichen Ding, Zhenmin Weng, Zhoumianze Liu, Shunyu Yao, Tao Yu, and Lingpeng Kong. Os-copilot: Towards generalist computer agents with self-improvement. *arXiv preprint arXiv:2402.07456*, 2024.
- [65] Tianbao Xie, Danyang Zhang, Jixuan Chen, Xiaochuan Li, Siheng Zhao, Ruisheng Cao, Toh Jing Hua, Zhoujun Cheng, Dongchan Shin, Fangyu Lei, et al. Osworld: Benchmarking multimodal agents for open-ended tasks in real computer environments. *arXiv preprint arXiv:2404.07972*, 2024.
- [66] Tianbao Xie, Fan Zhou, Zhoujun Cheng, Peng Shi, Luoxuan Weng, Yitao Liu, Toh Jing Hua, Junning Zhao, Qian Liu, Che Liu, Leo Z. Liu, Yiheng Xu, Hongjin Su, Dongchan Shin, Caiming Xiong, and Tao Yu. Openagents: An open platform for language agents in the wild, 2023.
- [67] Qiantong Xu, Fenglu Hong, Bo Li, Changran Hu, Zhengyu Chen, and Jian Zhang. On the tool manipulation capability of open-source large language models. May 2023.
- [68] An Yan, Zhengyuan Yang, Wanrong Zhu, Kevin Lin, Linjie Li, Jianfeng Wang, Jianwei Yang, Yiwu Zhong, Julian McAuley, Jianfeng Gao, Zicheng Liu, and Lijuan Wang. GPT-4V in

- wonderland: Large multimodal models for Zero-Shot smartphone GUI navigation. November 2023.
- [69] Jianwei Yang, Hao Zhang, Feng Li, Xueyan Zou, Chunyuan Li, and Jianfeng Gao. Set-of-mark prompting unleashes extraordinary visual grounding in gpt-4v. *arXiv preprint arXiv:2310.11441*, 2023.
 - [70] Zhao Yang, Jiaxuan Liu, Yucheng Han, Xin Chen, Zebiao Huang, Bin Fu, and Gang Yu. Appagent: Multimodal agents as smartphone users. *arXiv preprint arXiv:2312.13771*, 2023.
 - [71] Shunyu Yao, Howard Chen, John Yang, and Karthik Narasimhan. Webshop: Towards scalable real-world web interaction with grounded language agents, 2023.
 - [72] Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. ReAct: Synergizing reasoning and acting in language models. October 2022.
 - [73] Chaoyun Zhang, Liqun Li, Shilin He, Xu Zhang, Bo Qiao, Si Qin, Minghua Ma, Yu Kang, Qingwei Lin, Saravan Rajmohan, et al. Ufo: A ui-focused agent for windows os interaction. *arXiv preprint arXiv:2402.07939*, 2024.
 - [74] Jiwen Zhang, Jihao Wu, Yihua Teng, Minghui Liao, Nuo Xu, Xiao Xiao, Zhongyu Wei, and Duyu Tang. Android in the zoo: Chain-of-action-thought for gui agents. *arXiv preprint arXiv:2403.02713*, 2024.
 - [75] Zhuosheng Zhang, Yao Yao, Aston Zhang, Xiangru Tang, Xinbei Ma, Zhiwei He, Yiming Wang, Mark Gerstein, Rui Wang, Gongshen Liu, et al. Igniting language intelligence: The hitchhiker’s guide from chain-of-thought reasoning to language agents. *arXiv preprint arXiv:2311.11797*, 2023.
 - [76] Zhuosheng Zhang and Aston Zhang. You only look at screens: Multimodal chain-of-action agents, 2023.
 - [77] Ziniu Zhang, Shulin Tian, Liangyu Chen, and Ziwei Liu. MMInA: Benchmarking multihop multimodal internet agents. *arXiv preprint arXiv:2404.09992*, 2024.
 - [78] Boyuan Zheng, Boyu Gou, Jihyung Kil, Huan Sun, and Yu Su. Gpt-4v(ision) is a generalist web agent, if grounded. *arXiv preprint arXiv:2401.01614*, 2024.
 - [79] Lianmin Zheng, Wei-Lin Chiang, Ying Sheng, Siyuan Zhuang, Zhanghao Wu, Yonghao Zhuang, Zi Lin, Zhuohan Li, Dacheng Li, Eric P Xing, Hao Zhang, Joseph E Gonzalez, and Ion Stoica. Judging LLM-as-a-Judge with MT-Bench and chatbot arena. June 2023.
 - [80] Longtao Zheng, Rundong Wang, Xinrun Wang, and Bo An. Synapse: Trajectory-as-exemplar prompting with memory for computer control, 2024.
 - [81] Shuyan Zhou, Frank F. Xu, Hao Zhu, Xuhui Zhou, Robert Lo, Abishek Sridhar, Xianyi Cheng, Tianyue Ou, Yonatan Bisk, Daniel Fried, Uri Alon, and Graham Neubig. Webarena: A realistic web environment for building autonomous agents, 2023.

Appendix A Ethical considerations

Malicious use There is a risk that malicious actors could engineer agents to bypass security measures like CAPTCHAs or engage in activities like spamming. Additionally, they could alter prompts or screen outputs to further harmful objectives.

Societal impact Automation agents may transform societal norms, disrupt employment, and modify human behavior. While they can enhance efficiency, this improvement could pose risks if exploited by malevolent forces.

Appendix B ANDROIDWORLD environment

B.1 Observation Space

In ANDROIDWORLD, the Android screen is represented using a `State` class, which includes the following attributes:

- **Pixels:** An RGB array representing the current screen capture of the device. The screenshot resolution is $2400 \times 1080 \times 3$.
- **Accessibility tree:** A raw representation of the accessibility tree.⁵ This UI tree provides a detailed snapshot of all UI elements currently displayed on the screen. We utilize an accessibility forwarding app from AndroidEnv [58], which leverages gRPC to transmit the accessibility tree data efficiently to the device.
- **UI elements:** A list of processed UI elements extracted from the children of the accessibility tree. Each `UIElement` contains attributes such as text, content description, bounding boxes, and various state flags (e.g., clickable, scrollable, focused).

Since Android observations and actions are asynchronous, changes resulting from actions may take some time to manifest. Therefore, instead of using an RL-based interface, which assumes a tight coupling between actions and observations, we design an interface for the agent tailored for asynchronous interaction. This interface implements a `get_state` method responsible for capturing the current state of the environment, typically after executing an action. This method includes an optional `wait_to_stabilize` flag, which, when enabled, employs heuristics to ensure the UI elements are not in a transient state, thus providing a stable and accurate snapshot of the environment.

B.2 Action space

Actions are stored using a Python dataclass (shown below) and are executed using adb. Each action type corresponds to specific ADB commands that interact with the Android environment. For click-based actions (click, double tap, long press), we use ADB to simulate touch events at specified coordinates on the screen. For text input actions, we first focus on the text input field and then use ADB to type the desired text and press the enter button. Navigation actions (home, back) involve sending corresponding key events to the device. Scrolling and swiping actions, which are essentially inverse operations, are both implemented by generating and issuing swipe commands through ADB to simulate these gestures. To launch applications, we use ADB to start the desired app.

```
1 ACTION_TYPES = {
2     "CLICK": "click",
3     "DOUBLE_TAP": "double_tap",
4     "SCROLL": "scroll",
5     "SWIPE": "swipe",
6     "INPUT_TEXT": "input_text",
7     "NAVIGATE_HOME": "navigate_home",
8     "NAVIGATE_BACK": "navigate_back",
9     "KEYBOARD_ENTER": "keyboard_enter",
10    "OPEN_APP": "open_app",
11    "STATUS": "status",
12    "WAIT": "wait",
13    "LONG_PRESS": "long_press",
14    "ANSWER": "answer",
15    "UNKNOWN": "unknown"
```

⁵Represented using all current windows; <https://developer.android.com/reference/android/view/accessibility/AccessibilityWindowInfo>

```

16 }
17
18 @dataclasses.dataclass()
19 class JSONAction:
20     """Represents a parsed JSON action.
21
22     # Example
23     result_json = {'action_type': 'click', 'x': %d, 'y': %d}
24     action = JSONAction(**result_json)
25
26     Attributes:
27     action_type: The action type.
28     index: The index to click, if action is a click. Either an index or a <x, y>
29           should be provided. See x, y attributes below.
30     x: The x position to click, if the action is a click.
31     y: The y position to click, if the action is a click.
32     text: The text to type, if action is type.
33     direction: The direction to scroll, if action is scroll.
34     goal_status: If the status is a 'status' type, indicates the status of the goal.
35     app_name: The app name to launch, if the action type is 'open_app'.
36     """
37     action_type: str
38     index: int = None
39     x: int = None
40     y: int = None
41     text: str = None
42     direction: str = None
43     goal_status: str = None
44     app_name: str = None

```

Listing 1: Pseudo-code representation of the action space.

B.3 MobileMiniWoB++

Authors manually completed all tasks in MiniWoB++ to verify solvability on a mobile interface. MobileMiniWoB++ differs from MiniWoB++ due to the touch-based interface, which required different approaches for certain tasks. For instance, highlighting text from the `highlight-text` tasks involves using Android’s long-press and cursor-moving functionalities. HTML5 `<input>` elements are natively rendered with native Android UI widgets like the date-picker (see Figure 4).

Our implementation of MiniWoB++ contains 92 tasks in total. We exclude the following tasks: `chase-circle` (requires near-realtime movement, unachievable by humans on emulators), `moving-items` (too hard to click in emulator), `drag-cube` (drags will scroll the screen, moving the task out of view), `drag-items-grid` (elements are not interactable on Android), `drag-items` (elements are not interactable on Android), `drag-shapes` (drags will scroll the screen, moving the task out of view), `drag-sort-numbers` (elements are not interactable on Android), `text-editor` (cannot underline everything, weird glitch), `number-checkboxes` (not correctly rendered: only three columns), `use-slider-2` (slider implementation not working), `use-spinner` (slider implementation not working), and `click-menu` (the menu responsiveness breaks and the task does not behave as intended).

Appendix C ANDROIDWORLD Benchmark Details

C.1 App selection

Our selection of apps (summarized in Table 4) was guided by three main factors: use case, popularity, and the need for consistency and reproducibility.

Use case and categories We analyzed popular app categories in app stores, focusing on productivity, communication, and multimedia. Selected apps had to meet criteria such as not requiring a login and storing data locally on the device. Additionally, we considered apps from categories that the authors commonly used, ensuring the selection was representative of real-world Android usage.

Popularity We used download statistics from the Google Play Store to gauge app popularity, selecting apps with over 1 million downloads. Most of the selected apps exceeded this threshold. Less popular apps were also included if they featured common UI patterns and affordances, ensuring they are indicative of typical Android app usage. For instance, Simple Calendar Pro, though less downloaded, has a UI comparable to the widely-used Google Calendar app.

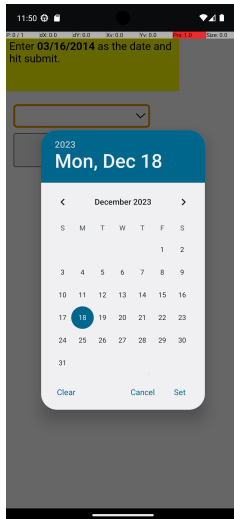


Figure 4: Native Android UI widget rendering for HTML5 `<input>` element.

Table 4: List of ANDROIDWORLD apps and number of tasks for each one.

App name	Description	# tasks
Simple Calendar Pro	A calendar app for creating, deleting, and managing events and appointments.	17
Settings	The Android system settings app for managing device settings such as Bluetooth, Wi-Fi, and brightness.	15
Markor	A note-taking app for creating, editing, deleting, and managing notes and folders.	14
Broccoli - Recipe App	A recipe management app for adding, deleting, and organizing recipes.	13
Pro Expense	An expense tracking app for adding, deleting, and managing expenses.	9
Simple SMS Messenger	An SMS app for sending, replying to, and resending text messages.	7
OpenTracks	A sport tracking app for recording and analyzing activities, durations, and distances.	6
Tasks	A task management app for tracking tasks, due dates, and priorities.	6
Clock	An app with stopwatch and timer functionality.	4
Joplin	A note-taking app.	4
Retro Music	A music player app.	4
Simple Gallery Pro	An app for viewing images.	4
Camera	An app for taking photos and videos.	3
Chrome	A web browser app.	3
Contacts	An app for managing contact information.	3
OsmAnd	A maps and navigation app with support for adding location markers, favorites, and saving tracks.	3
VLC	A media player app for playing media files.	3
Audio Recorder	An app for recording and saving audio clips.	2
Files	A file manager app for the Android filesystem, used for deleting and moving files.	2
Simple Draw Pro	A drawing app for creating and saving drawings.	1

Consistency and reproducibility All apps were sourced from F-Droid, an open-source Android app repository. This allowed us to manage app versions precisely by selecting and distributing specific APKs. We use the newest version of each app at the time of download.

C.2 Task classification and generation

We categorize tasks into two types: those with side-effects and those without. Tasks with side-effects are those that modify the internal state of the device or applications, such as turning off Wi-Fi or creating a calendar event. These tasks are implemented as distinct Python classes, each with its own parameter generation, initialization, evaluation, and teardown methods.

Below we show an example of the task evaluation for a SendSms task, which involves sending and validating a text message. The pseudocode illustrates the task initialization, success check, and parameter generation methods. Each task has its own random parameter generation method and success logic.

```

1 class SendSms(TaskEval):
2     """Task sending and validating a text message has been sent.
3
4     It checks the SMS telephony database, which is located at:
5     /data/data/com.android.providers.telephony/databases/mmssms.db."""
6
7     template = (
8         "Send a text message using Simple SMS Messenger to "
9         "{number} with message: {message}"
10    )
11
12    def initialize_task(self, env: interface.AsyncEnv) -> None:
13        """Sets up the initial state of the task."""
14        super().initialize_task(env)
15        clear_sms_database(env.base_env)
16
17    def is_successful(self, env: interface.AsyncEnv) -> float:
18        """Checks if the SMS was sent successfully."""
19        super().is_successful(env)
20        messages = get_messages(env.base_env)
21        return check_message_exists(
22            phone_number=self.params["number"],
23            body=self.params["message"],
24        )
25
26    def teardown(self, env: interface.AsyncEnv) -> None:
27        """Clears the SMS database."""
28        super().teardown(env)
29        clear_sms_database(env.base_env)
30
31    @classmethod
32    def generate_random_params(cls) -> dict[str, Any]:
33        number = generate_random_number()
34        message = generate_random_message()
35        return {
36            "number": number,
37            "message": message,
38    }

```

C.3 Information retrieval tasks

Tasks without side-effects are Information Retrieval tasks, requiring the agent to answer a question based on the device or app’s current state. For these tasks, instead of a Python class, we create a protobuf structure to specify the prompt, parameter values, and initialization and validation logic. We decided to use a structured data format with the belief that it would allow us to define new information retrieval tasks by simply adding new entries, making it easier to scale up the number of tasks without needing to write and maintain Python classes for each one.

Initialization is defined per app, including only the state relevant to the prompt’s answer and exclusion conditions for generating random states. This ensures that no random state contains information that could alter the expected answer. The initial state and prompt are parameterized using random values from the specified task parameters. For validation, we define the expected answer format within the prompt and use a few supported functions (“count”, “sum”, “identity”) to generate the answer from the initial state.

Once an app and its specific logic are programmed, new tasks can be generated using an LLM to generate the task’s protobuf. The process is not automatic and requires human review. Common issues with LLM-generated tasks include missing fields, hallucinated fields, incompatible parameter generation, insufficient parameter usage, and non-specific task prompts. We observed that the complexity of the proto structure correlates with an increase in generated task issues. Despite these challenges, we found that editing LLM-generated protobufs can be more efficient than writing a complete task from scratch.

Below we show a simplified version of the task definition for the SimpleCalendarEventsOnDate task which involves checking which events are on a certain date. It specifies the relevant event, the exclusion conditions for any noisy event, how to determine success, and possible parameter values to be chosen at random that will be used to fill out the task definition.

```

1 tasks {
2     name: "SimpleCalendarEventsOnDate"

```

```

3  prompt: "What events do I have {date} in Simple Calendar Pro? Answer with the titles only. If there
4      are multiple titles, format your answer as a comma separated list."
5  complexity: 1
6  relevant_state {
7      // Defines information for the goal events.
8      state: {
9          calendar {
10             events {
11                 start_date: "{date}"
12                 start_time: "{time}"
13                 duration: "{duration}"
14                 title: "{title}"
15             }
16         }
17         // Non-goal events.
18         exclusion_conditions {
19             field: "start_date"
20             operation: EQUAL_TO
21             value: "{date}"
22         }
23     }
24     success_criteria {
25         expectations {
26             field_transformation {
27                 operation: IDENTITY
28                 field_name: "title"
29             }
30             match_type: STRING_MATCH
31         }
32     }
33 }
34 task_params {
35     name: "time"
36     possible_values: "11:00am"
37     // ...
38 }
39
40 task_params {
41     name: "date"
42     possible_values: "October 15 2023"
43     //...
44 }
45 task_params {
46     name: "duration"
47     possible_values: "30 m"
48     // ...
49 }
50 task_params {
51     name: "title"
52     possible_values: "Data Dive"
53     // ...
54 }
55 }

```

C.4 Humans for task analysis

During development, we recruited six software engineers from Google to analyze task difficulty, duration, and category. Each human was assigned an equal portion of tasks and tasked with identifying bugs during this annotation phase. This process resulted in the discovery and resolution of over 30 bugs.

To evaluate human performance, we enlisted two software engineers to complete the tasks using an Android emulator. Participants were provided with task descriptions and attempted to achieve the goals based on their interpretations. Each participant had one attempt per task. The majority of errors stemmed from misinterpretations or minor errors, such as entering an incorrect file extension. Other errors occurred when participants encountered unfamiliar user interfaces, impeding their ability to solve the tasks on their first attempt.

In both exercises, we informed participants about the intended use of the collected data. Participants were not required to enter any personal information in the tested tasks.

C.5 Task examples

Table 5 lists some additional examples of tasks and highlights which task attributes can be parameterized in unlimited ways.

Table 5: Examples of ANDROIDWORLD tasks. We list the task nickname, the task template indicating which task attributes can be parameterized, the initialization logic that is executed before the task starts and pseudo code describing the success evaluation.

Task nickname	Task template	Initialization logic	Success evaluation code
VlcCreatePlaylist	Create a playlist in VLC, titled "{playlist_name}" with the following files, in order: {files}	Create new mpeg files: files + "noise" files that should not be added. Add them to VLC videos folder.	execute_sql(vlc_query) == files
RecipeAddMultiple RecipesFromImage	Add the recipes from recipes.jpg in Simple Gallery Pro to the recipe app.	Write a receipt file with recipes to Simple Gallery.	sql_rows_exist(expected_recipes)
MarkerEditNote	Edit {file_name} in Markor. {file_operation}.	Generate file with starting content, along with "noise" files not relevant to goal. <i>Note: file_operation can be to add a footer, header, or update note content.</i>	file_exists(file_name, content=expected_content)
ExpenseAddSingle	Add the following expenses into pro expense: {expense.csv}	Add to the app's SQLite database the expense that should be deleted, along with "noise" expenses that should not be deleted.	sql_rows_exist(expense_obj)
SimpleCalendarDelete EventsOnRelativeDay	In Simple Calendar Pro, delete all events scheduled for this {day_of_week}.	add to the app's SQLite database calendar events on specified day, along with "noise" events that should not be deleted.	!sql_rows_exist(expected_events)
FilesDeleteFile	Delete the file {file_name} from the Android filesystem located in the {subfolder} folder within the sdk.gphone.x86.64 storage area.	Generate specified file, along with "noise" files that should not be deleted.	!file_exists(file_name)
SportsTrackerActivities CountForWeek	How many {category} activities did I do this week in the OpenTracks app? Express your answer as a single integer.	add to the app's SQLite database activities for the specified category, along with "noise" activities.	int(agent_response) == expected_count

Appendix D ANDROIDWORLD agent details

D.1 M3A observations

ANDROIDWORLD consumes the raw screen pixels, the screen shot with Set-of-Mark (SoM) [69] annotations, and a list of UI elements on screen.

```

1 Here is a list of descriptions for some UI elements on the current screen:
2
3 UIElement0: UIElement(text="VLC", content_description=None, class_name="android.widget.EditText",
4 bbox_pixels=BoundingBox(x_min=98, x_max=886, y_min=146, y_max=311), ...)
5 UIElement1: UIElement(text=None, content_description="Clear search box", class_name="android.widget.
6 ImageButton",
7 bbox_pixels=BoundingBox(x_min=886, x_max=1023, y_min=160, y_max=297), ...)
8 UIElement2: UIElement(text="15:11", content_description="15:11", class_name="android.widget.TextView",
9 bbox_pixels=BoundingBox(x_min=50, x_max=148, y_min=1, y_max=128), ...)
10 ... More elements listed ...
11
12 ... Guidelines on action selection emitted ...
13
14 Now output an action from the above list in the correct JSON format, following the reason why you do
15 that. Your answer should look like:
16 Reason: ...
17 Action: {"action_type":...}

```

Listing 2: The prompt format pertaining to screen representation with UI elements.

D.2 M3A actions

For the SoM prompting, the screen is annotated based on the UI elements extracted from the accessibility tree, which form the agent's action space. Figure 5 shows one example.

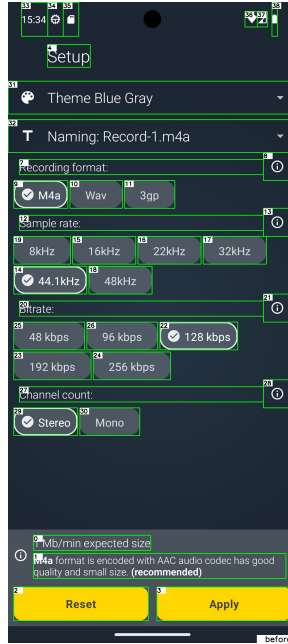


Figure 5: Set-of-marks overlaid on an Android screen.

D.3 Error analysis

We analyze M3A errors based on broader categories we observe during evaluation.

Perceptual errors Perceptual errors are caused when the model fails to recognize crucial elements on the screen necessary for task completion.

For the task below, the model does not recognize that the “All-day” checkbox is currently not checked (see Figure 6a):

In Simple Calendar Pro, create a recurring calendar event titled 'Review session for Budget Planning' starting on 2023-10-15 at 14h. The event recurs weekly, forever, and lasts for 60 minutes each occurrence. The event description should be 'We will understand software updates. Remember to confirm attendance.'

Reasoning errors Reasoning errors occur when the model misinterprets the task requirements or the current state, leading to incorrect actions.

For example, in the task below, the model mistakenly believes the note name has already been entered, so it types the note text into the “Name” field and cannot recover from this error (see Figure 6b):


Create a new note in Markor named ipsum_mNcKd36pDq.txt with the following text: ...

Here is the agent’s reasoning trace:

The user wants to create a new note with a specific name and text. The name of the note has already been entered, so all that needs to be done is to enter the text and click on the OK button.

Missing knowledge errors Missing knowledge errors occur when the model lacks the necessary understanding of the application’s UI to complete a task efficiently.

For example, in the task below, the agent does not know how to delete all files at once. It looks for an option to do that instead of deleting each file one by one (see Figure 6c):

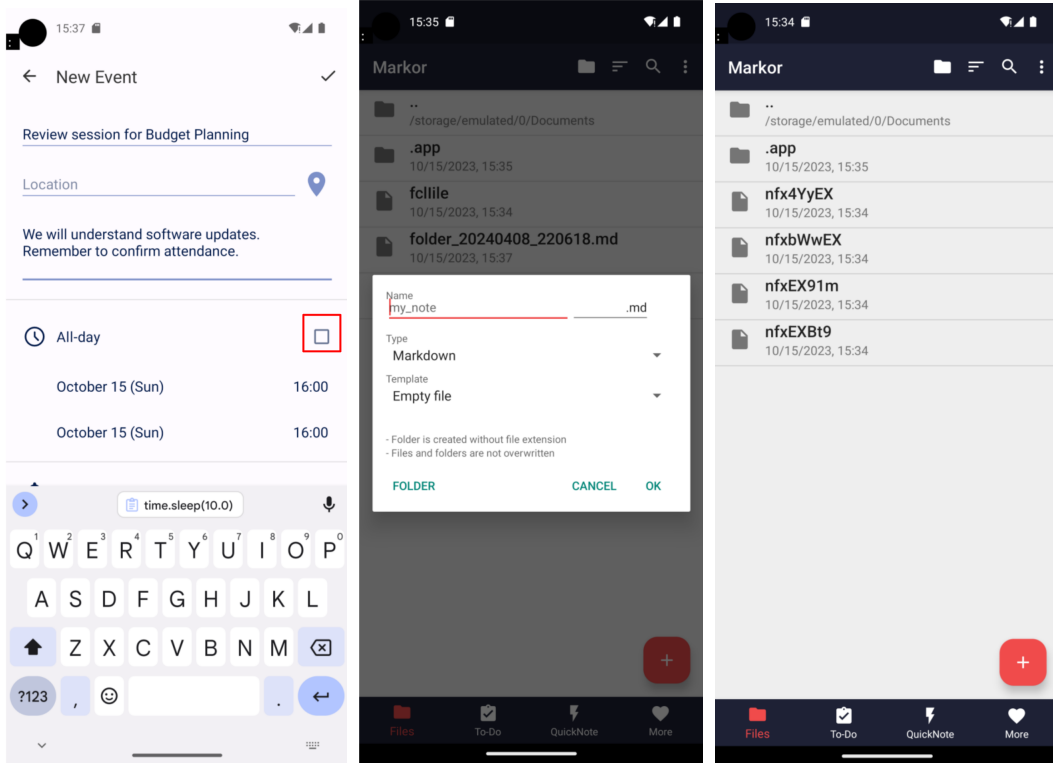

(a) Perceptual error. Red square highlights issue. (b) Reasoning error. The agent's next action is to start entering the note's contents, which is incorrect because it needs to enter the note's name first. (c) Missing knowledge error. To delete all notes, the agent mistakenly looks for an option to delete all the notes at once, rather than trying to do it note-by-note.

Figure 6: Screens illustrating perceptual, reasoning and missing knowledge errors.

Delete all files in the current directory.

Grounding errors Grounding errors occur when the model fails to correctly interact with the UI elements based on their spatial or contextual positioning.

For the task below, the agent needs to update the Markor note by prepending text to the existing text. Figure 7 illustrates the errors the agent makes. It clicks the entire text field area, highlighted in green, which automatically places the cursor after the current text, resulting in the new text being appended after the current content.


Update the Markor note '2023_08_10_neat_wolf.txt' by adding the following text, along with a new blank line before the existing content: "ETBM2jAP6vXqhbPUsfVm", and rename it to 'sure_ocean_uRnI.txt'.

Then, in the next screen, the text has been entered after the existing content, and the agent clicks the save button.


D.4 Agent robustness experiments

We ran the agent on the following tasks (the nicknames shown in the figures in parentheses):

- MarkorEditNote (EditNote)
- ExpenseAddSingle (AddExpense)
- SimpleCalendarDeleteEventsOnRelativeDay (DeleteEvent)

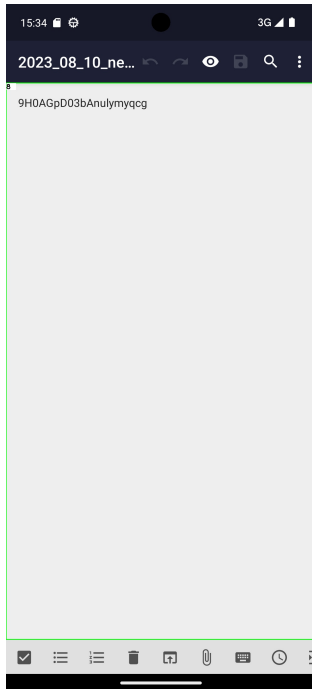

(a) Error on initial click.

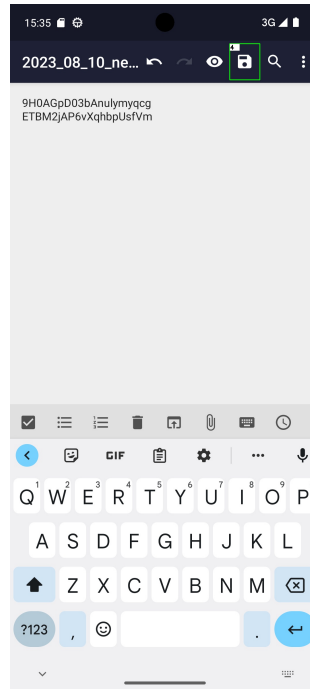

(b) Error with text entered and saving.

Figure 7: Screens illustrating grounding errors.

- FilesDeleteFile (DeleteFile)
- SportsTrackerActivitiesCountForWeek (CountActivities)

More details about these tasks can be found in Table 5.

D.5 SeeAct details

We modify the SeeAct prompt [78] to reflect that the environment is Android by inputting elements from the accessibility tree and supporting additional actions (e.g., scrolling). Below we include the updated prompt. We annotate the system, user, and assistant roles that are each provided to the OpenAI API.

```

1
2 > Role: SYSTEM
3 Imagine that you are imitating humans operating an Android device for a task step by step. At each
stage, you can see the Android screen like humans by a screenshot and know the previous actions
before the current step decided by yourself through recorded history. You need to decide on the
first following action to take. You can tap on an element, long-press an element, swipe, input
text, open an app, or use the keyboard enter, home, or back key. (For your understanding, they are
like 'adb shell input tap', 'adb shell input swipe', 'adb shell input text', 'adb shell am start
-n', and 'adb shell input keyevent'). One next step means one operation within these actions.
Unlike humans, for typing (e.g., in text areas, text boxes), you should try directly typing the
input or selecting the choice, bypassing the need for an initial click. You should not attempt to
create accounts, log in or do the final submission. Terminate when you deem the task complete or
if it requires potentially harmful actions.
4
5 > Role: USER
6 You are asked to complete the following task: <GOAL>
7
8 Previous Actions:
9 <PREVIOUS ACTIONS>
10
11 The screenshot below shows the Android screen you see. Follow the following guidance to think step by
step before outlining the next action step at the current stage:
12
13 (Current Screen Identification)
14 Firstly, think about what the current screen is.
15
16 (Previous Action Analysis)
17 Secondly, combined with the screenshot, analyze each step of the previous action history and their
intention one by one. Particularly, pay more attention to the last step, which may be more related
to what you should do now as the next step. Specifically, if the last action involved a INPUT

```

TEXT, always evaluate whether it necessitates a confirmation step, because typically a single INPUT TEXT action does not make effect. (often, simply pressing 'Enter', assuming the default element involved in the last action, unless other clear elements are present for operation).

18

19 (Screenshot Details Analysis)

20 Closely examine the screenshot to check the status of every part of the screen to understand what you can operate with and what has been set or completed. You should closely examine the screenshot details to see what steps have been completed by previous actions even though you are given the textual previous actions. Because the textual history may not clearly and sufficiently record some effects of previous actions, you should closely evaluate the status of every part of the screen to understand what you have done.

21

22 (Next Action Based on Android screen and Analysis)

23 Then, based on your analysis, in conjunction with human phone operation habits and the logic of app design, decide on the following action. And clearly outline which element on the Android screen users will operate with as the first next target element, its detailed location, and the corresponding operation.

24

25 To be successful, it is important to follow the following rules:

26 1. You should only issue a valid action given the current observation.

27 2. You should only issue one action at a time

28 3. For handling the select dropdown elements on a screen, it's not necessary for you to provide completely accurate options right now. The full list of options for these elements will be supplied later.

29

30 > Role: ASSISTANT

31 <AGENT RESPONSE TO ABOVE>

32

33 > Role: USER

34 (Reiteration)

35 First, reiterate your next target element, its detailed location, and the corresponding operation.

36

37 (Multichoice Question)

38 Below is a multi-choice question, where the choices are elements on the screen. All elements are arranged in the order based on their height on the screen, from top to bottom (and from left to right). This arrangement can be used to locate them. From the screenshot, find out where and what each one is on the screen, taking into account both their text content and details. Then, determine whether one matches your target element. Please examine the choices one by one. Choose the matching one. If multiple options match your answer, choose the most likely one by re-examining the screenshot, the choices, and your further reasoning. If you would like to perform a swipe action, you can optionally select the choice where you will swipe.

39

40 A. "Home" icon

41 B. "Phone" icon

42 C. "Messages" icon

43 D. "Chrome" icon

44 E. "Search" icon

45 ...

46 If none of these elements match your target element, please select Z. None of the other options match the correct element.

47

48 (Final Answer)

49 Finally, conclude your answer using the format below. Ensure your answer is strictly adhering to the format provided below. Please do not leave any explanation in your answers of the final standardized format part, and this final part should be clear and certain. The element choice, action, and value should be in three separate lines.

50

51 Format:

52

53 ELEMENT: The uppercase letter of your choice. (No need for TERMINATE, KEYBOARD ENTER, WAIT, ANSWER, OPEN APP, NAVIGATE HOME, NAVIGATE BACK; and optional for SWIPE.)

54

55 ACTION: Choose an action from {CLICK, INPUT TEXT, LONG PRESS, NAVIGATE BACK, TERMINATE, KEYBOARD ENTER, SWIPE, WAIT, ANSWER, OPEN APP, NAVIGATE HOME}.

56

57 VALUE: Provide additional input based on ACTION.

58

59 The VALUE means:

60 If ACTION == INPUT TEXT, specify the text to be typed.

61 If ACTION == SWIPE, specify the direction: up, down, left, right.

62 If ACTION == OPEN APP, provide the name of the app to be opened.

63 If ACTION == ANSWER, specify the text of your answer to respond directly to a question or request for information.

64 For CLICK, LONG PRESS, KEYBOARD ENTER, NAVIGATE HOME, NAVIGATE BACK, WAIT, and TERMINATE, write "None".