
Polyak Meets Parameter-free Clipped Gradient Descent

Yuki Takezawa^{1,2}, Han Bao^{1,2}, Ryoma Sato³, Kenta Niwa⁴, Makoto Yamada²
¹Kyoto University, ²OIST, ³NII, ⁴NTT Communication Science Laboratories

Abstract

Gradient descent and its variants are de facto standard algorithms for training machine learning models. As gradient descent is sensitive to its hyperparameters, we need to tune the hyperparameters carefully using a grid search, but it is time-consuming, especially when multiple hyperparameters exist. Recently, parameter-free methods that adjust the hyperparameters on the fly have been studied. However, the existing work only studied parameter-free methods for the stepsize, and parameter-free methods for other hyperparameters have not been explored. For instance, the gradient clipping threshold is also a crucial hyperparameter in addition to the stepsize to prevent gradient explosion issues, but none of the existing studies investigated the parameter-free methods for clipped gradient descent. In this work, we study the parameter-free methods for clipped gradient descent. Specifically, we propose Inexact Polyak Stepsize, which converges to the optimal solution without any hyperparameters tuning, and its convergence rate is asymptotically independent of L under L -smooth and (L_0, L_1) -smooth assumptions of the loss function as that of clipped gradient descent with well-tuned hyperparameters. We numerically validated our convergence results using a synthetic function and demonstrated the effectiveness of our proposed methods using LSTM, Nano-GPT, and T5.

1 Introduction

We consider the convex optimization problem:

$$\min_{\mathbf{x} \in \mathbb{R}^d} f(\mathbf{x}), \quad (1)$$

where the loss function f is convex and lower bounded. In this setting, gradient descent and its variants (Duchi et al., 2011; Kingma and Ba, 2015) are de facto standard algorithms to minimize the loss function. To achieve the best performance, we need to carefully tune the hyperparameters, e.g., stepsize, because the performance is highly sensitive to the hyperparameter settings. More specifically, when the loss function is L -smooth, gradient descent can achieve the optimal convergence rate $\mathcal{O}(\frac{L\|\mathbf{x}_0 - \mathbf{x}^*\|^2}{T})$ when we set the stepsize to $\frac{1}{L}$ where \mathbf{x}_0 is the initial parameter and \mathbf{x}^* is the optimal solution (Nesterov, 2018). Unfortunately, the parameter L is problem-specific and unavailable in practice. Thus, we need to run gradient descent many times with different hyperparameters and search for good hyperparameter settings, which is very time-consuming. Especially when multiple hyperparameters exist, this hyperparameters search becomes computationally more demanding.

Recently, *parameter-free methods* that tune the hyperparameters on the fly have been studied (Berrada et al., 2020; Defazio and Mishchenko, 2023; Orvieto et al., 2022; Jiang and Stich, 2023; Ivgi et al., 2023; Khaled et al., 2023; Orabona and Tommasi, 2017; Carmon and Hinder, 2022).¹ These methods automatically adjust the stepsize during the training and are guaranteed to converge to the optimal

¹We use *parameter-free methods* to describe algorithms that provably converge to the optimal solution without any problem-specific parameters for setting their stepsizes and other hyperparameters.

solution without tuning the stepsize. That is, we do not need to tune the stepsize by using the grid search. However, the existing parameter-free methods only focus on the stepsize, and parameter-free methods for other hyperparameters have not been explored. For example, in addition to the stepsize, the gradient clipping threshold is also an important hyperparameter for training language models (Pascanu et al., 2013; Zhang et al., 2020a,b,c).

Clipped gradient descent can achieve the convergence rate $\mathcal{O}(\frac{L_0\|\mathbf{x}_0-\mathbf{x}^*\|^2}{T})$ under the assumption that the loss function is (L_0, L_1) -smooth when we use the optimal stepsize and gradient clipping threshold (Koloskova et al., 2023). In many cases, L_0 is significantly smaller than L (Zhang et al., 2020b). Thus, by comparing with the convergence rate of gradient descent $\mathcal{O}(\frac{L\|\mathbf{x}_0-\mathbf{x}^*\|^2}{T})$, gradient clipping often allows gradient descent to converge faster. However, we need to carefully tune two hyperparameters, stepsize and gradient clipping threshold, to achieve this convergence rate. If the gradient clipping threshold is too large, the gradient clipping fails to accelerate the convergence. Moreover, if the gradient clipping threshold is too small, the gradient clipping deteriorates rather than accelerates the convergence rate. *Can we develop a parameter-free method whose convergence rate is asymptotically independent of L under (L_0, L_1) -smoothness?*

In this work, we study a parameter-free method for clipped gradient descent. First, we provide the better convergence rate of Polyak stepsize (Polyak, 1987) under (L_0, L_1) -smoothness. Then, we discover that the convergence rate of Polyak stepsize matches that of clipped gradient descent with well-tuned stepsize and gradient clipping threshold. Although the convergence rate of Polyak stepsize is asymptotically independent of L under (L_0, L_1) -smooth assumption as clipped gradient descent, it still requires the minimum loss value, which is a problem-specific value. Thus, we make Polyak stepsize parameter-free without losing this property under (L_0, L_1) -smoothness by proposing **Inexact Polyak Stepsize**, which converges to the optimal solution without any problem-specific parameters. We numerically evaluated Inexact Polyak Stepsize with a synthetic function and neural networks, validating our theory and demonstrating the effectiveness of Inexact Polyak Stepsize.

2 Preliminary

2.1 Gradient descent & L -smoothness

One of the most fundamental algorithms to solve Eq. (1) is gradient descent:

$$\mathbf{x}_{t+1} = \mathbf{x}_t - \eta_t \nabla f(\mathbf{x}_t),$$

where $\mathbf{x}_0 \in \mathbb{R}^d$ is the initial parameter and $\eta_t > 0$ is the stepsize at t -th iteration. To make gradient descent converge to the optimal solution fast, we need to carefully tune the stepsize η_t . When the stepsize is too large, the training collapses. In contrast, when the stepsize is too small, the convergence rate becomes too slow. Thus, we need to search for a proper stepsize as the following theorem indicates.

Assumption 1 (L -smoothness). *There exists a constant $L > 0$ that satisfies the following for all $\mathbf{x}, \mathbf{y} \in \mathbb{R}^d$:*

$$\|\nabla f(\mathbf{x}) - \nabla f(\mathbf{y})\| \leq L\|\mathbf{x} - \mathbf{y}\|. \quad (2)$$

Theorem 1 (Nesterov (2018, Corollary 2.1.2)). *Assume that f is convex and L -smooth, and there exists an optimal solution $\mathbf{x}^* := \arg \min_{\mathbf{x} \in \mathbb{R}^d} f(\mathbf{x})$. Then, gradient descent with stepsize $\eta_t = \frac{1}{L}$ satisfies*

$$f(\bar{\mathbf{x}}) - f(\mathbf{x}^*) \leq \mathcal{O}\left(\frac{L\|\mathbf{x}_0 - \mathbf{x}^*\|^2}{T}\right), \quad (3)$$

where $\bar{\mathbf{x}} := \frac{1}{T} \sum_{t=0}^{T-1} \mathbf{x}_t$ and T is the number of iterations.

2.2 Clipped gradient descent & (L_0, L_1) -smoothness

To stabilize and accelerate the training of gradient descent, gradient clipping is widely used (Pascanu et al., 2013; Devlin et al., 2019). Let $c > 0$ be a threshold of gradient clipping. Clipped gradient descent is given by:

$$\mathbf{x}_{t+1} = \mathbf{x}_t - \eta_t \min \left\{ 1, \frac{c}{\|\nabla f(\mathbf{x}_t)\|} \right\} \nabla f(\mathbf{x}_t). \quad (4)$$

Many prior studies investigated the theoretical benefits of gradient clipping (Koloskova et al., 2023; Zhang et al., 2020a,b,c; Li and Liu, 2022; Sadiev et al., 2023). Zhang et al. (2020b) experimentally found that the gradient Lipschitz constant decreases during the training of various neural networks and is highly correlated with gradient norm $\|\nabla f(\mathbf{x})\|$. To describe this phenomenon, Zhang et al. (2020a) introduced a novel smoothness assumption called (L_0, L_1) -smoothness. Then, it was experimentally demonstrated that the local gradient Lipschitz constant L_0 is thousands of times smaller than the global gradient Lipschitz constant L .

Assumption 2 ((L_0, L_1) -smoothness). *There exists constants $L_0 > 0$ and $L_1 > 0$ that satisfy the following for all $\mathbf{x}, \mathbf{y} \in \mathbb{R}^d$ with $\|\mathbf{x} - \mathbf{y}\| \leq \frac{1}{L_1}$:*

$$\|\nabla f(\mathbf{x}) - \nabla f(\mathbf{y})\| \leq (L_0 + L_1 \|\nabla f(\mathbf{x})\|) \|\mathbf{x} - \mathbf{y}\|. \quad (5)$$

It is worth noting that (L_0, L_1) -smoothness is strictly weaker than L -smoothness because (L_0, L_1) -smoothness covers L -smoothness by taking $L_1 = 0$. By using the (L_0, L_1) -smoothness assumption, the convergence rate of clipped gradient descent is established as follows.

Theorem 2 (Koloskova et al. (2023, Theorem 2.3)). *Assume that f is convex, L -smooth, and (L_0, L_1) -smooth, and there exists an optimal solution $\mathbf{x}^* := \arg \min_{\mathbf{x} \in \mathbb{R}^d} f(\mathbf{x})$. Then, clipped gradient descent with $\eta_t = \frac{1}{L_0}$ and $c = \frac{L_0}{L_1}$ satisfies:*

$$f(\bar{\mathbf{x}}) - f(\mathbf{x}^*) \leq \mathcal{O} \left(\frac{L_0 \|\mathbf{x}_0 - \mathbf{x}^*\|^2}{T} + \frac{LL_1^2 \|\mathbf{x}_0 - \mathbf{x}^*\|^4}{T^2} \right), \quad (6)$$

where $\bar{\mathbf{x}} := \frac{1}{T} \sum_{t=0}^{T-1} \mathbf{x}_t$ and T is the number of iterations.

When the number of iterations T is large, the first term $\mathcal{O}(\frac{L_0 \|\mathbf{x}_0 - \mathbf{x}^*\|^2}{T})$ becomes dominant, and the convergence rate of clipped gradient descent is asymptotically independent of L . Therefore, gradient clipping allows gradient descent to converge faster because of $L_0 \ll L$. Intuitively, this is because gradient clipping allows us to use a larger stepsize. We can interpret $L \simeq L_0 + L_1 \sup_{\mathbf{x}} \|\nabla f(\mathbf{x})\|$. The stepsize of gradient descent in Theorem 1 is $\frac{1}{L_0 + L_1 \sup_{\mathbf{x}} \|\nabla f(\mathbf{x})\|}$, which is typically very small. By comparing with gradient descent, the coefficient multiplied by the gradient of clipped gradient descent in Theorem 2 is $\min\{\frac{1}{L_0}, \frac{1}{L_1 \|\nabla f(\mathbf{x}_t)\|}\}$, which is larger than $\frac{1}{L_0 + L_1 \sup_{\mathbf{x}} \|\nabla f(\mathbf{x})\|}$. Especially when the parameter \mathbf{x} is close to the optimal solution \mathbf{x}^* (i.e., $\|\nabla f(\mathbf{x})\|$ is small), clipped gradient descent can use a larger stepsize and then reach the optimal solution faster than gradient descent.

2.3 Polyak stepsize

When f is convex, \mathbf{x}_{t+1} and \mathbf{x}_t generated by gradient descent satisfy $\|\mathbf{x}_{t+1} - \mathbf{x}^*\|^2 \leq \|\mathbf{x}_t - \mathbf{x}^*\|^2 - 2\eta_t(f(\mathbf{x}_t) - f(\mathbf{x}^*)) + \eta_t^2 \|\nabla f(\mathbf{x}_t)\|^2$. Minimizing the right-hand side, we can derive well-known Polyak stepsize (Polyak, 1987):

$$\eta_t = \frac{f(\mathbf{x}_t) - f^*}{\|\nabla f(\mathbf{x}_t)\|^2}, \quad (7)$$

where $f^* := f(\mathbf{x}^*)$. When f is L -smooth, gradient descent with Polyak stepsize converges to the optimal solution as fast as gradient descent with $\eta_t = \frac{1}{L}$.

Theorem 3 (Hazan and Kakade (2019, Theorem 1)). *Assume that f is convex and L -smooth, and there exists an optimal solution $\mathbf{x}^* := \arg \min_{\mathbf{x} \in \mathbb{R}^d} f(\mathbf{x})$. Then, gradient descent with Polyak stepsize Eq. (7) satisfies:*

$$f(\bar{\mathbf{x}}) - f(\mathbf{x}^*) \leq \mathcal{O} \left(\frac{L \|\mathbf{x}_0 - \mathbf{x}^*\|^2}{T} \right), \quad (8)$$

where $\bar{\mathbf{x}} := \frac{1}{T} \sum_{t=0}^{T-1} \mathbf{x}_t$ and T is the number of iterations.

Besides the L -smooth setting, Polyak stepsize is well-known to make gradient descent converge to the optimal solution with the optimal rate among various settings, e.g., non-smooth convex, smooth convex, and strongly convex settings (Hazan and Kakade, 2019).

3 Improved convergence result of Polyak stepsize

Before we propose a parameter-free method for clipped gradient descent, in this section, we provide a new convergence analysis of Polyak stepsize under (L_0, L_1) -smoothness. Surprisingly, our new analysis reveals that Polyak stepsize achieves exactly the same convergence rate as *clipped* gradient descent with appropriate hyperparameters. A bunch of prior studies established the convergence rates of Polyak stepsize, and it is well-known that Polyak stepsize allows gradient descent to converge as fast as the optimal stepsize. However, our theorem finds that Polyak stepsize achieves a faster convergence rate than gradient descent with the optimal stepsize as clipped gradient descent, and none of the existing studies have found this favorable property of Polyak stepsize.

3.1 Connection between Polyak stepsize and clipped gradient descent

Under (L_0, L_1) -smoothness, we can obtain the following results.

Proposition 1. *Assume that f is convex and (L_0, L_1) -smooth. Then, Polyak stepsize Eq. (7) satisfies:*

$$\min \left\{ \frac{1}{4L_0}, \frac{1}{4L_1 \|\nabla f(\mathbf{x}_t)\|} \right\} \leq \frac{f(\mathbf{x}_t) - f^*}{\|\nabla f(\mathbf{x}_t)\|^2}. \quad (9)$$

Proof. Assumption 2 and Lemma 2 imply

$$\frac{f(\mathbf{x}_t) - f^*}{\|\nabla f(\mathbf{x}_t)\|^2} \geq \frac{1}{2(L_0 + L_1 \|\nabla f(\mathbf{x}_t)\|)}.$$

When $\|\nabla f(\mathbf{x}_t)\| < \frac{L_0}{L_1}$, Polyak stepsize is bounded from below by $\frac{1}{4L_0}$. When $\|\nabla f(\mathbf{x}_t)\| \geq \frac{L_0}{L_1}$, we have

$$\frac{1}{2(L_0 + L_1 \|\nabla f(\mathbf{x}_t)\|)} \geq \frac{1}{4L_1 \|\nabla f(\mathbf{x}_t)\|}.$$

Therefore, we can conclude the statement. \square

Under L -smoothness, the lower bound of Polyak stepsize was obtained as follows.

Proposition 2 (Jiang and Stich (2023, Lemma 15)). *Assume that f is convex and L -smooth. Then, Polyak stepsize Eq. (7) satisfies:*

$$\frac{1}{2L} \leq \frac{f(\mathbf{x}_t) - f^*}{\|\nabla f(\mathbf{x}_t)\|^2}. \quad (10)$$

By comparing Propositions 1 and 2, Proposition 1 shows that Polyak stepsize does not become excessively small when the parameter approaches the optimal solution (i.e., $\|\nabla f(\mathbf{x})\|$ approaches zero) as clipped gradient descent does. If we choose the stepsize and gradient clipping threshold as in Theorem 2, clipped gradient descent is written as follows:

$$\mathbf{x}_{t+1} = \mathbf{x}_t - \min \left\{ \frac{1}{L_0}, \frac{1}{L_1 \|\nabla f(\mathbf{x}_t)\|} \right\} \nabla f(\mathbf{x}_t). \quad (11)$$

Thus, Proposition 1 implies that Polyak stepsize can be regarded as internally estimating the hyperparameters for clipped gradient descent shown in Theorem 2.

3.2 Convergence analysis of Polyak stepsize under (L_0, L_1) -smoothness

Based on the relationship between Polyak stepsize and clipped gradient descent in Sec. 3.1, we provide a new convergence result of Polyak stepsize under (L_0, L_1) -smoothness. The proof is deferred to Sec. A.

Theorem 4. *Assume that f is convex, L -smooth, and (L_0, L_1) -smooth, and there exists an optimal solution $\mathbf{x}^* := \arg \min_{\mathbf{x} \in \mathbb{R}^d} f(\mathbf{x})$. Let T be the number of iterations and define $\tau := \arg \min_{0 \leq t \leq T-1} f(\mathbf{x}_t)$. Then, gradient descent with Polyak stepsize Eq. (7) satisfies:*

$$f(\mathbf{x}_\tau) - f(\mathbf{x}^*) \leq \mathcal{O} \left(\frac{L_0 \|\mathbf{x}_0 - \mathbf{x}^*\|^2}{T} + \frac{LL_1^2 \|\mathbf{x}_0 - \mathbf{x}^*\|^4}{T^2} \right). \quad (12)$$

By comparing Theorem 4 with Theorem 2, the convergence rate of Polyak stepsize is exactly the same as that of clipped gradient descent. Thus, Polyak stepsize can converge faster than the optimal stepsize shown in Theorem 1 when $L_0 \ll L$. Many prior studies analyzed the convergence rate of Polyak stepsize and discussed the relationship between Polyak stepsize and gradient descent with the optimal stepsize (Polyak, 1987; Loizou et al., 2021; Galli et al., 2023; Berrada et al., 2020). However, they only recognized Polyak stepsize as making gradient descent to converge with the same convergence rate as the optimal stepsize, and none of the prior studies have found this relationship between Polyak stepsize and clipped gradient descent. Our new convergence result is the first to discover that the Polyak stepsize can achieve the same convergence rate not only as gradient descent with appropriate stepsize but also as clipped gradient descent with appropriate stepsize and gradient clipping threshold.

4 Making clipped gradient descent parameter-free

In the previous section, we found that the convergence rate of Polyak stepsize is asymptotically independent of L under (L_0, L_1) -smoothness as clipped gradient descent with appropriate hyperparameters. However, Polyak stepsize requires the minimum loss value f^* , which is a problem-specific parameter. In this section, we propose a method that can remove the prior knowledge of f^* from Polyak stepsize without losing the property of asymptotic independence of L under (L_0, L_1) -smoothness.

4.1 Inexact Polyak Stepsize

To make Polyak stepsize parameter-free, several prior studies have proposed using a lower bound of f^* instead of f^* (Loizou et al., 2021; Orvieto et al., 2022; Jiang and Stich, 2023). Loss functions commonly used in machine learning models are non-negative. Thus, the lower bound of f^* is trivially obtained as zero and is not a problem-specific parameter. By utilizing this lower bound, a straightforward approach to make Polyak stepsize independent of problem-specific parameters is replacing f^* in Polyak stepsize with the lower bound l^* as shown below:

$$\eta_t = \frac{f(\mathbf{x}_t) - l^*}{\|\nabla f(\mathbf{x}_t)\|^2}. \quad (13)$$

However, the stepsize in Eq. (13) becomes too large when the parameter approaches the optimal solution, and it does not lead to the optimal solution (Loizou et al., 2021). This is because $\|\nabla f(\mathbf{x}_t)\|$ approaches zero, while $f(\mathbf{x}_t) - l^*$ approaches $f^* - l^* (> 0)$, which makes the stepsize in Eq. (13) excessively large as the parameter approaches the optimal solution. To mitigate this issue, DecSPS (Orvieto et al., 2022) and AdaSPS (Jiang and Stich, 2023), which are parameter-free methods based on Polyak stepsize that use l^* instead of f^* , make the stepsize monotonically non-increasing to converge to the optimal solution.

However, making the stepsize monotonically non-increasing loses the fruitful property that the convergence rate of Polyak stepsize is asymptotically independent of L as clipping gradient descent under (L_0, L_1) -smoothness. The reason is that Polyak stepsize and clipped gradient descent make the convergence rate asymptotic independent of L by increasing the stepsize when the parameter approaches the optimal solution. In fact, we evaluated DecSPS and AdaSPS with a synthetic function in Sec. 6.1, demonstrating that their convergence deteriorates as L becomes large.

Algorithm 1 Inexact Polyak Stepsize

- 1: **Input:** The number of iterations T and lower bound l^* .
 - 2: $f^{\text{best}}, \mathbf{x}^{\text{best}} \leftarrow f(\mathbf{x}_0), \mathbf{x}_0$.
 - 3: **for** $t = 0, 1, \dots, T - 1$ **do**
 - 4: $\mathbf{x}_{t+1} \leftarrow \mathbf{x}_t - \frac{f(\mathbf{x}_t) - l^*}{\sqrt{T} \|\nabla f(\mathbf{x}_t)\|^2} \nabla f(\mathbf{x}_t)$.
 - 5: **if** $f(\mathbf{x}_{t+1}) \leq f(\mathbf{x}_t)$ **then**
 - 6: $f^{\text{best}}, \mathbf{x}^{\text{best}} \leftarrow f(\mathbf{x}_{t+1}), \mathbf{x}_{t+1}$.
 - 7: **return** \mathbf{x}^{best} .
-

To address this issue, we propose **Inexact Polyak Stepsize**, whose details are described in Alg. 1. As discussed above, we cannot make the stepsize decrease to maintain the property of asymptotic independence of L under (L_0, L_1) -smoothness. Thus, we set the stepsize as follows:

$$\eta_t = \frac{f(\mathbf{x}_t) - l^*}{\sqrt{T} \|\nabla f(\mathbf{x}_t)\|^2}, \quad (14)$$

where T is the number of iterations. Then, instead of making the stepsize decrease, we propose returning the parameter at which the lowest loss is achieved as the final parameter.

4.2 Convergence analysis of Inexact Polyak Stepsize

The following theorem provides the convergence rate of Inexact Polyak Stepsize. The proof is deferred to Sec. B.

Theorem 5. *Assume that f is convex, L -smooth, and (L_0, L_1) -smooth, and there exists an optimal solution $\mathbf{x}^* := \arg \min_{\mathbf{x} \in \mathbb{R}^d} f(\mathbf{x})$. Let T be the number of iterations and $\sigma^2 := f^* - l^*$. Then, \mathbf{x} generated by Alg. 1 satisfies:*

$$f(\mathbf{x}) - f(\mathbf{x}^*) \leq \mathcal{O} \left(\frac{L_0 \|\mathbf{x}_0 - \mathbf{x}^*\|^2 + \sigma^2}{\sqrt{T}} + \frac{LL_1^2 \|\mathbf{x}_0 - \mathbf{x}^*\|^4}{T} + \frac{L_1^2 L \sigma^4}{L_0^2 T} \right). \quad (15)$$

Asymptotic independence of L : When the number of iterations T is large, only the first term $\mathcal{O}(\frac{L_0 \|\mathbf{x}_0 - \mathbf{x}^*\|^2 + \sigma^2}{\sqrt{T}})$ becomes dominant in the convergence rate, which does not depend on L . Thus, Theorem 5 shows that Inexact Polyak Stepsize successfully inherits the favorable property of Polyak stepsize under (L_0, L_1) -smoothness. Besides Inexact Polyak Stepsize, DecSPS (Orvieto et al., 2022) and AdaSPS (Jiang and Stich, 2023) have been proposed as parameter-free methods that also use l^* instead of f^* in Polyak stepsize. However, these prior methods fail to inherit the favorable property of Polyak stepsize, and their convergence rates deteriorate when L is large because these methods decrease the stepsize during the training. In fact, we evaluated DecSPS and AdaSPS with a synthetic function in Sec. 6.1, demonstrating that convergence rates of DecSPS and AdaSPS are degraded when L becomes large, whereas the convergence rate of Inexact Polyak Stepsize does not depend on L .

Removing dependence on D_T : The convergence rates of DecSPS and AdaSPS depend on $D_T (= \max_{0 \leq t \leq T} \|\mathbf{x}_t - \mathbf{x}^*\|)$. Thus, strictly speaking, these convergence rates cannot show that DecSPS and AdaSPS converge to the optimal solution because D_T may increase as the number of iterations T increases. For instance, if D_T increase with $\Omega(T^{\frac{1}{4}})$, the convergence rate of AdaSPS is $\mathcal{O}(L\sigma + L^2)$, which does not show that AdaSPS converges to the optimal solution. In contrast, the convergence rate of Eq. (15) depends on only $\|\mathbf{x}_0 - \mathbf{x}^*\|$, and Theorem 5 precisely shows that Inexact Polyak Stepsize converges to the optimal solution.

5 Related work

Gradient clipping: Gradient clipping was initially proposed to mitigate the gradient explosion problem for training RNN and LSTM (Mikolov et al., 2010; Merity et al., 2018) and is now widely

Table 1: Summary of convergence rates of parameter-free methods based on Polyak stepsize. All convergence results are the ones under convex, L -smoothness, and (L_0, L_1) -smoothness. We define $D_T := \max_{0 \leq t \leq T} \|\mathbf{x}_t - \mathbf{x}^*\|$.

Algorithm	Convergence Rate	Assumption
DecSPS (Orvieto et al., 2022)	$\mathcal{O} \left(\frac{\max\{L, \eta_0^{-1}\} D_T^2 + \sigma^2}{\sqrt{T}} \right)$	1
AdaSPS (Jiang and Stich, 2023)	$\mathcal{O} \left(\frac{LD_T^2 \sigma}{\sqrt{T}} + \frac{L^2 D_T^4}{T} \right)$	1
Inexact Polyak Stepsize (This work)	$\mathcal{O} \left(\frac{L_0 \ \mathbf{x}_0 - \mathbf{x}^*\ ^2 + \sigma^2}{\sqrt{T}} + \frac{LL_1^2 \ \mathbf{x}_0 - \mathbf{x}^*\ ^4}{T} + \frac{L_1^2 L \sigma^4}{L_0^2 T} \right)$	1, 2 ^(a)

(a) If f is L -smooth, f is (L_0, L_1) -smooth because (L_0, L_1) -smoothness assumption is strictly weaker than L -smoothness assumption.

used to accelerate and stabilize the training not only for RNN and LSTM, but also for various machine learning models, especially language models (Devlin et al., 2019; Raffel et al., 2019). Recently, many studies investigated the theoretical benefits of gradient clipping and analyzed the convergence rate of clipped gradient descent under (1) (L_0, L_1) -smoothness assumption (Koloskova et al., 2023; Zhang et al., 2020a,b) or (2) heavy-tailed noise assumption (Zhang et al., 2020c; Li and Liu, 2022; Sadiev et al., 2023). (1) Zhang et al. (2020b) found that the local gradient Lipschitz constant is correlated with the gradient norm. To describe this phenomenon, Zhang et al. (2020b), Zhang et al. (2020a), and Koloskova et al. (2023) introduced the new assumption, (L_0, L_1) -smoothness, providing the convergence rate of clipped gradient descent under (L_0, L_1) -smoothness. Then, they showed that gradient clipping can improve the convergence rate of gradient descent, as we introduced in Sec. 2.2. (2) Besides (L_0, L_1) -smoothness, Zhang et al. (2020c) pointed out that the distribution of stochastic gradient noise is heavy-tailed for language models. Then, it has been showed that gradient clipping can make the stochastic gradient descent robust against the heavy-tailed noise of stochastic gradient (Li and Liu, 2022; Sadiev et al., 2023; Zhang et al., 2020c).

Parameter-free methods: Hyperparameter-tuning is one of the most time-consuming tasks for training machine learning models. To alleviate this issue, many parameter-free methods that adjust the stepsize on the fly have been proposed, e.g., Polyak-based stepsize (Berrada et al., 2020; Hazan and Kakade, 2019; Loizou et al., 2021; Mukherjee et al., 2023; Orvieto et al., 2022; Jiang and Stich, 2023), AdaGrad-based methods (Ivgi et al., 2023; Khaled et al., 2023), and Dual Averaging-based methods (Orabona and Tommasi, 2017; Defazio and Mishchenko, 2023). However, parameter-free methods for hyperparameters, except for stepsizes, have not been studied. In this work, we studied the parameter-free methods for two hyperparameters, the stepsize and gradient clipping threshold, and then proposed Inexact Polyak Stepsize, which converges to the optimal solution without tuning any hyperparameters and its convergence rate is asymptotically independent of L as clipped gradient descent with well-tuned hyperparameters.

6 Numerical evaluation

In this section, we numerically evaluate our theory. In Sec. 6.1, we evaluate Polyak stepsize and Inexact Polyak Stepsize using a synthetic function, varying that their convergence rates are asymptotically independent of L . In Sec. 6.2, we show the results with neural networks.

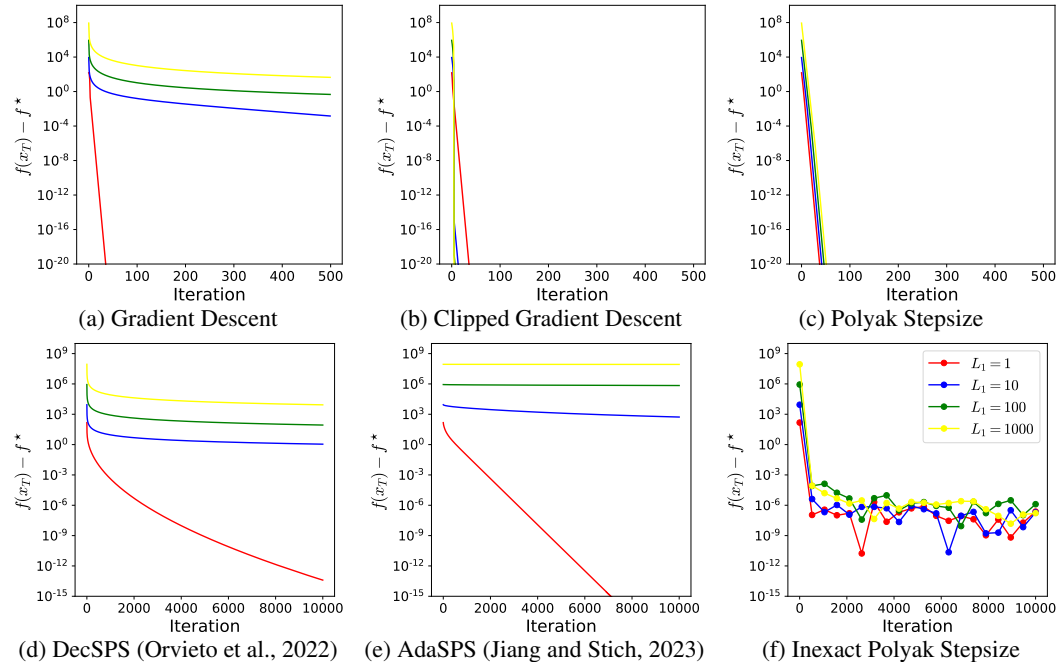


Figure 1: Convergence behaviors of various methods with the synthetic function.

6.1 Synthetic function

Setting: In this section, we validate our theory for Polyak stepsize and Inexact Polyak Stepsize using a synthetic function. We set the loss function as $f(x) = \frac{L_0 L_1^2}{72} x^4 + \frac{L_0}{4} x^2 + f^*$, which is (L_0, L_1) -smooth for any $L_0 > 0$ and $L_1 > 0$ (See Proposition 3 in Appendix). We set L_0 to 1, x_0 to 5, $f^* = 1$, and $l^* = 0$ and then evaluated various methods when varying L_1 .

Results: We show the results in Fig. 1. The results indicate that gradient descent converges slowly when L_1 is large, whereas Polyak stepsize and clipped gradient descent does not depend on L_1 . These observations are consistent with our discussion in Sec. 3, which shows that the convergence

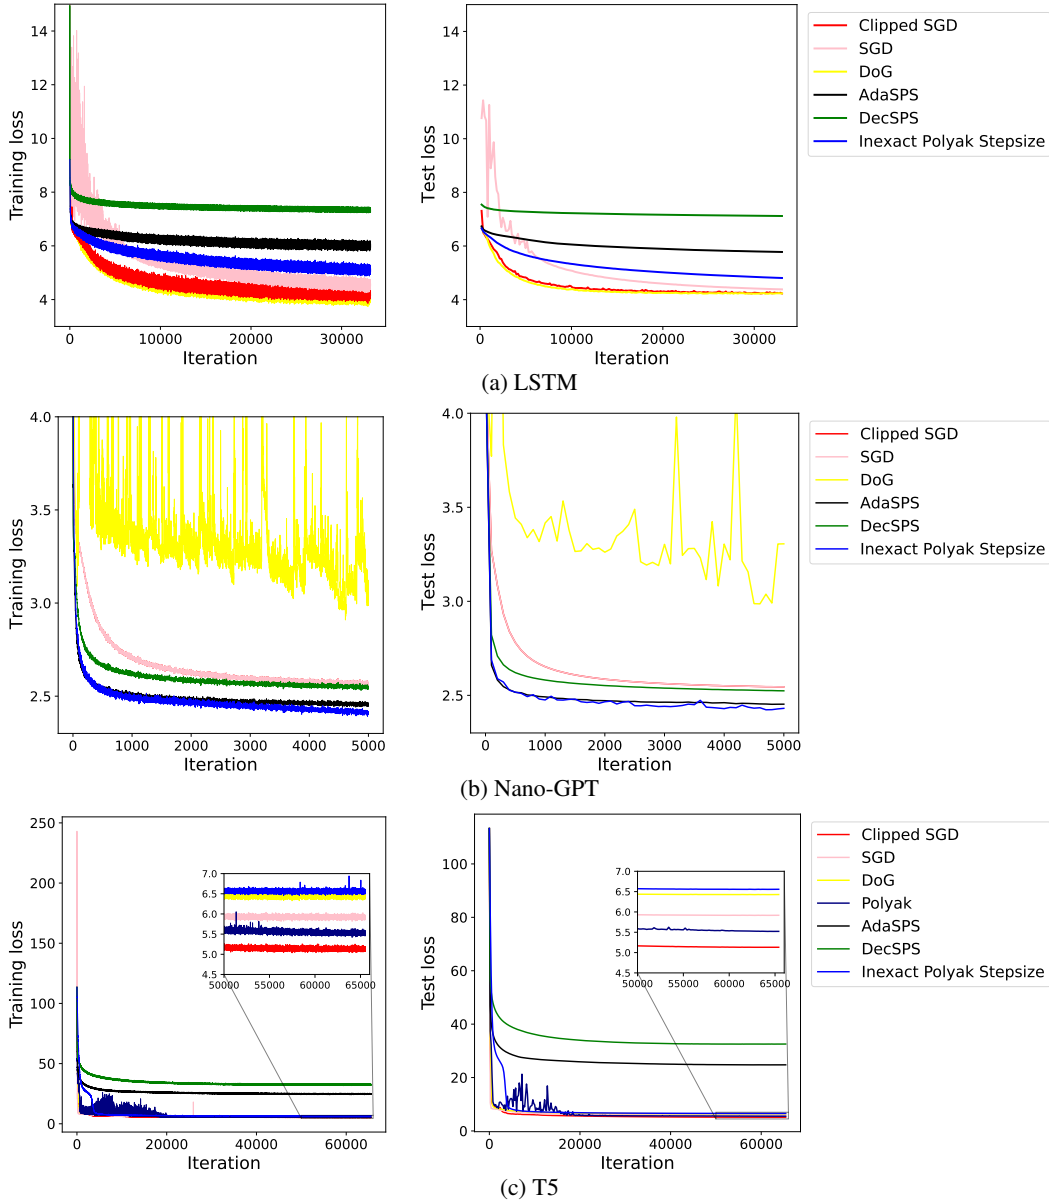


Figure 2: Loss curves for LSTM, Nano-GPT, and T5. We plotted the test loss per one epoch, 100 iterations, and 200 iterations for LSTM, Nano-GPT, and T5, respectively. For LSTM and Nano-GPT, we found that Polyak stepsize does not converge, and its loss was much larger than that of other comparison methods. Thus, to make the figure easier to read, we omit the results of Polyak stepsize and provide the complete results, including Polyak stepsize in Sec. E.

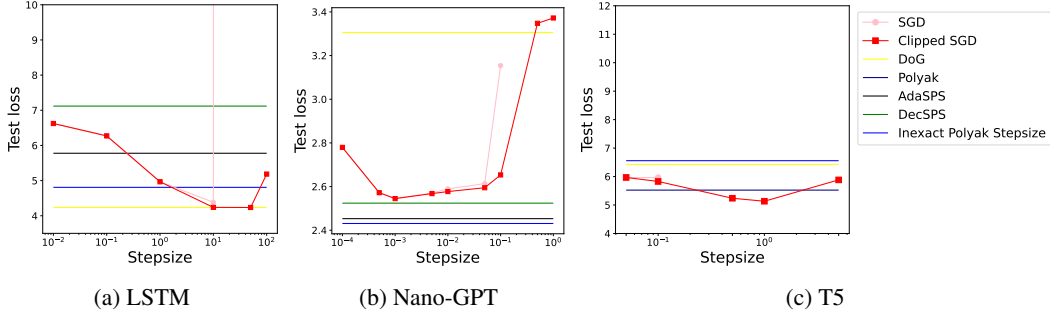


Figure 3: The final test loss with various hyperparameter settings. For T5, the results of DecSPS and AdaSPS were omitted because their final test loss was much larger than the others, as shown in Fig. 4. Furthermore, the results of SGD were also omitted when the final test loss became nan or infinity.

rate of Polyak stepsize is asymptotically independent of L as clipped gradient descent. By comparing DecSPS, AdaSPS, and Inexact Polyak Step Size, which are parameter-free methods, the convergence rates of DecSPS and AdaSPS degrade as L_1 becomes large. Thus, DecSPS and AdaSPS lose the favorable property of asymptotic independence of L under (L_0, L_1) -smoothness. In contrast, the convergence behavior of Inexact Polyak Step Size does not depend on L_1 , which is consistent with Theorem 5, and Inexact Polyak Step Size successfully inherits the Polyak stepsize under (L_0, L_1) -smoothness.

6.2 Neural networks

Setting: Next, we evaluated Inexact Polyak Step Size using LSTM, Nano-GPT², and T5 (Nawrot, 2023). For LSTM, Nano-GPT, and T5, we used the Penn Treebank, Shakespeare, and C4 as training datasets, respectively. For SGD and Clipped SGD, we tuned the stepsize and gradient clipping threshold on validation datasets. For Polyak stepsize, we showed the results when we set f^* to zero. For Inexact Polyak Step Size, Theorem 4 requires us to select the best parameters, but we do not need to choose it for neural networks because the parameters only reach the stationary point and do not reach the global minima. See Sec. D for detailed training configuration. For all experiments, we repeated with three different seed values and reported the average.

Results: Figure 4 plots the loss curves, and Fig. 3 shows the final test loss with various hyperparameters. The results indicate that Inexact Polyak Step Size can consistently outperform DecSPS and AdaSPS for all neural network architectures. Although DoG performed the best for LSTM among the parameter-free methods, the training behavior of DoG was very unstable for Nano-GPT, and the loss values were much higher than those of other comparison methods. Similar to DoG, Polyak stepsize outperformed all parameter-free methods for T5, but the loss values of Polyak stepsize diverged for LSTM and Nano-GPT. Thus, Inexact Polyak Step Size can consistently succeed in training models for all neural network architectures.

7 Conclusion

In this study, we proposed Inexact Polyak Step Size, which converges to the optimal solution without hyperparameter tuning at the convergence rate that is asymptotically independent of L under (L_0, L_1) -smoothness. Specifically, we first provided the novel convergence rate of Polyak stepsize under (L_0, L_1) -smoothness, revealing that Polyak stepsize can achieve exactly the same convergence rate as clipped gradient descent. Although Polyak stepsize can improve the convergence under (L_0, L_1) -smoothness, Polyak stepsize requires the minimum loss value, which is a problem-specific parameter. Then, we proposed Inexact Polyak Step Size, which removes the problem-specific parameter from Polyak stepsize without losing the property of asymptotic independence of L under (L_0, L_1) -smoothness. We numerically validated our convergence results and demonstrated the effectiveness of Inexact Polyak Step Size.

²<https://github.com/karpathy/nanoGPT>

Acknowledgement

Y.T. was supported by KAKENHI Grant Number 23KJ1336. H.B. and M.Y. were supported by MEXT KAKENHI Grant Number 24K03004. We thank Satoki Ishikawa for his helpful comments on our experiments.

References

- Berrada, L., Zisserman, A., and Kumar, M. P. (2020). Training neural networks for and by interpolation. In *International Conference on Machine Learning*.
- Carmon, Y. and Hinder, O. (2022). Making SGD parameter-free. In *Conference on Learning Theory*.
- Defazio, A. and Mishchenko, K. (2023). Learning-rate-free learning by D-adaptation. In *International Conference on Machine Learning*.
- Devlin, J., Chang, M.-W., Lee, K., and Toutanova, K. (2019). BERT: Pre-training of deep bidirectional transformers for language understanding. In *Association for Computational Linguistics*.
- Duchi, J., Hazan, E., and Singer, Y. (2011). Adaptive subgradient methods for online learning and stochastic optimization. In *Journal of Machine Learning Research*.
- Galli, L., Rauhut, H., and Schmidt, M. (2023). Don't be so monotone: Relaxing stochastic line search in over-parameterized models. In *Advances in Neural Information Processing Systems*.
- Garrigos, G. and Gower, R. M. (2023). Handbook of convergence theorems for (stochastic) gradient methods. In *arXiv*.
- Hazan, E. and Kakade, S. M. (2019). Revisiting the Polyak step size. In *arXiv*.
- Ivji, M., Hinder, O., and Carmon, Y. (2023). DoG is SGD's best friend: A parameter-free dynamic step size schedule. In *International Conference on Machine Learning*.
- Jiang, X. and Stich, S. U. (2023). Adaptive SGD with Polyak stepsize and line-search: Robust convergence and variance reduction. In *Advances in Neural Information Processing Systems*.
- Khaled, A., Mishchenko, K., and Jin, C. (2023). DoWG unleashed: An efficient universal parameter-free gradient descent method. In *Advances in Neural Information Processing Systems*.
- Kingma, D. and Ba, J. (2015). Adam: A method for stochastic optimization. In *International Conference on Learning Representations*.
- Koloskova, A., Hendriks, H., and Stich, S. U. (2023). Revisiting gradient clipping: Stochastic bias and tight convergence guarantees. In *International Conference on Machine Learning*.
- Li, S. and Liu, Y. (2022). High probability guarantees for nonconvex stochastic gradient descent with heavy tails. In *International Conference on Machine Learning*.
- Loizou, N., Vaswani, S., Hadj Laradji, I., and Lacoste-Julien, S. (2021). Stochastic Polyak step-size for SGD: An adaptive learning rate for fast convergence. In *International Conference on Artificial Intelligence and Statistics*.
- Merity, S., Keskar, N. S., and Socher, R. (2018). Regularizing and optimizing LSTM language models. In *International Conference on Learning Representations*.
- Mikolov, T., Karafiat, M., Burget, L., Cernocky, J. H., and Khudanpur, S. (2010). Recurrent neural network based language model. In *Interspeech*.
- Mukherjee, S., Loizou, N., and Stich, S. U. (2023). Locally adaptive federated learning via stochastic polyak stepsizes. In *arXiv*.
- Nawrot, P. (2023). NanoT5: A pytorch framework for pre-training and fine-tuning t5-style models with limited resources. In *arXiv*.

- Nesterov, Y. (2018). *Lectures on Convex Optimization*. Springer.
- Orabona, F. and Tommasi, T. (2017). Training deep networks without learning rates through coin betting. In *Advances in Neural Information Processing Systems*.
- Orvieto, A., Lacoste-Julien, S., and Loizou, N. (2022). Dynamics of SGD with stochastic Polyak stepsizes: Truly adaptive variants and convergence to exact solution. In *Advances in Neural Information Processing Systems*.
- Pascanu, R., Mikolov, T., and Bengio, Y. (2013). On the difficulty of training recurrent neural networks. In *International Conference on Machine Learning*.
- Polyak, B. (1987). *Introduction to Optimization*. Optimization Software.
- Raffel, C., Shazeer, N. M., Roberts, A., Lee, K., Narang, S., Matena, M., Zhou, Y., Li, W., and Liu, P. J. (2019). Exploring the limits of transfer learning with a unified text-to-text transformer. In *Journal of Machine Learning Research*.
- Sadiev, A., Danilova, M., Gorbunov, E., Horváth, S., Gidel, G., Dvurechensky, P., Gasnikov, A., and Richtárik, P. (2023). High-probability bounds for stochastic optimization and variational inequalities: the case of unbounded variance. In *International Conference on Machine Learning*.
- Zhang, B., Jin, J., Fang, C., and Wang, L. (2020a). Improved analysis of clipping algorithms for non-convex optimization. In *Advances in Neural Information Processing Systems*.
- Zhang, J., He, T., Sra, S., and Jadbabaie, A. (2020b). Why gradient clipping accelerates training: A theoretical justification for adaptivity. In *International Conference on Learning Representations*.
- Zhang, J., Karimireddy, S. P., Veit, A., Kim, S., Reddi, S., Kumar, S., and Sra, S. (2020c). Why are adaptive methods good for attention models? In *Advances in Neural Information Processing Systems*.

A Proof of Theorem 4

Lemma 1. *If Assumption 1 holds, the following holds for any $\mathbf{x} \in \mathbb{R}^d$:*

$$\frac{1}{2L} \|\nabla f(\mathbf{x})\|^2 \leq f(\mathbf{x}) - f(\mathbf{x}^*). \quad (16)$$

Proof. See Lemma 2.28 in (Garrigos and Gower, 2023). \square

Lemma 2. *If Assumption 2 holds, the following holds for any $\mathbf{x} \in \mathbb{R}^d$:*

$$\frac{1}{2(L_0 + L_1 \|\nabla f(\mathbf{x})\|)} \|\nabla f(\mathbf{x})\|^2 \leq f(\mathbf{x}) - f(\mathbf{x}^*). \quad (17)$$

Proof. See Lemma A.2 in (Koloskova et al., 2023). \square

Lemma 3. *Assume that f is convex and Assumption 1 and 2 hold. Let T be the number of iterations and define $\tau := \arg \min_{0 \leq t \leq T-1} f(\mathbf{x}_t)$. Then, gradient descent with Polyak stepsize Eq. (7) satisfies:*

$$f(\mathbf{x}_\tau) - f(\mathbf{x}^*) \leq \frac{8L_0 \|\mathbf{x}_0 - \mathbf{x}^*\|^2}{T} + \frac{64LL_1^2 \|\mathbf{x}_0 - \mathbf{x}^*\|^4}{T^2}.$$

Proof. We have

$$\begin{aligned} \|\mathbf{x}_{t+1} - \mathbf{x}^*\|^2 &= \|\mathbf{x}_t - \mathbf{x}^*\|^2 - 2\eta_t \langle \nabla f(\mathbf{x}_t), \mathbf{x}_t - \mathbf{x}^* \rangle + \eta_t^2 \|\nabla f(\mathbf{x}_t)\|^2 \\ &\leq \|\mathbf{x}_t - \mathbf{x}^*\|^2 - 2\eta_t (f(\mathbf{x}_t) - f(\mathbf{x}^*)) + \eta_t^2 \|\nabla f(\mathbf{x}_t)\|^2, \end{aligned}$$

where we use the convexity of f in the inequality.

Case when $\|\nabla f(\mathbf{x}_t)\| \leq \frac{L_0}{L_1}$: Substituting the stepsize, we get

$$\begin{aligned} \|\mathbf{x}_{t+1} - \mathbf{x}^*\|^2 &\leq \|\mathbf{x}_t - \mathbf{x}^*\|^2 - \frac{f(\mathbf{x}_t) - f(\mathbf{x}^*)}{\|\nabla f(\mathbf{x}_t)\|^2} (f(\mathbf{x}_t) - f(\mathbf{x}^*)) \\ &\leq \|\mathbf{x}_t - \mathbf{x}^*\|^2 - \frac{1}{2(L_0 + L_1 \|\nabla f(\mathbf{x}_t)\|)} (f(\mathbf{x}_t) - f(\mathbf{x}^*)) \\ &\leq \|\mathbf{x}_t - \mathbf{x}^*\|^2 - \frac{1}{4L_0} (f(\mathbf{x}_t) - f(\mathbf{x}^*)), \end{aligned}$$

where we use Lemma 2 in the second inequality. Unrolling the above inequality, we obtain

$$f(\mathbf{x}_t) - f(\mathbf{x}^*) \leq 4L_0 (\|\mathbf{x}_t - \mathbf{x}^*\|^2 - \|\mathbf{x}_{t+1} - \mathbf{x}^*\|^2).$$

Case when $\|\nabla f(\mathbf{x}_t)\| > \frac{L_0}{L_1}$: Substituting the stepsize, we get

$$\begin{aligned} \|\mathbf{x}_{t+1} - \mathbf{x}^*\|^2 &\leq \|\mathbf{x}_t - \mathbf{x}^*\|^2 - \frac{(f(\mathbf{x}_t) - f(\mathbf{x}^*))^2}{\|\nabla f(\mathbf{x}_t)\|^2} \\ &\leq \|\mathbf{x}_t - \mathbf{x}^*\|^2 - \sqrt{\frac{f(\mathbf{x}_t) - f(\mathbf{x}^*)}{2L} \frac{f(\mathbf{x}_t) - f(\mathbf{x}^*)}{\|\nabla f(\mathbf{x}_t)\|}}, \end{aligned}$$

where we use Lemmas 1 in the last inequality. Then, $\|\nabla f(\mathbf{x}_t)\| > \frac{L_0}{L_1}$ implies

$$\frac{L_0 + L_1 \|\nabla f(\mathbf{x}_t)\|}{2L_1 \|\nabla f(\mathbf{x}_t)\|} < 1.$$

Thus, we get

$$\begin{aligned} \|\mathbf{x}_{t+1} - \mathbf{x}^*\|^2 &\leq \|\mathbf{x}_t - \mathbf{x}^*\|^2 - \sqrt{\frac{f(\mathbf{x}_t) - f(\mathbf{x}^*)}{2L} \frac{f(\mathbf{x}_t) - f(\mathbf{x}^*)}{\|\nabla f(\mathbf{x}_t)\|^2} \frac{L_0 + L_1 \|\nabla f(\mathbf{x}_t)\|}{2L_1}} \\ &\leq \|\mathbf{x}_t - \mathbf{x}^*\|^2 - \frac{1}{4L_1} \sqrt{\frac{f(\mathbf{x}_t) - f(\mathbf{x}^*)}{2L}}, \end{aligned}$$

where we use Lemma 2 in the last inequality. Unrolling the above inequality and multiplying L_0 on both sides, we get

$$\frac{L_0}{L_1} \sqrt{\frac{f(\mathbf{x}) - f(\mathbf{x}^*)}{2L}} \leq 4L_0 (\|\mathbf{x}_t - \mathbf{x}^*\|^2 - \|\mathbf{x}_{t+1} - \mathbf{x}^*\|^2).$$

Summing the two cases: Define \mathcal{T}_1 and \mathcal{T}_2 as follows:

$$\mathcal{T}_1 := \left\{ t \mid \|\nabla f(\mathbf{x}_t)\| \leq \frac{L_0}{L_1} \right\}, \quad \mathcal{T}_2 := \left\{ t \mid \|\nabla f(\mathbf{x}_t)\| > \frac{L_0}{L_1} \right\}.$$

We obtain

$$\sum_{t \in \mathcal{T}_1} (f(\mathbf{x}_t) - f(\mathbf{x}^*)) + \frac{L_0}{L_1} \sum_{t \in \mathcal{T}_2} \sqrt{\frac{f(\mathbf{x}_t) - f(\mathbf{x}^*)}{2L}} \leq 4L_0 \|\mathbf{x}_0 - \mathbf{x}^*\|^2.$$

Then, the above inequality implies

$$\begin{aligned} \frac{1}{T} \sum_{t \in \mathcal{T}_1} f(\mathbf{x}_t) - f(\mathbf{x}^*) &\leq \frac{4L_0 \|\mathbf{x}_0 - \mathbf{x}^*\|^2}{T}, \\ \frac{1}{T} \sum_{t \in \mathcal{T}_2} \sqrt{f(\mathbf{x}_t) - f(\mathbf{x}^*)} &\leq \frac{4L_1 \sqrt{2L} \|\mathbf{x}_0 - \mathbf{x}^*\|^2}{T}. \end{aligned}$$

Using $a^2 \geq 2ab - b^2$, we obtain for any $b \in \mathbb{R}$

$$\frac{1}{T} \sum_{t \in \mathcal{T}_1} \left(2b \sqrt{f(\mathbf{x}_t) - f(\mathbf{x}^*)} - b^2 \right) \leq \frac{4L_0 \|\mathbf{x}_0 - \mathbf{x}^*\|^2}{T}.$$

Thus, when $b > 0$, we obtain

$$\frac{1}{T} \sum_{t \in \mathcal{T}_1} \sqrt{f(\mathbf{x}_t) - f(\mathbf{x}^*)} \leq \frac{4L_0 \|\mathbf{x}_0 - \mathbf{x}^*\|^2}{2bT} + \frac{b}{2}.$$

Choosing $b = \sqrt{\frac{4L_0 \|\mathbf{x}_0 - \mathbf{x}^*\|^2}{T}}$, we get

$$\frac{1}{T} \sum_{t \in \mathcal{T}_1} \sqrt{f(\mathbf{x}_t) - f(\mathbf{x}^*)} \leq \sqrt{\frac{4L_0 \|\mathbf{x}_0 - \mathbf{x}^*\|^2}{T}}.$$

Thus, we get

$$\frac{1}{T} \sum_{t=0}^{T-1} \sqrt{f(\mathbf{x}_t) - f(\mathbf{x}^*)} \leq \sqrt{\frac{4L_0 \|\mathbf{x}_0 - \mathbf{x}^*\|^2}{T}} + \frac{4L_1 \sqrt{2L} \|\mathbf{x}_0 - \mathbf{x}^*\|^2}{T}.$$

Defining $\tau := \arg \min_t f(\mathbf{x}_t)$, we get

$$\sqrt{f(\mathbf{x}_\tau) - f(\mathbf{x}^*)} \leq \sqrt{\frac{4L_0 \|\mathbf{x}_0 - \mathbf{x}^*\|^2}{T}} + \frac{4L_1 \sqrt{2L} \|\mathbf{x}_0 - \mathbf{x}^*\|^2}{T}.$$

Squaring the both sides, and using $(a+b)^2 \leq 2a^2 + 2b^2$ for all $a, b \in \mathbb{R}$, we obtain

$$f(\mathbf{x}_\tau) - f(\mathbf{x}^*) \leq \frac{8L_0 \|\mathbf{x}_0 - \mathbf{x}^*\|^2}{T} + \frac{64LL_1^2 \|\mathbf{x}_0 - \mathbf{x}^*\|^4}{T^2}.$$

This concludes the statement. \square

B Proof of Theorem 5

Lemma 4. Assume that f is convex and Assumptions 1 and 2 hold. Let T be the number of iterations and define $\tau := \arg \min_{0 \leq t \leq T-1} f(\mathbf{x}_t)$. If $f(\mathbf{x}_t) - f^* \geq \frac{\sigma^2}{\sqrt{T}}$ for all t , then gradient descent with stepsize Eq. (14) satisfies:

$$f(\mathbf{x}_\tau) - f^* \leq \frac{8L_0 \|\mathbf{x}_0 - \mathbf{x}^*\|^2 + 2\sigma^2}{\sqrt{T}} + \frac{128L_1^2 L \|\mathbf{x}_0 - \mathbf{x}^*\|^4}{T} + \frac{8L_1^2 \sigma^4 L}{L_0^2 T}.$$

where $\mathbf{x}^* := \arg \min_{\mathbf{x}} f(\mathbf{x})$ and $\sigma^2 := f^* - l^*$.

Proof. By the convexity of f , we have

$$\begin{aligned} \|\mathbf{x}_{t+1} - \mathbf{x}^*\|^2 &= \|\mathbf{x}_t - \mathbf{x}^*\|^2 - 2\eta_t \langle \nabla f(\mathbf{x}_t), \mathbf{x}_t - \mathbf{x}^* \rangle + \eta_t^2 \|\nabla f(\mathbf{x}_t)\|^2 \\ &\leq \|\mathbf{x}_t - \mathbf{x}^*\|^2 - 2\eta_t (f(\mathbf{x}_t) - f^*) + \eta_t^2 \|\nabla f(\mathbf{x}_t)\|^2. \end{aligned}$$

Substituting the stepsize Eq. (14), we get

$$\begin{aligned} \|\mathbf{x}_{t+1} - \mathbf{x}^*\|^2 &\leq \|\mathbf{x}_t - \mathbf{x}^*\|^2 - 2\eta_t (f(\mathbf{x}_t) - f^*) + \frac{\eta_t}{\sqrt{T}} (f(\mathbf{x}_t) - l^*) \\ &\leq \|\mathbf{x}_t - \mathbf{x}^*\|^2 - \eta_t \left(2 - \frac{1}{\sqrt{T}}\right) (f(\mathbf{x}_t) - f^*) + \frac{\eta_t \sigma^2}{\sqrt{T}} \\ &\leq \|\mathbf{x}_t - \mathbf{x}^*\|^2 - \eta_t (f(\mathbf{x}_t) - f^*) + \frac{\eta_t \sigma^2}{\sqrt{T}}, \end{aligned} \quad (18)$$

where we use $T \geq 1$ in the last inequality. Unrolling the above inequality and dividing by η_t , we obtain

$$f(\mathbf{x}_t) - f^* \leq \frac{\|\mathbf{x}_t - \mathbf{x}^*\|^2 - \|\mathbf{x}_{t+1} - \mathbf{x}^*\|^2}{\eta_t} + \frac{\sigma^2}{\sqrt{T}}. \quad (19)$$

Case when $\|\nabla f(\mathbf{x}_t)\| \leq \frac{L_0}{L_1}$: From $f(\mathbf{x}_t) - f^* \geq \frac{\sigma^2}{\sqrt{T}}$ and Eq. (18), we obtain

$$\|\mathbf{x}_t - \mathbf{x}^*\|^2 - \|\mathbf{x}_{t+1} - \mathbf{x}^*\|^2 \geq 0. \quad (20)$$

Thus, we get

$$\begin{aligned} f(\mathbf{x}_t) - f^* &\leq 2(L_0 + L_1 \|\nabla f(\mathbf{x}_t)\|) \sqrt{T} (\|\mathbf{x}_t - \mathbf{x}^*\|^2 - \|\mathbf{x}_{t+1} - \mathbf{x}^*\|^2) + \frac{\sigma^2}{\sqrt{T}} \\ &\leq 4L_0 \sqrt{T} (\|\mathbf{x}_t - \mathbf{x}^*\|^2 - \|\mathbf{x}_{t+1} - \mathbf{x}^*\|^2) + \frac{\sigma^2}{\sqrt{T}}, \end{aligned}$$

where we use $f^* \geq l^*$ and Lemma 2 for the first inequality and use $\|\nabla f(\mathbf{x}_t)\| \leq \frac{L_0}{L_1}$ for the last inequality.

Case when $\|\nabla f(\mathbf{x}_t)\| > \frac{L_0}{L_1}$: From Lemma 2, we have

$$\eta_t \geq \frac{f(\mathbf{x}_t) - f^*}{\sqrt{T} \|\nabla f(\mathbf{x}_t)\|^2} \geq \frac{1}{2(L_0 + L_1 \|\nabla f(\mathbf{x}_t)\|) \sqrt{T}}.$$

Then, we obtain

$$\eta_t \geq \frac{1}{4L_1 \|\nabla f(\mathbf{x}_t)\| \sqrt{T}} \geq \frac{1}{4L_1 \sqrt{2LT} (f(\mathbf{x}_t) - f^*)},$$

where we use $\|\nabla f(\mathbf{x}_t)\| > \frac{L_0}{L_1}$ for the first inequality, and Lemma 1 for the last inequality. Combining Eqs. (19) and (20), we obtain

$$f(\mathbf{x}_t) - f^* \leq 4L_1 \sqrt{2LT} (f(\mathbf{x}_t) - f^*) (\|\mathbf{x}_t - \mathbf{x}^*\|^2 - \|\mathbf{x}_{t+1} - \mathbf{x}^*\|^2) + \frac{\sigma^2}{\sqrt{T}}.$$

Furthermore, from $\|\nabla f(\mathbf{x}_t)\| > \frac{L_0}{L_1}$ and Lemma 1, we obtain

$$\sqrt{f(\mathbf{x}_t) - f^*} \geq \frac{L_0}{L_1} \sqrt{\frac{f(\mathbf{x}_t) - f^*}{\|\nabla f(\mathbf{x}_t)\|^2}} \geq \frac{L_0}{L_1} \sqrt{\frac{1}{2L}}.$$

Thus, we get

$$\begin{aligned} f(\mathbf{x}_t) - f^* &\leq 4L_1 \sqrt{2LT(f(\mathbf{x}_t) - f^*)} (\|\mathbf{x}_t - \mathbf{x}^*\|^2 - \|\mathbf{x}_{t+1} - \mathbf{x}^*\|^2) + \frac{L_1 \sigma^2}{L_0 \sqrt{T}} \sqrt{2L(f(\mathbf{x}_t) - f^*)}. \end{aligned}$$

Dividing by $\frac{L_1 \sqrt{2L(f(\mathbf{x}_t) - f^*)}}{L_0}$, we get

$$\frac{L_0}{L_1} \sqrt{\frac{f(\mathbf{x}_t) - f^*}{2L}} \leq 4L_0 \sqrt{T} (\|\mathbf{x}_t - \mathbf{x}^*\|^2 - \|\mathbf{x}_{t+1} - \mathbf{x}^*\|^2) + \frac{\sigma^2}{\sqrt{T}}.$$

Summing the two cases: Define \mathcal{T}_1 and \mathcal{T}_2 as follows:

$$\mathcal{T}_1 := \left\{ t \mid \|\nabla f(\mathbf{x}_t)\| \leq \frac{L_0}{L_1} \right\}, \quad \mathcal{T}_2 := \left\{ t \mid \|\nabla f(\mathbf{x}_t)\| > \frac{L_0}{L_1} \right\}.$$

We obtain

$$\frac{1}{T} \left(\sum_{t \in \mathcal{T}_1} (f(\mathbf{x}_t) - f^*) + \frac{L_0}{L_1} \sum_{t \in \mathcal{T}_2} \sqrt{\frac{f(\mathbf{x}_t) - f^*}{2L}} \right) \leq \frac{4L_0 \|\mathbf{x}_0 - \mathbf{x}^*\|^2 + \sigma^2}{\sqrt{T}}.$$

The above inequality implies that

$$\begin{aligned} \frac{1}{T} \sum_{t \in \mathcal{T}_1} (f(\mathbf{x}_t) - f^*) &\leq \frac{4L_0 \|\mathbf{x}_0 - \mathbf{x}^*\|^2 + \sigma^2}{\sqrt{T}}, \\ \frac{1}{T} \sum_{t \in \mathcal{T}_2} \sqrt{f(\mathbf{x}_t) - f^*} &\leq \frac{4L_1 \sqrt{2L} \|\mathbf{x}_0 - \mathbf{x}^*\|^2}{\sqrt{T}} + \frac{L_1 \sigma^2 \sqrt{2L}}{L_0 \sqrt{T}}. \end{aligned}$$

Using $a^2 \geq 2ab - b^2$, we obtain for any $b \in \mathbb{R}$

$$\frac{1}{T} \sum_{t \in \mathcal{T}_1} (2b \sqrt{f(\mathbf{x}_t) - f^*} - b^2) \leq \frac{4L_0 \|\mathbf{x}_0 - \mathbf{x}^*\|^2 + \sigma^2}{\sqrt{T}}.$$

Thus, when $b > 0$, we obtain

$$\frac{1}{T} \sum_{t \in \mathcal{T}_1} \sqrt{f(\mathbf{x}_t) - f^*} \leq \frac{4L_0 \|\mathbf{x}_0 - \mathbf{x}^*\|^2 + \sigma^2}{2b\sqrt{T}} + \frac{b}{2}.$$

Choosing $b = \sqrt{\frac{4L_0 \|\mathbf{x}_0 - \mathbf{x}^*\|^2 + \sigma^2}{\sqrt{T}}}$, we get

$$\frac{1}{T} \sum_{t \in \mathcal{T}_1} \sqrt{f(\mathbf{x}_t) - f^*} \leq \sqrt{\frac{4L_0 \|\mathbf{x}_0 - \mathbf{x}^*\|^2 + \sigma^2}{\sqrt{T}}}.$$

Thus, we get

$$\frac{1}{T} \sum_{t=0}^{T-1} \sqrt{f(\mathbf{x}_t) - f^*} \leq \sqrt{\frac{4L_0 \|\mathbf{x}_0 - \mathbf{x}^*\|^2 + \sigma^2}{\sqrt{T}}} + \frac{4L_1 \sqrt{2L} \|\mathbf{x}_0 - \mathbf{x}^*\|^2}{\sqrt{T}} + \frac{L_1 \sigma^2 \sqrt{2L}}{L_0 \sqrt{T}}.$$

Defining $\tau := \arg \min_t f(\mathbf{x}_t)$, we get

$$\sqrt{f(\mathbf{x}_\tau) - f^*} \leq \sqrt{\frac{4L_0 \|\mathbf{x}_0 - \mathbf{x}^*\|^2 + \sigma^2}{\sqrt{T}}} + \frac{4L_1 \sqrt{2L} \|\mathbf{x}_0 - \mathbf{x}^*\|^2}{\sqrt{T}} + \frac{L_1 \sigma^2 \sqrt{2L}}{L_0 \sqrt{T}}.$$

Squaring the both sides, and using $(a+b)^2 \leq 2a^2 + 2b^2$ for all $a, b \in \mathbb{R}$, we obtain

$$f(\mathbf{x}_\tau) - f^* \leq \frac{8L_0 \|\mathbf{x}_0 - \mathbf{x}^*\|^2 + 2\sigma^2}{\sqrt{T}} + \frac{128L_1^2 L \|\mathbf{x}_0 - \mathbf{x}^*\|^4}{T} + \frac{8L_1^2 \sigma^4 L}{L_0^2 T}.$$

This concludes the statement. \square

Lemma 5. Assume that f is convex and Assumptions 1 and 2 hold. Let T be the number of iterations and define $\tau := \arg \min_{0 \leq t \leq T-1} f(\mathbf{x}_t)$. Then, gradient descent with stepsize Eq. (14) satisfies:

$$f(\mathbf{x}_\tau) - f(\mathbf{x}^*) \leq \mathcal{O} \left(\frac{L_0 \|\mathbf{x}_0 - \mathbf{x}^*\|^2 + \sigma^2}{\sqrt{T}} + \frac{LL_1^2 \|\mathbf{x}_0 - \mathbf{x}^*\|^4}{T} + \frac{L_1^2 L \sigma^4}{L_0^2 T} \right), \quad (21)$$

where $\mathbf{x}^* := \arg \min_{\mathbf{x}} f(\mathbf{x})$ and $\sigma^2 := f^* - l^*$.

Proof. If there exists t such that $f(\mathbf{x}_t) - f^* < \frac{\sigma^2}{\sqrt{T}}$, we have

$$f(\mathbf{x}_\tau) - f^* \leq f(\mathbf{x}_t) - f^* < \frac{\sigma^2}{\sqrt{T}}.$$

Then, if $f(\mathbf{x}_t) - f^* \geq \frac{\sigma^2}{\sqrt{T}}$ for all t , Lemma 4 shows that

$$f(\mathbf{x}_\tau) - f^* \leq \frac{8L_0 \|\mathbf{x}_0 - \mathbf{x}^*\|^2 + 2\sigma^2}{\sqrt{T}} + \frac{128L_1^2 L \|\mathbf{x}_0 - \mathbf{x}^*\|^4}{T} + \frac{8L_1^2 \sigma^4 L}{L_0^2 T}.$$

By combining the above two cases, we have the desired statement. \square

C Additional theoretical result

Lemma 6. Let f be a function such that $\|\nabla^2 f(\mathbf{x})\| \leq L_0 + L_1 \|\nabla f(\mathbf{x})\|$ holds for any \mathbf{x} . For any \mathbf{x}, \mathbf{y} such that $\|\mathbf{x} - \mathbf{y}\| \leq \frac{1}{L_0}$, we have

$$\|\nabla f(\mathbf{x}) - \nabla f(\mathbf{y})\| \leq 2(L_0 + L_1 \|\nabla f(\mathbf{x})\|) \|\mathbf{x} - \mathbf{y}\|.$$

Proof. See Lemma A.2 in (Zhang et al., 2020a). \square

Proposition 3. For any $L_0 \geq 0$ and $L_1 \geq 0$, $f(x) := \frac{L_0 L_1^2}{72} x^4 + \frac{L_0}{4} x^2$ is (L_0, L_1) -smooth.

Proof. Since $f(x)$ is twice differentiable, we have

$$|\nabla^2 f(x)| = \frac{L_0 L_1^2}{6} x^2 + \frac{L_0}{2}.$$

Using $\frac{L_1}{6} x^2 + \frac{3}{2L_1} \geq |x|$, we obtain

$$\begin{aligned} |\nabla^2 f(x)| &\leq \frac{L_0 L_1^2}{6} \left(\frac{L_1}{6} x^2 + \frac{3}{2L_1} \right) |x| + L_0 \\ &= \frac{L_1}{2} \left| \frac{L_0 L_1^2}{18} x^3 + \frac{L_0}{2} x \right| + \frac{L_0}{2} \\ &= \frac{L_1}{2} |\nabla f(x)| + \frac{L_0}{2}. \end{aligned}$$

From Lemma 6, we have the desired statement. \square

D Hyperparameter settings

D.1 Synthetic function

In our experiments, we ran the clipped gradient descent with the following hyperparameters and tuned the hyperparameters by grid search.

Table 2: Hyperparameter settings for clipped gradient descent.

Learning Rate	$\{1, 1.0 \times 10^{-1}, \dots, 1.0 \times 10^{-8}\}$
Gradient Clipping Threshold	$\{0.01, 0.1, 1, 5, 10, 15, 20, \infty\}$

D.2 Neural networks

In our experiments, we used the following training configuration:

- **LSTM:** <https://github.com/salesforce/awd-lstm-lm>
- **Nano-GPT:** <https://github.com/karpathy/nanoGPT>
- **T5:** <https://github.com/PiotrNawrot/nanoT5>

We ran all experiments on an A100 GPU. For Clipped SGD and SGD, we tuned the stepsize and gradient clipping threshold using the grid search. See Tables 3, 4, and 5 for detailed hyperparameter settings.

Table 3: Hyperparameter settings for LSTM.

Learning Rate	$\{100, 50, 10, 1, 0.1, 0.01\}$
Gradient Clipping Threshold	$\{0.5, 1, \dots, 4.5, 5, \infty\}$

Table 4: Hyperparameter settings for Nano-GPT.

Learning Rate	$\{1, 0.5, 0.1, \dots, 0.0005, 0.0001\}$
Gradient Clipping Threshold	$\{1, 2, \dots, 9, 10, \infty\}$

Table 5: Hyperparameter settings for T5.

Learning Rate	$\{5.0, 1.0, 0.5, 0.1, 0.05\}$
Gradient Clipping Threshold	$\{1, 2, 3, \infty\}$

E Additional numerical evaluation

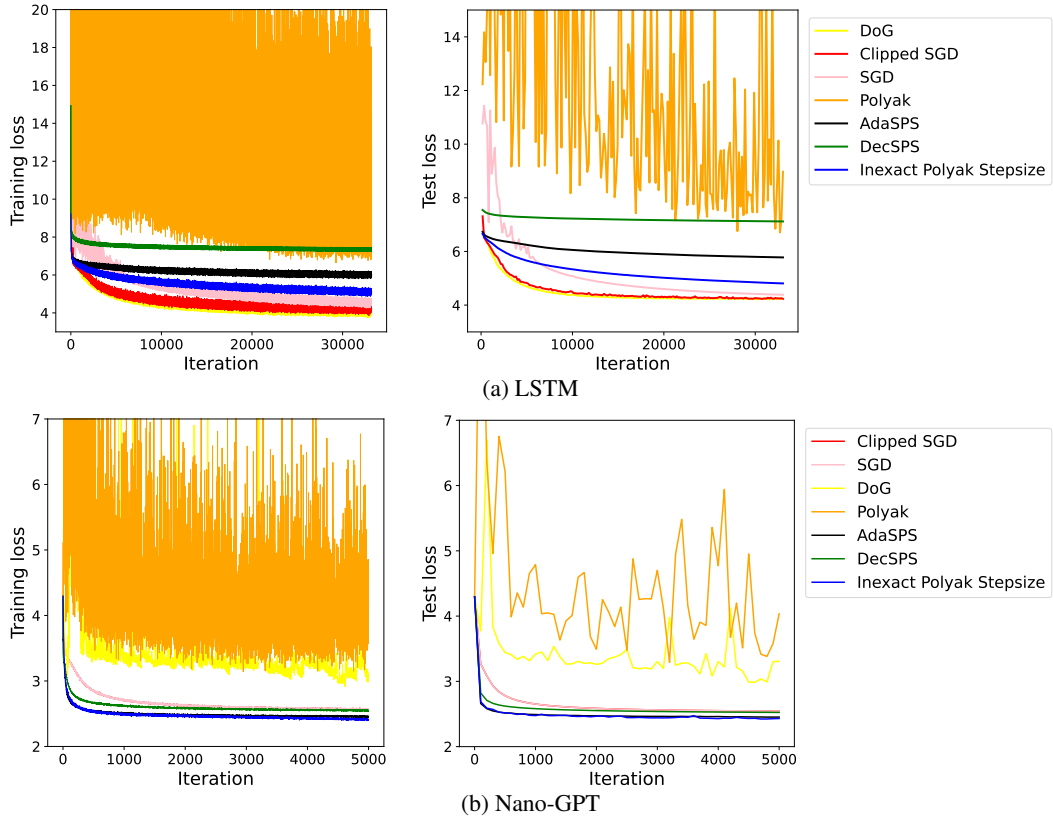


Figure 4: Loss curves for LSTM and Nano-GPT. We plotted the test loss per one epoch and 100 iterations for LSTM and Nano-GPT, respectively.