

One Token Can Help! Learning Scalable and Pluggable Virtual Tokens for Retrieval-Augmented Large Language Models

Yutao Zhu, Zhaoheng Huang, Zhicheng Dou*, and Ji-Rong Wen
Gaoling School of Artificial Intelligence, Renmin University of China
yutaozhu94@gmail.com, dou@ruc.edu.cn

Abstract

Retrieval-augmented generation (RAG) is a promising way to improve large language models (LLMs) for generating more factual, accurate, and up-to-date content. Existing methods either optimize prompts to guide LLMs in leveraging retrieved information or directly fine-tune LLMs to adapt to RAG scenarios. Although fine-tuning can yield better performance, it often compromises the LLMs' general generation capabilities by modifying their parameters. This limitation poses challenges in practical applications, especially when LLMs are already deployed, as parameter adjustments may affect their original functionality. To address this, we propose a novel method that involves learning scalable and pluggable virtual tokens for RAG. By maintaining the LLMs' original parameters and fine-tuning only the embeddings of these pluggable tokens, our approach not only enhances LLMs' performance but also preserves their general generation capabilities. Furthermore, we design several training strategies to improve the scalability, flexibility, and generalizability of our method. Comprehensive experiments across nine question-answering tasks demonstrate the superiority of our approach. The virtual tokens and training code are publicly available at <https://github.com/DaoD/SPRING/>.

1 Introduction

Large language models (LLMs) have achieved remarkable performance across various natural language processing tasks (Brown et al., 2020; OpenAI, 2023; Touvron et al., 2023). Despite their extensive parameters enabling them to learn rich knowledge during pre-training, LLMs may still generate hallucinated, outdated, or inaccurate content, especially in scenarios requiring long-tail knowledge (Ji et al., 2023; Zhang et al., 2023b).

To address this problem, retrieval-augmented generation (RAG) has emerged as a pivotal strategy. By explicitly decoupling knowledge retrieval from the backbone LLMs, such architectures have achieved more accurate and reliable content generation and shown particularly enhanced performance on knowledge-intensive tasks such as open-domain question answering (Lewis et al., 2020b; Petroni et al., 2021; Izacard et al., 2023; Tan et al., 2024; Jin et al., 2024).

Existing efforts in RAG development can be roughly categorized into two groups (as illustrated in Figure 1). The first group leverages the in-context learning capabilities of LLMs by incorporating retrieved information into the input along with appropriate prompts (Shi et al., 2023; Ram et al., 2023). This allows for straightforward application to any *off-the-shelf* LLM without tuning its parameters. However, its effectiveness largely depends on the human experience in crafting effective prompts and the LLM's ability to interpret these prompts. The second group focuses on training LLMs to enhance their performance in RAG scenarios. This training might involve either *end-to-end pre-training* (Guu et al., 2020; Borgeaud et al., 2022) or *fine-tuning* (Lin et al., 2023; Wang et al., 2023) for specific tasks. These approaches can often lead to better performance, but they require significant computational resources. Recently, parameter-efficient fine-tuning techniques, such as LoRA (Hu et al., 2022), have been widely studied, significantly reducing training costs. These methods can optimize the LLMs' parameters for RAG, but unfortunately compromise the model's general generation abilities in scenarios without retrieval. This limitation prevents their application to LLMs already operational in real-world settings.

Therefore, a critical research problem arises: *Is it possible to enhance LLMs' performance under RAG scenarios while preserving their general generation capabilities?* To achieve this, we introduce

*Corresponding author.

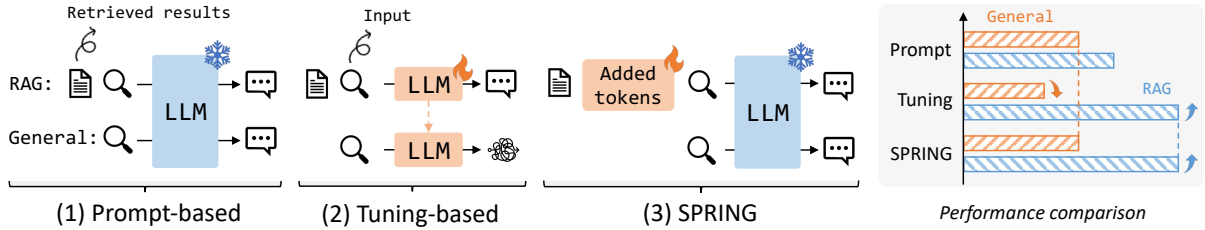


Figure 1: Illustration of existing methods for RAG and our proposed method. Our method can improve LLMs’ performance in RAG scenarios by incorporating trainable virtual tokens, and these tokens can be removed to preserve the general generation abilities in non-RAG scenarios.

a novel, lightweight tuning method named **SPRING**, which learns **Scalable and Pluggable virtual tokens for retrieval-augmented Generation**. Our basic idea is to add trainable virtual tokens to help LLMs learn RAG problems. Through fine-tuning, these virtual tokens effectively enhance the LLM’s capability to understand retrieved information and its correlation with user inputs. Importantly, as the LLM’s original parameters are frozen, its general generation abilities are preserved without any loss. During inference, when retrieval is triggered, these trained virtual tokens can be simply added to the prompt, which includes both the retrieved results and user input, thereby significantly enhancing performance. Moreover, we employ a scalable training approach, allowing the number of virtual tokens to be adjusted according to the needs of the inference scenario. Various training strategies have been implemented to further improve the generalizability of our method, ensuring robustness regardless of the number of the retrieved results.

In experiments, SPRING is trained with Mistral-7b, LLaMA-2-7b, and LLaMA-2-13b on nine commonly used QA datasets and evaluated in both in-domain and out-of-domain tasks. The experimental results demonstrate that SPRING not only effectively improves the RAG performance of LLMs but also successfully preserves their general generation capabilities. Overall, the SPRING method exhibits four main characteristics:

- **Lightweight yet effective.** Instead of updating the full parameters of the LLMs, we opt to freeze the pre-trained models and only learn the embeddings for the added virtual tokens. For example, adding 50 tokens to the Mistral-7b model introduces only 0.2M parameters in total. Despite these minimal parameters, SPRING improves the average EM and F1 scores by more than 33% and 12% across nine QA datasets, respectively.

- **Scalable.** With our proposed scalable training

approach, SPRING can be effective with any number of virtual tokens ($k \in [1, 50]$ in our experiments). Remarkably, even just one token can substantially improve the LLMs’ performance in RAG scenarios.

- **Pluggable.** Owing to its lightweight design, SPRING can be applied in a plug-and-play manner. When retrieval is triggered, simply adding the virtual tokens can lead to better performance. In non-RAG scenarios, the virtual tokens are not added so the LLMs’ original capabilities can be well preserved. This characteristic is crucial for LLMs that have already been deployed for practical use.

- **Generalizable.** Our robust training strategies ensure that SPRING is adaptable to different retrievers and various numbers of retrieved results. Consequently, there is no need to retrain SPRING with each update to the retrieval system, enhancing its practicality and efficiency.

2 Related Work

Retrieval-Augmented Generation (RAG) Compared to standard text generation, RAG incorporates a retrieval module that accesses external knowledge to enhance generation quality (Lewis et al., 2020b; Guu et al., 2020; Zhu et al., 2023). The mainstream RAG follows a “retrieve-then-read” paradigm, where the retrieval module provides external knowledge as additional context, which is then read by generation models to produce the final output (Izacard et al., 2023; Shi et al., 2023; Ram et al., 2023; Borgeaud et al., 2022; Lin et al., 2023; Zhu et al., 2024). To optimize the use of external knowledge, some methods focus on crafting effective prompts that guide the utilization of retrieved information (Shi et al., 2023; Ram et al., 2023). These prompt-based methods are applicable to any LLM without tuning its parameters. However, they depend heavily on skillful prompt writing and the LLMs’ ability to understand instructions. In contrast, other studies attempt to

directly train the model to better use the retrieved knowledge. For example, REALM (Guu et al., 2020) and RETRO (Borgeaud et al., 2022) incorporate retrieval in end-to-end retrieval-augmented pre-training. RA-DIT (Lin et al., 2023) employs fine-tuning to enhance LLMs’ retrieval understanding. These tuning-based methods often yield better performance than prompt-based methods by optimizing model parameters for RAG. However, they may compromise the LLMs’ general capabilities, particularly in non-retrieval scenarios. Different from existing methods, we design a new lightweight tuning method for RAG. It is a plug-and-play module that enhances RAG performance using trainable virtual tokens, which can be removed in non-RAG scenarios to preserve the LLMs’ general generation abilities.

Parameter-Efficient Fine-Tuning (PEFT) The paradigms of “pre-training then fine-tuning” have demonstrated efficacy across various natural language (Devlin et al., 2019; Raffel et al., 2020; Lewis et al., 2020a; Radford et al., 2019) and vision tasks (He et al., 2020; Dosovitskiy et al., 2021; Chen et al., 2020). The common fine-tuning process involves tuning all parameters of a model, which is computational intensive, especially for LLMs. To address this, PEFT (Mangrulkar et al., 2022) approaches have been developed. These approaches freeze most of the pre-trained models’ parameters, yet still manage to achieve comparable performance on downstream tasks. PEFT has been widely studied (Wan et al., 2023), and typical methods including adapter-based tuning (Houlsby et al., 2019; Lin et al., 2020; Rebuffi et al., 2017; Chen et al., 2023), low-rank adaptation (LoRA) (Hu et al., 2022; Dettmers et al., 2023), and prompt tuning (Li and Liang, 2021; Lester et al., 2021; Liu et al., 2021b,a; Qin and Eisner, 2021). Adapter-based tuning inserts lightweight modules into a model’s existing layers and have been extended to various domains (Gao et al., 2024; Hu et al., 2023; Zhang et al., 2023a). LoRA (Hu et al., 2022) introduces trainable low-rank matrices that adjust the model’s weight updates, achieving promising fine-tuning performance on LLMs (Hu et al., 2023). Prompt tuning incorporates a series of trainable prompt tokens to LLMs. These tokens can be inserted either to the input layer only (Lester et al., 2021; Liu et al., 2021b) or to all of the intermediate layers (Li and Liang, 2021; Liu et al., 2021a). In this paper, we propose a novel prompt tuning

method, SPRING, specifically designed for RAG scenarios. Our method introduces virtual tokens between retrieved results and the input, exploiting the auto-regressive generation paradigm to improve the model’s ability to utilize retrieved information. Additionally, it is designed to be scalable and pluggable, thus broadening its application scope while preserving the original generative capabilities of LLMs.

3 Methodology

To take advantage of both the flexibility of prompt-based methods and the efficacy of fine-tuning-based methods, we propose SPRING to learn scalable and pluggable virtual tokens for retrieval-augmented generation (RAG).

3.1 Problem Formulation

Language models are designed to calculate the probability distribution over sequences of natural language texts. Auto-regressive models are commonly used for this through next-token prediction:

$$p_{\text{LM}} = \prod_{i=1}^n p_{\theta}(x_i | x_{<i}), \quad (1)$$

where $x_{<i}$ denotes the sequence of tokens preceding x_i at each step, and θ represents the parameters of the model. For RAG, a retrieval corpus \mathcal{D} and a retriever M are introduced. Then, the generation process is conditioned on both $x_{x<i}$ and the retrieved results $R = M_{\mathcal{D}}(x_{x<i})$ as:

$$p_{\text{RAG}} = \prod_{i=1}^n p_{\theta}(x_i | R; x_{<i}), \quad (2)$$

$$p_{\text{RAG-QA}} = \prod_{i=1}^n p_{\theta}(a_i | R; Q). \quad (3)$$

Note that here $x_{<i}$ serves as the query for retrieval. In question-answering (QA) tasks, $x_{<i}$ is usually the question Q , and the learning objective is to generate the right answer $A = \{a_i\}_{i=1}^n$. The retriever can yield multiple passages, which can be concatenated as a long text sequence using proper separator such as “\n\n”. For brevity, this formulation directly concatenates the retrieved results R with the question Q , omitting more complex prompt designs. Henceforth, we will use the notations in QA tasks as our evaluation is performed on them.

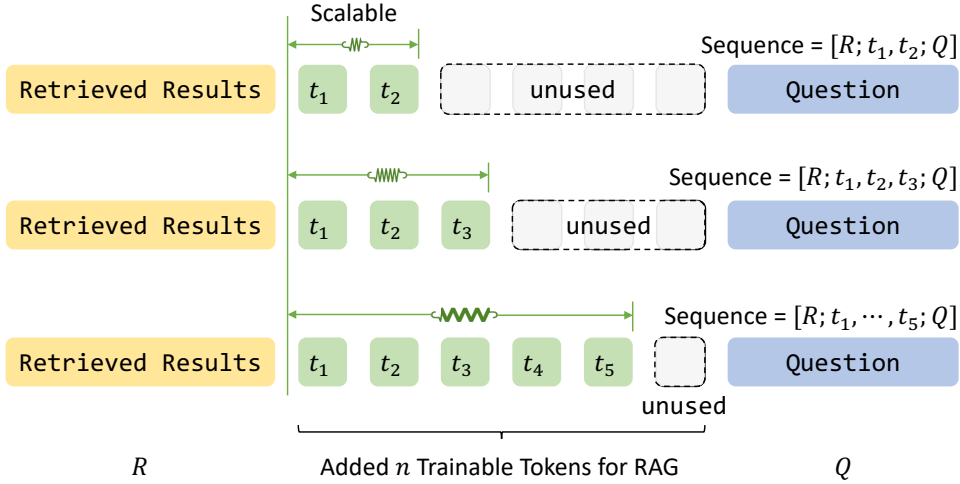


Figure 2: Illustration of SPRING. Only the embeddings of the added n tokens are trainable during fine-tuning. The added tokens are scalable where any first k ($k \leq n$) tokens can be used in inference.

3.2 SPRING: Scalable and Pluggable Virtual Tokens for RAG

Our SPRING method, shown in Figure 2, introduces trainable virtual tokens into the input to optimize LLMs for RAG scenarios. Specifically, following the notation in Equation (3), we add n trainable tokens $T = [t_1, t_2, \dots, t_n]$ between the retrieved results $R_{\mathcal{D}}(Q)$ and the input Q .¹ The generation process can then be described as:

$$p_{\text{SPRING}} = \prod_{i=1}^n p_{\theta, \delta}(a_i | R; [t_1, t_2, \dots, t_n]; Q), \quad (4)$$

where $\delta \in \mathbb{R}^{n \times d}$ represents the added parameters of the trainable tokens (*i.e.*, their embeddings), and d is the embedding size of the LLM. θ denotes the parameters of the backbone LLM, which are *frozen* during training. Given that $|\delta| \ll |\theta|$, our method is *highly efficient* for training. For example, with the Mistral-7b model (where $d = 4,096$), when $n = 50$ tokens are added, we only add and train $50 \times 4,096 = 0.2\text{M}$ parameters, approximately 0.003% of the full model.

Importantly, we place the virtual tokens T between the retrieved results R and the question Q for two main reasons: (1) In the auto-regressive generation paradigm, positioning the tokens after the retrieved results allows them to attend to this information, thereby aiding the model’s comprehension. (2) Recent studies have indicated that LLMs are particularly sensitive to the end of an input (Liu et al., 2023). By consistently placing these virtual tokens before the question across all test samples,

¹In our implementation, we set $n = 50$ for training.

we aim to mitigate any potential adverse effects on the understanding of the question.

Scalable In practical developments, LLMs are often constrained by their maximum input lengths, limiting the number of tokens available for retrieval augmentation (especially when the retrieved results are very long). Therefore, it is desired to design a mechanism so that any number of virtual tokens can be used in the inference to improve RAG performance. To achieve this, we propose an optimization strategy working like a “spring” (as shown in Figure 2). Specifically, for a given sample $\{R, Q, A\}$ with the total number of added tokens n , we randomly select a number k ($k \leq n$) and utilize the *first* k virtual tokens $t_{1:k}$ to construct the training example as $[R; t_1, t_2, \dots, t_k; Q]$. This method allows for the flexible optimization of any number of virtual tokens. Consequently, the number of virtual tokens incorporated during inference can be dynamically adjusted based on the requirements of the application. The effectiveness of this strategy and its comparison with other methods are further discussed in Section 4.4.2.

Pluggable Due to its designed structure, our method provides considerable flexibility in application. Practically, if user input is assessed to require external knowledge, our virtual tokens can be simply appended after the retrieval results and then fed, along with the user input, into the LLM for generation. In contrast, if the user input does not necessitate retrieval, it can be processed directly by the LLM. As our approach does not adjust the original parameters of the LLM, it preserves the model’s

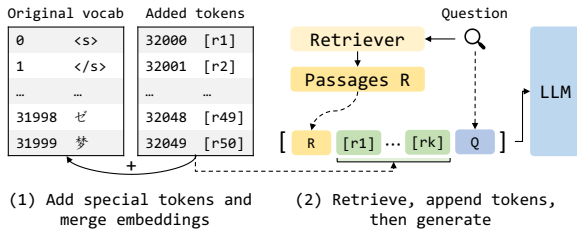


Figure 3: Instructions for using SPRING.

inherent capabilities. This feature is particularly important for industry or business since existing LLMs may have already been deployed for multiple purposes; our method enhances the retrieval understanding capabilities of these models without compromising their existing functionalities.

Inference We illustrate the instructions for using our SPRING in Figure 3. After training, the embeddings of the added tokens have been optimized for RAG, but these tokens do not correspond to any existing tokens in the vocabulary. To make them easy to use, we can add some special tokens (e.g., [r1], ..., [r50]) to the vocabulary and initialize their embeddings with the trained embeddings. Then, during inference, after obtaining the retrieved results R , we can add any number of these special tokens (e.g., [r1] ... [rk]) after R and input them with the question Q to the LLMs for generation. We also provide an example code snippet in Appendix A for using our method in practice.

We refer to our method as SPRING due to its scalable and pluggable nature, making it particularly well-suited for enhancing existing LLMs that are already deployed. Additionally, it effectively bridges the gap between retrieved results and user input, significantly improving the LLMs’ capabilities in understanding the retrieved external knowledge.

4 Experiment

4.1 Datasets and Retrievers

We conduct experiments on nine commonly used question-answering datasets, including TriviaQA (TQA) (Joshi et al., 2017), Natural Questions (NQ) (Kwiatkowski et al., 2019), HotpotQA (HQA) (Yang et al., 2018), SQuAD 1.1 (Rajpurkar et al., 2016), Web Questions (WebQ) (Berant et al., 2013), 2WikiMultiHopQA (2Wiki) (Ho et al., 2020), CoQA (Reddy et al., 2019), MS MARCO (Nguyen et al., 2016), and PopQA (Mallen et al., 2023). These datasets are publicly available at HuggingFace or their official

websites. Since PopQA only has a test set, we use it as a held-out dataset to evaluate the generalizability of the methods. Except for PopQA, we mix the training set of all other datasets for training, and test the methods on their corresponding test set. If the test set is unavailable, we use the development set for evaluation. It is worth noting that, though some datasets have provided golden reference passages for the answer, we do not use them in our experiment but use the passages retrieved from the following retrieval sets in both training and inference stages. Exact match (EM) and F1 score are employed as evaluation metrics.

For the retrieval sets, we follow previous studies (Yoran et al., 2023) and use the combination of Wikipedia and MS MARCO datasets as the retrieval corpus. Wikipedia contains high-quality human knowledge, which is helpful for many knowledge-intensive tasks. MS MARCO contains a large amount of web pages, which can provide information necessary for curating some natural language questions. We use the datasets that have already been preprocessed into passages and released on HuggingFace.² The Wikipedia set has 21M passages, while the MS MARCO set has 8M passages. More details are provided in Appendix B.

We use E5-large (Wang et al., 2022) as the main retriever in our experiments. The impact of other retrievers, i.e., BM25 (Robertson and Zaragoza, 2009), BGE-base (Xiao et al., 2023), and E5-base, is studied in our further analysis (Section 4.4.3). Among these retrievers, BM25 is a non-neural sparse retrieval algorithm, while others are neural-based dense retrievers. In general, dense retrievers perform better than BM25 on several benchmarks (Wang et al., 2022; Izacard et al., 2022).

4.2 Baseline Methods

We consider both the base and instruction-tuned versions of Mistral-7b, LLaMA-2-7b, and LLaMA-2-13b as the backbone models, and compare our SPRING with the following baselines.

- **Concat:** This method directly concatenates the retrieval results and the question for evaluation.

- **Prompt:** This method uses a manually-crafted prompt to indicate the use of retrieval information (details are provided in Appendix C).

²Wikipedia passages: <https://huggingface.co/datasets/Tevatron/wikipedia-nq-corpus>. MS MARCO passages: <https://huggingface.co/datasets/Tevatron/msmarco-passage-corpus>.

Table 1: Evaluation results of different backbone models and methods on nine QA datasets. The retriever is e5-large model, and the number of retrieved passages is set as three. The number of virtual tokens used in SPRING is set as 50. *PopQA is invisible during training. “Prefix” stands for prefix-tuning. The best results are in **bold**.

Dataset	Metric	with Retrieval					without Retrieval				
		Concat	Prompt	Prefix	LoRA	SPRING	Concat	Prompt	Prefix	LoRA	SPRING
<i>Tuning Parameters</i>		0	0	0.2M	4M	0.2M	0	0	0.2M	4M	0.2M
TQA	EM	0.00	57.79	11.74	62.76	65.71	0.01	39.90	0.00	0.03	46.56
	F1	65.60	80.33	59.97	85.44	85.26	63.96	69.72	28.30	34.91	74.48
NQ	EM	0.00	28.99	13.04	47.95	42.35	0.00	13.36	0.00	0.00	18.80
	F1	41.77	58.72	38.22	74.15	70.73	43.74	48.63	17.74	29.10	55.75
HQA	EM	0.00	26.36	5.79	39.95	35.26	0.00	17.07	0.00	0.03	20.15
	F1	44.91	56.15	42.59	68.93	65.44	47.54	49.50	17.45	27.57	54.79
SQuAD	EM	0.00	23.92	7.19	35.71	33.67	0.00	8.61	0.00	0.00	12.71
	F1	43.05	57.66	39.75	68.05	66.99	43.32	46.81	21.88	27.51	53.58
WebQ	EM	0.00	17.53	4.44	43.65	31.84	0.00	14.79	0.00	0.00	24.95
	F1	37.46	52.10	31.55	71.99	64.78	44.34	50.60	20.14	32.36	59.83
2Wiki	EM	0.00	22.64	4.38	35.93	31.80	0.00	23.45	0.00	0.01	24.62
	F1	47.77	55.58	41.82	63.85	62.03	52.83	53.55	21.14	37.09	56.83
CoQA	EM	0.00	8.20	1.56	12.89	13.28	0.00	8.59	0.00	0.00	9.96
	F1	27.98	36.72	20.02	41.19	42.41	32.97	36.58	13.15	18.99	39.96
MS MARCO	EM	0.00	5.73	0.60	8.13	6.57	0.00	2.56	0.00	0.01	2.09
	F1	56.44	53.81	50.56	54.81	53.48	49.50	47.75	47.44	52.44	51.41
PopQA	EM	0.00	39.79	10.02	47.15	48.71	0.00	16.05	0.00	0.00	20.25
	F1	56.49	68.26	44.54	73.12	73.90	53.61	54.85	20.39	25.09	58.32
Average	EM	0.00	25.66	6.53	37.13	34.35	0.00	16.04	14.31	0.01	20.01
	F1	46.83	57.70	41.00	66.84	65.00	47.98	50.89	23.07	31.67	56.11

- **LoRA** (Hu et al., 2022): This method uses LoRA to fine-tune the backbone models. We use the hyperparameters suggested by the LLaMA’s official guidance.³

- **Prefix-tuning** (Li and Liang, 2021): This method uses prefix-tuning to fine-tune the backbone models. To make a fair comparison with our method, we add 50 prefix tokens for training.

The implementation details are provided in Appendix D.

4.3 Experimental Results

We fine-tune the prefix-tuning, LoRA, and SPRING methods on RAG tasks, and then evaluate their performance in scenarios both with (RAG) and without (non-RAG) retrieval. For SPRING, we use $k = 50$ virtual tokens for inference by default, and the impact of token quantity k is discussed in Section 4.4.2. The experimental results are shown in Table 1. To save space, we only show the results based on Mistral-7b-instruct, and other results are provided in Appendix E.

We can observe: (1) It is evident that SPRING significantly improves the RAG performance of the original LLM with manually-crafted prompts

(the average EM and F1 scores are improved by 33.9% and 12.7%, respectively). It even outperforms LoRA on certain datasets, such as TriviaQA and CoQA. Given that SPRING involves only 0.2M trainable parameters, these results demonstrate its remarkable efficiency and effectiveness. (2) While LoRA achieves slightly better performance, it adversely impact their performance in non-RAG scenarios — a significant drop has been observed, far worse than the original models. This challenge also extends to other general generation tasks, which will be discussed in the next section. (3) Using manually-crafted prompts is effective for improving LLMs’ performance on RAG tasks. However, this improvement is limited as no training is involved. (4) All backbone models show improvements with SPRING (see Appendix E), demonstrating its adaptability across various backbone models. (5) SPRING achieves the best performance on the held-out test set, PopQA, validating the good generalizability of our method. (6) Interestingly, prefix-tuning cannot perform well for RAG, highlighting that the insertion position of the virtual tokens in SPRING is both reasonable and effective. We conduct more analysis in Appendix F.

³LLaMA Recipes, https://github.com/meta-llama/llama-recipes/blob/main/src/llama_recipes/configs/peft.py

Dataset	n -shot	LoRA	SPRING	Diff
BoolQ	0	79.30	82.97	3.67
CommonsenseQA	0	55.45	63.80	8.35
CommonsenseQA	4	59.87	67.07	7.20
GSM8K	8	17.33	31.89	14.56
MMLU	0	51.30	53.62	2.32
MMLU	5	48.76	54.96	6.20

Table 2: Performance comparison on other datasets.

4.4 Further Analysis

We further conduct a series of experiments to investigate the impact of different settings in SPRING. All the following experiments are conducted based on fine-tuning the Mistral-7b-instruct model.

4.4.1 Performance on Other Tasks

To examine the impact of different fine-tuning methods on the inherent capabilities of LLMs, we evaluate the performance of models fine-tuned by LoRA and SPRING on several other (non-RAG) tasks. These tasks are commonly used to evaluate LLMs’ reasoning, mathematical abilities, and world knowledge, including BoolQ (Clark et al., 2019), CommonsenseQA (Talmor et al., 2019), GSM8K (Cobbe et al., 2021), and MMLU (Hendrycks et al., 2021). The experimental results are shown in Table 2.⁴ From the results, we can observe: (1) Thanks to the plug-and-play design of our method, SPRING can revert to the original LLMs by not using virtual tokens. Therefore, it successfully preserves the original capabilities of the LLMs. In contrast, LoRA, which adjusts the model’s parameters for RAG tasks, inevitably compromises the model’s performance on other tasks. (2) A noticeable decline is observed in the few-shot evaluation, reflecting a decrease in the in-context learning abilities of LLMs. This decline may stem from the fact that RAG fine-tuning does not incorporate in-context learning capabilities. Besides, fine-tuning for RAG tasks may lead the model to overfit to specific task formats, thereby impairing its general generation abilities (more empirical studies are detailed in Appendix G).

4.4.2 Impact of Token Quantity

In SPRING, we design a scalable training approach that enables to use arbitrary numbers of virtual to-

⁴We notice that our results are quite different from those officially reported, which we attribute to the impact of different prompts. Since official prompts for testing are unavailable, we provide the prompts we used in Appendix C to facilitate reproducibility.

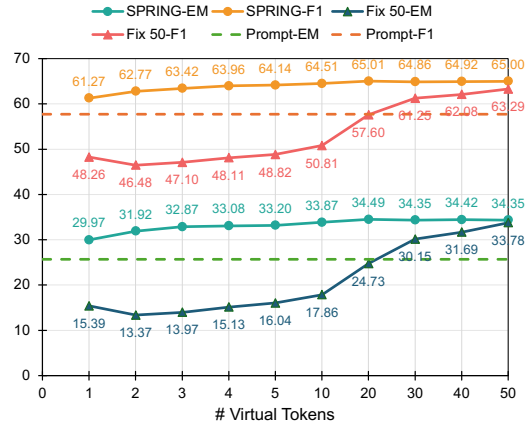


Figure 4: Average performance on nine QA datasets with various numbers of virtual tokens.

Retriever	Prompt		SPRING	
	EM	F1	EM	F1
BM25	21.23	54.94	30.94	62.73
BGE-base	23.07	56.12	31.81	63.46
E5-base	24.38	56.84	33.34	64.49
E5-large	25.66	57.70	34.35	65.00
Average	23.58	56.40	32.61	63.92
Variance	2.69	1.02	1.75	0.78

Table 3: Average performance on nine QA datasets with different retrievers.

kens in inference. To validate its effectiveness, we test the performance of our method with various numbers of virtual tokens and compare it with a variant model trained with a fixed number of tokens ($k = 50$). The experimental results are illustrated in Figure 4. In general, we can observe that the performance of SPRING increases with more virtual tokens used. Surprisingly, SPRING can significantly enhance LLMs’ performance in RAG scenarios with just a single token, which is very encouraging.⁵ In comparison, training with a fixed number of tokens limits the flexibility of SPRING, making it can only be used with the same number of tokens in inference (*i.e.*, $k = 50$).

4.4.3 Effects of Different Retrievers

In our experiments, SPRING is fine-tuned using passages retrieved by E5-large. To investigate its effectiveness with other retrievers, we conduct an experiment by testing its performance with passages retrieved by BM25, BGE-base, and E5-large. The results are presented in Table 3. First, SPRING achieves consistent improvement over the origi-

⁵This varies across different LLMs (see Appendix H).

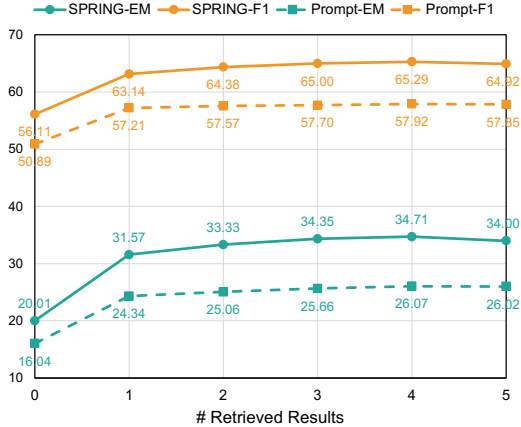


Figure 5: Average performance on nine QA datasets with different number of retrieved passages.

nal model using manually crafted prompt, thereby confirming the generalizability of our approach. Second, compared to the original model, the performance gap (variance) among different retrievers becomes smaller, highlighting SPRING’s robustness to variations in retrievers. Finally, even fine-tuned with a superior retriever (*i.e.*, E5-large), SPRING maintains strong performance well with less effective retrievers (such as BM25). This indicates that our method can effectively adapt to varying quality of retrieved results. Hence, there is no necessity to retrain the virtual tokens with each update of retrievers in practical applications, significantly enhancing its applicability.

4.4.4 Influence of Retrieved Passages

During the fine-tuning of SPRING, we construct training samples by randomly selecting the top- m ($m \in [1, 5]$) retrieved passages. This aims to enhance SPRING’s adaptability by ensuring it can operate effectively with varying numbers of retrieved passages in real-world scenarios. To evaluate the effect of this training strategy, we test the SPRING’s performance across a range from zero to five passages. Figure 5 illustrates the results. We can find that SPRING’s performance gradually improves as more retrieved passages are used ($m = 0 \rightarrow 4$), suggesting that more retrieved passages contribute valuable knowledge for question answering. However, the performance peaks at four passages and declines when more passages are added. This decrease could be attributed to noise accumulation within the retrieved knowledge, a phenomenon also reported in recent studies (Yoran et al., 2023; Wu et al., 2024). Despite this, the use of retrieved pas-

Training \rightarrow	TQA		NQ		Mix	
Test \downarrow	EM	F1	EM	F1	EM	F1
TQA	62.80	84.65	65.51	84.73	65.71	85.26
NQ	32.19	64.98	45.26	72.68	42.35	70.73
HQA	22.97	56.95	28.11	59.45	35.26	65.44
SQuAD	25.24	61.39	30.81	64.32	33.67	66.99
WebQ	26.03	62.40	34.13	67.30	31.84	64.78
2Wiki	17.32	54.41	25.43	58.21	31.80	62.03
CoQA	6.05	36.61	7.62	38.54	13.28	42.41
MARCO	3.26	31.88	3.88	33.33	6.57	53.48
PopQA	44.07	72.50	48.28	74.07	48.71	73.90
Average	26.66	58.42	32.11	61.40	34.35	65.00

Table 4: Performance comparison between training on a specific dataset or a mixture of all datasets.

sages still results in performance gains compared to scenarios without retrieval ($m = 0$), highlighting again the benefits of RAG.

4.4.5 Cross-Dataset Generalizability

Inspired by previous studies in multi-task learning (Raffel et al., 2020; Khashabi et al., 2020), we mix eight QA datasets for training as they require similar LLM capabilities (*e.g.*, reasoning). To study the impact of this strategy, we conduct experiments by training SPRING on each dataset individually and then testing its performance on the others. Table 4 shows partial results, and more results are available at Appendix E. As indicated, training on a mixed dataset generally enhances performance on most datasets, thereby validating the benefits of multi-task learning. While training on a single dataset, such as NQ, may yield superior results on its specific test set, such improvements often fail to generalize to other datasets. Notably, training solely on NQ may negatively impact performance on MS MARCO, where the original LLM using a prompt could outperform it. These findings inspire us to carefully consider the interaction between different datasets when applying our method in future applications.

5 Conclusion

In this paper, we introduced scalable and pluggable virtual tokens for retrieval-augmented large language models. Our method, SPRING, serves as a parameter-efficient fine-tuning approach that significantly enhances RAG performance with the addition of only 0.2M trainable parameters. More importantly, the plug-and-play nature of our approach successfully preserves the performance of LLMs on non-RAG tasks, while its scalable train-

ing strategy broadens the method’s applicational flexibility. Through extensive experiments across various datasets, we have demonstrated the effectiveness, generalizability, flexibility, and high efficiency of our method. We believe that our research will foster further integration of information retrieval and LLMs, and advance the development of other parameter-efficient fine-tuning technologies for LLMs.

Limitations

In this work, we introduced a new parameter-efficient fine-tuning method for RAG. By employing scalable and pluggable virtual tokens, our method not only significantly enhances the RAG performance of LLMs but also preserves their general capabilities. However, there are still several limitations in our current work that offer avenues for future research.

First, as discussed in Section 4.4.2, while increasing the number of virtual tokens generally leads to improvements, these benefits are subject to the law of diminishing marginal utility, indicating a performance upper-bound for our method. The potential reason is that our SPRING only fine-tunes the embeddings of the added tokens, which may have limited influence on LLMs’ inference process. Second, compared to LoRA, which optimizes LLMs’ parameters in each layer of LLMs, our SPRING performs slightly worse. This is potentially because our optimization is restricted to the embedding layer only. Therefore, it is interesting to explore a method that optimizes more parameters of LLMs but can still work in a plug-and-play manner. Finally, due to the limited computational resources, our main experiments are conducted on models up to 7B parameters. Although we have demonstrated the effectiveness of our method on 13B models, its performance on larger models, such as those with 30B or 70B parameters, remains untested but holds promise.

References

Jonathan Berant, Andrew Chou, Roy Frostig, and Percy Liang. 2013. [Semantic parsing on freebase from question-answer pairs](#). In *Proceedings of the 2013 Conference on Empirical Methods in Natural Language Processing, EMNLP 2013, 18-21 October 2013, Grand Hyatt Seattle, Seattle, Washington, USA, A meeting of SIGDAT, a Special Interest Group of the ACL*, pages 1533–1544. ACL.

Sebastian Borgeaud, Arthur Mensch, Jordan Hoffmann, Trevor Cai, Eliza Rutherford, Katie Millican, George van den Driessche, Jean-Baptiste Lespiau, Bogdan Damoc, Aidan Clark, Diego de Las Casas, Aurelia Guy, Jacob Menick, Roman Ring, Tom Hennigan, Saffron Huang, Loren Maggiore, Chris Jones, Albin Cassirer, Andy Brock, Michela Paganini, Geoffrey Irving, Oriol Vinyals, Simon Osindero, Karen Simonyan, Jack W. Rae, Erich Elsen, and Laurent Sifre. 2022. [Improving language models by retrieving from trillions of tokens](#). In *International Conference on Machine Learning, ICML 2022, 17-23 July 2022, Baltimore, Maryland, USA*, volume 162 of *Proceedings of Machine Learning Research*, pages 2206–2240. PMLR.

Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. 2020. [Language models are few-shot learners](#). In *Advances in Neural Information Processing Systems 33: Annual Conference on Neural Information Processing Systems 2020, NeurIPS 2020, December 6-12, 2020, virtual*.

Ting Chen, Simon Kornblith, Mohammad Norouzi, and Geoffrey E. Hinton. 2020. [A simple framework for contrastive learning of visual representations](#). In *Proceedings of the 37th International Conference on Machine Learning, ICML 2020, 13-18 July 2020, Virtual Event*, volume 119 of *Proceedings of Machine Learning Research*, pages 1597–1607. PMLR.

Zhe Chen, Yuchen Duan, Wenhai Wang, Junjun He, Tong Lu, Jifeng Dai, and Yu Qiao. 2023. [Vision transformer adapter for dense predictions](#). In *The Eleventh International Conference on Learning Representations, ICLR 2023, Kigali, Rwanda, May 1-5, 2023*. OpenReview.net.

Christopher Clark, Kenton Lee, Ming-Wei Chang, Tom Kwiatkowski, Michael Collins, and Kristina Toutanova. 2019. [Boolq: Exploring the surprising difficulty of natural yes/no questions](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2019, Minneapolis, MN, USA, June 2-7, 2019, Volume 1 (Long and Short Papers)*, pages 2924–2936. Association for Computational Linguistics.

Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, Christopher Hesse, and John Schulman. 2021. [Training verifiers to solve math word problems](#). *CoRR*, abs/2110.14168.

- Tim Dettmers, Artidoro Pagnoni, Ari Holtzman, and Luke Zettlemoyer. 2023. [Qlora: Efficient finetuning of quantized llms](#). In *Advances in Neural Information Processing Systems 36: Annual Conference on Neural Information Processing Systems 2023, NeurIPS 2023, New Orleans, LA, USA, December 10 - 16, 2023*.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [BERT: pre-training of deep bidirectional transformers for language understanding](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2019, Minneapolis, MN, USA, June 2-7, 2019, Volume 1 (Long and Short Papers)*, pages 4171–4186. Association for Computational Linguistics.
- Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, Jakob Uszkoreit, and Neil Houlsby. 2021. [An image is worth 16x16 words: Transformers for image recognition at scale](#). In *9th International Conference on Learning Representations, ICLR 2021, Virtual Event, Austria, May 3-7, 2021*. OpenReview.net.
- Peng Gao, Shijie Geng, Renrui Zhang, Teli Ma, Rongyao Fang, Yongfeng Zhang, Hongsheng Li, and Yu Qiao. 2024. [Clip-adapter: Better vision-language models with feature adapters](#). *Int. J. Comput. Vis.*, 132(2):581–595.
- Kelvin Guu, Kenton Lee, Zora Tung, Panupong Pasupat, and Ming-Wei Chang. 2020. [Retrieval augmented language model pre-training](#). In *Proceedings of the 37th International Conference on Machine Learning, ICML 2020, 13-18 July 2020, Virtual Event*, volume 119 of *Proceedings of Machine Learning Research*, pages 3929–3938. PMLR.
- Kaiming He, Haoqi Fan, Yuxin Wu, Saining Xie, and Ross B. Girshick. 2020. [Momentum contrast for unsupervised visual representation learning](#). In *2020 IEEE/CVF Conference on Computer Vision and Pattern Recognition, CVPR 2020, Seattle, WA, USA, June 13-19, 2020*, pages 9726–9735. Computer Vision Foundation / IEEE.
- Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. 2021. [Measuring massive multitask language understanding](#). In *9th International Conference on Learning Representations, ICLR 2021, Virtual Event, Austria, May 3-7, 2021*. OpenReview.net.
- Xanh Ho, Anh-Khoa Duong Nguyen, Saku Sugawara, and Akiko Aizawa. 2020. [Constructing A multi-hop QA dataset for comprehensive evaluation of reasoning steps](#). In *Proceedings of the 28th International Conference on Computational Linguistics, COLING 2020, Barcelona, Spain (Online), December 8-13, 2020*, pages 6609–6625. International Committee on Computational Linguistics.
- Neil Houlsby, Andrei Giurgiu, Stanislaw Jastrzebski, Bruna Morrone, Quentin de Laroussilhe, Andrea Gesmundo, Mona Attariyan, and Sylvain Gelly. 2019. [Parameter-efficient transfer learning for NLP](#). In *Proceedings of the 36th International Conference on Machine Learning, ICML 2019, 9-15 June 2019, Long Beach, California, USA*, volume 97 of *Proceedings of Machine Learning Research*, pages 2790–2799. PMLR.
- Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. 2022. [Lora: Low-rank adaptation of large language models](#). In *The Tenth International Conference on Learning Representations, ICLR 2022, Virtual Event, April 25-29, 2022*. OpenReview.net.
- Zhiqiang Hu, Lei Wang, Yihuai Lan, Wanyu Xu, Ee-Peng Lim, Lidong Bing, Xing Xu, Soujanya Poria, and Roy Ka-Wei Lee. 2023. [Llm-adapters: An adapter family for parameter-efficient fine-tuning of large language models](#). In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing, EMNLP 2023, Singapore, December 6-10, 2023*, pages 5254–5276. Association for Computational Linguistics.
- Gautier Izacard, Mathilde Caron, Lucas Hosseini, Sebastian Riedel, Piotr Bojanowski, Armand Joulin, and Edouard Grave. 2022. [Unsupervised dense information retrieval with contrastive learning](#). *Trans. Mach. Learn. Res.*, 2022.
- Gautier Izacard, Patrick S. H. Lewis, Maria Lomeli, Lucas Hosseini, Fabio Petroni, Timo Schick, Jane Dwivedi-Yu, Armand Joulin, Sebastian Riedel, and Edouard Grave. 2023. [Atlas: Few-shot learning with retrieval augmented language models](#). *J. Mach. Learn. Res.*, 24:251:1–251:43.
- Ziwei Ji, Nayeon Lee, Rita Frieske, Tiezheng Yu, Dan Su, Yan Xu, Etsuko Ishii, Yejin Bang, Andrea Madotto, and Pascale Fung. 2023. [Survey of hallucination in natural language generation](#). *ACM Comput. Surv.*, 55(12):248:1–248:38.
- Jiajie Jin, Yutao Zhu, Yujia Zhou, and Zhicheng Dou. 2024. [BIDER: bridging knowledge inconsistency for efficient retrieval-augmented llms via key supporting evidence](#). *CoRR*, abs/2402.12174.
- Mandar Joshi, Eunsol Choi, Daniel S. Weld, and Luke Zettlemoyer. 2017. [Triviaqa: A large scale distantly supervised challenge dataset for reading comprehension](#). In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics, ACL 2017, Vancouver, Canada, July 30 - August 4, Volume 1: Long Papers*, pages 1601–1611. Association for Computational Linguistics.
- Daniel Khashabi, Sewon Min, Tushar Khot, Ashish Sabharwal, Oyvind Tafjord, Peter Clark, and Hannaneh Hajishirzi. 2020. [Unifiedqa: Crossing format boundaries with a single QA system](#). In *Findings of the Association for Computational Linguistics: EMNLP*

- 2020, *Online Event, 16-20 November 2020*, volume EMNLP 2020 of *Findings of ACL*, pages 1896–1907. Association for Computational Linguistics.
- Tom Kwiatkowski, Jennimaria Palomaki, Olivia Redfield, Michael Collins, Ankur P. Parikh, Chris Alberti, Danielle Epstein, Illia Polosukhin, Jacob Devlin, Kenton Lee, Kristina Toutanova, Llion Jones, Matthew Kelcey, Ming-Wei Chang, Andrew M. Dai, Jakob Uszkoreit, Quoc Le, and Slav Petrov. 2019. [Natural questions: a benchmark for question answering research](#). *Trans. Assoc. Comput. Linguistics*, 7:452–466.
- Brian Lester, Rami Al-Rfou, and Noah Constant. 2021. [The power of scale for parameter-efficient prompt tuning](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing, EMNLP 2021, Virtual Event / Punta Cana, Dominican Republic, 7-11 November, 2021*, pages 3045–3059. Association for Computational Linguistics.
- Mike Lewis, Yinhan Liu, Naman Goyal, Marjan Ghazvininejad, Abdelrahman Mohamed, Omer Levy, Veselin Stoyanov, and Luke Zettlemoyer. 2020a. [BART: denoising sequence-to-sequence pre-training for natural language generation, translation, and comprehension](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics, ACL 2020, Online, July 5-10, 2020*, pages 7871–7880. Association for Computational Linguistics.
- Patrick S. H. Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, Sebastian Riedel, and Douwe Kiela. 2020b. [Retrieval-augmented generation for knowledge-intensive NLP tasks](#). In *Advances in Neural Information Processing Systems 33: Annual Conference on Neural Information Processing Systems 2020, NeurIPS 2020, December 6-12, 2020, virtual*.
- Xiang Lisa Li and Percy Liang. 2021. [Prefix-tuning: Optimizing continuous prompts for generation](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing, ACL/IJCNLP 2021, (Volume 1: Long Papers), Virtual Event, August 1-6, 2021*, pages 4582–4597. Association for Computational Linguistics.
- Xi Victoria Lin, Xilun Chen, Mingda Chen, Weijia Shi, Maria Lomeli, Rich James, Pedro Rodriguez, Jacob Kahn, Gergely Szilvassy, Mike Lewis, Luke Zettlemoyer, and Scott Yih. 2023. [RA-DIT: retrieval-augmented dual instruction tuning](#). *CoRR*, abs/2310.01352.
- Zhaojiang Lin, Andrea Madotto, and Pascale Fung. 2020. [Exploring versatile generative language model via parameter-efficient transfer learning](#). In *Findings of the Association for Computational Linguistics: EMNLP 2020, Online Event, 16-20 November 2020*, volume EMNLP 2020 of *Findings of ACL*, pages 441–459. Association for Computational Linguistics.
- Nelson F. Liu, Kevin Lin, John Hewitt, Ashwin Paranjape, Michele Bevilacqua, Fabio Petroni, and Percy Liang. 2023. [Lost in the middle: How language models use long contexts](#). *CoRR*, abs/2307.03172.
- Xiao Liu, Kaixuan Ji, Yicheng Fu, Zhengxiao Du, Zhilin Yang, and Jie Tang. 2021a. [P-tuning v2: Prompt tuning can be comparable to fine-tuning universally across scales and tasks](#). *CoRR*, abs/2110.07602.
- Xiao Liu, Yanan Zheng, Zhengxiao Du, Ming Ding, Yujie Qian, Zhilin Yang, and Jie Tang. 2021b. [GPT understands, too](#). *CoRR*, abs/2103.10385.
- Alex Mallen, Akari Asai, Victor Zhong, Rajarshi Das, Daniel Khatabi, and Hannaneh Hajishirzi. 2023. [When not to trust language models: Investigating effectiveness of parametric and non-parametric memories](#). In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), ACL 2023, Toronto, Canada, July 9-14, 2023*, pages 9802–9822. Association for Computational Linguistics.
- Sourab Mangrulkar, Sylvain Gugger, Lysandre Debut, Younes Belkada, Sayak Paul, and Benjamin Bossan. 2022. [Peft: State-of-the-art parameter-efficient fine-tuning methods](#).
- Tri Nguyen, Mir Rosenberg, Xia Song, Jianfeng Gao, Saurabh Tiwary, Rangan Majumder, and Li Deng. 2016. [MS MARCO: A human generated machine reading comprehension dataset](#). In *Proceedings of the Workshop on Cognitive Computation: Integrating neural and symbolic approaches 2016 co-located with the 30th Annual Conference on Neural Information Processing Systems (NIPS 2016), Barcelona, Spain, December 9, 2016*, volume 1773 of *CEUR Workshop Proceedings*. CEUR-WS.org.
- OpenAI. 2023. [GPT-4 technical report](#). *CoRR*, abs/2303.08774.
- Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, Alban Desmaison, Andreas Köpf, Edward Z. Yang, Zachary DeVito, Martin Raison, Alykhan Tejani, Sasank Chilamkurthy, Benoit Steiner, Lu Fang, Junjie Bai, and Soumith Chintala. 2019. [Pytorch: An imperative style, high-performance deep learning library](#). In *Advances in Neural Information Processing Systems 32: Annual Conference on Neural Information Processing Systems 2019, NeurIPS 2019, December 8-14, 2019, Vancouver, BC, Canada*, pages 8024–8035.
- Fabio Petroni, Aleksandra Piktus, Angela Fan, Patrick S. H. Lewis, Majid Yazdani, Nicola De Cao, James Thorne, Yacine Jernite, Vladimir Karpukhin, Jean Maillard, Vassilis Plachouras, Tim Rocktäschel, and Sebastian Riedel. 2021. [KILT: a benchmark for knowledge intensive language tasks](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics:*

- Human Language Technologies, NAACL-HLT 2021, Online, June 6-11, 2021*, pages 2523–2544. Association for Computational Linguistics.
- Guanghui Qin and Jason Eisner. 2021. [Learning how to ask: Querying lms with mixtures of soft prompts](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2021, Online, June 6-11, 2021*, pages 5203–5212. Association for Computational Linguistics.
- Alec Radford, Jeff Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. 2019. Language models are unsupervised multitask learners.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. 2020. [Exploring the limits of transfer learning with a unified text-to-text transformer](#). *J. Mach. Learn. Res.*, 21:140:1–140:67.
- Pranav Rajpurkar, Jian Zhang, Konstantin Lopyrev, and Percy Liang. 2016. [Squad: 100, 000+ questions for machine comprehension of text](#). In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing, EMNLP 2016, Austin, Texas, USA, November 1-4, 2016*, pages 2383–2392. The Association for Computational Linguistics.
- Ori Ram, Yoav Levine, Itay Dalmedigos, Dor Muhlgay, Amnon Shashua, Kevin Leyton-Brown, and Yoav Shoham. 2023. [In-context retrieval-augmented language models](#). *CoRR*, abs/2302.00083.
- Sylvestre-Alvise Rebuffi, Hakan Bilen, and Andrea Vedaldi. 2017. [Learning multiple visual domains with residual adapters](#). In *Advances in Neural Information Processing Systems 30: Annual Conference on Neural Information Processing Systems 2017, December 4-9, 2017, Long Beach, CA, USA*, pages 506–516.
- Siva Reddy, Danqi Chen, and Christopher D. Manning. 2019. [Coqa: A conversational question answering challenge](#). *Trans. Assoc. Comput. Linguistics*, 7:249–266.
- Stephen E. Robertson and Hugo Zaragoza. 2009. [The probabilistic relevance framework: BM25 and beyond](#). *Found. Trends Inf. Retr.*, 3(4):333–389.
- Weijia Shi, Sewon Min, Michihiro Yasunaga, Minjoon Seo, Rich James, Mike Lewis, Luke Zettlemoyer, and Wen-tau Yih. 2023. [REPLUG: retrieval-augmented black-box language models](#). *CoRR*, abs/2301.12652.
- Alon Talmor, Jonathan Herzig, Nicholas Lourie, and Jonathan Berant. 2019. [Commonsenseqa: A question answering challenge targeting commonsense knowledge](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2019, Minneapolis, MN, USA, June 2-7, 2019, Volume 1 (Long and Short Papers)*, pages 4149–4158. Association for Computational Linguistics.
- Jiejun Tan, Zhicheng Dou, Yutao Zhu, Peidong Guo, Kun Fang, and Ji-Rong Wen. 2024. [Small models, big insights: Leveraging slim proxy models to decide when and what to retrieve for llms](#). *CoRR*, abs/2402.12052.
- Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, Aurélien Rodriguez, Armand Joulin, Edouard Grave, and Guillaume Lample. 2023. [Llama: Open and efficient foundation language models](#). *CoRR*, abs/2302.13971.
- Zhongwei Wan, Xin Wang, Che Liu, Samiul Alam, Yu Zheng, Jiachen Liu, Zhongnan Qu, Shen Yan, Yi Zhu, Quanlu Zhang, Mosharaf Chowdhury, and Mi Zhang. 2023. [Efficient large language models: A survey](#). *CoRR*, abs/2312.03863.
- Liang Wang, Nan Yang, Xiaolong Huang, Binxing Jiao, Linjun Yang, Daxin Jiang, Rangan Majumder, and Furu Wei. 2022. [Text embeddings by weakly-supervised contrastive pre-training](#). *CoRR*, abs/2212.03533.
- Zhiruo Wang, Jun Araki, Zhengbao Jiang, Md. Rizwan Parvez, and Graham Neubig. 2023. [Learning to filter context for retrieval-augmented generation](#). *CoRR*, abs/2311.08377.
- Siye Wu, Jian Xie, Jiangjie Chen, Tinghui Zhu, Kai Zhang, and Yanghua Xiao. 2024. [How easily do irrelevant inputs skew the responses of large language models?](#) *CoRR*, abs/2404.03302.
- Shitao Xiao, Zheng Liu, Peitian Zhang, and Niklas Muennighof. 2023. [C-pack: Packaged resources to advance general chinese embedding](#). *CoRR*, abs/2309.07597.
- Zhilin Yang, Peng Qi, Saizheng Zhang, Yoshua Bengio, William W. Cohen, Ruslan Salakhutdinov, and Christopher D. Manning. 2018. [Hotpotqa: A dataset for diverse, explainable multi-hop question answering](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing, Brussels, Belgium, October 31 - November 4, 2018*, pages 2369–2380. Association for Computational Linguistics.
- Ori Yoran, Tomer Wolfson, Ori Ram, and Jonathan Berant. 2023. [Making retrieval-augmented language models robust to irrelevant context](#). *CoRR*, abs/2310.01558.
- Renrui Zhang, Jiaming Han, Aojun Zhou, Xiangfei Hu, Shilin Yan, Pan Lu, Hongsheng Li, Peng Gao, and Yu Qiao. 2023a. [Llama-adapter: Efficient fine-tuning of language models with zero-init attention](#). *CoRR*, abs/2303.16199.

Yue Zhang, Yafu Li, Leyang Cui, Deng Cai, Lemao Liu, Tingchen Fu, Xinting Huang, Enbo Zhao, Yu Zhang, Yulong Chen, Longyue Wang, Anh Tuan Luu, Wei Bi, Freda Shi, and Shuming Shi. 2023b. [Siren's song in the AI ocean: A survey on hallucination in large language models](#). *CoRR*, abs/2309.01219.

Yutao Zhu, Huaying Yuan, Shuting Wang, Jiongnan Liu, Wenhan Liu, Chenlong Deng, Zhicheng Dou, and Ji-Rong Wen. 2023. [Large language models for information retrieval: A survey](#). *CoRR*, abs/2308.07107.

Yutao Zhu, Peitian Zhang, Chenghao Zhang, Yifei Chen, Binyu Xie, Zhicheng Dou, Zheng Liu, and Ji-Rong Wen. 2024. [INTERS: unlocking the power of large language models in search with instruction tuning](#). *CoRR*, abs/2401.06532.

```

def add_special_tokens(model, tokenizer, new_embeddings):
    # get original LLMs' embeddings
    embedding_layer = model.embed_tokens
    embedding_weights = embedding_layer.weight
    original_vocab_size, embedding_dim = embedding_weights.shape

    # initialize special tokens and add them into the vocabulary
    added_tokens = [f"[ref{i}]" for i in range(1, 51)]
    tokenizer.add_tokens(added_tokens)

    # add trained embeddings into the original embeddings
    new_vocab_size = len(tokenizer)
    new_embedding_weights = torch.zeros(new_vocab_size, embedding_dim)
    new_embedding_weights[:original_vocab_size, :] = embedding_weights
    new_embedding_weights[original_vocab_size:, :] = new_embeddings
    embedding_layer.weight.data = new_embedding_weights
    return model, tokenizer

new_embeddings = ...
model, tokenizer = add_special_tokens(model, tokenizer, new_embeddings)
added_tokens = [f"[ref{i}]" for i in range(1, 51)]
added_tokens = "".join(added_tokens)
retrieved_results = ...
question = ...
input_text = retrieved_results + added_tokens + question
# using the input text for generation...

```

Figure 6: An example code snippet of using our SPRING in practice.

A Example Code for Usage

We provide an example of how to use our SPRING in practice. During the initialization phase, SPRING merges the trained embeddings with the original embeddings of the LLM, and assigns these new embeddings to newly added special tokens. These special tokens are then inserted between the retrieved results and the user input for generation.

B Datasets

We use the following datasets in our experiments, and their statistics are shown in Table 5.

(1) **TriviaQA** (Joshi et al., 2017) is a reading comprehension dataset including question-answering pairs created by trivia enthusiasts, accompanied by independently gathered evidence documents. The questions are relatively complex and compositional, which require advanced reasoning to derive answers. This dataset is licensed under Apache 2.0 License.

(2) **Natural Questions** (Kwiatkowski et al., 2019) is a question-answering dataset. The questions are collected from the Google search engine, with answers annotated based on the Wikipedia pages. All questions are from real users. This dataset is licensed under Apache 2.0 License.

(3) **HotpotQA** (Yang et al., 2018) is a question-answering dataset with natural and multi-hop questions. All question-answer pairs are Wikipedia-based, where the questions are diverse and include

factoid comparison questions. This dataset is licensed under CC BY-SA 4.0 License.

(4) **SQuAD 1.1** (Rajpurkar et al., 2016) is a reading comprehension dataset derived from Wikipedia articles. The questions are posed by crowd workers while the answers are text segments from the corresponding passages. This dataset is licensed under CC BY-SA 4.0 License.

(5) **Web Questions** (Berant et al., 2013) is a question-answering dataset using Freebase as the knowledge base. The questions are collected via the Google Suggest API, and the answers are defined as Freebase entities. This dataset is licensed under CC BY 4.0 License.

(6) **2WikiMultiHopQA** (Ho et al., 2020) is a multi-hop question-answering dataset designed to test reasoning and inference skills. It introduces evidence information containing a reasoning path to ensure the quality and multi-hop nature of the questions. This dataset is licensed under Apache 2.0 License.

(7) **CoQA** (Reddy et al., 2019) is a conversational question-answering dataset, which is obtained from human conversations about text passages from various domains. To keep the completeness of the question, we only use the first-round questions and their corresponding answers. This dataset contains data from several sources, under the license of CC BY-SA 4.0, MSR-LA, Apache, and RACE-specific License.

(8) **MS MARCO** (Nguyen et al., 2016) is a question-answering dataset featuring real Bing questions and human-generated answers. Since MS MARCO is extremely large, to balance the data amount in each dataset, we randomly sample 80,000 examples from the training set for fine-tuning. Besides, we also filter out questions without answers in the test set for evaluation. This dataset is licensed under the MIT License.

(9) **PopQA** (Mallen et al., 2023) is an open-domain QA dataset with fine-grained and long-tail Wikidata entities, Wikipedia page views, and the information of relationship type. Since LLMs often struggle with less popular factual knowledge, retrieval augmentation is particularly beneficial for this dataset. This dataset is licensed under the MIT License.

(10) **BoolQ** (Clark et al., 2019) is a reading comprehension dataset, where each sample consists of a question, a passage excerpt, and a yes/no answer. The questions are often complex and require difficult entailment-like inference to solve. Therefore,

QA Dataset	# Training	# Test	Average Input Length	Average Output Length
Trivia QA	78,785	11,313	20.93	5.16
Natural Questions	79,168	3,610	11.31	4.66
Hotpot QA	90,447	7,405	26.13	4.38
SQuAD 1.1	87,599	10,570	13.89	5.56
Web Questions	3,778	2,032	10.04	4.10
2WikiMultiHopQA	15,000	12,576	19.33	4.10
CoQA	7,199	500	7.89	3.89
MS MARCO	80,000	55,636	7.76	20.75
PopQA	-	14,267	9.24	3.48
BoolQ	-	3,270	10.70	1.00
CommonsenseQA	-	1,221	15.91	1.00
GSM8K	-	1,319	64.90	3.29
MMLU	-	14,042	63.91	9.62

Retrieval Set	# Passages	Average Length
Wikipedia Passages	21,015,324	169.57
MS MARCO Passages	8,841,823	95.73

Table 5: Statistics of all datasets. The input/output length is the number of tokens calculated by Mistral tokenizer.

it is often used to evaluate LLMs’ text comprehension capability. This dataset is licensed under CC BY-SA 3.0 License.

(11) **CommonsenseQA** (Talmor et al., 2019) is a commonsense question-answering dataset with multiple-choice questions designed to distinguish between related concepts. It is commonly used for evaluating LLMs’ commonsense reasoning ability. This dataset is licensed under the MIT License.

(12) **GSM8K** (Cobbe et al., 2021) is a dataset that contains high-quality linguistically diverse grade school math word problems to measure models’ ability of multi-step mathematical reasoning. This dataset is licensed under the MIT License.

(13) **MMLU** (Hendrycks et al., 2021) is a comprehensive aggregated benchmark. It contains 57 tasks to measure LLMs’ knowledge across different subjects. This dataset is licensed under the MIT License.

C Prompt

Figure 7 illustrates the prompts used in the baseline methods. In the Concat method, we simply concatenate the retrieval results and the question for evaluation. In the Prompt method, we use a manually-crafted prompt to indicate the incorporation of retrieval information.

Figure 8 and Figure 9 present the prompts used for the BoolQ, CommonsenseQA, GSM8K, and MMLU datasets. We follow the practices in lm-evaluation-harness and adopt different strategies for performing evaluation on these datasets.⁶ Specifically, for the BoolQ dataset, we

⁶<https://github.com/EleutherAI/>

(1) Prompt used in Concat	
<u>Input</u>	
[1] {ref 1}	
[2] {ref 2}	
...	
[k] {ref k}	
{Question}	
<u>Output</u>	
{Answer}	

(2) Prompt used in Prompt	
<u>Input</u>	
[1] {ref 1}	
[2] {ref 2}	
...	
[k] {ref k}	
According to the previous relevant passages, please answer the following question. Only return the answer without any other words.	
Question: {Question}	
Answer:	
<u>Output</u>	
{Answer}	

Figure 7: The prompt used in the baseline methods. “{x}” is the placeholder which will be replaced by the real data.

compare the generation probabilities of the token “true” and “false”, and then we select the token with the higher probability as the predicted result. For CommonsenseQA and MMLU, we determine the answer by comparing the generation probabilities of each option with its content and choosing the option with the highest probability. For GSM8K, we provide LLMs with chain-of-thought demonstrations and extract the answer from the generated text. It is worth noting that the choice of prompt

lm-evaluation-harness

Prompt used in BoolQ	
<u>Input</u>	According to the given passages, please answer the following question. Only return true or false. Passage: {Passage}
	Question: {Question}
	Answer:
<u>Output</u>	true / false
Prompt used in CommonsenseQA	
<u>Input</u>	Please the following question about {Question type}.
	Question: {Question}
	Choices:
	A. {Option A}
	B. {Option B}
	C. {Option C}
	D. {Option D}
	E. {Option E}
	Answer:
<u>Output</u>	A. {Option A} / B. {Option B} / C. {Option C} / D. {Option D} / E. {Option E}

Figure 8: The prompt used in the BoolQ and CommonsenseQA datasets. “{x}” is the placeholder which will be replaced by the real data.

significantly affects the performance of LLMs, so we select the most effective prompt for the vanilla model and apply it across other methods for evaluation. We also observe that our results are worse than those officially reported, and we attribute the gap to the different prompts used for evaluation. Unfortunately, the official prompts are not released publicly, so we are limited to selecting the best-performing prompt from our experiments.

D Implementation Details

We use PyTorch (Paszke et al., 2019) and Huggingface Accelerate library to implement all methods. The learning rate is set as $1e-4$ with a warm-up ratio of 0.1. All methods are trained for three epochs, with a training batch size of 256. We use eight NVIDIA A800 GPUs for training. Training our SPRING for Mistral-7b models consumes around 2.3 hours per epoch.

E Full Experimental Results

In the main body of our paper, we present the results using Mistral-7b-instruct as the backbone model. We also apply our

Prompt used in GSM8K	
<u>Input</u>	Question: {Question} Answer:
<u>Output</u>	{Reasoning process} The answer is: {Answer}
Prompt used in MMLU	
<u>Input</u>	The following are multiple choice questions about {Subject}.
	Question: {Question}
	Choices:
	A. {Option A}
	B. {Option B}
	C. {Option C}
	D. {Option D}
	Correct answer:
<u>Output</u>	A. {Option A} / B. {Option B} / C. {Option C} / D. {Option D}

Figure 9: The prompt used in the GSM8K and MMLU datasets. “{x}” is the placeholder which will be replaced by the real data.

method to Mistral-7b-base, LLaMA-2-7b-chat, LLaMA-2-7b-base, LLaMA-2-13b-base, and LLaMA-2-13b-chat. Their results are shown in Table 6, Table 7, and Table 8. We can observe that SPRING can achieve consistent improvement for all models. Specifically, using prompt is very effective for instruction-tuned models (*i.e.*, Mistral-instruct and LLaMA-chat) but less so for base models. This is because the base model cannot understand the instructions to read the retrieved results and provide correct answers. Mistral series models perform slightly better than LLaMA series models of the same size. This is consistent with their officially reported benchmark performance. Furthermore, larger models tend to perform better than smaller models, and our SPRING can bring improvement across models of different sizes. In future, we plan to extend our method to much larger models (such as 30B or 70B) when more computing resources available.

F Impact of Token Insertion Position

In SPRING, virtual tokens (T) are strategically inserted between the retrieved results (R) and the question (Q). Generally, there are three possible insertion positions:

- $[T, R, Q]$: The virtual tokens are added at the beginning of the sequence, akin to prefix-tuning. In this setup, due to the auto-

	Mistral-7b-base				Mistral-7b-instruct			
	Prompt		SPRING		Prompt		SPRING	
	EM	F1	EM	F1	EM	F1	EM	F1
TQA	0.00	17.03	68.54	86.89	57.79	80.33	65.71	85.26
NQ	0.08	7.47	46.90	73.28	28.99	58.72	42.35	70.73
HQA	0.00	12.22	39.78	68.48	26.36	56.15	35.26	65.44
SQuAD	0.01	12.04	37.13	69.02	23.92	57.66	33.67	66.99
WebQ	0.00	11.61	35.25	66.44	17.53	52.10	31.84	64.78
2Wiki	0.00	14.48	35.42	64.13	22.64	55.58	31.80	62.03
CoQA	0.00	8.15	15.23	43.94	8.20	36.72	13.28	42.41
MS MARCO	0.08	21.21	7.59	53.90	5.73	53.81	6.57	53.48
PopQA	0.00	14.72	50.37	74.84	39.79	68.26	48.71	73.90
Average	0.02	13.21	37.36	66.77	25.66	57.70	34.35	65.00

Table 6: Performance of SPRING with Mistral-7b models.

	LLaMA-2-7b-base				LLaMA-2-7b-chat			
	Prompt		SPRING		Prompt		SPRING	
	EM	F1	EM	F1	EM	F1	EM	F1
TQA	0.01	34.37	65.42	85.30	59.84	81.75	66.95	85.59
NQ	0.00	22.31	43.48	71.04	32.46	62.10	42.13	70.57
HQA	0.00	26.17	35.48	65.59	26.39	56.58	33.88	64.47
SQuAD	0.00	26.49	35.10	67.34	24.57	59.40	33.36	66.60
WebQ	0.00	23.76	31.20	63.73	20.85	57.22	31.10	64.31
2Wiki	0.00	25.83	30.61	60.90	20.69	55.82	30.86	61.45
CoQA	0.00	16.08	13.67	42.73	8.59	38.56	14.06	43.99
MS MARCO	0.00	51.75	7.43	54.11	5.32	48.42	7.18	52.85
PopQA	0.00	32.17	49.93	74.41	45.08	72.23	49.00	73.98
Average	0.00	28.77	34.70	65.02	27.09	59.12	34.28	64.87

Table 7: Performance of SPRING with LLaMA-2-7b models.

regressive nature of LLMs, these tokens cannot access subsequent sequence information.

- $[R, T, Q]$: This is what we used in SPRING. The virtual tokens can attend to the retrieved results, while positioning the question immediately next to the answer.
- $[R, Q, T]$: The virtual tokens are added at the end of the sequence. They are able to attend to all preceding information, including both the retrieved results and the question.

We compare the performance of these three strategies. The results are shown in Table 10. It is evident that SPRING achieves the best performance among the three strategies, which demonstrates the effectiveness of our token placement design. Placing virtual tokens at the beginning of the sequence (prefix-tuning) is the worst strategy, because the added tokens cannot adapt based on the retrieved results or the question during fine-tuning. This result is different from those reported in the original prefix-tuning study (Li and Liang, 2021),

which suggested that prefix-tuning can yield better performance. We attribute this discrepancy to the different targets of general generation tasks versus RAG tasks. In general generation, all contexts are crucial for predicting the next token, hence adding trainable tokens at the beginning can effectively influence the activation of contexts. In contrast, in RAG tasks, the retrieved information is supplementary to answering the user’s question, so the virtual tokens are added to help LLMs understand and leverage the retrieved information rather than enhance the retrieved information itself. This speculation is further validated by the strong performance achieved by adding tokens at the end of the sequence, where they can also access the retrieved results. Among the three strategies, SPRING is the most effective, not only allowing the virtual tokens to utilize the retrieved information optimally but also maintaining coherence between the question and the answer being generated.

	LLaMA-2-13b-base				LLaMA-2-13b-chat			
	Prompt		SPRING		Prompt		SPRING	
	EM	F1	EM	F1	EM	F1	EM	F1
TQA	0.26	30.77	66.95	86.48	63.54	82.54	68.52	86.62
NQ	0.57	19.54	44.91	71.70	36.66	67.03	43.80	71.15
HQA	0.07	19.72	37.24	66.81	29.27	59.36	36.23	66.11
SQuAD	0.26	22.79	36.35	68.48	28.45	61.92	34.80	67.76
WebQ	0.24	20.77	32.32	64.54	20.61	55.75	31.01	64.17
2Wiki	0.10	22.63	33.32	62.85	28.01	59.20	32.32	62.43
CoQA	0.39	14.85	14.84	44.00	9.96	39.27	14.26	44.49
MS MARCO	0.57	47.30	7.36	53.71	6.24	47.68	7.51	52.94
PopQA	0.13	24.06	50.08	74.72	42.49	69.67	50.29	74.84
Average	0.29	24.71	35.93	65.92	29.47	60.27	35.42	65.61

Table 8: Performance of SPRING with LLaMA-2-13b models.

Training →	TQA		NQ		HQA		SQuAD		Mix	
Test ↓	EM	F1	EM	F1	EM	F1	EM	F1	EM	F1
TQA	62.80	84.65	65.51	84.73	66.42	85.26	67.48	85.76	65.71	85.26
NQ	32.19	64.98	45.26	72.68	40.79	70.18	37.88	67.23	42.35	70.73
HQA	22.97	56.95	28.11	59.45	36.30	66.33	30.43	61.46	35.26	65.44
SQuAD	25.24	61.39	30.81	64.32	33.37	66.36	35.01	67.83	33.67	66.99
WebQ	26.03	62.40	34.13	67.30	29.15	64.04	28.27	63.38	31.84	64.78
2Wiki	17.32	54.41	25.43	58.21	30.42	61.62	25.48	58.26	31.80	62.03
CoQA	6.05	36.61	7.62	38.54	12.50	43.12	7.62	37.74	13.28	42.41
MS MARCO	3.26	31.88	3.88	33.33	5.18	36.12	3.89	45.80	6.57	53.48
PopQA	44.07	72.50	48.28	74.07	48.80	74.32	48.40	73.83	48.71	73.90
Average	26.66	58.42	32.11	61.40	33.66	63.04	31.61	62.37	34.35	65.00

Table 9: Full results of training on a specific dataset and a mixture of all datasets.

	$[T, R, Q]$		SPRING		$[R, Q, T]$	
	EM	F1	EM	F1	EM	F1
TQA	11.74	59.97	65.71	85.26	64.90	84.65
NQ	13.04	38.22	42.35	70.73	43.16	71.30
HQA	5.79	42.59	35.26	65.44	34.00	64.27
SQuAD	7.19	39.75	33.67	66.99	34.09	66.75
WebQ	4.44	31.55	31.84	64.78	31.35	64.84
2Wiki	4.38	41.82	31.80	62.03	30.64	61.01
CoQA	1.56	20.02	13.28	42.41	12.30	41.18
MS MARCO	0.60	50.56	6.57	53.48	6.94	49.40
PopQA	10.02	44.54	48.71	73.90	46.55	72.33
Average	6.53	41.00	34.35	65.00	33.77	63.97

Table 10: Performance of different virtual token insertion positions. The best results are in bold.

G Impact of Prompt after Fine-tuning

In our experiments, we notice that models fine-tuned by certain methods (such as LoRA) are very sensitive to the prompts used for inference. To investigate this problem, we conduct an empirical study. We mainly focus on the impact of the prompt P inserted between the retrieved results and the question, formatted as $[R; P; Q]$. We consider four different prompts listed in Table 11.

Prompt 1: According to the previous relevant passages, please answer the following question. Only return the answer without any other words.\n
Prompt 2: According to the previous relevant passages, please answer the following question.\n
Prompt 3: Answer the following question based on the provided passages.\n
Prompt 4: (None)

Table 11: The prompts we used for exploring their impacts on inference.

Specifically, for LoRA, we use the first prompt during training, and test its performance with all prompts. For SPRING, it does not need a prompt in training, which can be seen as using the fourth prompt (none). We also evaluate its performance with the four prompts.

The experimental results are shown in Figure 10. It clearly reflects the prompt dependency of models fine-tuned with LoRA. LoRA achieves the highest

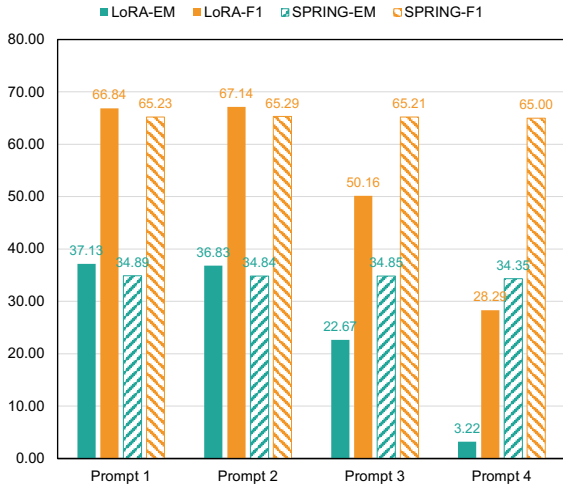


Figure 10: Performance under various prompts.

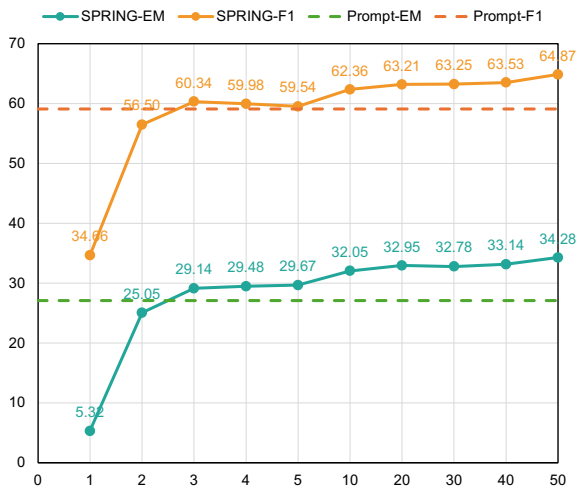


Figure 11: Average performance on nine QA datasets with various numbers of virtual tokens.

EM score of 37.13 with the first prompt, which is used during its training. The performance remains robust with the second prompt, which is very similar to the first but omits the last sentence. However, the third prompt, while semantically similar to the first, involves different phrasing and significantly impacts LoRA’s performance. Notably, in scenarios where no prompt is used (the fourth prompt), LoRA’s performance drops sharply, even worse than that of the original model. These results indicate that fine-tuning with LoRA may lead to overfitting problems. This may also be the reason why models tuned with LoRA cannot perform well on non-RAG tasks. In comparison, our SPRING demonstrates a consistent performance across all prompts, demonstrating its robustness and generalizability.

H Impact of Token Quantity

In the main body of our paper, we explore the impact of token quantity based on the Mistral-7b-instruct model. Since this impact may vary across different models, we also extend our analysis to include the LLaMA-2-7b-chat model. The result is shown in Figure 11. It can be seen that the general trend is similar to that based on the Mistral model, namely the performance of SPRING is gradually improved as more virtual tokens are used. However, LLaMA requires at least three tokens to obtain improvement over the original model with prompts. This indicates that different models may require various numbers of virtual tokens to effectively learn and perform RAG tasks.