Similarity is Not All You Need: Endowing Retrieval-Augmented Generation with Multi–layered Thoughts

Chunjing Gan Dan Yang Binbin Hu Hanxiao Zhang Siyuan Li Ziqi Liu

Yue Shen Lin Ju Zhiqiang Zhang Jinjie Gu Lei Liang Jun Zhou[†]

Ant Group

jun.zhoujun@antgroup.com

Abstract

In recent years, large language models (LLMs) have made remarkable achievements in various domains. However, the untimeliness and cost of knowledge updates coupled with hallucination issues of LLMs have curtailed their applications in knowledge-intensive tasks, where retrieval-augmented generation (RAG) can be of help. Nevertheless, existing retrievalaugmented models typically use similarity as a bridge between queries and documents and follow a retrieve-then-read procedure. In this work, we argue that similarity is not always the "panacea" and totally relying on similarity would sometimes degrade the performance of retrieval-augmented generation. To this end, we propose METRAG, a Multi-layEred Thoughts enhanced Retrieval-Augmented Generation framework. To begin with, beyond existing similarity-oriented thought, we embrace a small-scale utility model that draws supervision from an LLM for utility-oriented thought and further come up with a "smarter" model by comprehensively combining the similarity- and utilityoriented thoughts. Furthermore, given the fact that the retrieved document set tends to be huge and using them in isolation makes it difficult to capture the commonalities and characteristics among them, we propose to make an LLM as a task-adaptive summarizer to endow retrieval-augmented generation with compactness-oriented thought. Finally, with multi-layered thoughts from the precedent stages, an LLM is called for knowledgeaugmented generation. Extensive experiments on knowledge-intensive tasks have demonstrated the superiority of METRAG.

1 Introduction

In recent years, large language models (LLMs) such as ChatGPT (OpenAI, 2023a), GPT4 (OpenAI, 2023b), Llama (Touvron et al., 2023) have made remarkable achievements in a variety of tasks due to their marvelous capability in language

comprehension and generation (Zhou et al., 2023). However, the untimeliness and cost of knowledge updates (Kasai et al., 2022) together with hallucinations issues of LLMs (Rawte et al., 2023) have curtailed their applications in knowledge-intensive tasks to a large extent (Mallen et al., 2023), where retrieval-augmented generation (RAG) approaches that prepending documents to the query without updating the underlying language models would come in handy (Ram et al., 2023; Asai et al., 2023a). Nevertheless, existing retrieval-augmented generation approaches are typically similarity-based (Jiang et al., 2023), i.e., they retrieve documents from external corpus based on similarity. Then, the retrieved documents are prepended as context for LLMs at once or independently for generation augmentation (Shi et al., 2023). In total, these approaches have been found to outperform purely parametric LLMs (Jiang et al., 2023), especially in some knowledge-intensive generation tasks (Kwiatkowski et al., 2019).

In this work, we argue that similarity is not always the "panacea" for retrieval-augmented generation and totally relying on similarity would sometimes degrade the performance. As is shown in the upper part of Figure 1, when a user types in the query "Tell me about author George RR Martin", a similarity-driven retrieval system would rank the documents in a given corpus according to similarity metrics, *i.e.*, the semantic relevance or TF-IDF based metric (Robertson and Zaragoza, 2009). Even though the retrieved documents barely provide useful information, e.g., "George RR Martin is an author", it would rank higher due to high similarity score and the document that states the publications "The Song of Ice and Fire" of George RR Martin with higher information gain would rank lower due to inadequate low similarity score. Besides, given the fact that the retrieved documents are often more than one, using them in isolation due to the context limitation of LLMs (Shi et al., 2023)

or simply aggregating the Top-k document without considering the relationships between them makes it difficult to capture the commonalities and characteristics among them and even confuse LLMs due to excessive text length thus incurring information loss and probably performance degradation (Mallen et al., 2023).




Figure 1: A toy example illustrating the difference between similarity and utility, where the score of similarity model is given by BGE^1 . Can we reunite the virtues of both worlds and come up with a better model?

Given the above limitations in current approaches, beyond similarity we aim to endow retrieval-augmented generation with multi-layered thoughts (i.e., utility- and compactness-oriented thoughts) for performance boosting. However, the solution is quite non-trivial, which needs to tackle the following essential challenges: (C1) To train a model that is capable of perceiving utility-oriented thoughts rather than solely similarity, external labeled data is required. However, it is hard to obtain external labeled data for guiding the learning process with explicit supervision. Though LLMs can serve as data annotators and come up with highquality corpus for model training and have demonstrated their tremendous capability in many circumstances, the innate uncontrollable and instability characteristics would sometimes deteriorate the performance. (C2) With high-quality retrieved documents, to reduce the burden that dozens of documents impose on LLMs and better capture the commonalities and characteristics between retrieved documents, document summarization is plausible. However, simple summarization cannot guarantee that the most important information w.r.t. the input query can be retained, hence there is need to train a summarization model that aligns with the task itself thus possessing compactness-oriented thoughts.

To this end, we propose METRAG. In particular, with an LLM serves as supervision on document utility *w.r.t.* the input query, we come up with a utility model that aligns itself with the LLM's feed-

back such that beyond similarity it is also equipped with utility-oriented thoughts. Considering that an LLM is strong most of time but sometimes would go out of control, yet dense retrievers trained on labelled corpus remain stable with relevance guarantee, though sometimes useless, we further combine similarity- and utility-oriented thoughts and takes the output of a similarity model and a utility model into consideration (C1), as depicted in Figure 1. Furthermore, to endow the summarization model with compactness-oriented thoughts, we first distill the summary ability from a strong teacher model (e.g., GPT4). Afterwards with multiple generated summaries, a subsequent reward model is utilized to further constrain the summarization model to align with the end task (C2). With the multilayered thoughts derived from the precedent stages, an LLM is called for knowledge-augmented generation. At last, we evaluate the proposed METRAG on multiple knowledge-extensive tasks, extensive experiments and analysis have demonstrated the superiority of the proposed method.

2 Related work

2.1 Retrieval-Augmented Generation

Retrieval-Augmented Generation (RAG) approaches (Gao et al., 2023; Asai et al., 2023a; Ram et al., 2023) tend to enhance LLMs following a retrieve-then-read pipeline when given the input query, which first retrieve a set of documents from the external corpus, and then utilize the retrieved documents as side information for an LLM to make the final prediction. This pipeline has demonstrated their superior performance, especially in knowledge-intensive tasks by fine-tuning or directly prepending to LLMs (Hu et al., 2022; Izacard et al., 2023). However, the essence of RAG is the quality of retrieved passages, yet plenty of existing approaches rely on similarity-based retrieval (Xu et al., 2023; Mallen et al., 2023) that tend to ignore the underlying utility of associated passages. Though Self-RAG, REPLUG (Asai et al., 2023b; Shi et al., 2023) have made progress in introducing the power of LLMs in augmenting retrieval ability and even achieve adaptive retrieval, purely depending on the capability of LLMs can be dangerous since the innate "uncontrollable" characteristics of LLMs would sometimes degrade the performance. Furthermore, they tend to ignore the potential inner relationships among retrieved passages and utilize them in isolation, which

¹https://github.com/FlagOpen/FlagEmbedding

deteriorate the performance.

2.2 Task-Oriented Summarization

Large language models (LLMs) (Zhao et al., 2023; OpenAI, 2023a,b) have made remarkable achievements in a variety of domains such as question answering, and summarization. However, calling large-scale commercial LLMs are of high cost and may induce data leakage issue, hence many approaches have been devoted to distilling the ability of large-scale LLMs (e.g., ChatGPT (OpenAI, 2023a)) to small-scale LLMs (e.g., Llama2 (Touvron et al., 2023)) and enhance their capabilities for downstream tasks, e.g., generate high-quality summary through distillation (Jung et al., 2023). However, for knowledge-intensive tasks, simple summarization is far from optimized because it cannot ensure that the most important information relevant to the input query is retained, hence it is necessary to generate the summary associated with downstream tasks. Though RECOMP (Xu et al., 2023) has made its step to train the summarization model for enhancing performance in tasks such as question answer and language modeling, it purely designs intricate samples and performs distillation without further aligning strategy for performance boosting, which downgrades its performance in applications.

3 The proposed approach

3.1 Overview

In this work, we propose METRAG, as shown in Figure 2. METRAG endows retrieval-augmented generation with multi-layered thoughts by firstly embracing LLM's supervision for utility-oriented thoughts and combining similarity and utility of documents for performance boosting (I, detailed in Section 3.2) and further pursuing compactness-oriented thoughts via a task-adaptive summarizer (II, detailed in Section 3.3), finally incorporating the derived multi-layered thoughts for answer generation (III, detailed in Section 3.4).

3.2 A Tale of Two "Models"

3.2.1 Similarity Model as an Off-the-shelf Retriever

Given an input query q, an off-the-shelf dense retriever \mathcal{R} is incorporated to map the input to a low-dimensional embedding $\mathbf{E}(\cdot)$ such that we can efficiently retrieve relevant documents *w.r.t.* query q from a given corpus $\mathcal{D} = \{d_1, d_2, ..., d_n\}$ via a predefined similarity metric \mathcal{M} (which could be cosine similarity and so on), where the similarity score between the query and document can be computed as follows:

$$s(q,d) = \mathcal{M}(\mathbf{E}(q), \mathbf{E}(d)) \tag{1}$$

With the derived similarity scores, the Top-k documents \mathcal{D}^* that have the highest similarity scores *w.r.t.* input query q are retrieved for enhancing follow-up tasks.

3.2.2 LLM's Supervision Empowered Utility Model

In this work, we argue that similarity is not always the "panacea" for information retrieval and totally relying on similarity would sometimes degrade the performance of retrieval-augmented generation approaches. As is illustrated in Figure 1, document with higher information gain to the input query would rank lower due to inadequate low similarity score. Inspired by the great success of LLMs in a variety of tasks, we aim to incorporate an LLM for supervision on document utility (In this paper, we define the utility of one document w.r.t. a question by its usefulness in assisting an LLM to answer this question, which is modelled by the normalization of the probability of generating correct answers with a specific LLM.) w.r.t. the input query to endow the retriever \mathcal{R} with utility-oriented thoughts.

To start with, given the Top-*n* documents set \mathcal{D}^{\bullet} $(\mathcal{D}^{\bullet} \subseteq \mathcal{D}^*)$ that a retriever \mathcal{R} considers most similar to the input query *q*, the approximated similarity likelihood of each document *d* can be formalized as follows:

$$\mathbf{P}_{\mathcal{R}}(d|q) = \frac{e^{\mathcal{M}(q,d)/\tau}}{\sum_{d \in \mathcal{D}^{\bullet}} e^{\mathcal{M}(q,d)/\tau}},$$
 (2)

where τ is the temperature hyperparameter that controls the smoothness of probability distribution, with a higher τ produces a softer probability distribution while a lower τ results in a "harder" max operation and \mathcal{D}^{\bullet} denotes the documents pool for model training. To endow the retriever \mathcal{R} with LLM's insights on retrieval utility, we further incorporate an LLM as the supervision signal on document utility of d w.r.t. the input query q such that beyond similarity the trained utility model can take the utility a document provides into consideration, which we can formalize as follows:

$$\mathbf{P}_{\mathcal{U}}(d|q, y) = \frac{e^{\mathbf{P}_{LLM}(y|q, d)/\tau}}{\sum_{d \in \mathcal{D}^{\bullet}} e^{\mathbf{P}_{LLM}(y|q, d)/\tau}}.$$
 (3)

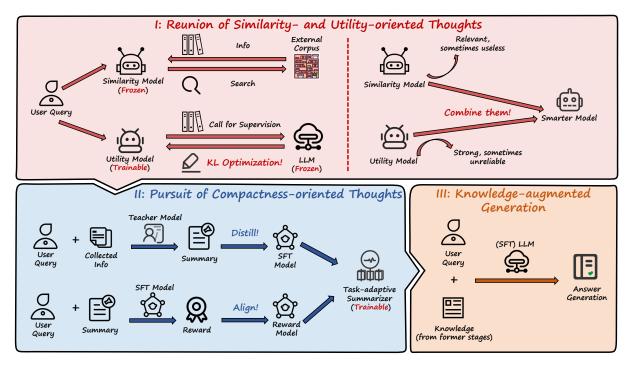


Figure 2: The proposed METRAG framework, where we endow retrieval-augmented generation with multi-layered thoughts from Stage I and II, and utilize the derived knowledge in Stage III for answer generation.

Finally, we break down the barriers of both sides and push the similarity distribution toward LLMsupervision enhanced utility distribution by minimizing the KL-divergence of these two distributions as follows:

$$\mathcal{L}_{U} = \frac{1}{|\mathcal{Q}|} \sum_{q \in \mathcal{Q}} \mathbf{KL}(\mathbf{P}_{\mathcal{R}}(\cdot)_{d \in \mathcal{D}^{\bullet}} || \mathbf{P}_{\mathcal{U}}(\cdot)_{d \in \mathcal{D}^{\bullet}}),$$
⁽⁴⁾

where Q is a set of queries. Due to the reason that the LLM is served as the external supervision, during training the parameter of the LLM is frozen and we only update the parameters of retriever \mathcal{R} and finally come up with the utility model \mathcal{U} , thus the overall optimization process remains lightweight. Besides, we further add an empty string *es* to \mathcal{D}^{\bullet} in the training process to enable the utility model with the ability to judge whether introducing a document for a query can promote the utility or not thus achieving selective retrieval.

3.2.3 Reunion of Similarity- and Utilityoriented Thoughts

Considering that an LLM would sometimes go out of control and produces unreliable supervision signals which degrade the model performance sometimes yet dense retrievers trained on accurately labelled corpus remain stable with relevance guarantee, though sometimes useless, we further combine similarity- and utility-oriented thoughts and take the output of a similarity model into consideration via an integration strategy $\mathcal{I}(\cdot)$. Therefore, the final score between document d and the input query q can be defined as follows:

$$f(q,d) = \mathcal{I}(\mathcal{R}(q,d),\mathcal{U}(q,d))$$
$$= \begin{cases} 1.0, \quad \mathcal{R}(q,d) \ge \zeta^{\mathcal{R}}(k^{\mathcal{R}}) \\ 1.0, \quad \mathcal{U}(q,d) \ge \zeta^{\mathcal{U}}(k^{\mathcal{U}}) \\ 0.0, \quad \text{otherwise} \end{cases}$$
(5)

where $\zeta^{\mathcal{R}}(k^{\mathcal{R}})$ and $\zeta^{\mathcal{U}}(k^{\mathcal{U}})$ find value of the $k^{\mathcal{R}}$ largest similarity score and $k^{\mathcal{U}}$ -largest utility score among retrieved documents through similarity and utility, respectively. Finally, only documents with f(q, d) = 1.0 are permitted to proceed to the subsequent stages. With the derived final score, we can easily obtain the current documents set \mathcal{D}^{Δ} w.r.t. input query q for follow-up tasks.

3.3 Pursuit of Compactness-oriented Thoughts

Given the fact that the retrieved documents are often more than one, using them in isolation due to the context limitation of LLMs or simply aggregating the Top-k document without considering the relationships between them makes it difficult to capture the commonalities and characteristics among them and even confuse LLMs thus incurring information loss and probably performance degradation, where text summarization can be of help. However, simple summarization cannot ensure that the most important information relevant to the input query is retained, therefore it is necessary to train a summarization model that aligns with the task itself. Hence, we propose the **Taskadaptive Summarizer**, which not only reduces the computational costs in end tasks but also relieves the burden of LLMs to identify relevant information in a large chunk of retrieved documents to obtain compactness-oriented thoughts.

3.3.1 Distilling from Strong Teacher Models

To initiate the summarization process, we design instructions via randomly sampled queries and retrieved documents. To start with, given query q, we harness the expertise of a sophisticated teacher model \mathcal{T} , *e.g.*, GPT4, to extract summarization proficiencies that facilitate the creation of a preliminary summary \mathbb{S}_q and compile an initial corpus $\mathcal{C}_{\mathcal{I}}$ consisting of Instruction-Summary pairs $\langle \mathbb{I}_q^s, \mathbb{S}_q \rangle$, where \mathbb{I}_q^s and \mathbb{S}_q are defined as follows:

$$\mathbb{I}_q^s = \text{TEMPLATE}(\mathbb{I}^s, q, [d_q^1, d_q^2, \cdots, d_q^n]), \quad (6)$$

$$\mathbb{I}_q^s \xrightarrow{\mathcal{T}} \mathbb{S}_q,\tag{7}$$

where \mathbb{I}^s is the summarization instruction, TEMPLATE is the summarization prompt template (detailed in Section A.1) and d_q^i is the *i*-th document retrieved for query *q* from former stage. Next, we apply Lora tuning to meticulously refine an open-source student model, *e.g.*, Llama2, which results in an initial summarizer model π^{SFT} tailored for the end task.

3.3.2 Alignment via End-task Feedback

To ensure the faithfulness of the summarizer to the end task, inspired by the principles of the DPO (Rafailov et al., 2023), we incorporate the LLM's performance on the end task as reward for the summarizer. With model π^{SFT} , given query q we adeptly produce concise summaries of the retrieved documents as \mathbb{S}_q and generate prompt \mathbb{X}_q to obtain end task response \mathbb{Y}_q and the label \mathbb{Z}_q indicating whether the response is correct or not, which accords with the following distribution:

$$p(\mathbb{Z}_q = 1 | \mathbb{X}_q, \mathbb{Y}_q) = \frac{1}{1 + e^{-r^*(\mathbb{X}_q, \mathbb{Y}_q)}}.$$
 (8)

Formally, we define the training corpus of this aligning process as C_A consisting of triplets $(\mathbb{X}_q, \mathbb{Y}_q, \mathbb{Z}_q)$ for each query q. With a reward model

 r_{ϕ} parameterized by ϕ to estimate r^* , the binary classification loss can be defined as follows:

$$\mathcal{L}_{RM}(\phi) = \sum_{(\mathbb{X}_q, \mathbb{Y}_q, \mathbb{Z}_q) \in \mathcal{C}_{\mathcal{A}}} - \mathbb{Z}_q log\sigma(r_{\phi}(\mathbb{X}_q, \mathbb{Y}_q)) - (1 - \mathbb{Z}_q) log\sigma(1 - r_{\phi}(\mathbb{X}_q, \mathbb{Y}_q)),$$
(9)

where σ is the sigmoid function. Furthermore, we follow the concept of DPO that eschews the need to explicitly estimate the reward model by solving r_{ϕ} as a function of language model policy π^{θ} , which is formalized as follows:

$$r_{\phi}(\mathbb{X}_{q}, \mathbb{Y}_{q}) = \beta log \frac{\pi^{\theta}(\mathbb{Y}_{q}|\mathbb{X}_{q})}{\pi^{\text{SFT}}(\mathbb{Y}_{q}|\mathbb{X}_{q})}.$$
 (10)

3.4 Knowledge-augmented Generation

With the input query q and the external knowledge \mathcal{K} derived from the former stages, we can directly call an LLM (can be fine-tuned in a supervised manner using question answering datasets), where its knowledge-augmented generation of answer a can be formalized as follows:

$$a^* = \underset{a}{\arg\max} \mathbf{P}(a|q, \mathcal{K}), \tag{11}$$

where $\mathbf{P}(a|q, \mathcal{K})$ is the probability of the answer a given the query q and the external knowledge \mathcal{K} , and $\arg \max$ denotes the argument of the maximum, i.e., the answer a for which $\mathbf{P}(a|q, \mathcal{K})$ is maximized.

4 **Experiments**

4.1 Experimental Setup

4.1.1 Tasks and Datasets

We evaluate our proposed METRAG and multiple baselines on a variety of knowledge-intensive public datasets (including general Open-Domain QA: NQ, TriviaQA-unfiltered², HotpotQA and entitycentric QA datasets: PopQA³) and evaluate the performance via metrics EM (following (Mallen et al., 2023), we evaluate the performance based on whether the gold answers are included in the model generations rather than strictly exact matching) and F1. All experiments are conducted in a zero-shot manner, where we provide instructions and retrieved information about tasks without fewshot demonstrations (Wei et al., 2022).

²As the test set is not publicly available, we follow the split setting of (Guu et al., 2020) and use 11,313 queries for testing.

³We test on the long-tail subset that includes 1399 queries with less than 100 Wikipedia page views.

4.1.2 Baselines

Baselines without retrievals. We evaluate strong publicly available pre-trained LLMs, ChatGLM2_{6B} (Du et al., 2022), Llama2_{7B,13B} (Touvron et al., 2023), Baichuan_{7B,13B} (Baichuan, 2023) and Qwen_{7B,14B} (Bai et al., 2023); and models trained and reinforced using private data, Chat-GPT⁴ (OpenAI, 2023a).

Baselines with retrievals. We evaluate models augmented with retrieval only at test time or during training. The first category includes standard RAG baselines, where an LM (*e.g.*, Llama $2_{7B,13B}$) generates output given the query prepended with the top retrieved documents. The latter category includes approaches that are trained with retrieved passages, including Self-RAG (Asai et al., 2023b), RECOMP (Xu et al., 2023)⁵.

4.1.3 Settings

Training details. We split all train, validation and test sets of datasets following (Izacard et al., 2023; Asai et al., 2023b). Our training data includes randomly sampled instruction-following input-output pairs. We randomly sample 50k pairs from training sets of NQ, TriviaQA and HotpotQA to train our model in different stages with Llama2_{13B} as base LLM. All experiments are conducted using 4 NVIDIA A100 GPUs. We train the utility model for 5 epochs with a learning rate of 1e-5, a batch size of 16 for each device, a warm-up ratio of 0.2, the passage window size of 50 and the temperature parameter τ set to 0.05. For taskadaptive summarizer and generation model, we utilize open-source Llama Factory ⁶ and adopt Lora tuning for 1 epoch with a learning rate of 5e-5, a batch size of 4 and a cosine learning rate scheduler.

Retrieval details. For NQ, TriviaQA and HotpotQA, we use 2018 English Wikipedia as the external retrieval source while for PopQA, since the 2018 Wikipedia sometimes lacks articles about entities that have been added to Wikipedia recently, we use December 2020 preprocessed Wikipedia corpus as the external retrieval source. We preprocess the external corpus following (Izacard et al., 2023)⁷. As for retriever \mathcal{R} , we incorporate BGE owing to its superior performance in a variety of benchmark leaderboards and retrieve up to 5 docu-

ments for each input query for testing, where $\mathcal{M}(\cdot)$ is defined as cosine similarity.

4.2 Results and Analysis

4.2.1 Main Results

From the empirical results across multiple knowledge-intensive datasets, the major findings can be summarized as follows:

- Retrieval largely improves performance. When compared against approaches without retrieval, the retrieval-augmented approaches demonstrated the superiority in EM metric even when compared to the strong baseline ChatGPT, showing the tremendous power and potential of retrieval-augmented generation. Besides, with retrieval-augmentation, even small-scale LLMs (*e.g.*, 7B LLMs) can achieve comparable performance *w.r.t.* large-scale LMs (*e.g.*, 13B LLMs) in terms of EM metric, showing their power in pursuit of true knowledge.
- Long-tail queries benefit more from retrieval. As depicted in Table 1, retrieval-augmented approaches achieve most performance gain in PopQA dataset with long-tail queries while the large-scale competitive LLM ChatGPT performs worst in this dataset due to the untimely updated knowledge, which illustrates that performance degradation due to knowledge updating issues can be alleviated to a great extent by retrieval.
- Supervised Fine-tuning improves instruction following. With regard to F1 metric, we find that approaches trained with retrieved passages perform better, showcasing their ability in instruction following for abstracting concise answers (which is the case of ChatGPT with remarkable instruction following ability for zero-shot tasks). However, for approaches without supervised fine-tuning, there exists a *seesaw effect* between EM and F1 with one focuses on answer accuracy while other focuses on the balance between exactness and conciseness (which is stated in input prompts).
- The way of incorporating external information matters! Different from approaches that directly incorporate the retrieved passages for answer generation, our proposed METRAG endows multi-layered thoughts to "*take the essence and discard the dross*" so that the most useful information of retrieved passages can be abstracted

⁴We use GPT-3.5-turbo-16K in our experiment.

⁵We report results reported in the original paper.

⁶https://github.com/hiyouga/LLaMA-Factory

⁷https://github.com/facebookresearch/atlas

Methods	N	NQ		TriviaQA		HotpotQA		PopQA	
Wienious	EM	F1	EM	F1	EM	F1	EM	F1	
		Basel	ines with	out retrie	val				
ChatGLM26B	11.1	8.80	22.5	20.0	13.5	14.6	18.8	14.0	
Llama27B	21.5	12.3	43.0	29.0	17.0	10.8	19.6	3.36	
Baichuan27B	18.0	14.0	39.3	35.0	18.8	15.9	25.1	17.8	
Qwen _{7B}	20.7	17.9	47.3	42.1	21.7	19.6	21.6	15.4	
Llama2 _{13B}	32.4	8.60	58.9	14.6	24.1	8.53	19.0	2.91	
Baichuan2 _{13B}	20.8	20.6	46.2	45.4	17.7	20.5	23.8	16.4	
Qwen _{14B}	25.9	26.9	53.4	53.7	24.1	25.6	19.7	18.7	
ChatGPT	37.8	42.9	71.4	72.3	27.9	34.2	25.2	25.7	
	I	Base	elines wit	h retrieva	al	I	I	I	
ChatGLM2 _{6B}	42.8	28.2	59.1	47.2	30.3	27.1	60.3	43.7	
Llama27B	42.2	40.6	65.4	62.5	30.3	33.0	60.3	57.8	
Baichuan27B	43.4	34.3	65.0	54.7	33.5	29.1	62.9	47.0	
Qwen _{7B}	43.7	31.2	62.1	48.3	30.9	24.8	40.4	27.3	
Llama2 _{13B}	50.3	21.2	70.2	25.7	38.2	17.3	62.9	15.1	
Baichuan2 _{13B}	44.4	41.7	65.1	62.6	30.2	32.4	61.4	53.1	
Qwen _{14B}	50.3	47.5	69.4	67.1	39.2	39.9	64.1	57.6	
SELF-RAG*7B	-	-	66.4	-	-	-	54.9	-	
SELF-RAG*13B	-	-	69.3	-	-	-	55.8	-	
RECOMP*EXT	36.6	44.2	59.0	65.3	30.4	40.1	-	-	
RECOMP*ABS	37.0	45.5	58.7	66.3	28.2	37.9	-	-	
METRAG	49.6	53.9	74.8	78.7	42.2	51.9	58.8	61.5	

Table 1: Overall performance evaluation across 4 public datasets. The best results are highlighted in boldface.

and distraction information can be dropped for end tasks. Experimental results in four different datasets illustrate and verify the rationale of our proposed METRAG.

4.2.2 Analysis

Ablation study. We examine the effectiveness of each component in METRAG by preparing the following variants: i) METRAG W/O COMB, which removes the combination of similarity model and utility model and degrades to the original similarity based retriever; ii) METRAG W/O AS, which removes the task-adaptive summarization for information integration. We plot the performance comparison in Figure 3, from which we can observe that the overall performance would drop a lot when either component is discarded, thus the effectiveness of our dedicate design is verified. In particular, we find that the METRAG W/O COMB performs worst among all variants, showcasing that the augmented information, which serves as the cornerstone in retrieval-augmented generation, deserves more attention.




Figure 3: Ablation study.

Passage window size matters in utility model performance! Since the utility model plays a key role in bring in the supervision of LLMs into passage selection process, we take a closer look at how the passage window size $\|\mathcal{D}^{\bullet}\|^{8}$ would influence the final performance by directly incorporating the utility model trained under different settings to the final task. Due to the space limit, we average the metrics in four datasets and present the result in Figure 4 and find that the model perfor-

⁸Here, since the empty string es is added by default, we only count the passages involved in training.

LLMs	NQ		TriviaQA		HotpotQA		PopQA	
	EM	F1	EM	F1	EM	F1	EM	F1
Baichuan27B	32.1	36.8	63.5	67.8	25.3	33.2	23.6	25.1
Llama27B	42.1	46.5	69.1	73.5	35.7	45.2	55.7	56.8
Llama2 _{13B}	45.2	49.8	71.9	76.0	38.3	47.9	55.1	56.4

Table 2: The Impact of LLMs on Utility Modeling.




Figure 4: The influence of passage window size.

mance improves as the window size grows, which demonstrates that the growing passage window size endows more LLMs' powers for distinguishing passage significance among diverse inputs to the utility model thus improving performance on downstream tasks. However, due to the computational burden (the model training time grows linearly with the passage window size) that a large passage window size imposes during training, there is need to balance the trade-off between performance and cost.

Impact of selective retrieval. When optimizing the utility model, we add an empty string es in the training process to leverage the knowledge of LLMs to achieve selective retrieval. Here, we conduct some case studies to examine this mechanism. As we can see from Table 3, there are example queries that the utility model deems no retrieval and in total there are 20.9% queries which the utility model ranks the empty string es higher than other documents. As we can see from Table 3, many of the listed queries are commonsense knowledge that has been memorized in LLMs' parameters and we can easily call an LLM for the required answer instead of retrieval, which illustrates that in retrieval-augmented generation, despite the further knowledge external corpus introduces, the inherent knowledge of LLMs when deploying retrievalbased techniques is worth investigation and we believe that our work has provided a straightforward and plausible solution. However, this design still has certain limitations, *i.e.*, the LLM used for end task needs to be the same or stronger than the one

utilized during utility model training, otherwise this mechanism may not work.

Table 3: Queries Deemed No Retrieval by Utility Model.

Is Cartagena or Chess more popular around the world? In what country is Chalhuacocha?
What was Ian Fleming's first Bond book?
When was catch me if you can made?
Cathay is a poetic name for which country?
Who sings sugar sugar you are my candy girl?
Who used to present I'm a celebrity now?
What county is Icknield Walk First School located in?
Where does the cell spend most of its time in the cell cycle? What country lies to north of the Republic of Chad?
Are Vintage Life and InStyle both US-based magazines?
Who is the first president to be impeached?
Are Andrew Stevens and Charles Burnett both American?
Which Genre of Television did Charles Quinton Murphy act for?
How was President Kennedy assassinated?
Which animal is the carrier of the h1n1 virus?
What part of the body produces insulin?

The impact of LLMs on utility modeling. То further analyse the impact of LLMs on utility modeling, beside Llama2_{13B} we also add Baichuan_{7B} and $Llama2_{7B}$ as the base LLMs for comparison by directly incorporating the utility model trained under different settings to the final task and present the metrics in four datasets in Table 2, from which we have two main conclusions: 1) Usually, a largescale LLM can outperforms an LLM of smallerscale, e.g., Llama2_{13B} vs Llama2_{7B}. Furthermore, we also find an interesting phenomenon that sometimes (e.g., PopQA dataset) the score of Llama27B is higher than that of Llama2_{13B}, which is consistent of the findings reported in Self-RAG(Asai et al., 2023b). 2) Baichuan_{7B} underperforms the Llama series in our experiments, one possible reason is that it places greater emphasis on its application in specific languages such as Chinese, as is stated in its original paper(Baichuan, 2023).

Investigation into task-adaptive summarizer. To start with, we introduce a case study to illustrate the virtues of our task-adaptive summarizer in Table 4, as we can see from the table, since the original information is quite long and with a lot of distracting information, an LLM tend to get lost in a large chunk of words. However, with our taskadaptive summarizer, the most relevant information for this query is extracted thus an LLM can easily answer the question given the extracted knowledge.

Table 4: Case Study: Task-adaptive Summarizer Output.

Query
What is Walter de la Pole's occupation?
Original information
Walter de la Pole: Family Walter was the son and heir of the MP Sir Edmund de la Pole and his second wife. Walter de la Pole Sir Walter de la Pole (November 1371 - 1434), of Dernford in Sawston, Cambridgeshire, was an English politician. Richard de la Pole Richard de la Pole (1480 - 24 February 1525) was a pretender to the English crown. Commonly nicknamed "White Rose", he was the last Yorkist claimant to actively and openly seek the crown of England. He lived in exile(4203 characters)
Task-adaptive summary
Walter de la Pole was an English politician. (44 characters)

In sum, the virtues of task-adaptive summarizer are two-fold. On the one hand, by using a smallscale LLM (i.e., a 13B Llama model) as the summarizer it could speed up the inference for downstream tasks. The summary ratio across the four datasets are 8.25%, 7.35%, 6.77% and 7.32% respectively, which might increase a small amount of inference cost by adding the summary stage, nevertheness, since the inference cost of LLMs is linearly correlated with token number, with the knowledge derived from the summarizer, it can potentially decrease the inference cost for high-cost commercial LLMs such as GPT4. On the other hand, it further enhances the performance by extracting the most relevant information for a given task so as to alleviate distracting information, which improves the EM and F1 metrics across the four datasets on average by 1.4% and 1.7% respectively, which further justifies our model design.

5 Conclusion

In this work, we propose METRAG, a multi-layered thoughts enhanced retrievalaugmented generation framework, which first embraces LLM's supervision to obtain utilityoriented thoughts and combines the similarity and utility of documents for performance boosting, and further pursuits compactness-oriented thoughts via a task-adaptive summarizer. Finally, with multi-layered thoughts from the precedent stages, an LLM is called for knowledge-augmented generation. Extensive experiments on knowledgeintensive tasks have demonstrated the superiority of the proposed METRAG.

6 Limitations

One of the limitation of our work is that the effectiveness of utility model is highly hinges on a strong LLM's supervision, although we have find that an LLM like LLama 7B or 13B is enough for training a satisfactory utility model. In sum, our work opens up a fresh perspective to reconsider retrieval-augmented generation, but more complex situation that require reading a large amount of material to answer (*e.g.*, legal or medical documents) is still unresolved. Hence, extending our framework in the super-long contexts is one of the future work.

References

- Akari Asai, Sewon Min, Zexuan Zhong, and Danqi Chen. 2023a. Retrieval-based language models and applications. In *ACL* (*tutorial*), pages 41–46.
- Akari Asai, Zeqiu Wu, Yizhong Wang, Avirup Sil, and Hannaneh Hajishirzi. 2023b. Self-rag: Learning to retrieve, generate, and critique through self-reflection. *CoRR*, abs/2310.11511.
- Jinze Bai, Shuai Bai, Yunfei Chu, Zeyu Cui, Kai Dang, Xiaodong Deng, Yang Fan, Wenbin Ge, Yu Han, Fei Huang, Binyuan Hui, Luo Ji, Mei Li, Junyang Lin, Runji Lin, Dayiheng Liu, Gao Liu, Chengqiang Lu, Keming Lu, Jianxin Ma, Rui Men, Xingzhang Ren, Xuancheng Ren, Chuanqi Tan, Sinan Tan, Jianhong Tu, Peng Wang, Shijie Wang, Wei Wang, Shengguang Wu, Benfeng Xu, Jin Xu, An Yang, Hao Yang, Jian Yang, Shusheng Yang, Yang Yao, Bowen Yu, Hongyi Yuan, Zheng Yuan, Jianwei Zhang, Xingxuan Zhang, Yichang Zhang, Zhenru Zhang, Chang Zhou, Jingren Zhou, Xiaohuan Zhou, and Tianhang Zhu. 2023. Qwen technical report. arXiv preprint arXiv:2309.16609.
- Baichuan. 2023. Baichuan 2: Open large-scale language models. *arXiv preprint arXiv:2309.10305*.
- Zhengxiao Du, Yujie Qian, Xiao Liu, Ming Ding, Jiezhong Qiu, Zhilin Yang, and Jie Tang. 2022. Glm: General language model pretraining with autoregressive blank infilling. In *ACL*, pages 320–335.
- Yunfan Gao, Yun Xiong, Xinyu Gao, Kangxiang Jia, Jinliu Pan, Yuxi Bi, Yi Dai, Jiawei Sun, Qianyu Guo, Meng Wang, and Haofen Wang. 2023. Retrievalaugmented generation for large language models: A survey. *CoRR*, abs/2312.10997.
- Kelvin Guu, Kenton Lee, Zora Tung, Panupong Pasupat, and Ming-Wei Chang. 2020. Retrieval augmented language model pre-training. In *ICML*, pages 3929– 3938.
- Yushi Hu, Hang Hua, Zhengyuan Yang, Weijia Shi, Noah A. Smith, and Jiebo Luo. 2022. Promptcap: Prompt-guided task-aware image captioning. *CoRR*, abs/2211.09699.
- Gautier Izacard, Patrick S. H. Lewis, Maria Lomeli, Lucas Hosseini, Fabio Petroni, Timo Schick, Jane Dwivedi-Yu, Armand Joulin, Sebastian Riedel, and Edouard Grave. 2023. Atlas: Few-shot learning with retrieval augmented language models. *J. Mach. Learn. Res.*, 24:251:1–251:43.
- Zhengbao Jiang, Frank F. Xu, Luyu Gao, Zhiqing Sun, Qian Liu, Jane Dwivedi-Yu, Yiming Yang, Jamie Callan, and Graham Neubig. 2023. Active retrieval augmented generation. In *EMNLP*, pages 7969– 7992.
- Jaehun Jung, Peter West, Liwei Jiang, Faeze Brahman, Ximing Lu, Jillian Fisher, Taylor Sorensen, and Yejin Choi. 2023. Impossible distillation: from low-quality

model to high-quality dataset & model for summarization and paraphrasing. *CoRR*, abs/2305.16635.

- Jungo Kasai, Keisuke Sakaguchi, Yoichi Takahashi, Ronan Le Bras, Akari Asai, Xinyan Yu, Dragomir R. Radev, Noah A. Smith, Yejin Choi, and Kentaro Inui. 2022. Realtime QA: what's the answer right now? *CoRR*, abs/2207.13332.
- Tom Kwiatkowski, Jennimaria Palomaki, Olivia Redfield, Michael Collins, Ankur P. Parikh, Chris Alberti, Danielle Epstein, Illia Polosukhin, Jacob Devlin, Kenton Lee, Kristina Toutanova, Llion Jones, Matthew Kelcey, Ming-Wei Chang, Andrew M. Dai, Jakob Uszkoreit, Quoc Le, and Slav Petrov. 2019. Natural questions: a benchmark for question answering research. *Trans. Assoc. Comput. Linguistics*, 7:452– 466.
- Alex Mallen, Akari Asai, Victor Zhong, Rajarshi Das, Daniel Khashabi, and Hannaneh Hajishirzi. 2023. When not to trust language models: Investigating effectiveness of parametric and non-parametric memories. In ACL, pages 9802–9822.
- OpenAI. 2023a. Chatgpt: Optimizing language models for dialogue.
- OpenAI. 2023b. GPT-4 technical report. *arXiv preprint arXiv:2303.08774*.
- Rafael Rafailov, Archit Sharma, Eric Mitchell, Stefano Ermon, Christopher D Manning, and Chelsea Finn. 2023. Direct preference optimization: Your language model is secretly a reward model. *arXiv preprint arXiv:2305.18290*.
- Ori Ram, Yoav Levine, Itay Dalmedigos, Dor Muhlgay, Amnon Shashua, Kevin Leyton-Brown, and Yoav Shoham. 2023. In-context retrieval-augmented language models. *CoRR*, abs/2302.00083.
- Vipula Rawte, Amit P. Sheth, and Amitava Das. 2023. A survey of hallucination in large foundation models. *CoRR*.
- Stephen E. Robertson and Hugo Zaragoza. 2009. The probabilistic relevance framework: BM25 and beyond. *Found. Trends Inf. Retr.*, 3(4):333–389.
- Weijia Shi, Sewon Min, Michihiro Yasunaga, Minjoon Seo, Rich James, Mike Lewis, Luke Zettlemoyer, and Wen-tau Yih. 2023. REPLUG: retrieval-augmented black-box language models. *CoRR*, abs/2301.12652.
- Hugo Touvron, Louis Martin, Kevin R. Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, D. Bikel, Lukas Blecher, Cristian Cantón Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes, Jeremy Fu, Wenyin Fu, Brian Fuller, Cynthia Gao, Vedanuj Goswami, Naman Goyal, A. Hartshorn, Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madian Khabsa, Isabel M. Kloumann, A. Korenev, Punit Singh Koura,

Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee, Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra, Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi, Alan Schelten, Ruan Silva, Eric Michael Smith, R. Subramanian, Xia Tan, Binh Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zhengxu Yan, Iliyan Zarov, Yuchen Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurelien Rodriguez, Robert Stojnic, Sergey Edunov, and Thomas Scialom. 2023. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2307.09288*.

- Jason Wei, Maarten Bosma, Vincent Y. Zhao, Kelvin Guu, Adams Wei Yu, Brian Lester, Nan Du, Andrew M. Dai, and Quoc V. Le. 2022. Finetuned language models are zero-shot learners. In *ICLR*.
- Fangyuan Xu, Weijia Shi, and Eunsol Choi. 2023. RECOMP: improving retrieval-augmented lms with compression and selective augmentation. *CoRR*, abs/2310.04408.
- Wayne Xin Zhao, Kun Zhou, Junyi Li, Tianyi Tang, Xiaolei Wang, Yupeng Hou, Yingqian Min, Beichen Zhang, Junjie Zhang, Zican Dong, Yifan Du, Chen Yang, Yushuo Chen, Zhipeng Chen, Jinhao Jiang, Ruiyang Ren, Yifan Li, Xinyu Tang, Zikang Liu, Peiyu Liu, Jian-Yun Nie, and Ji-Rong Wen. 2023. A survey of large language models. arXiv preprint arXiv:2303.18223.
- Wenxuan Zhou, Sheng Zhang, Hoifung Poon, and Muhao Chen. 2023. Context-faithful prompting for large language models. In *EMNLP Findings*, pages 14544–14556.

A Appendix

A.1 Prompt Template

A.1.1 Utility Model Training Prompt

When training the utility model, we design different prompts so that an LLM can output its perplexity when i) answering the question with retrieved document; ii) answering the question directly. We present the prompts in Table 5.

Table 5: Utility Model Training Prompt.

	w/ retrieved document
[question] T	r the question based on the given context. Question: he context related to the question is as follows: ocument]. Answer: [answer]
	w/o retrieved document
Please answe	r the question. Question: [question] Answer: [answer]

A.1.2 Task-adaptive Summarizer Training and Inference Prompt

To endow retrieval-augmented generation with compactness-oriented thought, we carefully train a task-adaptive summarizer for information integration and extraction, where we show the prompt in Table 6.

Table 6: Task-adaptive Summarizer Prompt.

```
Instruction:
You are an excellent summary generation robot. Given the following
question (Question) and texts (Docs), you need to summarize these
texts (Docs) into a concise abstract to adequately address the
corresponding question.
Question:
[question], [options if it is multiple-choice question]
Docs:
[retrieved documents]
Summary:
```

A.1.3 Knowledge-augmented Generation Prompt

We show the prompt for generating the final answer in Table 7.

Table 7: Knowledge-augmented Generation Prompt.

```
Instruction:
You are an AI assistant for answering questions. Based on the given
question (Question) and the corresponding information (Info), please
provide the correct answer as concise as possible according to the
info and your commonsense.
Info:
[retrieved documents / summary]
Question:
[question]
Answer:
Please answer the question in the form of 2 or 3 words.
```