DEBAJYOTI MAZUMDER, Indian Institute of Science Education and Research Bhopal, India AAKASH KUMAR, Indian Institute of Science Education and Research Bhopal, India JASABANTA PATRO, Indian Institute of Science Education and Research Bhopal, India

Hate detection has long been a challenging task for the NLP community. The task becomes complex in a code-mixed environment because the models must understand the context and the hate expressed through language alteration. Compared to the monolingual setup, we see very less work on code-mixed hate as large-scale annotated hate corpora are unavailable to make the study. To overcome this bottleneck, we propose using native language hate samples. We hypothesise that in the era of multilingual language models (MLMs), hate in code-mixed settings can be detected by majorly relying on the native language samples. Even though the NLP literature reports the effectiveness of MLMs on hate detection in many cross-lingual settings, their extensive evaluation in a code-mixed scenario is yet to be done. This paper attempts to fill this gap through rigorous empirical experiments. We considered the Hindi-English code-mixed setup as a case study as we have the linguistic expertise for the same. Some of the interesting observations we got are: (i) adding native hate samples in the code-mixed training set, even in small quantity, improved the performance of MLMs for code-mixed hate detection, (ii) MLMs trained with native samples alone observed to be detecting code-mixed hate to a large extent, (iii) The visualisation of attention scores revealed that, when native samples were included in training, MLMs could better focus on the hate emitting words in the code-mixed context, and (iv) finally, when hate is subjective or sarcastic, naively mixing native samples doesn't help much to detect code-mixed hate. We will release the data and code repository to reproduce the reported results.

Additional Key Words and Phrases: Code-mixed hate detection, Cross-lingual learning, Native sample mixing.

ACM Reference Format:

1 INTRODUCTION:

The rising cases of online hate-speech [25] and similar components (cyberbullying [16], racism [45], gender discrimination [26], radicalisation [44], religious hatred, abusive language detection [3] etc.) distress the sanity and the civic nature of online discussions. To address this, the NLP community have been working long on characterisation, detection and mitigation of these components [1, 8, 18, 23, 25, 36, 37, 42, 43]. The intensity of their focus can be gauged by the fact that around 460+ peer-reviewed AI/ML papers were published between 2001 and 2021 [25] on this topic, and exponentially rising since then. The community has proposed 70+ datasets spanning 20+ languages and different modalities (memes, texts, social media posts, images, videos etc.) [8, 25].

Manuscript submitted to ACM

Authors' addresses: Debajyoti Mazumder, debajyoti22@iiserb.ac.in, Indian Institute of Science Education and Research Bhopal, Bhopal Bypass Road, Bhauri, Bhopal, Madhya Pradesh, India, 462066; Aakash Kumar, aakashk19@iiserb.ac.in, Indian Institute of Science Education and Research Bhopal, Bhopal Bypass Road, Bhauri, Bhopal, Madhya Pradesh, India, 462066; Jasabanta Patro, jpatro@iiserb.ac.in, Indian Institute of Science Education and Research Bhopal, Bhopal Bypass Road, Bhauri, Bhopal, Madhya Pradesh, India, 462066.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org. © 2024 Copyright held by the owner/author(s). Publication rights licensed to ACM.

Even now, we have yet to eradicate the hate completely from online platforms. The main reason is that most of the studies were done for a few resource-rich languages (51% alone for English), whereas we have 100+ languages in the world, each having seven million+ speakers¹. Further, a small fraction of these studies focused on code-mixed setups where the hate is uttered altering more than one language. It is common in multilingual environments like Europe, India and Latin America, where a significant portion of the population knows more than one language. Hate detection in code-mixed language is more complex compared to the monolingual environment. The models must understand the context and the hate expressed through multiple languages. One of the primary bottlenecks for the research on code-mixed hate detection is the unavailability of large-scale training corpora. The same reason also holds for most of the low-resource languages.

The emergence of multilingual language models (MLMs) allowed us to address this issue via cross-lingual learning. It enables the models to learn task-specific knowledge from a dataset in one language and make predictions for samples in different languages. Past works demonstrated that MLMs, to a significant extent, could detect hate when train and test languages are different [24]. This is because (i) the vocabulary of MLMs covers many languages, and (ii) their embeddings encode the semantic and syntactic features seen across multiple languages. However, they face several criticisms too. The NLP literature reported [5, 24] that cross-lingual learning fails when hate (i) expresses language-specific taboos and (ii) is specific to a community or culture. We argue that these limitations may not hold in the code-mixed setup if we rely on native samples. This is because the native corpora are expected to be capturing both. This paper attempts to showcase results for it by doing empirical experiments. Particularly, we attempted to answer the following two research questions,

- R1: Does training with additional native hate samples impact the code-mixed hate detection?
- R2: Can training with only native samples detect the hate in a code-mix scenario?

We have done all of our experiments for the Hindi-English code-mixed environment. This is because (i) we have the necessary linguistic expertise for this pair (It is required for calculating code-mixing complexity (section 5), and error analysis (section 7)), and (ii) We could find annotated code-mixed and respective native language hate corpora publicly available (GPL 3). Our contributions in this paper can be summarised as,

- We evaluated the impact of native language hate samples on code-mixed hate detection (**Exp 1**: Section 4.3) by comparing the performance across two training sets, (i) having only code-mixed hate samples and (ii) with additional samples from Hindi and English hate corpora. We experimented with two types of models: (i) statistical classifiers on top of the word n-grams and (ii) MLMs such as mBERT [15], XLM [29] and XLM-R [11] with and without additional transformer layers. We reported the model performance when native samples were added, with an equal label distribution or with a label ratio the same as in the code-mixed hate corpora. Further, we also reported the performance variations of the MLMs when native samples were added in different amounts (**Exp 2**: section 4.4).
- We evaluated the performance of MLMs by training them only with native samples (**Exp 3**: Section 4.5) as well. We created three types of training sets: (i) with only Hindi samples, (ii) with only English samples and (ii) with Hindi and English samples together.
- We visualised the attention scores given by the MLMs and reported the change in scores on hate-emitting words after native samples were mixed with the original code-mixed training set (see Figure 1 in appendix).

¹http://www2.harpercollege.edu/mhealy/g101ilec/intro/clt/cltclt/top100.html

Manuscript submitted to ACM

• Finally, we manually inspected each test prediction and reported the cases for which MLMs (a) got better, (b) remained confused, and (c) performed worse after native samples were mixed in the code-mixed training set.

Some of the interesting results we got are,

- On combining the native samples, while the statistical models performed worse, many MLMs reported significant (*p* < 0.05) improvements (an increase of ~0.09 in *F*1 score)
- MLMs, when trained with only native samples, could identify hate in a code-mixed context nearly as good as when trained with additional code-mixed samples (~0.6 in *F*1 score for both). It implies that we can deploy the MLMs trained with native samples if an appropriate code-mixed corpus is unavailable. Further, we also observed that the native language dataset that shares maximum linguistic overlap with the code-mixed hate corpus is more prominent in capturing the code-mixed hate.
- We observed that after native sample mixing, the MLMs gave high attention scores to the hate-emitting words when they appeared in the code-mixed context. Some of such cases were demonstrated in Figure 1 (see appendix).
- Finally, in the error analysis, we also reported cases where hate is sarcastic and subjective; it's still hard to identify them in the code-mixed setting by simply relying on native hate samples.

2 RELATED WORKS:

2.1 Monolingual hate:

In the monolingual set-up, detecting and mitigating hate and similar components were extensively studied in the literature [8, 23, 25]. Still, as mentioned earlier, the language coverage is yet to rise significantly. From a task formulation point of view, we saw several variations, such as binary, multi-class, and multi-label classification. There were several datasets proposed that did binary categorization of samples such as: 'hate' or not, [4, 19, 38], 'harassment' or not [21], 'personal attack' or not [47], 'sexism' or not [26], 'offensive' or not [2], 'anti-refugee hate' or not [40, 41] and 'islamophobic' or not [10]. Similarly, from a multi-class and multi-label perspective, researchers combined previously mentioned labels; datasets were annotated with: 'sexist'/'racist'/'none' [46], 'obscene'/'offensive but not obscene'/'clean' [33], hate against 'gender'/'sexual orientation'/'religion/'disability'/'none' [22, 35, 39] etc. From an architecture point of view, over the years, we observed a general shift from traditional rule-based and keyword-based systems to machine-learning methods (SVM, Random forest, etc.) to deep-neural methods(linear layers, RNNs, LSTMs, CNNs, Transformers)[8, 23, 25]. With the rise of transformer-based language models, fine-tuning their last layers or using neural layers on top of them got approved as a standard go-to approach. Meanwhile, in parallel, researchers also experimented with strategies like ensemble methods, multi-tasking and transfer learning [8, 23, 25] frameworks. These methods produced state-of-the-art results in their respective timelines. For model explainability, people focused on projecting attention scores on input segments to check the model focus on hate words and hate targets [31].

2.2 Code-mixed hate:

Very few studies focused on hate detection in code-mixed environments [6, 9, 14, 27, 28, 32]. Most of them focused on the Hindi-English code-mixed scenario. From a task formulation point of view, we also saw several variations. In binary classification framework, Bohra et al. [6] presented a dataset of 4.8k tweets, each annotated with 'hate'/'nonhate'. In multi-class and multi-label set-ups Kumar et al. [28] published a dataset of 21k Facebook posts, each annotated with one of three labels ('covert aggression'/ 'overt aggression'/ 'none') and their associated category ('physical threat', Manuscript submitted to ACM 'sexual threat', 'identity threat', 'non-threatening aggression'). Similarly, Mathur et al. [32] produced a dataset focusing only on sexism tweets, each annotated with 'not-offensive'/ 'abusive'/ 'hate'. Approach-wise, we see people have relied upon (i) feature-based methods (n-grams, lexicons, negations etc.) with traditional machine learning algorithms like SVM, Random forest etc. [6], and (ii) neural architectures like CNNs, and LSTMs on top of LIWC features and sentiment scores [32].

2.3 Hate detection by cross-lingual learning:

In the context of using cross-lingual learning for hate detection, Bigoulaeva et al. [5] demonstrated that neural architectures like CNNs and LSTMs, without using pre-trained MLMs, could detect hate expressed in German text while training was done with the English hate corpora. However, they additionally used an unlabelled German corpora. Firmino et al. [17], on the other hand, showed that training MLMs like mBERT and XLM with English and Italian hate corpora can detect the hate in Portuguese samples. However, as mentioned earlier, previous work reported that cross-lingual learning fails when hate (i) expresses language-specific taboos and (ii) is specific to a community or culture.

2.4 Research gap:

We couldn't find any critical study evaluating impact of native hate samples on code-mixed hate detection. We argue that limitations of cross-lingual learning[34] for hate detection, like failing to identify language-specific taboos and culture-specific hate, may not appear in the code-mixed setup. This is because the native corpora are expected to be capturing both. As an initial attempt to show the impact native samples on code-mixed hate detection, we considered a simple binary hate classification framework (i.e. 'hate' or not), in a Hindi-English code-mixed setting.

3 DATASET DETAILS:

We considered the Hindi-English code-mixed hate dataset [7], made up of social media posts. The authors retrieved 1,12,718 tweets based on a list of hashtags and keywords related to politics, public protests, riots, etc. Out of which, they manually filtered out 4575 code-mixed tweets. Expert annotators manually annotated the filtered tweets as "hate" or "non-hate". The label distribution is reported in Table 1.

Additionally, for native language samples, we considered Hindi [13] and English ² hate datasets in our experiments. We chose them as they are (i) relatively balanced, (ii) versatile, and (iii) widely used in past works. Their samples are manually annotated as "hate"/ "non-hate". The observed label distributions for both are reported in Table 1. Table-2 presents some samples from all three considered datasets. The datasets are open-source (two of them are GPL-3 licensed, the other can be easily collected by simple sign-up).

Dataset	Hate	Non-Hate
English-Hindi CM[7]	1661	2914
$English^2$	2261	3591
Hindi[13]	3338	1416

Table 1. Distribution of labels present in the considered code-mixed and monolingual hate corpora.

²HASOC-2019: https://hasocfire.github.io/hasoc/2019/dataset.html

Manuscript submitted to ACM

 Table 2. Samples from all three considered datasets. The Hindi parts (Romanized or Devanagri) are underlined for identification.

 We have provided English translation for code-mixed and Hindi samples for readability.

Classes	English-Hindi code-mixed							
Hate	Aise logo se sakht nafrat karta hu Jo caste ko naam ke sath jod ke chaude hote h but real me vo piddu hote h							
	Translation: I strongly hate those people who associate caste with their names and act tough, but in reality, they are weak.							
Non-Hate	Sir phansi nahi sirf looted money wapas chaiya							
	Translation: Sir, not execution, we just want the looted money back.							
Classes	English							
Hate	I don't know how much more I can take! 45 is a compulsive liar! #Trump30Hours #TrumpIsATraitor							
Non-Hate	Stand by the doctors , with the doctors. They need support and world needs to interfere.							
Classes	Hindi							
Hate	दलित बिलकुल नीच होते हैं							
	Translation: Dalits are downright mean.							

Non-Hate	हमें महिलाओं का प्रोत्साहन करना चाहिए
	Translation: We should encourage women.

4 EXPERIMENTS:

4.1 Experimental set-up:

We considered three generic architectures for our experiments. Note that our aim was not to propose any novel architecture; rather, we evaluated the behaviour of widely used statistical and MLM-based models when native samples were kept in the training sets. The three architectures we considered are,

- (1) Statistical classifiers SVM, Random Forest and Naive Bayes on top of word n-gram features. We considered word-level unigram, bigram and trigram features, as past work [7] reported them to perform best.
- (2) As a second approach, we fine-tuned MLMs mBERT [15], XLM-R [11] and XLM [29]. We stacked a linear layer on top of the [CLS] token embedding and fine-tuned their last two layers.
- (3) Lastly, we stacked four transformer layers followed by a linear layer on top of the considered MLMs (represented by mBERT_{trans}, XLM-R_{trans} and XLM_{trans} respectively). During fine-tuning, we froze all but the last two layers of the language model.

4.2 Experimental setting:

For the experiments, we collected the pre-trained weights for the MLMs from the Huggingface³ transformer library. We used AdamW optimizer [30], with a learning rate of 2×10^{-5} , and a scheduler with a learning rate decay of 0.9(gamma value) for training. We experimented with various (i) batch sizes, (ii) three random seeds and (iii) early stopping strategies. Models were trained for a maximum of 25 epochs with an epoch patience of four. We reported the average F1-scores across the random seeds.

4.3 Exp. 1- Impact of added native samples:

In the first experiment, we measured the impact of adding native samples on code-mixed hate detection. We created training(70%), validation(15%) and test(15%) splits of the code-mixed hate dataset [7] using stratified sampling. Additionally, we formulated two new training sets by including samples from the English and Hindi hate corpora. In the first set (**Train-1**), we added an equal amount of "hate" or "non-hate" samples from each monolingual dataset. In the second (**Train-2**), we kept label distribution the same as we observed in the training split of the code-mixed dataset. The label distribution present in the formulated training sets, in the initial code-mixed training set, and in the validation and test sets are reported in table 3.

Table 3. The distribution of labels present in the formulated training sets **Train-1** (equal ratio) and **Train-2** (code-mixed ratio). The initial code-mixed training set distribution is presented next to **CM** in Train-1 and Train-2. The numbers next to **Validation** and **Test** represent the distribution of labels in code-mixed validation and test splits, respectively.

Partition	Dataset	Hate	Non Hate
	СМ	1149	2062
Train-1	Hindi	1416	1416
	English	1416	1416
	Total	3981	4894
	СМ	1149	2062
Train-2	Hindi	810	1416
	English	2000	3500
	Total	3959	6978
Validation	СМ	249	438
Test	СМ	249	437

4.4 Exp. 2- Impact of native samples added in different amounts:

Our second experiment quantified the impact of English and Hindi samples when they were added in different amounts to the code-mixed training set. For this purpose, we created two bags of training sets. In the first bag, training sets were created by incrementally adding two batches of native samples with the code-mixed training set. One of the batches had English samples, while the other had Hindi samples. Each of them had 200 randomly selected unique samples with an equal ratio of "hate" and "non-hate" samples taken from the respective monolingual hate corpora (similar to **Train-1** in the first experiment). In the second bag, we created similar training sets, except here, the label ratio in each batch was the same as in the original code-mixed training set (similar to **Train-2** in the first experiment).

4.5 Exp. 3- Relying only on native samples:

Our last experiment evaluated the performance of MLMs after they were trained with only native samples. The intuition behind this experiment was to check if the knowledge learned from the training of native samples was enough to detect hate in the code-mixed scenario. We considered three types of training sets: (i) with only Hindi samples, (ii) with only English samples, and (iii) with both English and Hindi samples. All of the training sets had an equal amount of "hate" and "non-hate" samples. We fine-tuned the hyper-parameters on the code-mixed validation set created as a part of the first experiment.

5 CODE-MIXING COMPLEXITY:

To understand the code-mixing complexity associated with the Hindi-English hate dataset, we calculated the average code-mixing index (CMI) [12] and average burstiness [20] index values for the test set. The linguistic complexity of code-mixed text are generally measured by code-mixing index(CMI)[12] and burstiness[20] metrics. The CMI for a input text is calculated as,

$$CMI = \begin{cases} 100 * \left[1 - \frac{max(t_i)}{N - I}\right] & \text{for } N > I \\ 0 & \text{for } N = I \end{cases}$$

Where t_i denotes the word count for language *i*, *N* represents the total word count, and *I* signifies the number of language-independent words. This measure reflects the degree of code-mixing present in the text, with a higher CMI indicating a greater amount of code-mixing. The CMI value falls within the range of [0, 50]. Similarly, the burstness index is measured by,

$$Burstiness = \frac{\sigma_{\gamma} - m_{\gamma}}{\sigma_{\gamma} + m_{\gamma}}$$

Where σ_{γ} denote standard deviation of language spans and m_{γ} denotes the mean of language spans. The burstiness measure serves as an indicator of code-switching intensity, with a low score (approaching -1) suggesting uniform code-switching patterns, and a high score (approaching 1) indicating bursty patterns of switch points. The average complexity statistics for our test set are presented in Table 4. Both of the measures rely on word-level language tags. As the tags were not readily available, we manually annotated them by two students who are well versed in Hindi and English languages. The CMI index (range: [0,50]) reflects the degree of code-mixing present in the text. Higher CMI index value indicates a greater amount of code-mixing. Specifically, it denotes fraction of total words that belong to languages other than the most dominant language in the text. On the other hand, the burstiness measure (range: [-1,1]) serves as an indicator of code-switching intensity, with a low score suggesting uniform code-switching patterns, and a high score (approaching 1) indicating bursty patterns of switch points. The results for both measures are presented in table 4. They indicate that, on an average, samples have significantly high i.e. 39% words from the non-dominant language (here English) with uniform code-switching patterns.

Table 4. Code-mixing complexity measures for test set. CMI and Burst. refers to the average code mixing index score and burstiness index score for the test set respectively.

No. of Samples	CMI	Burst.
Test: 686	39	-0.32

6 RESULTS AND DISCUSSION:

6.1 Exp.-1 observations:

Here, we reported the results of our experiment measuring the impact of native hate samples on code-mixed hate detection. We compared the performance of different models in terms of accuracy (*Acc*), precision (*Pre*), recall (*Rec*) and F1-score (*F*1), and reported them in Table 5. The best scores for individual training scenarios were marked in bold. Manuscript submitted to ACM Since the label distributions in all training sets are unbalanced, we believe the *F*1 score best compares the performance. Following were our takeaways,

- On combining the native language samples, statistical models got confused and performed worse. On the contrary, MLMs significantly improved (an increase of 0.07 and 0.09 in best-reported *F*1 scores for Train-1 and Train-2, respectively). The MLMs for which the improvements were statistically significant (t-test, p < 0.05) are marked with an asterisk (*) next to their *F*1 scores.
- We observed minimal or no *F*1-score improvement when transformer layers were added to the MLMs. This indicates that fine-tuning the last layers of MLMs can serve the purpose to a large extent.
- We observed no clear performance difference in MLMs when native language samples were mixed in different label ratios (**Train-1** vs **Train-2**). It indicates that they are relatively robust towards label unbalancing.
- We investigated the attention scores given by MLMs after they were trained with or without the native samples. We observed that after native sample mixing, the MLMs gave high scores to the hate-emitting words when they appeared in code-mixed contexts. Figure 1 in the appendix reported some of such cases. MLMs gave more attention scores to words like 'murder' and 'rape' when they were trained with additional native samples.

Table 5. The results of our experiment measuring the impact of native hate samples on code-mixed hate detection. The evaluating parameters are accuracy(*Acc*), precision(*Pre*), recall(*Rec*) and F1-score(*F*1). The scores under columns **Code-mixed**, **Train-1**, and **Train-2** reported the performance when training was done with the original code-mixed training set, and additionally formulated training sets explained in section 4.3. The variations in *F*1 scores for different random seeds were mentioned in brackets.


Models	Codemix			Train-1				Train-2					
Models	Acc	Pre	Rec	F1	Acc	Pre	Rec	F1	Acc	Pre	Rec	F1	
SVM	0.67	0.58	0.37	0.45 (±0.03)	0.65	0.51	0.39	0.44 (±0.01)	0.69 0.60 0.4		0.40	$0.48 (\pm 0.01)$	
RF	0.67	0.77	0.13	0.23 (±0.01)	0.67	0.71	0.16	16 0.26 (±0.00)		0.79	0.10	0.18 (±0.02)	
Naive Bayes	0.63	0.49	0.53	0.51 (±0.02)	0.66	0.65	0.16	0.26 (±0.02)	0.67 0.62 0.25		0.25	0.36 (±0.01)	
XLM	0.68	0.52	0.56	0.52 (±0.01)	0.69	0.58	0.47	0.52 (±0.01)	0.67	0.53	0.63	$0.58^{*} (\pm 0.01)$	
mBERT	0.61	0.44	0.55	0.49 (±0.01)	0.71	0.62	0.51	0.56^{*} (±0.02)	0.68	0.57	0.55	0.56 (±0.00)	
XLM-R	0.67	0.51	0.43	$0.47 (\pm 0.02)$	0.67	0.54	0.61	0.58^{*} (±0.01)	0.69	0.60	0.46	$0.52 (\pm 0.01)$	
XLM _{trans}	0.65	0.48	0.52	0.50 (±0.02)	0.69	0.56	0.63	$0.59^{*} (\pm 0.01)$	0.67	0.53	0.65	$0.58^{*} (\pm 0.01)$	
mBERT _{trans}	0.72	0.62	0.39	$0.48 (\pm 0.01)$	0.67	0.54	0.65	0.59 * (±0.02)	0.67	0.54	0.60	0.57^{*} (±0.01)	
XLM-R _{trans}	0.74	0.69	0.42	0.52 (±0.01)	0.69	0.58	0.55	0.56 (±0.00)	0.72	.72 0.62 0.60 $0.61^* (\pm 0.02)$		0.61 [*] (±0.02)	

6.2 Exp.-2 observations:

Here, we presented the results of our experiments quantifying the impact of native samples when they were added in different amounts. As mentioned in section 4.4, we created many training sets by incrementally adding native sample batches in the original code-mixed training set. The F1 scores obtained for different training sets with different label ratios were presented in Figure 2. The absolute values of all measured parameters were reported in Table-7. Some of the interesting observations we got are,

• There was no major change in the *F*1-scores when we added native samples in different amounts. This observation holds irrespective of when samples were added with label ratios similar to **Train-1** or **Train-2**.

Fig. 1. Visualisation of attention scores: The upper row in each sub-figure reported the attention scores when training was done only on code-mixed samples, whereas the lower row reported the attention scores when training was done with **Train-1**. We saw similar pattern for **Train-2** as well.

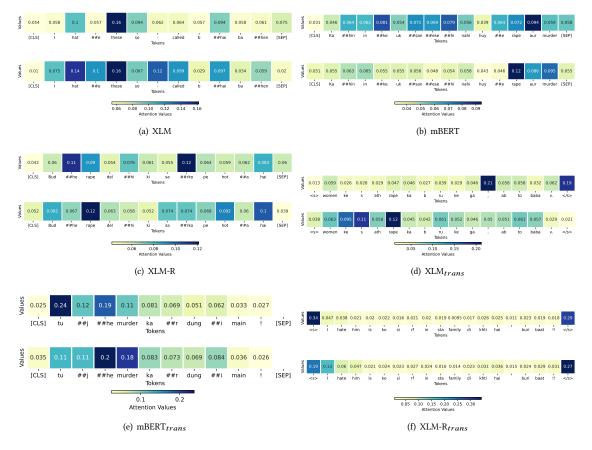

• While the *F*1 score stayed between **0.52** and **0.6** for equal label ratio set-up, a relatively high fluctuation, i.e. between **0.47** and **0.6** was observed when label ratio was kept in proportional to the original code-mixed training set.

The absolute values of performance measuring parameters for different set-ups considered under Experiments 2 are shown in Table 7 . These scores are average values of five different random seeds.

6.3 Exp.-3 observations:

In this section, we reported the results of our experiment evaluating the performance of MLMs when they were trained with only native samples. As described in section 4.5, we trained the MLMs using (i) Hindi samples, (ii) English samples, and (iii) both English and Hindi samples together. We kept the equal label ratios in all of the training sets. This is because we didn't observe any significant F1-score variations in the previous experiments by not keeping the same. The F1-scores of MLMs for different training sets were reported in Table 6. We observed the following,

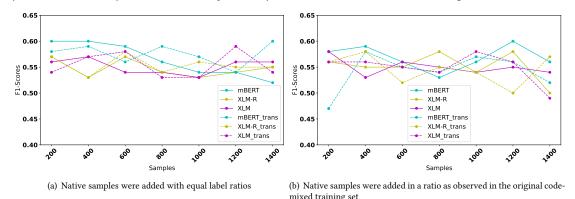


Fig. 2. Results of Experiments quantifying the impact of native samples when they were added in different amounts. The x - axis represents the native sample batch size, and the y - axis represents the F1 scores. The scores are averaged over five random runs.

Table 6. *F*1-scores of MLMs when they were trained with only native samples. The variations in *F*1 scores for different random seeds were reported in brackets.

Models	Training sets								
widueis	English	Hindi	English + Hindi						
XLM	0.47 (±0.03)	0.34 (±0.04)	0.36 (±0.02)						
mBERT	$0.50 (\pm 0.04)$	$0.41 (\pm 0.03)$	$0.51 (\pm 0.01)$						
XLM-R	$0.53 (\pm 0.01)$	0.60 (±0.03)	0.60 (±0.01)						
XLM _{trans}	0.36 (±0.04)	0.21 (±0.05)	0.45 (±0.04)						
mBERT _{trans}	$0.48 (\pm 0.02)$	$0.31 (\pm 0.04)$	$0.51 (\pm 0.02)$						
XLM-R _{trans}	0.54 (±0.00)	0.55 (±0.02)	$0.57 (\pm 0.03)$						

- The highest *F*1-score we got when models were trained using only English samples was **0.54**, while the same with Hindi samples raised to **0.60**. We found this interesting, particularly because all Hindi samples were in the Devanagari script, while most code-mixed test samples were in the Roman script. We believe there could be two possible reasons. The first one is based on the observation that the code-mixed hate dataset is majorly Hindi dominant with nearly **39** percent non-dominant (majorly English) words. Therefore, when the MLMs were trained with Hindi samples, they could capture the code-mixed hate. The other possible reason could be that both Hindi and code-mixed samples came from the same cultural context. Both datasets were labelled by annotators who know Hindi; hence, the models possibly captured the common cultural context. Some of the past works [5, 24] also reported similar phenomena, arguing that cross-lingual learning results by MLMs were good only when training samples and test samples came from similar languages and their cultural context were similar.
- The variants of the XLM-R language model gave the highest *F*1 scores across all native training scenarios; this means the projections of XLM-R generalise better from the native context to the code-mixed context.
- There were no significant improvements in the best F1 scores when Hindi and English samples were trained together, compared to when training was done with only Hindi samples. Also, the highest F1 score we got by training on Train-1 or Train-2 sets was 0.61, which is a minimal improvement over when training was Manuscript submitted to ACM

done with native samples (**0.60**). This empirically points out that MLMs trained on native samples can predict code-mixed hate to a large extent.

Models	Ratio	Scores							
widdels	Katio	scores	200	400	600	800	1000	1200	1400
		ACC	0.66	0.67	0.69	0.70	0.66	0.67	0.67
	E	F1	0.56	0.57	0.54	0.54	0.53	0.56	0.54
	Equal ratio	PRE	0.53	0.54	0.57	0.60	0.53	0.54	0.54
NT M		REC	0.59	0.59	0.52	0.49	0.53	0.58	0.58
XLM		ACC	0.69	0.70	0.68	0.68	0.69	0.70	0.68
	C) (tis	F1	0.58	0.53	0.56	0.55	0.54	0.55	0.54
	CM ratio	PRE	0.57	0.61	0.56	0.56	0.58	0.61	0.56
		REC	0.59	0.46	0.57	0.55	0.50	0.51	0.53
		ACC	0.68	0.70	0.71	0.71	0.69	0.66	0.65
	D 1	F1	0.60	0.60	0.59	0.56	0.54	0.54	0.56
	Equal ratio	PRE	0.56	0.58	0.62	0.62	0.59	0.53	0.51
		REC	0.64	0.63	0.56	0.50	0.49	0.55	0.53
mBERT		ACC	0.69	0.67	0.68	0.73	0.72	0.72	0.68
		F1	0.58	0.59	0.56	0.53	0.56	0.60	0.56
	CM ratio	PRE	0.56	0.54	0.56	0.71	0.66	0.61	0.57
		REC	0.60	0.64	0.55	0.42	0.49	0.60	0.56
		ACC	0.71	0.70	0.68	0.70	0.70	0.69	0.68
		F1	0.57	0.53	0.57	0.54	0.53	0.54	0.55
	Equal ratio	PRE	0.61	0.60	0.56	0.62	0.62	0.58	0.56
		REC	0.54	0.48	0.58	0.49	0.46	0.50	0.53
XLM-R		ACC	0.68	0.71	0.70	0.70	0.69	0.66	0.69
	CM ratio	F1	0.56	0.55	0.55	0.58	0.54	0.58	0.50
		PRE	0.56	0.62	0.60	0.59	0.59	0.50	0.60
		REC	0.57	0.50	0.50	0.57	0.49	0.64	0.43
		ACC	0.68	0.71	0.68	0.69	0.47	0.68	0.45
		F1	0.54	0.57	0.58	0.53	0.53	0.59	0.56
	Equal ratio	PRE	0.54	0.61	0.55	0.60	0.63	0.55	0.56
		REC	0.53	0.53	0.55	0.00	0.05	0.63	0.50
XLM _{trans}		ACC	0.33	0.70	0.62	0.47	0.40	0.05	0.52
		F1	0.56	0.56	0.55	0.54	0.58	0.56	0.49
	CM ratio	PRE	0.60	0.61	0.58	0.54	0.57	0.50	0.52
		REC	0.53	0.51	0.52	0.50	0.57	0.53	0.32
		ACC	0.69	0.70	0.52	0.69	0.66	0.68	0.40
		F1	0.58	0.59	0.56	0.59	0.57	0.54	0.60
	Equal ratio	PRE	0.56	0.59	0.50	0.59	0.57	0.54	0.56
		REC	0.50	0.59	0.52	0.57	0.52	0.57	0.50
mBERT _{trans}		ACC	0.01	0.39	0.39	0.01	0.69	0.51	0.04
		F1							
	CM ratio	PRE	0.47	0.58	0.55	0.54	0.57	0.56	0.52
			0.68	0.56	0.58	0.65	0.58	0.52	0.63
		REC	0.36	0.60	0.51	0.47	0.55	0.61	0.45
		ACC	0.68	0.70	0.69	0.70	0.70	0.70	0.69
	Equal ratio	F1	0.57	0.53	0.58	0.54	0.56	0.55	0.55
		PRE	0.55	0.61	0.56	0.61	0.60	0.60	0.58
XLM-Rtrans		REC	0.59	0.47	0.61	0.48	0.52	0.51	0.52
		ACC	0.69	0.69	0.70	0.70	0.67	0.70	0.69
	CM ratio	F1	0.56	0.58	0.52	0.55	0.54	0.50	0.57
		PRE	0.58	0.57	0.63	0.61	0.54	0.65	0.57
		REC	0.54	0.60	0.44	0.51	0.54	0.40	0.57

 Table 7. Detailed results of experiment-2. The reported values are average of three random seeds.

7 ERROR ANALYSIS:

In this section, we reported the cases in which combining the native samples improved or degraded the performance of considered MLMs. Table 8 reported some of such samples. Note that we reported the predictions only for MLMs with additional transformer layers. We saw similar performance without transformer layers as well. We observed the following:

Table 8. Selected examples for various cases reported under error analysis. Here, the check-mark, and the cross-mark denote correct and incorrect classification by the corresponding model, respectively. Notation: T1 for Train-1 and T2 for Train-2. The columns under **Code-mixed** reported the results when the models were trained with only code-mixed samples.

SI		Translated English		Codemixed				Combined					
No	Sample		Label	XLMtrans	mBERTtrans	XLM-R _{trans}	XLM _{trans}		mBERT _{trans}		XLM-R _{trans}		
					index i i ans	ALM Rerans	T1	T2	T1	T2	T1	T2	
1	Tum logon ne hi karwaya tha blasts in PAKISTAN iss liye aise posts daal rahe ho	You guys were the ones who orches- trated the blasts in Pakistan, that's why you're posting such things.	Hate	X	X	X	~	×	\checkmark	\checkmark	\checkmark	X	
2	Kabhi nafrat to kabhi dilo ka mail hai,	Sometimes it's hatred, sometimes it's the connection of hearts.	Non-Hate	X	X	×	~	\checkmark	\checkmark	\checkmark	\checkmark	~	
3	Tabhi Loktantra ka Murder BJP karti hai Supreme court bhi kai bar Phatkaar laga Chuka hai	That's why BJP commits the murder of democracy; the Supreme Court has also reprimanded them many times.	Hate	X	X	X	×	X	X	Х	~	X	
4	BhaiIndian bhulakkar hote heSan bhul hate henotebandhhikya hua?	Brother Indians are forgetful They forget everything Demonetization what happened?	Hate	~	~	\checkmark	×	~	X	X	X	~	
5	Abhi bhe time he sab sudar jao.	There's still time. Everyone, mend your ways.	Non-Hate	~	×	\checkmark	X	\checkmark	X	\checkmark	×	\checkmark	

- The addition of the native samples helped the MLMs to identify hate, expressed in a code-mixed phrase, without using any explicit hate words. Examples reported in *Sl. No.* 1 and 2 demonstrate this. Even though there is no explicit hate word mentioned in *'tum logo ne hi karwaya tha blast.'* (**Gloss:** You guys have done blast..), most MLMs trained with added native samples could detect the hate. Similarly, in *SL. No.* 2, MLMs trained without native samples failed to understand that the Hindi hate word *'nafrat'* is used to convey a non-hate message.
- For the cases where hate is expressed in a sarcastic tone, we observed that MLMs generally struggle to identify it. For example, in *Sl. No.* 3, only the XLM-R model trained **T1** could identify it.
- Finally, in many cases, like *Sl. No.* 5 and 6, we saw performance degradation after adding the native samples. After a careful inspection by the expert linguists, we found that they are some of the hard cases to identify, even for them. This is because the hate expressed here is subjective. For instance, if we see the translation of *Sl. No.* 5 i.e. *"Brother... Indians are forgetful... they forget everything... demonetization... what happened?"*, the label assigned to it was 'Hate'; however, many linguists preferred to categorise it as a 'criticism' without having a solid hate component (E.g. if the writer is an Indian). Similarly, the sample in row 6 translates to 'there is still time, improve yourself' can be considered a case of implicit hate (patronizing and condescending language) depending on the context.

8 CONCLUSIONS:

In this paper, we presented several experiments to evaluate the impact of native language samples on code-mixed hate detection. Some of the important observations we got were,

• On combining the native hate samples in the code-mixed training set, we found that MLMs performed relatively better. For many of them, the improvements were statistically significant. The attention scores produced by MLMs also validated this fact.

• MLMs trained with only native samples could identify hate in the code-mixed context to a large extent. It implies that we can deploy them if an appropriate code-mixed corpus is unavailable. We also observed that the native corpus (here Hindi) that share maximum linguistic overlap and cultural context with the code-mixed hate corpus is more effective in capturing code-mixed hate.

9 FUTURE WORKS:

In this section, we report the limitations of the present work. They can be addressed in subsequent future works.

- In this work, we have evaluated our hypothesis only for a single code-mixed environment (Hindi-English) and a task (hate). This is because we don't have linguistic expertise for other code-mixed environments for which we have code-mixed hate corpora publicly available (e.g. Sinhala-English hate dataset ⁴). In future, one can evaluate the idea of native sample mixing for other code-mixed environments and tasks (humour, sarcasm, etc.) for discovering its wide usage.
- We have kept the architecture and the task setup simple and basic. We believe wider testing of our hypothesis across many task set-ups (e.g. multi-tasking, sequence labelling, sequence-to-sequence tasks etc.) can be done to further report the applicability of the idea of native language mixing. For example, in this paper, we found that for the cases where code-mixed hate was sarcastic or subjective, it's still hard to identify them by simply including native hate samples. One can check in future if multi-tasking with native and code-mixed sarcasm samples helps the models to perform better.
- We could show our results only for three language models, i.e. XLM, mBERT and XLM-R. Expanding the experiments to newer language models will showcase the strength and relevance of the idea of native language mixing in the context of modern MLMs.

REFERENCES

- Areej Al-Hassan and Hmood Al-Dossari. 2019. Detection of hate speech in social networks: a survey on multilingual corpus. In 6th international conference on computer science and information technology, Vol. 10. 10–5121.
- [2] Azalden Alakrot, Liam Murray, and Nikola S Nikolov. 2018. Dataset construction for the detection of anti-social behaviour in online communication in Arabic. Procedia Computer Science 142 (2018), 174–181.
- [3] Nuha Albadi, Maram Kurdi, and Shivakant Mishra. 2018. Are they our brothers? analysis and detection of religious hate speech in the arabic twittersphere. In 2018 IEEE/ACM International Conference on Advances in Social Networks Analysis and Mining (ASONAM). IEEE, 69–76.
- [4] Ika Alfina, Rio Mulia, Mohamad Ivan Fanany, and Yudo Ekanata. 2018. Hate speech detection in the Indonesian language: A dataset and preliminary study. In 9th International Conference on Advanced Computer Science and Information Systems, ICACSIS 2017. Institute of Electrical and Electronics Engineers Inc., 233–237.
- [5] Irina Bigoulaeva, Viktor Hangya, and Alexander Fraser. 2021. Cross-lingual transfer learning for hate speech detection. In Proceedings of the first workshop on language technology for equality, diversity and inclusion. 15–25.
- [6] Aditya Bohra, Deepanshu Vijay, Vinay Singh, Syed Sarfaraz Akhtar, and Manish Shrivastava. 2018. A dataset of Hindi-English code-mixed social media text for hate speech detection. In Proceedings of the second workshop on computational modeling of people's opinions, personality, and emotions in social media. 36–41.
- [7] Aditya Bohra, Deepanshu Vijay, Vinay Singh, Syed Sarfaraz Akhtar, and Manish Shrivastava. 2018. A Dataset of Hindi-English Code-Mixed Social Media Text for Hate Speech Detection. In Proceedings of the Second Workshop on Computational Modeling of People's Opinions, Personality, and Emotions in Social Media. Association for Computational Linguistics, New Orleans, Louisiana, USA, 36–41. https://doi.org/10.18653/v1/W18-1105
- [8] Anusha Chhabra and Dinesh Kumar Vishwakarma. 2023. A literature survey on multimodal and multilingual automatic hate speech identification. Multimedia Systems (2023), 1–28.
- [9] Abhishek Chopra, Deepak Kumar Sharma, Aashna Jha, and Uttam Ghosh. 2023. A Framework for Online Hate Speech Detection on Code-mixed Hindi-English Text and Hindi Text in Devanagari. ACM Transactions on Asian and Low-Resource Language Information Processing 22, 5 (2023), 1–21.

⁴https://huggingface.co/datasets/NLPC-UOM/Sinhala-English-Code-Mixed-Code-Switched-Dataset

Debajyoti Mazumder, Aakash Kumar, and Jasabanta Patro

- [10] Yi-Ling Chung, Elizaveta Kuzmenko, Serra Sinem Tekiroğlu, and Marco Guerini. 2019. CONAN-COunter NArratives through Nichesourcing: a Multilingual Dataset of Responses to Fight Online Hate Speech. In Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics. 2819–2829.
- [11] Alexis Conneau, Kartikay Khandelwal, Naman Goyal, Vishrav Chaudhary, Guillaume Wenzek, Francisco Guzmán, Edouard Grave, Myle Ott, Luke Zettlemoyer, and Veselin Stoyanov. 2019. Unsupervised Cross-lingual Representation Learning at Scale. CoRR abs/1911.02116 (2019). arXiv:1911.02116 http://arxiv.org/abs/1911.02116
- [12] Amitava Das and Björn Gambäck. 2014. Identifying Languages at the Word Level in Code-Mixed Indian Social Media Text. In Proceedings of the 11th International Conference on Natural Language Processing, Dipti Misra Sharma, Rajeev Sangal, and Jyoti D. Pawar (Eds.). NLP Association of India, Goa, India, 378–387. https://aclanthology.org/W14-5152
- [13] Mithun Das, Punyajoy Saha, Binny Mathew, and Animesh Mukherjee. 2022. HateCheckHIn: Evaluating Hindi Hate Speech Detection Models. arXiv preprint arXiv:2205.00328 (2022).
- [14] V Sharmila Devi, S Kannimuthu, and Anand Kumar Madasamy. 2024. The Effect of Phrase Vector Embedding in Explainable Hierarchical Attentionbased Tamil Code-Mixed Hate Speech and Intent Detection. *IEEE Access* (2024).
- [15] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. BERT: Pre-training of Deep Bidirectional Transformers for Language Understanding. In Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2019, Minneapolis, MN, USA, June 2-7, 2019, Volume 1 (Long and Short Papers), Jill Burstein, Christy Doran, and Thamar Solorio (Eds.). Association for Computational Linguistics, 4171–4186. https://doi.org/10.18653/v1/n19-1423
- [16] Karthik Dinakar, Birago Jones, Catherine Havasi, Henry Lieberman, and Rosalind Picard. 2012. Common sense reasoning for detection, prevention, and mitigation of cyberbullying. ACM Transactions on Interactive Intelligent Systems (TiiS) 2, 3 (2012), 1–30.
- [17] Anderson Almeida Firmino, Cláudio de Souza Baptista, and Anselmo Cardoso de Paiva. 2023. Improving hate speech detection using Cross-Lingual Learning. Expert Systems with Applications (2023), 121115.
- [18] Paula Fortuna and Sérgio Nunes. 2018. A survey on automatic detection of hate speech in text. ACM Computing Surveys (CSUR) 51, 4 (2018), 1-30.
- [19] Lei Gao and Ruihong Huang. 2017. Detecting Online Hate Speech Using Context Aware Models. In Proceedings of the International Conference Recent Advances in Natural Language Processing, RANLP 2017. 260–266.
- [20] Kwang-Il Goh and Albert-Laszlo Barabasi. 2006. Burstiness and Memory in Complex Systems. arXiv:physics/0610233 [physics.data-an]
- [21] Jennifer Golbeck, Zahra Ashktorab, Rashad O Banjo, Alexandra Berlinger, Siddharth Bhagwan, Cody Buntain, Paul Cheakalos, Alicia A Geller, Rajesh Kumar Gnanasekaran, Raja Rajan Gunasekaran, et al. 2017. A large labeled corpus for online harassment research. In Proceedings of the 2017 ACM on web science conference. 229–233.
- [22] Raul Gomez, Jaume Gibert, Lluis Gomez, and Dimosthenis Karatzas. 2020. Exploring hate speech detection in multimodal publications. In Proceedings of the IEEE/CVF winter conference on applications of computer vision. 1470–1478.
- [23] Jarod Govers, Philip Feldman, Aaron Dant, and Panos Patros. 2023. Down the Rabbit Hole: Detecting Online Extremism, Radicalisation, and Politicised Hate Speech. Comput. Surveys (2023).
- [24] Vikram Gupta, Sumegh Roychowdhury, Mithun Das, Somnath Banerjee, Punyajoy Saha, Binny Mathew, Animesh Mukherjee, et al. 2022. Multilingual Abusive Comment Detection at Scale for Indic Languages. Advances in Neural Information Processing Systems 35 (2022), 26176–26191.
- [25] Md Saroar Jahan and Mourad Oussalah. 2023. A systematic review of Hate Speech automatic detection using Natural Language Processing. *Neurocomputing* (2023), 126232.
- [26] Akshita Jha and Radhika Mamidi. 2017. When does a compliment become sexist? analysis and classification of ambivalent sexism using twitter data. In Proceedings of the second workshop on NLP and computational social science. 7–16.
- [27] Sakshi Kalra, Kushank Maheshwari, Saransh Goel, and Yashvardhan Sharma. 2022. Hate Speech Detection in Marathi and Code-Mixed Languages using TF-IDF and Transformers-Based BERT-Variants. (2022).
- [28] Ritesh Kumar, Aishwarya N Reganti, Akshit Bhatia, and Tushar Maheshwari. 2018. Aggression-annotated Corpus of Hindi-English Code-mixed Data. In Proceedings of the Eleventh International Conference on Language Resources and Evaluation (LREC 2018).
- [29] Guillaume Lample and Alexis Conneau. 2019. Cross-lingual Language Model Pretraining. CoRR abs/1901.07291 (2019). arXiv:1901.07291 http: //arxiv.org/abs/1901.07291
- [30] Ilya Loshchilov and Frank Hutter. 2017. Fixing Weight Decay Regularization in Adam. CoRR abs/1711.05101 (2017). arXiv:1711.05101 http: //arxiv.org/abs/1711.05101
- [31] Binny Mathew, Punyajoy Saha, Seid Muhie Yimam, Chris Biemann, Pawan Goyal, and Animesh Mukherjee. 2021. Hatexplain: A benchmark dataset for explainable hate speech detection. In Proceedings of the AAAI conference on artificial intelligence, Vol. 35. 14867–14875.
- [32] Puneet Mathur, Ramit Sawhney, Meghna Ayyar, and Rajiv Shah. 2018. Did you offend me? classification of offensive tweets in hinglish language. In Proceedings of the 2nd workshop on abusive language online (ALW2). 138–148.
- [33] Hamdy Mubarak, Kareem Darwish, and Walid Magdy. 2017. Abusive language detection on Arabic social media. In Proceedings of the first workshop on abusive language online. 52–56.
- [34] Debora Nozza. 2021. Exposing the limits of zero-shot cross-lingual hate speech detection. In Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 2: Short Papers). 907–914.
- [35] Nedjma Ousidhoum, Zizheng Lin, Hongming Zhang, Yangqiu Song, and Dit-Yan Yeung. 2019. Multilingual and Multi-Aspect Hate Speech Analysis. In Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural

Language Processing (EMNLP-IJCNLP). 4675-4684.

- [36] Fabio Poletto, Valerio Basile, Manuela Sanguinetti, Cristina Bosco, and Viviana Patti. 2021. Resources and benchmark corpora for hate speech detection: a systematic review. Language Resources and Evaluation 55 (2021), 477–523.
- [37] Rahul Pradhan, Ankur Chaturvedi, Aprna Tripathi, and Dilip Kumar Sharma. 2020. A review on offensive language detection. Advances in Data and Information Sciences: Proceedings of ICDIS 2019 (2020), 433–439.
- [38] Jing Qian, Anna Bethke, Yinyin Liu, Elizabeth Belding, and William Yang Wang. 2019. A Benchmark Dataset for Learning to Intervene in Online Hate Speech. In Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP). 4755–4764.
- [39] Mohammadreza Rezvan, Saeedeh Shekarpour, Lakshika Balasuriya, Krishnaprasad Thirunarayan, Valerie L Shalin, and Amit Sheth. 2018. A quality type-aware annotated corpus and lexicon for harassment research. In Proceedings of the 10th acm conference on web science. 33–36.
- [40] Bjorn Ross, Michael Rist, Guillermo Carbonell, Benjamin Cabrera, Nils Kurowsky, and Michael Wojatzki. 2016. Measuring the Reliability of Hate Speech Annotations: The Case of the European Refugee Crisis. In 3rd Workshop on Natural Language Processing for Computer-Mediated Communication/Social Media. Ruhr-Universitat Bochum, 6–9.
- [41] Manuela Sanguinetti, Fabio Poletto, Cristina Bosco, Viviana Patti, and Marco Stranisci. 2018. An italian twitter corpus of hate speech against immigrants. In Proceedings of the eleventh international conference on language resources and evaluation (LREC 2018).
- [42] Anna Schmidt and Michael Wiegand. 2017. A survey on hate speech detection using natural language processing. In Proceedings of the fifth international workshop on natural language processing for social media. 1–10.
- [43] Nicolas Tsapatsoulis and Vasiliki Anastasopoulou. 2019. Cyberbullies in Twitter: A focused review. In 2019 14th International Workshop on Semantic and Social Media Adaptation and Personalization (SMAP). IEEE, 1–6.
- [44] Pooja Wadhwa and MPS Bhatia. 2013. Tracking on-line radicalization using investigative data mining. In 2013 National Conference on Communications (NCC). IEEE, 1–5.
- [45] Zeerak Waseem. 2016. Are you a racist or am i seeing things? annotator influence on hate speech detection on twitter. In Proceedings of the first workshop on NLP and computational social science. 138–142.
- [46] Zeerak Waseem and Dirk Hovy. 2016. Hateful symbols or hateful people? predictive features for hate speech detection on twitter. In Proceedings of the NAACL student research workshop. 88–93.
- [47] Ellery Wulczyn, Nithum Thain, and Lucas Dixon. 2017. Ex machina: Personal attacks seen at scale. In Proceedings of the 26th international conference on world wide web. 1391–1399.