
Cascade-Aware Training of Language Models

Congchao Wang
Google Inc.
congchaowang@google.com

Sean Augenstein
Google Inc.
saugenst@google.com

Keith Rush
Google Inc.
krush@google.com

Wittawat Jitkrittum
Google Inc.
wittawat@google.com

Harikrishna Narasimhan
Google Inc.
hparasimhan@google.com

Ankit Singh Rawat
Google Inc.
ankitsrawat@google.com

Aditya Krishna Menon
Google Inc.
adityakmenon@google.com

Alec Go
Google Inc.
ago@google.com

Abstract

Reducing serving cost and latency is a fundamental concern for the deployment of language models (LMs) in business applications. To address this, *cascades* of LMs offer an effective solution that conditionally employ smaller models for simpler queries. Cascaded systems are typically built with independently trained models, neglecting the advantages of considering inference-time interactions of the cascaded LMs during training. In this paper, we present *cascade-aware training* (CAT), an approach to optimizing the overall quality-cost performance tradeoff of a cascade of LMs. We achieve inference-time benefits by training the small LM with awareness of its place in a cascade and downstream capabilities. We demonstrate the value of the proposed method with over 60 LM tasks of the SuperGLUE, WMT22, and FLAN2021 datasets.

1 Introduction

Dense neural networks, such as large language models (LLMs), incur significant computational cost to train and serve. Conditional computation—where a strict subset of model parameters are activated on some queries—is a manner of reducing cost. One general approach is to arrange a group of models into a *cascade* of varying scales [Viola and Jones, 2001, Varshney and Baral, 2022], with the smallest being least capable (but computationally cheapest) and largest being most capable (but most expensive). A query is routed through the cascade, and uses the smallest model which is ‘confident’ (in some concrete sense) to compute the response. See Figure 1, Left.

Such a modular arrangement naturally admits physically distributed deployments: e.g., a low-latency small model on a mobile device where queries originate, augmented by a high-latency larger model on a server in a datacenter [Rawat et al., 2021, Kag et al., 2023]. Compared to sending all queries to the highest-quality model at the server, the cascade saves on both computation cost (e.g., average floating point operations or ‘FLOPs’ per query, a proxy for power usage) and average query latency.

Cascades have been extensively studied for image classification and segmentation [Viola and Jones, 2001, Trapeznikov and Saligrama, 2013, Bolukbasi et al., 2017, Huang et al., 2018, Wang et al., 2018, Streeter, 2018, Rawat et al., 2021, Wang et al., 2022, Kag et al., 2023, Jitkrittum et al., 2023], for classification-based natural language processing (NLP) [Rawat et al., 2021, Mamou et al., 2022, Varshney and Baral, 2022, Khalili et al., 2022, Dohan et al., 2022], and recently for *generative*

NLP [Chen et al., 2023, Gupta et al., 2024, Yue et al., 2024]. The latter’s central challenge is that it involves variable-length *sequence* outputs, where a suitable confidence measure that can indicate the quality of the response is non-obvious [Gupta et al., 2024].

Typically, neural network cascades leverage preexisting models, dropping them into place in the cascade as is [Varshney and Baral, 2022]. Any considerations of the overall cascade’s performance are *post-hoc* and concentrated on aspects apart from the constituent models, like the routing or deferral logic (e.g., as in Narasimhan et al. [2022], Jitkrittum et al. [2023], Gupta et al. [2024], Chen et al. [2023], Yue et al. [2024]). The models themselves remain fixed and *cascade-oblivious*. But intuitively it would be preferable if the small model did not expend capacity attempting to handle ‘hard’ queries that will be routed onwards anyway. A few *cascade-aware* approaches have been proposed in the literature for non-generative tasks. Kag et al. [2023] trains an entire cascaded system for image classification end-to-end. Rawat et al. [2021] uses carefully tuned distillation-inspired losses to isolate knowledge in a ‘lite’ (i.e., small) model while keeping their large model frozen. Both show significant improvements, but are not immediately applicable to the generative LLM setting.

To the best of our knowledge, the present work is the first to consider how to perform *cascade-aware* training for cascades of *LLMs*. Fine-tuning a constituent LLM in a cascade of LLMs requires addressing several underlying technical challenges. First, LLMs in their generative capacity are deployed in an autoregressive manner; inference routing decisions are made at the sequence level (as noted by Gupta et al. [2024]). Training, however, takes place at the *token* level. Bridging this gap between token-based training and sequence-level inference routing is not straightforward. Second, and related, the notion of ‘easy’ or ‘hard’ training content is complex as it must be judged at the token level. Finally, the larger model(s) may have several billions of parameters (with correspondingly massive training costs).

In this paper, we describe how to significantly improve a cascade of language models (LMs) by fine-tuning the smallest LM with ‘awareness’ of its place in the cascade and the capabilities of the larger LMs that support it, in a scalable manner, while bridging the token-to-sequence training to inference gap. Such *cascade-aware training* (as we refer to it) yields a significantly improved quality-cost tradeoff relation compared to various baselines, at relatively small increased training cost. Crucially, we only query the typical functional API of the larger model with respect to which we train, analogous to that exposed by ChatGPT [OpenAI, 2022] or Gemini [Team et al., 2024]. We seek a ‘sweet spot’ where we impact the deferral behavior enough to significantly reduce inference-time computational cost, without dramatically increasing the computational cost of training, and while leaving the capabilities of the large model unmodified.

The contributions of this paper are as follows:

- (i) We present a practical, scalable, and general method to improve the quality-to-cost tradeoff curve for a cascade of two language models (Section 3). This method functions by leveraging the predictions of the large model to define a new loss function for the small model. Intuitively, the small model is encouraged to focus its capacity on ‘easier’ examples, by selectively masking certain tokens—those on which both models’ prediction was incorrect (see Figure 1, Right).
- (ii) We observe that this altered loss function improves the cascade quality primarily by increasing performance of the small model when asked to process a significant fraction of the queries, often improving the performance of the small model when it processes *all* queries (Section 4). In this sense, our methods can be understood as a novel approach to token-wise data filtering without sacrificing large amounts of data.
- (iii) To the best of our knowledge, our work is the first to consider *directly optimizing* language models for their position in cascades in a multi-task scenario encompassing both generation and classification tasks, and the first to demonstrate that *token-level* loss adjustments can be translated to *sequence-level* cascade gains.

We demonstrate all of the above with experiments on the SuperGLUE [Wang et al., 2019], WMT22 [Kocmi et al., 2022], and FLAN2021 [Wei et al., 2021] datasets encompassing over 60 LM tasks.

2 Setup

Language Models (LMs) Let $\mathbf{x} := (x_1, \dots, x_M) \in \mathcal{X}$ denote an input sequence (or ‘query’) where each token x_i is an element from a vocabulary $\mathcal{V} := [V] := \{1, \dots, V\}$ of cardinality V ,

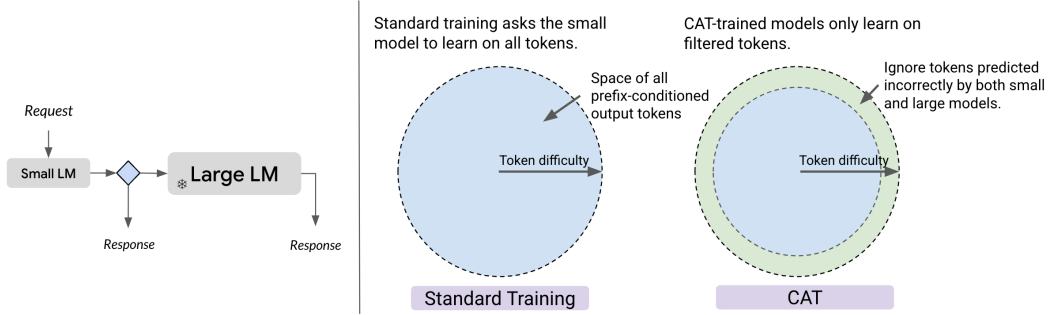


Figure 1: **Left:** Cascade setup at inference time. The small model is deployed along side the large model that guided its training. **Right:** Our proposed cascade-aware training (CAT). The small model has access to a trained, fixed, large model during training. The proposed training objective (see (7)) is a generalization of the standard one-hot cross entropy and KL-divergence based distillation loss, where losses are only accounted for on tokens that are predicted correctly by the small or the large model (i.e., tokens that are not too difficult).

and $\mathcal{X} := \mathcal{V}^*$. Similarly, let $\mathbf{y} := (y_1, \dots, y_N) \in \mathcal{Y} := \mathcal{V}^*$ be an output sequence (or ‘response’) where each output token $y_i \in \mathcal{V}$. A language model p is a parametric probability distribution that computes the probability $p(\mathbf{y}|\mathbf{x})$ of an output sequence \mathbf{y} given an input sequence \mathbf{x} . This conditional probability may be expressed as:

$$p(\mathbf{y}|\mathbf{x}) = \prod_{i=1}^N p(y_i|\mathbf{x}, \mathbf{y}_{<i}), \quad (1)$$

where $\mathbf{y}_{<i} := (y_1, \dots, y_{i-1})$ and $y_{<1} = \emptyset$. Expressing the probability in this auto-regressive manner allows one to parameterize a model to repeatedly predict one output token at a time. A common modeling approach is to set $p(\cdot|\mathbf{x}, \mathbf{y}_{<i}) = \text{softmax}(f(\mathbf{x}, \mathbf{y}_{<i}))$ where $f(\mathbf{x}, \mathbf{y}_{<i}) \in \mathbb{R}^V$ is a vector of per-token logit scores. Common network architecture choices for modeling f are Recurrent Neural Networks, such as Long Short-Term Memory [Hochreiter and Schmidhuber, 1997], or Transformers [Vaswani et al., 2017]. The latter are generally considered the state-of-the-art, and we will use them in our experiments in Section 4.

LM Training Losses Suppose that we observe a training set $\{(\mathbf{x}^{(j)}, \mathbf{y}^{(j)})\}_{j=1}^S$ containing S query-response pairs. With the auto-regressive representation in (1), a common way to use this training set to fine-tune the LM is by minimizing the average over examples of (one-hot) cross-entropy loss, which is the sum negative log likelihoods of the N output tokens of a particular example (\mathbf{x}, \mathbf{y}) :

$$L_{\text{xent}}(\mathbf{x}, \mathbf{y}) = - \sum_{i=1}^N \log p(y_i|\mathbf{x}, \mathbf{y}_{<i}). \quad (2)$$

This can be augmented with *distillation* [Bucilă et al., 2006, Hinton et al., 2015] in some proportion $w \in [0, 1]$, if we have a well-trained (teacher) LM, p_{teach} , available to ‘teach’ the (student) LM undergoing training, p :

$$L_{\text{dist}}(\mathbf{x}, \mathbf{y}) = - \sum_{i=1}^N \left(w \cdot \log p(y_i|\mathbf{x}, \mathbf{y}_{<i}) + (1-w) \cdot \sum_{y'=1}^V p_{\text{teach}}(y'|\mathbf{x}, \mathbf{y}_{<i}) \log p(y'|\mathbf{x}, \mathbf{y}_{<i}) \right) \quad (3)$$

The latter involves *token-level* distillation [Sanh et al., 2020], as opposed to *sequence-level* distillation [Kim and Rush, 2016, Gu et al., 2024, Wei et al., 2024]. Recent work has also explored the utility of modifying the samples on which token-level distillation is performed [Agarwal et al., 2024].

The above standard approaches ((2) and (3)) consider all output tokens when calculating the loss. This penalizes the LM equally for its prediction ability on *all* tokens. In Section 3, we will present an alternative approach which *selectively* considers which tokens should count when calculating loss.

LM Cascades Let p_S and p_L be a small model and a large model, respectively. At test time, given an input query \mathbf{x} , we call a pre-determined deferral rule $r: \mathcal{X} \rightarrow \mathbb{R}$ to obtain a routing score (or deferral score) $r(\mathbf{x})$. The small model p_S is used if $r(\mathbf{x}) < \tau$ and the large model is used otherwise, where $\tau \in \mathbb{R}$ is a threshold to be specified. The cascade model may be written succinctly as:

$$p_{\text{cas}}(\mathbf{y}|\mathbf{x}) := 1[r(\mathbf{x}) < \tau] \cdot p_S(\mathbf{y}|\mathbf{x}) + 1[r(\mathbf{x}) \geq \tau] \cdot p_L(\mathbf{y}|\mathbf{x}). \quad (4)$$

There are many design choices for the function r (see Gupta et al. [2024], Wang et al. [2022]).

In this work, we focus on a deferral arrangement where r depends on p_S . That is, each input query \mathbf{x} always triggers a call to p_S , and then r is used to decide whether to additionally invoke (or ‘defer’ to) p_L . In particular, we use the confidence (as measured by normalized log-likelihood of the output sequence) of p_S to decide whether to use p_S for prediction or use p_L . Concretely, let $\mathbf{y}_S \sim p_S(\cdot|\mathbf{x})$ be the output sequence consisting of N tokens. The deferral rule of interest is:

$$r(\mathbf{x}) = -\frac{1}{N} \sum_{i=1}^N \log p_S(y_{S,i}|\mathbf{x}, \mathbf{y}_{S,<i}). \quad (5)$$

Cascade Cost The point of a model cascade is to reduce costs, like expected number of floating point operations (FLOPs) per query or expected latency per query, via conditional activation of parameters. If the cost to serve query \mathbf{x} is $C_S(\mathbf{x})$ for the small model and $C_L(\mathbf{x})$ for the large model, the cost to serve query \mathbf{x} by the overall neural cascade is:

$$C_{\text{cas}}(\mathbf{x}) = C_S(\mathbf{x}) + 1[r(\mathbf{x}) \geq \tau] \cdot C_L(\mathbf{x}) \quad (6)$$

3 Cascade-Aware Training (CAT)

Given the preliminaries in the previous section, we can describe the exact problem we will optimize. We assume that p_L has already been fine-tuned on desired tasks and is fixed. We are interested in fine-tuning p_S in a manner that, when deployed jointly alongside p_L in an overall cascade p_{cas} , achieves the best expected quality of response from (4) for expected cost expended from (6).

Adjusting the parameters of p_S can affect the quality-cost tradeoff in two ways: via changes to the small model’s prediction accuracy, and via changes to the small model’s prediction confidence (which affects routing decisions via (5)). Note that the routing threshold τ is a free parameter which controls the operating location on the quality-cost tradeoff curve. Cascade-aware training should provide a more desirable such tradeoff curve.

We now present our approach for training the small model p_S in a cascade-aware manner. Given an input-output training example (\mathbf{x}, \mathbf{y}) , we define the *cascade-aware training loss* as:

$$L_{\text{cat-dist}}(\mathbf{x}, \mathbf{y}) := -\sum_{i=1}^N \alpha_i \cdot \left(w \cdot \log p_S(y_i|\mathbf{x}, \mathbf{y}_{<i}) + (1-w) \cdot \sum_{y'=1}^V p_L(y'|\mathbf{x}, \mathbf{y}_{<i}) \log p_S(y'|\mathbf{x}, \mathbf{y}_{<i}) \right), \quad (7)$$

$$\alpha_i = \alpha_i(\mathbf{x}, \mathbf{y}_{<i}) := 1 \left[y_i = \arg \max_{y' \in \mathcal{V}} p_S(y'|\mathbf{x}, \mathbf{y}_{<i}) \vee y_i = \arg \max_{y' \in \mathcal{V}} p_L(y'|\mathbf{x}, \mathbf{y}_{<i}) \right]. \quad (8)$$

This loss is nearly the same as L_{dist} in (3), with the large model leveraged as teacher ($p_{\text{teach}} = p_L$). The difference is that we selectively ignore some tokens (those wrongly predicted by both the small and large models), via the α_i term (see Figure 1 Right for illustration). This focuses the small

model to learn to predict learnable output tokens, where a token is considered learnable if it can be predicted correctly by one of the two models. We can also consider a simplified version of cascade-aware training loss when $w = 1$, i.e. a cascade-aware variant of just the one-hot cross-entropy loss: $L_{\text{cat-xent}}$. Note that α_i is non-differentiable, so it influences model updating only by selectively ignoring certain tokens.

The token filtering criterion defined by α_i serves to consider only tokens that are not too difficult, i.e., those predicted correctly by at least one model. This approach allows the small model to optimize its limited capacity by focusing on learnable tokens curated by the large model, which helps improve both the small model’s overall accuracy and its output confidence measure. Intuitively, this strategy leverages the large model’s capability to concentrate the small model on a learnable token set (Figure 1, Right), thereby enhancing the small model’s confidence and accuracy. Simultaneously, it maintains exploration by including tokens that the small model can correctly predict. This overall confidence enhancement on the correctly predicted tokens increases the reliability of the score from (5), serving as a robust deferral indicator. As shall be seen in Section 4.2, a CAT-trained model exhibits improved accuracy on examples where it is confident.

Since α_i acts token-wise, it can be easily applied to the training or fine-tuning of language models. Rawat et al. [2021] demonstrated that filtering out the ‘hard’ sequence (the whole training example) can also benefit the cascade, allowing the small model to learn more efficiently on ‘easy’ ones. However, designing an appropriate criterion for ‘hard’ sequences (compared to ‘hard’ tokens) is non-trivial. Additionally, even within difficult sequences, some tokens may not be inherently difficult to predict. Discarding entire sequences could result in the loss of valuable training tokens.

The experiments in the next section will show the benefits to the cascade of fine-tuning the small model in a cascade-aware manner.

4 Experiments

In this section, we present a series of experiments comparing the performance of small models trained with cascade-aware training (CAT) against models trained with the more commonly used cross-entropy loss and distillation loss. These experiments were conducted on three datasets encompassing over 60 language model tasks. Additionally, we provide a case study, demonstrating that small models trained with CAT loss exhibit improved accuracy on examples where they have high confidence.

4.1 CAT improves performance of the cascade

Datasets To verify our hypothesis that CAT could benefit the cascade with more robust deferral indicator from the small model, we conducted fine-tuning experiments on the SuperGLUE [Wang et al., 2019], WMT22 [Kocmi et al., 2022], and FLAN2021 [Wei et al., 2021] datasets, which encompass over 60+ language model tasks commonly used for multi-task language model fine-tuning. SuperGLUE and WMT22 datasets consist of classification and generation tasks, respectively. Given the wide range of languages in WMT22, we randomly selected three language pairs (en ↔ zh, en ↔ ja, and en ↔ ru), resulting in six translation tasks. The performance measurements for SuperGLUE and WMT (accuracy and BLEU score) are well-accepted benchmarks for robust performance comparison. FLAN2021 datasets include a large number of tasks covering both classification and generation task types, allowing us to examine CAT’s influence on both when trained together.

Beyond fine-tuning, we also explored the benefits of CAT on the pretraining task using the C4 datasets [Raffel et al., 2020], as detailed in Appendix E.

Models We employed PALM-2 language models [Anil et al., 2023] as our cascading LM candidates. For all experiments, we used pretrained PALM-2 Gecko as the small LM and PALM-2 Otter as the large LM. For each model-dataset pair, we conducted a round of fine-tuning to ensure they performed reasonably well. Note that for WMT22, the large model was fine-tuned on the entire WMT22 dataset, not just the three selected language pairs of interest. This make the gap between small and large models clearer. Across all three datasets, the large model consistently outperformed the small model. We used greedy decoding for all LMs. Detailed training configurations, including learning rate, training steps, and batch size, are provided in Appendix A.

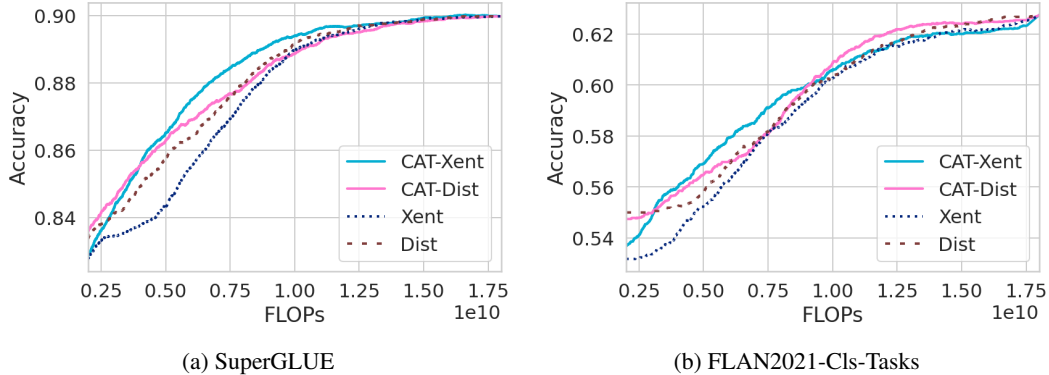


Figure 2: Quality-vs.-FLOPs curves for classification tasks on SuperGLUE, and FLAN2021 datasets. We utilized two most commonly used training losses as comparison: cross-entropy (Xent) and distillation with KL divergence (Dist). Results showed that CAT benefits the cascade dramatically on both losses. On the SuperGLUE dataset as shown in (a), CAT-Xent reduces 50% FLOPs given fixed 86% accuracy requests (13% deferral request less). With the same 5 billion FLOPs budget, CAT-Xent achieves 2% absolute accuracy improvement. Meanwhile, CAT does not clearly downgrade the small model’s original capability (left end of the curves). When applying CAT with distillation, we can still see benefits for the cascade majority of the time (CAT-Dist vs. Dist). Similar benefits are also seen on FLAN2021 datasets in (b).

Evaluation We conducted evaluations on the benchmarks in a task-agnostic manner, wherein queries from different tasks were input into the language models. This approach is more realistic for language models with multi-task support. The results of task-specific comparisons are available in Appendix D. We used deferral curves (Accuracy-vs.-FLOPs or BLEU score-vs.-FLOPs) to summarize the models’ cascading performance, following the methodology from previous works [Gupta et al., 2024, Jitkrittum et al., 2023, Kag et al., 2023]. FLOPs per token was used as the cost of interest (x-axis in Figures 2 and 3). We consider the per-token FLOPs cost of calling either constituent LM for inference as a constant (i.e., independent of query x); we approximated it as twice the number of parameters in that LM (as in Kaplan et al. [2020] and Hoffmann et al. [2022]). Calculating the FLOPs cost in this way makes it essentially the same as the "deferral ratio" used in [Gupta et al., 2024, Jitkrittum et al., 2023, Kag et al., 2023]. We constructed the deferral curves by sweeping different thresholds τ in (6) on the deferral score $r(x)$ in (5).

The FLAN2021 datasets provided 15 different metrics for evaluation. Here, we present results from 39 tasks whose evaluation metric is accuracy, and 8 tasks that rely on BLEU scores.

Baselines As CAT is applied on losses in a token-wise manner, we can easily apply it to various training paradigms for language models. We chose two loss functions for this study. One is the plain cross-entropy loss Xent (L_{xent} in (2)), which is most commonly used in model fine-tuning. The other is model distillation loss Dist (L_{dist} in (3)). For the distillation experiments, we set $w = 0.5$, which has proven reliable based on our experience. We applied cascade-aware training to these two losses and got our new design CAT-Xent and CAT-Dist (see $L_{\text{cat-xent}}$ and $L_{\text{cat-dist}}$ in (7) in Section 3). We also explored four other loss designs which are similar to (7) but only based on either p_S or p_L ; see our ablation study in Appendix C.2. Kag et al. [2023], Gupta et al. [2024] are also compared with some adjustment to adapt the multi-task LM cascade, but their performance is not on-par with the other baselines. For the sake of clarity, we defer their presentation to Appendix B.

Comparison: classification tasks Figure 2 shows that CAT benefits the cascade dramatically on the SuperGLUE dataset, especially when the model is trained with one-hot cross entropy (CAT-Xent). Compared with the training with plain one-hot cross entropy (Xent), CAT-Xent reduces 13% FLOPs (large model calls) given fixed 87% accuracy.

With fixed 2 billion total FLOPs budget ($\sim 20\%$ large model calls), CAT-Xent gets 2% accuracy improvement. Meanwhile, CAT does not clearly downgrade the small model’s original capability (left end of the curves). When applying CAT with distillation, we can still see benefits for the cascade

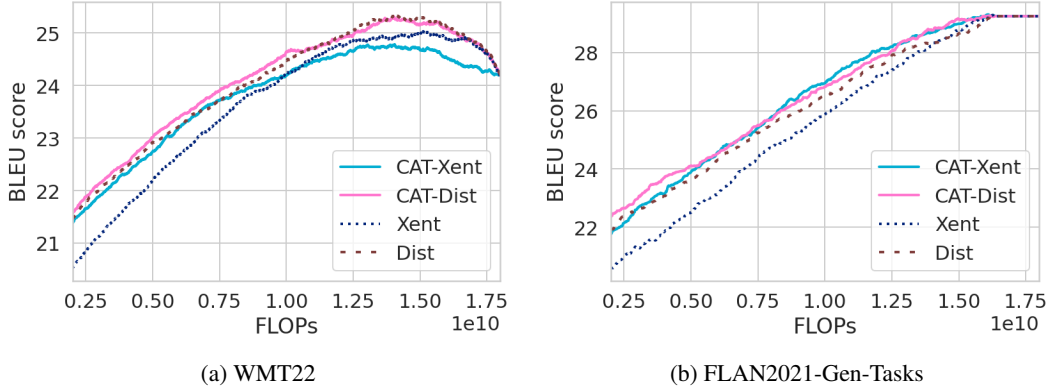


Figure 3: Quality-vs-FLOPs curves for generation tasks on WMT22, and FLAN2021 datasets. We see benefits from CAT for the cascade in two aspects. One is the benefits to the small model’s quality directly and the other one is to the cascade. On both WMT22 and FLAN2021 datasets, we see clear higher BLEU scores from the small model trained with CAT and cross-entropy loss (see the starting point of CAT-Xent vs. Xent in (a) and (b)). This even mitigates the improvements from distillation (CAT-Xent vs. Dist). For cascade, we can also see the benefits, though not as significant as those on classification tasks.

majority of the time (CAT-Dist vs. Dist). Similar trends can be seen on FLAN2021 datasets. It is worth mentioning that on both SuperGLUE and FLAN2021 dataset, distillation improves the small LM’s quality (Dist vs. Xent) compared to with one-hot cross entropy, CAT-Xent levels up the cascade performance and out-performs the cascade with small LM fine-tuned with distillation, especially in the low-FLOPs range.

Comparison: generation tasks Generation tasks commonly contain dozens to hundreds of tokens in the responses. Though more challenging than classification tasks, we see from Figure 3 benefits from CAT for the cascade. One obvious gain from CAT is that the small LMs could enjoy better intrinsic quality with cross-entropy loss (higher BLEU scores see the starting points of CAT-Xent versus Xent in Figure 3(a) and (b)) on WMT22 dataset. This improvement even mitigates the benefits gained from distillation (CAT-Xent versus Dist). This is further confirmed on the FLAN2021 dataset. We hypothesize that this improvement partially comes from the lower ratio of noisy training samples after token-wise filtering from CAT. In addition, we can also see the benefits from CAT for the cascade on the generation tasks (e.g. CAT-Xent versus Xent on FLAN2021 or WMT22 in the low-to-intermediate deferral regime).

4.2 CAT improves accuracy on non-deferred examples

In this section, we show that the model trained with the proposed CAT objective of (7) has improved accuracy on examples on which it is confident (compared to a standard trained model).

Let M be a task-specific metric function such that $M(\mathbf{x}, \mathbf{y}, p)$ gives a quality score of a predicted output sequence produced by a model p relative to the ground-truth output \mathbf{y} . For instance, for SuperGLUE, a common choice is to set M to be the 0-1 correctness indicator function. The mean quality score $M_{\text{cas}}(\tau)$ of a cascade of p_S and p_L is given by

$$M_{\text{cas}}(\tau) = \mathbb{E}_{(\mathbf{x}, \mathbf{y})} [M(\mathbf{x}, \mathbf{y}, p_S)1[r(\mathbf{x}) < \tau]] + \mathbb{E}_{(\mathbf{x}, \mathbf{y})} [M(\mathbf{x}, \mathbf{y}, p_L)1[r(\mathbf{x}) \geq \tau]] \quad (9)$$

$$:= A_1(\tau) + A_2(\tau),$$

where \mathbb{E} may be replaced with an empirical expectation. We recall from (5) that $r(\mathbf{x}) = -\frac{1}{N} \sum_{i=1}^N \log p_S(y_{S,i} | \mathbf{x}, \mathbf{y}_{S, < i})$, where $\mathbf{y}_S \sim p_S(\cdot | \mathbf{x})$ is the output generated from p_S . In (9), $A_1(\tau)$ thus denotes the average (unnormalized) quality score on examples that invoke p_S as a function of the deferral threshold τ . Similarly, $A_2(\tau)$ denotes the average quality score on examples that are deferred to p_L . Note that the y -axis in Figure 3 shows $A_1(\tau) + A_2(\tau)$ as τ varies.

Figure 4 shows $A_1(\tau)$ and $A_2(\tau)$ as we vary τ , which in turn varies the deferral rate (i.e., the fraction of examples sent to p_L). We compare two models fine-tuned on SuperGLUE: (i) CAT, and (ii) the

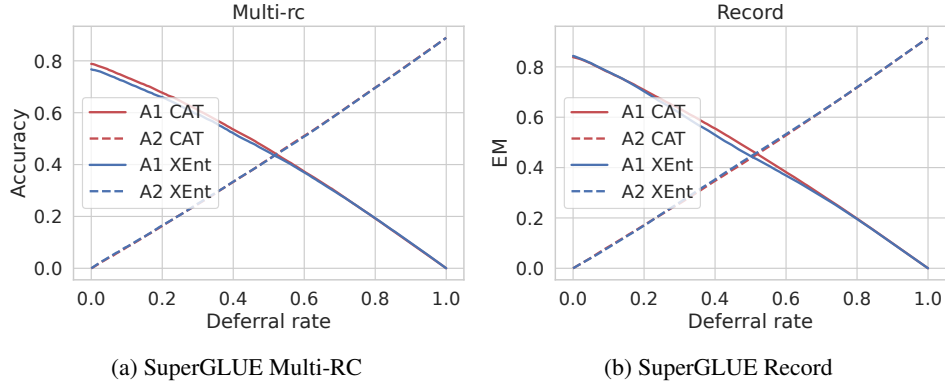


Figure 4: Average quality scores on examples deferred to the small model (A1) and to the large model (A2). Accuracy numbers weighted by deferral rate, so that the sum of the two curves represents the accuracy of the cascaded system. We compare two models fine-tuned on SuperGLUE. CAT refers to fine-tuning using cascade-aware training loss of (7) (setting $w = 1$), and XEnt refers to using the standard cross-entropy loss of (2). We observe that the gains in accuracy is from A1. Note that curve of A2-XEnt is fully covered by A2-CAT

model trained with the standard one-hot cross entropy. We observe that both models have roughly the same A_2 across all deferral rates, while the CAT-trained model has higher A_1 . This indicates that on the set of examples each candidate model is confident, the CAT-trained model has higher accuracy.

We note that Figure 4 demonstrates two separate phenomena leading to improved performance of CAT-trained models. On SuperGLUE Multi-RC, A_1 -CAT starts above A_1 -Xent when deferral rate is 0; this indicates that A_1 -CAT is simply a better model than A_1 -Xent—all the queries are routed to the small model. Therefore A_1 -CAT must have learned to correctly process some examples which A_1 -Xent cannot. In the case of SuperGLUE Record, on the other hand, the two models start effectively overlapping on the left-hand side of the figure; it is only in the body of the deferral rate graph that A_1 -CAT achieves separation from A_1 -Xent.

5 Related work

Having reviewed cascades and language models in Sections 1 and 2, and our novel contributions to cascade-aware training of language models in Sections 3 and 4, we now describe a few other, more tangentially-related research directions.

Conditional Compute The deep learning revolution has been dominated by those models which most effectively leverage compute resources, a phenomenon famously characterized as the ‘bitter lesson’ [Sutton, 2019]. One natural direction to better leverage compute resources (or, alternatively, expand model capacity for fixed compute cost) is to introduce conditional computation into the model architecture. Model cascades are one manner of doing this, making the inference computation conditional/adaptive.

A closely related technique for adaptive inference is *early-exiting*, wherein a *single* model is partitioned into multiple sub-models (typically via attaching classification heads to intermediate layers) [Teerapittayanon et al., 2016, Huang et al., 2018, Schwartz et al., 2020, Xin et al., 2020, Jazbec et al., 2023]. As with a cascade, these less compute-intensive, intermediate sub-models can be invoked for ‘easy’ queries. Recent works have successfully extended this paradigm to generative language models [Schuster et al., 2022, Kusupati et al., 2022, Devvrit et al., 2023]. As with cascade-aware training, one can also aim to train each of the sub-models to be aware of their adaptive usage [Yu et al., 2022, Regol et al., 2024].

An altogether different approach to conditional computation is via the paradigm of ‘experts as layers’—that is, using a sparse layer consisting of distinct ‘experts’ to effectively replace each dense layer in a model architecture which is otherwise unchanged. Pursuing conditional computation in this form requires ‘baking’ sparsity into the model at a granular level (i.e., per layer), from the start of

training. Notable examples of research on this approach are Mixture-of-Experts [Shazeer et al., 2017] and Switch Transformers [Fedus et al., 2022b]). For an excellent overview of this family’s history, see Fedus et al. [2022a], which we will not attempt to reproduce here.

Cascade Deferral Decision-Making Cascades involve orchestrating amongst a series of models via a *deferral rule*, which decides which model is most appropriate for a given input. Classically, for a probabilistic classifier, this is simply based on thresholding the model’s probability for the predicted class, or the entropy of the model’s probability distribution [Viola and Jones, 2001, Wang et al., 2018]. While it is possible to *learn* a deferral rule based on these probabilities (and other features) [Trapeznikov and Saligrama, 2013, Narasimhan et al., 2022] — leveraging advances in the literature on learning to defer to an expert [Madras et al., 2018, Mozannar and Sontag, 2020, Verma and Nalisnick, 2022, Mao et al., 2024] — simple probability thresholding is often competitive [Jitkritum et al., 2023]. We note also that learned deferral rules can be seen as generalizing *model routing*, wherein a model selector is learned based purely on the input example [Shnitzer et al., 2023, Lu et al., 2023, Hari and Thomson, 2023, Wang et al., 2023, Lee et al., 2024, Sakota et al., 2024, Ding et al., 2024, Hu et al., 2024].

Data Filtering Equation (7) can be seen as *filtering* out from the training objective certain ‘hard-to-learn’ tokens, wherein neither the small nor the large model makes a correct prediction. The value of filtering out ‘hard-to-learn’ samples has been demonstrated in conventional classification problems [Mindermann et al., 2022], and more broadly, the question of what constitutes an ‘easy’, ‘hard’, or ‘important’ example to learn has been an active thread of research [Toneva et al., 2018, Ren et al., 2018, Paul et al., 2021, Baldock et al., 2021, Agarwal et al., 2022]. A closely related line of work has also demonstrated the value of filtering out samples with noisy labels [Jiang et al., 2018, Song et al., 2019, Wei et al., 2022, Xia et al., 2023].

6 Conclusion

We have presented an approach to modifying the small model in a LM cascade, filtering tokens used in training to make it ‘aware’ of the knowledge of a larger LM situated downstream in the cascade. Experiments with a representative cascade of LLMs, on a variety of fine-tuning datasets of classification and generative tasks, demonstrate the efficacy of this cascade-aware LM training for improving the quality-cost tradeoff curve.

In this work, we have endeavored to understand empirically the relative contributions to cascade improvements from two separate effects: (1) ‘zero-sum’ changes to the knowledge of the small model, as it focuses its capacity on easier topics, and (2) non-‘zero-sum’ changes, where removing the ‘hard’ examples is tantamount to filtering out label noise in training data. But an even deeper understanding of the two effects would be useful.

We applied our methodology to the most basic form of model cascade (namely, involving just two LMs). A number of natural extensions come to mind. Applying cascade-aware training for a cascade of three or more LMs, where perhaps both the small and medium models have their parameters updated during fine-tuning, would be an interesting study. What should the criteria for filtering tokens (i.e., the α_i term of (7)) be in such a scenario?

Another interesting future direction of cascade-aware training would be in regards to the ‘flavor’ of fine-tuning applied. We focused on supervised fine-tuning methods, but reinforcement learning (RL) approaches to fine-tuning, like RLHF, have become of significant interest to the LLM field [Ouyang et al., 2022].

As noted in the introduction, one of the major benefits of a model cascade is the capacity to host the cascade’s models in different physical or logical locations. The techniques we present are naturally amenable to deployment in a distributed system, where e.g. small models live on edge devices and large models are deployed in a datacenter. In this vein, it would be interesting to explore cascade-aware training further in a setting like federated learning (FL) [McMahan et al., 2017], where the fine-tuning data is private and decentralized (residing at the edge e.g. on users’ phones), and a global cascade-aware trained small model is learned over successive rounds of FL training. Recent developments in distributed training over edge devices (e.g. Rush et al. [2023]) enable development and training against much more flexible losses, including e.g. dynamic system costs. Overall, we

expect the exploration of training cascaded models in and for distributed deployments to form a major area of research going forward.

References

- Chirag Agarwal, Daniel D'souza, and Sara Hooker. Estimating example difficulty using variance of gradients. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 10368–10378, 2022.
- Rishabh Agarwal, Nino Vieillard, Yongchao Zhou, Piotr Stanczyk, Sabela Ramos Garea, Matthieu Geist, and Olivier Bachem. On-policy distillation of language models: Learning from self-generated mistakes. In *The Twelfth International Conference on Learning Representations*, 2024.
- Rohan Anil, Andrew M Dai, Orhan Firat, Melvin Johnson, Dmitry Lepikhin, Alexandre Passos, Siamak Shakeri, Emanuel Taropa, Paige Bailey, Zhifeng Chen, et al. Palm 2 technical report. *arXiv preprint arXiv:2305.10403*, 2023.
- Robert Baldock, Hartmut Maennel, and Behnam Neyshabur. Deep learning through the lens of example difficulty. *Advances in Neural Information Processing Systems*, 34:10876–10889, 2021.
- Tolga Bolukbasi, Joseph Wang, Ofer Dekel, and Venkatesh Saligrama. Adaptive neural networks for fast test-time prediction. In *International Conference on Machine Learning*, 2017.
- Cristian Bucilă, Rich Caruana, and Alexandru Niculescu-Mizil. Model compression. In *Proceedings of the 12th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, KDD '06, pages 535–541, New York, NY, USA, 2006. ACM.
- Lingjiao Chen, Matei Zaharia, and James Zou. FrugalGPT: How to use large language models while reducing cost and improving performance, 2023.
- Devvrit, Sneha Kudugunta, Aditya Kusupati, Tim Dettmers, Kaifeng Chen, Inderjit Dhillon, Yulia Tsvetkov, Hannaneh Hajishirzi, Sham Kakade, Ali Farhadi, and Prateek Jain. Matformer: Nested transformer for elastic inference, 2023.
- Dujian Ding, Ankur Mallick, Chi Wang, Robert Sim, Subhabrata Mukherjee, Victor Rühle, Laks V. S. Lakshmanan, and Ahmed Hassan Awadallah. Hybrid LLM: Cost-efficient and quality-aware query routing. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=02f3mUtqnM>.
- David Dohan, Winnie Xu, Aitor Lewkowycz, Jacob Austin, David Bieber, Raphael Gontijo Lopes, Yuhuai Wu, Henryk Michalewski, Rif A. Saurous, Jascha Sohl-dickstein, Kevin Murphy, and Charles Sutton. Language model cascades, 2022. URL <https://arxiv.org/abs/2207.10342>.
- William Fedus, Jeff Dean, and Barret Zoph. A review of sparse expert models in deep learning. *arXiv preprint arXiv:2209.01667*, 2022a.
- William Fedus, Barret Zoph, and Noam Shazeer. Switch transformers: Scaling to trillion parameter models with simple and efficient sparsity. *Journal of Machine Learning Research*, 23(120):1–39, 2022b. URL <http://jmlr.org/papers/v23/21-0998.html>.
- Yuxian Gu, Li Dong, Furu Wei, and Minlie Huang. Minillm: Knowledge distillation of large language models, 2024.
- Neha Gupta, Harikrishna Narasimhan, Wittawat Jitkrittum, Ankit Singh Rawat, Aditya Krishna Menon, and Sanjiv Kumar. Language model cascades: Token-level uncertainty and beyond. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=KgaBScZ4VI>.
- Surya Narayanan Hari and Matt Thomson. Tryage: Real-time, intelligent routing of user prompts to large language models, 2023.
- Geoffrey Hinton, Oriol Vinyals, and Jeff Dean. Distilling the knowledge in a neural network, 2015.

- Sepp Hochreiter and Jürgen Schmidhuber. Long short-term memory. *Neural computation*, 9(8): 1735–1780, 1997.
- Jordan Hoffmann, Sebastian Borgeaud, Arthur Mensch, Elena Buchatskaya, Trevor Cai, Eliza Rutherford, Diego de Las Casas, Lisa Anne Hendricks, Johannes Welbl, Aidan Clark, Tom Hennigan, Eric Noland, Katie Millican, George van den Driessche, Bogdan Damoc, Aurelia Guy, Simon Osindero, Karen Simonyan, Erich Elsen, Jack W. Rae, Oriol Vinyals, and Laurent Sifre. Training compute-optimal large language models, 2022.
- Qitian Jason Hu, Jacob Bieker, Xiuyu Li, Nan Jiang, Benjamin Keigwin, Gaurav Ranganath, Kurt Keutzer, and Shriyash Kaustubh Upadhyay. Routerbench: A benchmark for multi-llm routing system, 2024.
- Gao Huang, Danlu Chen, Tianhong Li, Felix Wu, Laurens van der Maaten, and Kilian Weinberger. Multi-scale dense networks for resource efficient image classification. In *International Conference on Learning Representations*, 2018.
- Metod Jazbec, James Urquhart Allingham, Dan Zhang, and Eric Nalisnick. Towards anytime classification in early-exit architectures by enforcing conditional monotonicity. In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023. URL <https://openreview.net/forum?id=Akslslk891N>.
- Lu Jiang, Zhengyuan Zhou, Thomas Leung, Li-Jia Li, and Li Fei-Fei. Mentornet: Learning data-driven curriculum for very deep neural networks on corrupted labels. In *ICML*, 2018.
- Wittawat Jitkrittum, Neha Gupta, Aditya Krishna Menon, Harikrishna Narasimhan, Ankit Singh Rawat, and Sanjiv Kumar. When does confidence-based cascade deferral suffice? In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023. URL <https://openreview.net/forum?id=4KZhZJSPYU>.
- Anil Kag, Igor Fedorov, Aditya Gangrade, Paul Whatmough, and Venkatesh Saligrama. Efficient edge inference by selective query. In *The Eleventh International Conference on Learning Representations*, 2023.
- Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B. Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. Scaling laws for neural language models, 2020.
- Leila Khalili, Yao You, and John Bohannon. Babybear: Cheap inference triage for expensive language models, 2022. URL <https://arxiv.org/abs/2205.11747>.
- Yoon Kim and Alexander M. Rush. Sequence-level knowledge distillation. In Jian Su, Kevin Duh, and Xavier Carreras, editors, *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, pages 1317–1327, Austin, Texas, November 2016. Association for Computational Linguistics.
- Tom Kocmi, Rachel Bawden, Ondřej Bojar, Anton Dvorkovich, Christian Federmann, Mark Fishel, Thamme Gowda, Yvette Graham, Roman Grundkiewicz, Barry Haddow, et al. Findings of the 2022 conference on machine translation (wmt22). In *Proceedings of the Seventh Conference on Machine Translation (WMT)*, pages 1–45, 2022.
- Aditya Kusupati, Gantavya Bhatt, Aniket Rege, Matthew Wallingford, Aditya Sinha, Vivek Ramanujan, William Howard-Snyder, Kaifeng Chen, Sham Kakade, Prateek Jain, et al. Matryoshka representation learning. In *Advances in Neural Information Processing Systems*, December 2022.
- Chia-Hsuan Lee, Hao Cheng, and Mari Ostendorf. Orchestrallm: Efficient orchestration of language models for dialogue state tracking, 2024.
- Keming Lu, Hongyi Yuan, Runji Lin, Junyang Lin, Zheng Yuan, Chang Zhou, and Jingren Zhou. Routing to the expert: Efficient reward-guided ensemble of large language models, 2023.
- David Madras, Toniann Pitassi, and Richard Zemel. Predict responsibly: Improving fairness and accuracy by learning to defer. In *Proceedings of the 32nd International Conference on Neural Information Processing Systems, NIPS’18*, page 6150–6160, Red Hook, NY, USA, 2018. Curran Associates Inc.

- Jonathan Mamou, Oren Pereg, Moshe Wasserblat, and Roy Schwartz. TangoBERT: Reducing inference cost by using cascaded architecture, 2022. URL <http://arxiv.org/abs/2204.06271>.
- Anqi Mao, Mehryar Mohri, and Yutao Zhong. Theoretically grounded loss functions and algorithms for score-based multi-class abstention. In *Twenty-sixth Conference on Artificial Intelligence and Statistics*, 2024.
- Brendan McMahan, Eider Moore, Daniel Ramage, Seth Hampson, and Blaise Aguera y Arcas. Communication-efficient learning of deep networks from decentralized data. In *Artificial intelligence and statistics*, pages 1273–1282. PMLR, 2017.
- Sören Mindermann, Jan M Brauner, Muhammed T Razzak, Mrinank Sharma, Andreas Kirsch, Winnie Xu, Benedikt Hölting, Aidan N Gomez, Adrien Morisot, Sebastian Farquhar, and Yarín Gal. Prioritized training on points that are learnable, worth learning, and not yet learnt. In Kamalika Chaudhuri, Stefanie Jegelka, Le Song, Csaba Szepesvari, Gang Niu, and Sivan Sabato, editors, *Proceedings of the 39th International Conference on Machine Learning*, volume 162 of *Proceedings of Machine Learning Research*, pages 15630–15649. PMLR, 17–23 Jul 2022.
- Hussein Mozannar and David Sontag. Consistent estimators for learning to defer to an expert. In Hal Daumé III and Aarti Singh, editors, *Proceedings of the 37th International Conference on Machine Learning*, volume 119 of *Proceedings of Machine Learning Research*, pages 7076–7087. PMLR, 13–18 Jul 2020.
- Harikrishna Narasimhan, Wittawat Jitkrittum, Aditya K Menon, Ankit Rawat, and Sanjiv Kumar. Post-hoc estimators for learning to defer to an expert. *Advances in Neural Information Processing Systems*, 35:29292–29304, 2022.
- OpenAI. Introducing chatgpt, 2022. URL <https://openai.com/index/chatgpt/>.
- Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. Training language models to follow instructions with human feedback. *Advances in neural information processing systems*, 35:27730–27744, 2022.
- Mansheej Paul, Surya Ganguli, and Gintare Karolina Dziugaite. Deep learning on a data diet: Finding important examples early in training. *Advances in Neural Information Processing Systems*, 34:20596–20607, 2021.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. Exploring the limits of transfer learning with a unified text-to-text transformer. *Journal of Machine Learning Research*, 21(140):1–67, 2020. URL <http://jmlr.org/papers/v21/20-074.html>.
- Ankit Singh Rawat, Manzil Zaheer, Aditya Krishna Menon, Amr Ahmed, and Sanjiv Kumar. When in doubt, summon the titans: Efficient inference with large models. *arXiv preprint arXiv:2110.10305*, 2021.
- Florence Regol, Joud Chataoui, and Mark Coates. Jointly-learned exit and inference for a dynamic neural network. In *The Twelfth International Conference on Learning Representations*, 2024.
- Mengye Ren, Wenyan Zeng, Bin Yang, and Raquel Urtasun. Learning to reweight examples for robust deep learning. In *International conference on machine learning*, pages 4334–4343. PMLR, 2018.
- Keith Rush, Zachary Charles, and Zachary Garrett. Federated automatic differentiation, 2023.
- Marija Sakota, Maxime Peyrard, and Robert West. Fly-swat or cannon? cost-effective language model choice via meta-modeling. In *Proceedings of the 17th ACM International Conference on Web Search and Data Mining*, WSDM ’24. ACM, March 2024. doi: 10.1145/3616855.3635825. URL <http://dx.doi.org/10.1145/3616855.3635825>.
- Victor Sanh, Lysandre Debut, Julien Chaumond, and Thomas Wolf. Distilbert, a distilled version of bert: smaller, faster, cheaper and lighter, 2020.

- Tal Schuster, Adam Fisch, Jai Gupta, Mostafa Dehghani, Dara Bahri, Vinh Q. Tran, Yi Tay, and Donald Metzler. Confident adaptive language modeling. In Alice H. Oh, Alekh Agarwal, Danielle Belgrave, and Kyunghyun Cho, editors, *Advances in Neural Information Processing Systems*, 2022. URL <https://openreview.net/forum?id=uLYc4L3C81A>.
- Roy Schwartz, Gabriel Stanovsky, Swabha Swayamdipta, Jesse Dodge, and Noah A. Smith. The right tool for the job: Matching model and instance complexities. In *Proc. of ACL*, 2020.
- Noam Shazeer, Azalia Mirhoseini, Krzysztof Maziarz, Andy Davis, Quoc V. Le, Geoffrey E. Hinton, and Jeff Dean. Outrageously large neural networks: The sparsely-gated mixture-of-experts layer. In *ICLR (Poster)*. OpenReview.net, 2017. URL <http://dblp.uni-trier.de/db/conf/iclr/iclr2017.html#ShazeerMMDLHD17>.
- Tal Shnitzer, Anthony Ou, Mírian Silva, Kate Soule, Yuekai Sun, Justin Solomon, Neil Thompson, and Mikhail Yurochkin. Large language model routing with benchmark datasets, 2023.
- Hwanjun Song, Minseok Kim, and Jae-Gil Lee. SELFIE: Refurbishing unclean samples for robust deep learning. In Kamalika Chaudhuri and Ruslan Salakhutdinov, editors, *Proceedings of the 36th International Conference on Machine Learning*, volume 97 of *Proceedings of Machine Learning Research*, pages 5907–5915. PMLR, 09–15 Jun 2019.
- Matthew Streeter. Approximation algorithms for cascading prediction models. In Jennifer Dy and Andreas Krause, editors, *Proceedings of the 35th International Conference on Machine Learning*, volume 80 of *Proceedings of Machine Learning Research*, pages 4752–4760. PMLR, 10–15 Jul 2018. URL <https://proceedings.mlr.press/v80/streeter18a.html>.
- Rich Sutton. The bitter lesson. <http://www.incompleteideas.net/IncIdeas/BitterLesson.html>, 2019. Accessed: 2024-05-17.
- Gemini Team, Rohan Anil, Sebastian Borgeaud, Jean-Baptiste Alayrac, Jiahui Yu, Radu Soricut, and others. Gemini: A family of highly capable multimodal models, 2024.
- Surat Teerapittayanon, Bradley McDanel, and H. T. Kung. Branchynet: Fast inference via early exiting from deep neural networks. In *23rd International Conference on Pattern Recognition, ICPR 2016, Cancún, Mexico, December 4-8, 2016*, pages 2464–2469. IEEE, 2016.
- Mariya Toneva, Alessandro Sordani, Remi Tachet des Combes, Adam Trischler, Yoshua Bengio, and Geoffrey J Gordon. An empirical study of example forgetting during deep neural network learning. *arXiv preprint arXiv:1812.05159*, 2018.
- Kirill Trapeznikov and Venkatesh Saligrama. Supervised sequential classification under budget constraints. In Carlos M. Carvalho and Pradeep Ravikumar, editors, *Proceedings of the Sixteenth International Conference on Artificial Intelligence and Statistics*, volume 31 of *Proceedings of Machine Learning Research*, pages 581–589, Scottsdale, Arizona, USA, 29 Apr–01 May 2013. PMLR.
- Neeraj Varshney and Chitta Baral. Model cascading: Towards jointly improving efficiency and accuracy of nlp systems. *arXiv preprint arXiv:2210.05528*, 2022.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. *Advances in neural information processing systems*, 30, 2017.
- Rajeev Verma and Eric Nalisnick. Calibrated learning to defer with one-vs-all classifiers. In Kamalika Chaudhuri, Stefanie Jegelka, Le Song, Csaba Szepesvari, Gang Niu, and Sivan Sabato, editors, *Proceedings of the 39th International Conference on Machine Learning*, volume 162 of *Proceedings of Machine Learning Research*, pages 22184–22202. PMLR, 17–23 Jul 2022.
- P. Viola and M. Jones. Rapid object detection using a boosted cascade of simple features. In *Proceedings of the 2001 IEEE Computer Society Conference on Computer Vision and Pattern Recognition. CVPR 2001*, volume 1, pages I–I, 2001. doi: 10.1109/CVPR.2001.990517.

- Alex Wang, Yada Pruksachatkun, Nikita Nangia, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel Bowman. Superglue: A stickier benchmark for general-purpose language understanding systems. *Advances in neural information processing systems*, 32, 2019.
- Xiaofang Wang, Dan Kondratyuk, Eric Christiansen, Kris M. Kitani, Yair Movshovitz-Attias, and Elad Eban. Wisdom of committees: An overlooked approach to faster and more accurate models. In *International Conference on Learning Representations*, 2022. URL <https://openreview.net/forum?id=MvO2t0vbs4->.
- Xin Wang, Yujia Luo, Daniel Crankshaw, Alexey Tumanov, Fisher Yu, and Joseph E. Gonzalez. IDK cascades: Fast deep learning by learning not to overthink. In Amir Globerson and Ricardo Silva, editors, *Proceedings of the Thirty-Fourth Conference on Uncertainty in Artificial Intelligence, UAI 2018, Monterey, California, USA, August 6-10, 2018*, pages 580–590. AUAI Press, 2018.
- Yiding Wang, Kai Chen, Haisheng Tan, and Kun Guo. Tabi: An efficient multi-level inference system for large language models. In *Proceedings of the Eighteenth European Conference on Computer Systems, EuroSys '23*, page 233–248, New York, NY, USA, 2023. Association for Computing Machinery. ISBN 9781450394871. doi: 10.1145/3552326.3587438. URL <https://doi.org/10.1145/3552326.3587438>.
- Jason Wei, Maarten Bosma, Vincent Y. Zhao, Kelvin Guu, Adams Wei Yu, Brian Lester, Nan Du, Andrew M. Dai, and Quoc V. Le. Finetuned language models are zero-shot learners, 2021.
- Jingxuan Wei, Linzhuang Sun, Yichong Leng, Xu Tan, Bihui Yu, and Ruifeng Guo. Sentence-level or token-level? a comprehensive study on knowledge distillation, 2024.
- Qi Wei, Haoliang Sun, Xiankai Lu, and Yilong Yin. Self-filtering: A noise-aware sample selection for label noise with confidence penalization. In *European Conference on Computer Vision*, pages 516–532. Springer, 2022.
- Xiaobo Xia, Bo Han, Yibing Zhan, Jun Yu, Mingming Gong, Chen Gong, and Tongliang Liu. Combating noisy labels with sample selection by mining high-discrepancy examples. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 1833–1843, 2023.
- Ji Xin, Raphael Tang, Jaejun Lee, Yaoliang Yu, and Jimmy Lin. DeeBERT: Dynamic early exiting for accelerating BERT inference. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 2246–2251, Online, July 2020. Association for Computational Linguistics.
- Haichao Yu, Haoxiang Li, Gang Hua, Gao Huang, and Humphrey Shi. Boosted dynamic neural networks. 2022. URL <https://arxiv.org/abs/2211.16726>.
- Murong Yue, Jie Zhao, Min Zhang, Liang Du, and Ziyu Yao. Large language model cascades with mixture of thought representations for cost-efficient reasoning. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=6okaSfANzh>.

Appendix

A Hyperparameters

In this section we provide details on fine tuning (batch size, which checkpoints, number of training steps, LR, etc) in Table 1. For all fine-tuning experiments, we use PaLM-2 [Anil et al., 2023] Gecko and Otter as our small and large LMs, respectively. We fine-tune them on one of SuperGLUE [Wang et al., 2019], WMT22 [Kocmi et al., 2022] or FLAN2021 [Wei et al., 2021], before evaluation. For Gecko fine tuning, we used 16xTPUv4 (HBM2 32GB), with the training time 6-9 hour on SuperGLUE dataset, 2-4 hours on WMT22 dataset and 8-11 hours on FLAN2021 dataset. For Otter fine tuning, we used 128xTPUv5e (HBM2 16GB) with training time roughly 3 days for SuperGLUE dataset and 64xTPUv4 with training time around 2 hours on WMT22 dataset and 3 days on FLAN2021 dataset. For all fine-tuning tasks or models mentioned in this appendix, they follow the same setting as listed in Table 1, unless otherwise indicated.

Table 1: Training configuration for the LMs tested.

Dataset	Base	Loss	Train Steps	LR	Batch Sz	Dropout	Optimizer
SuperGLUE	Gecko	Xent	10000	5e-5	64	0.1	Adafactor
SuperGLUE	Gecko	CAT-Xent	10000	5e-5	64	0.1	Adafactor
SuperGLUE	Gecko	Dist	10000	5e-5	64	0.1	Adafactor
SuperGLUE	Gecko	CAT-Dist	10000	5e-5	64	0.1	Adafactor
SuperGLUE	Otter	Xent	5000	1e-5	512	0.1	Adafactor
WMT22	Gecko	Xent	4000	5e-5	32	0.1	Adafactor
WMT22	Gecko	CAT-Xent	4000	5e-5	32	0.1	Adafactor
WMT22	Gecko	Dist	4000	5e-5	32	0.1	Adafactor
WMT22	Gecko	CAT-Dist	4000	5e-5	32	0.1	Adafactor
WMT22	Otter	Xent	1000	1e-5	1024	0.1	Adafactor
FLAN2021	Gecko	Xent	10000	1e-3	64	0.1	Adafactor
FLAN2021	Gecko	CAT-Xent	10000	1e-3	64	0.1	Adafactor
FLAN2021	Gecko	Dist	10000	1e-3	64	0.1	Adafactor
FLAN2021	Gecko	CAT-Dist	10000	1e-3	64	0.1	Adafactor
FLAN2021	Otter	Xent	60000	3e-5	128	0.05	Adafactor

B Comparison with other baselines

In addition to the two baselines, Xent and Dist, mentioned in the paper, we compared CAT against two other baselines: EdgeInference [Kag et al., 2023] and ChowQuantile [Gupta et al., 2024]. The EdgeInference method, a notable work exploring the benefits of model training in a cascade, uses a router on the output logits or embeddings of the smaller model to determine deferral based on the router’s scores. However, this approach was designed for classification tasks in the vision field, where the model generates a single embedding and logits vector. This method is not directly applicable to language model tasks, where outputs are sequences of tokens, whether for classification or generation tasks. To adapt EdgeInference for our study, we modified the router’s input from the vector of logits to the logits of each output token from the small language model:

$$[p_S(y_{S,i}|\mathbf{x}, \mathbf{y}_{S,<i})], \quad i \in \{0, 1, 2, \dots, N\}, \tag{10}$$

forming a feature vector. Since the output token length is not fixed, we padded it with zeros to a fixed length of 2048. We fine-tuned the router while keeping both the small and large models frozen, with one-hot cross-entropy loss. ChowQuantile [Gupta et al., 2024] explores different methods to combine the small model’s logits into reliable deferral indicators. We used ChowQuantile-0, which essentially uses the minimum of the logits from the small model as the deferral indicator, as

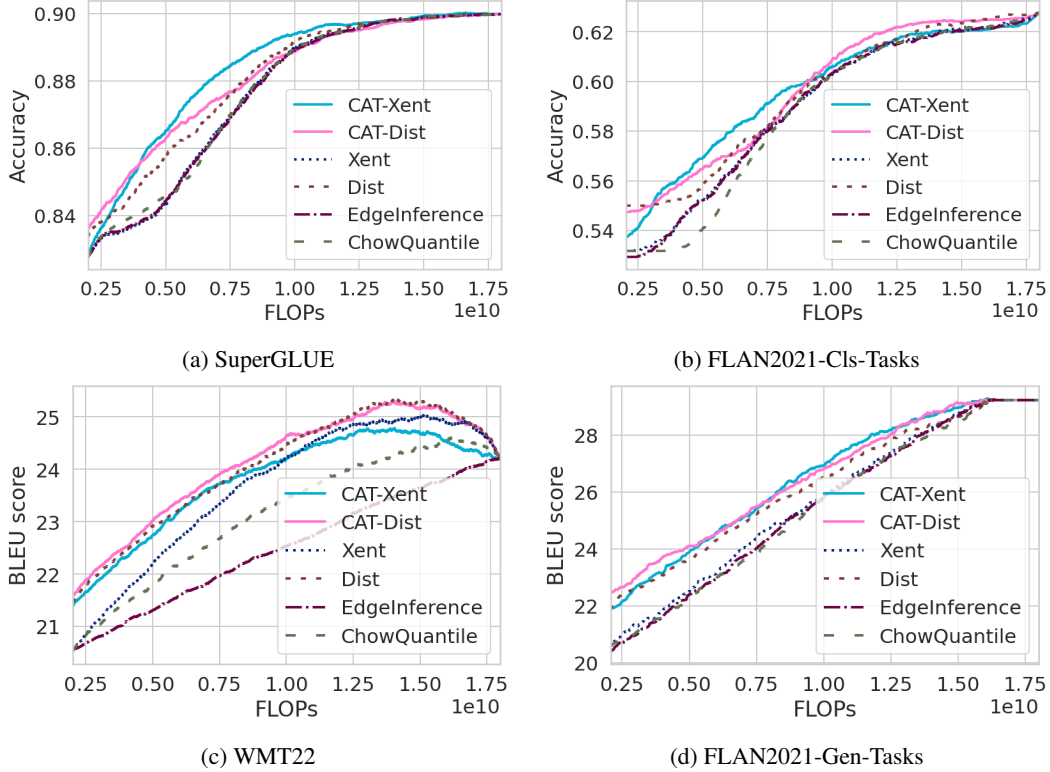


Figure 5: Quality-vs-FLOPs curves for classification and generation tasks on SuperGLUE, WMT22 and FLAN2021 datasets.

one baseline. In the following section of ablation study, we will present results from other quantile choices.

For EdgeInference, its performance is quite similar to the baseline Xent on the SuperGLUE dataset and the classification tasks on the FLAN2021 dataset. This is because the response length for classification tasks in language models generally consists of a limited number of tokens (mostly just one token). However, when tested on generation tasks, the cascade quality dropped significantly, especially for the WMT22 dataset, as shown in Figure 5 (c) and (d). Since ChowQuantile does not fine-tune the model and relies solely on the model’s inherent capability, it uses the same small model as the baseline Xent. The results of ChowQuantile are generally not on par with Xent, which uses the average.

C Ablation study

In the ablation study, we aim to explore: 1) the best methods to derive deferral decisions from token-level uncertainty, aside from the approach described in (5); and 2) two alternative loss designs that are natural extensions of the current one.

C.1 Token-level uncertainty to deferral decision

This exploration is similar to Gupta et al. [2024]. The major difference is that we are exploring deferral rules in a multi-task scenario, whereas Gupta et al. [2024] focused on single-task deferral.

As indicated in (5), we can use token-wise logits from the language model to measure its uncertainty (or confidence) in its responses. We compared six different methods to combine logits from tokens into a deferral indicator: ‘average’, ‘minimum’, ‘maximum’, ‘sum’, ‘ChowQuantile04’, and ‘ChowQuantile08’ [Gupta et al., 2024]. Note that ‘minimum’ can be viewed as a special case of ‘ChowQuantile’ as mentioned in [Gupta et al., 2024]. We tested each deferral rule with our small

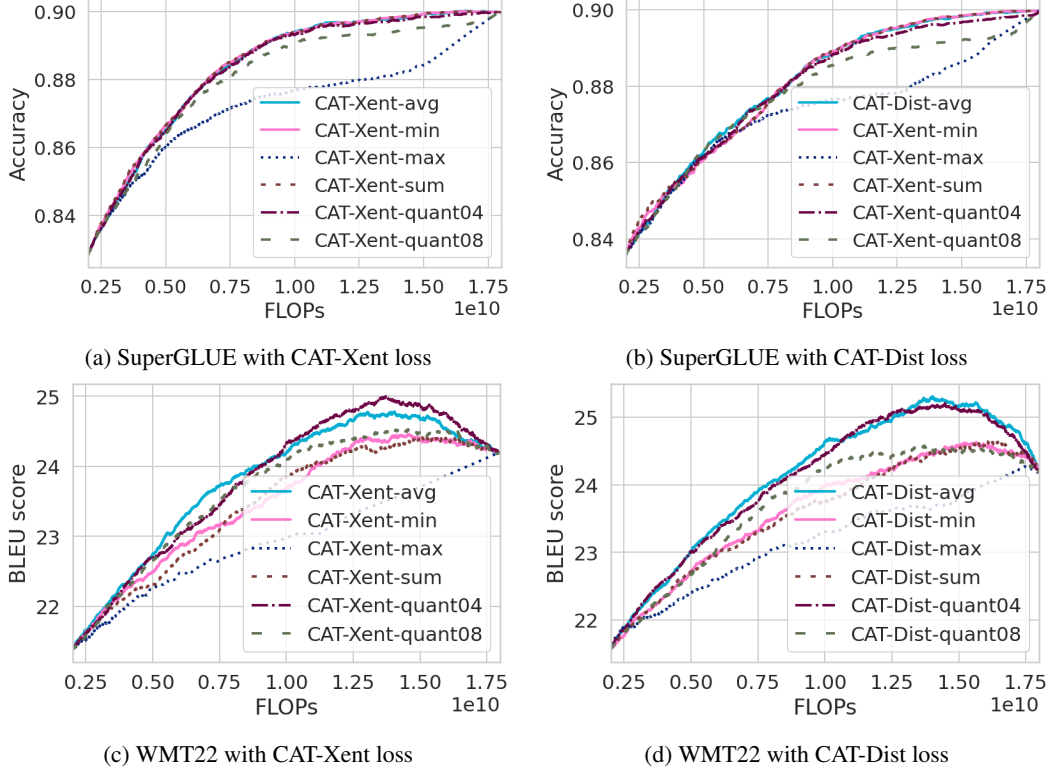


Figure 6: Quality-vs-FLOPs curves for different deferral rules on SuperGLUE, and WMT22 datasets.

language model trained with CAT-Xent loss and CAT-Dist loss (3) on the SuperGLUE and WMT22 datasets.

From Figure 6, we can clearly see that ‘average’ works best for both classification and generation tasks with both CAT-Xent and CAT-Dist loss designs. Similar to [Gupta et al., 2024], we observe that ‘ChowQuantile04’ (CAT-Xent-quant04 and CAT-Dist-quant04) can be another comparable choice for building the deferral indicator.

C.2 Four other CAT loss designs

As shown in (7), our loss function essentially filters out tokens that cannot be correctly predicted by either the small or large language model. It is natural to question whether it is sufficient to use only the small or large language model for this filtering. To investigate this, we conducted an ablation study on the SuperGLUE and WMT22 datasets.

In this study, in addition to the CAT-Xent and CAT-Dist loss designs presented in the main paper, we included four other loss designs.

CAT-Xent-L:

$$L_{\text{cat-xent-l}}(\mathbf{x}, \mathbf{y}) = - \sum_{i=1}^N \alpha_i \cdot \log p_S(y_i | \mathbf{x}, \mathbf{y}_{<i})$$

$$\alpha_i := 1 \left[y_i = \arg \max_{y' \in \mathcal{V}} p_L(y' | \mathbf{x}, \mathbf{y}_{<i}) \right] \quad (11)$$

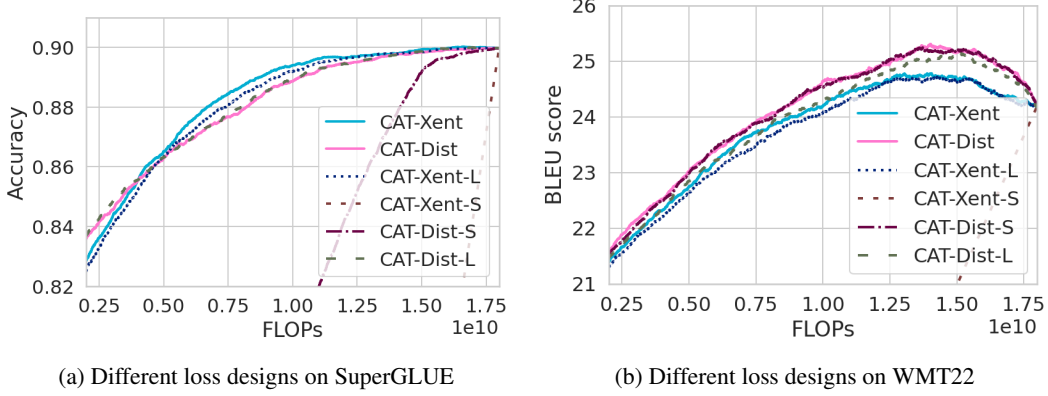


Figure 7: Ablation study on different cascade-aware loss designs.

CAT-Xent-S:

$$L_{\text{cat-xent-s}}(\mathbf{x}, \mathbf{y}) = - \sum_{i=1}^N \alpha_i \cdot \log p_S(y_i | \mathbf{x}, \mathbf{y}_{<i})$$

$$\alpha_i := 1 \left[y_i = \arg \max_{y' \in \mathcal{V}} p_S(y' | \mathbf{x}, \mathbf{y}_{<i}) \right] \quad (12)$$

CAT-Dist-L:

$$L_{\text{cat-dist-l}}(\mathbf{x}, \mathbf{y}) = - \sum_{i=1}^N \alpha_i \left(w \cdot \log p_S(y_i | \mathbf{x}, \mathbf{y}_{<i}) + (1-w) \cdot \sum_{y'=1}^V p_L(y' | \mathbf{x}, \mathbf{y}_{<i}) \log p(y' | \mathbf{x}, \mathbf{y}_{<i}) \right)$$

$$\alpha_i := 1 \left[y_i = \arg \max_{y' \in \mathcal{V}} p_L(y' | \mathbf{x}, \mathbf{y}_{<i}) \right] \quad (13)$$

CAT-Dist-S:

$$L_{\text{cat-dist-s}}(\mathbf{x}, \mathbf{y}) = - \sum_{i=1}^N \alpha_i \left(w \cdot \log p_S(y_i | \mathbf{x}, \mathbf{y}_{<i}) + (1-w) \cdot \sum_{y'=1}^V p_L(y' | \mathbf{x}, \mathbf{y}_{<i}) \log p(y' | \mathbf{x}, \mathbf{y}_{<i}) \right)$$

$$\alpha_i := 1 \left[y_i = \arg \max_{y' \in \mathcal{V}} p_S(y' | \mathbf{x}, \mathbf{y}_{<i}) \right] \quad (14)$$

From the results shown in Figure 7, we found that CAT-Xent-L and CAT-Dist-L both perform quite competitively compared to our loss design in the main paper. This is reasonable because the large language model should dominate the token filtering with higher accuracy, especially in the early stages of training. Beyond the tokens that the large language model can correctly predict, our loss design in (7) also includes those that the small language model can correctly predict. This allows the small language model some extra space to explore, thus achieving the best overall performance compared to other choices.

We also found that training is very slow if we filter out all the tokens that the small language model cannot correctly predict (CAT-Xent-S and CAT-Dist-S) as shown in Figure 7. With the same training time, the model will be far from convergence, leading to downgraded cascade performance.

D Task-specific Quality-FLOPs tradeoff

In the main paper, we presented the results of CAT on three datasets. For each dataset, we combined all tasks, which is more realistic for multi-task LM deployment. In this section, we include the Quality-FLOPs tradeoff in a task-specific manner to provide a better understanding of CAT for each task.

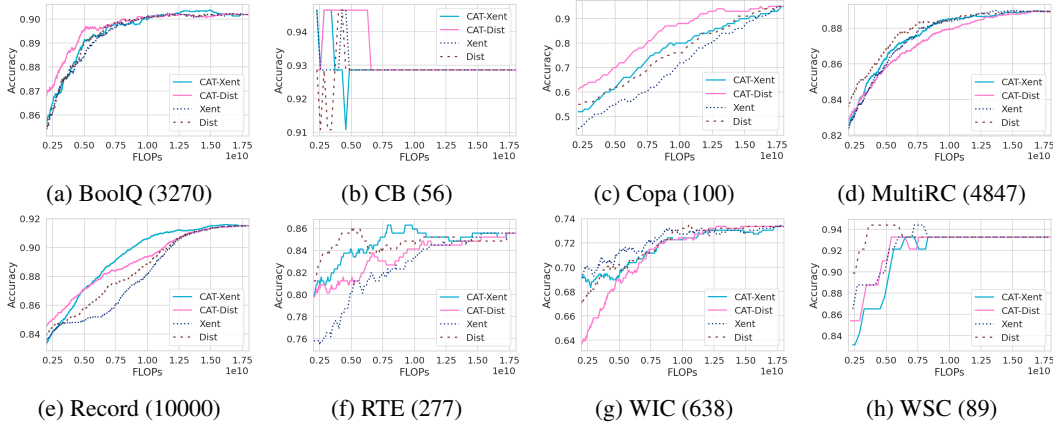


Figure 8: Task-specific Quality-FLOPs tradeoff on SuperGLUE dataset.

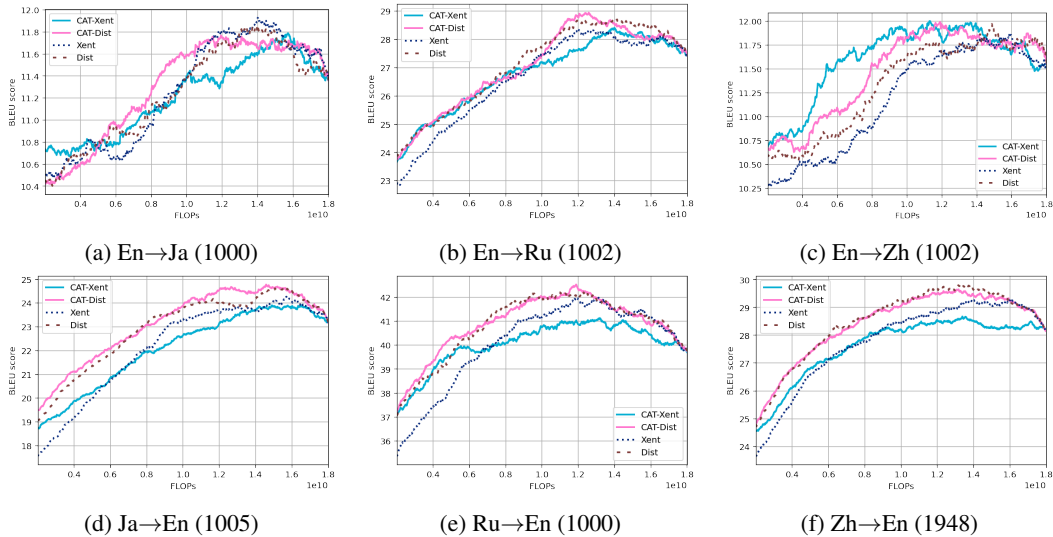


Figure 9: Task-specific Quality-FLOPs tradeoff on WMT22 dataset.

Figures 8 and 9 show the task-specific comparisons for each task on the SuperGLUE and WMT22 datasets. Beyond benefits to the cascade, we observed that CAT can help the small model itself perform better on some tasks, while for others, it may result in a downgrade. This aligns with our expectation that CAT filters out tokens that are difficult to predict, benefiting ‘easier’ tasks more. For difficult tasks, since more tokens are filtered, the model’s intrinsic performance may be adversely affected. This observation is also evident in the FLAN2021 dataset, as shown in Figures 10, 11, and 12. Note that the FLAN2021 dataset consists of 39 tasks evaluated by accuracy. We found that for 7 of these tasks (CoQA, DROP, Natural Questions, SAMSum, SQuAD v1, SQuAD v2, and TriviaQA), the four methods in the comparison showed no clear differences. We did not include plots for these 7 tasks to maintain clarity in figure arrangement.

For each task-specific plot, we included the task name and the evaluation set size in the title.

E CAT on model pre-training

In the main body of the paper we presented CAT as a method for fine-tuning (small) language models which will target a cascaded deployment topology. One may similarly inquire whether pretraining tasks can benefit from a similar phenomenon, if it is known that the resulting models will also be deployed in a cascade.

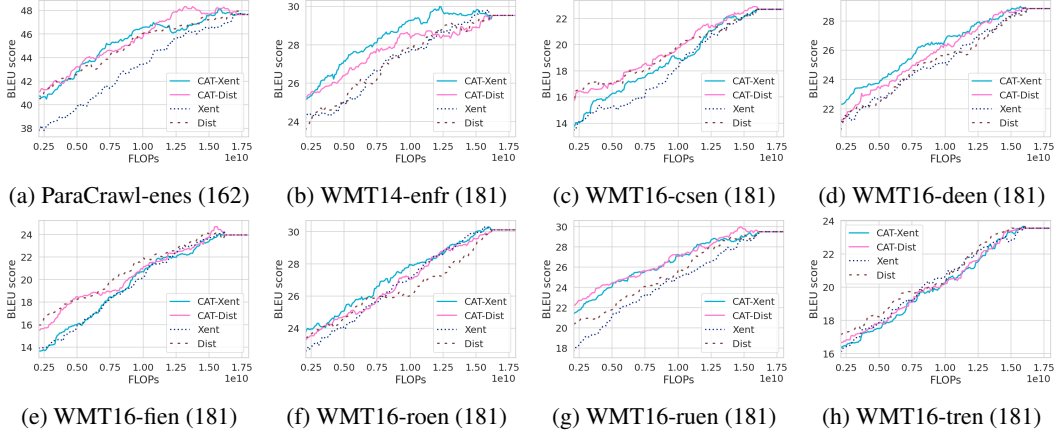


Figure 10: Task-specific Quality-FLOPs tradeoff on FLAN dataset with BLEU score as quality measurement.

We performed some limited exploration of CAT for pre-training of language models and did indeed see that training with CAT yielded similar benefits on next-token prediction accuracies during pretraining. We used these early experiments on pretraining as effectively an iteration ground and so were not as rigorous with our evaluations, considering the fine-tuning regime to be the more promising area—therefore we evaluated only with teacher forcing, never using full decoding.

The results in Figure 13 served as essentially the starting point of the CAT workstream, demonstrating that significant gains could be had by relatively simply modification of loss functions.

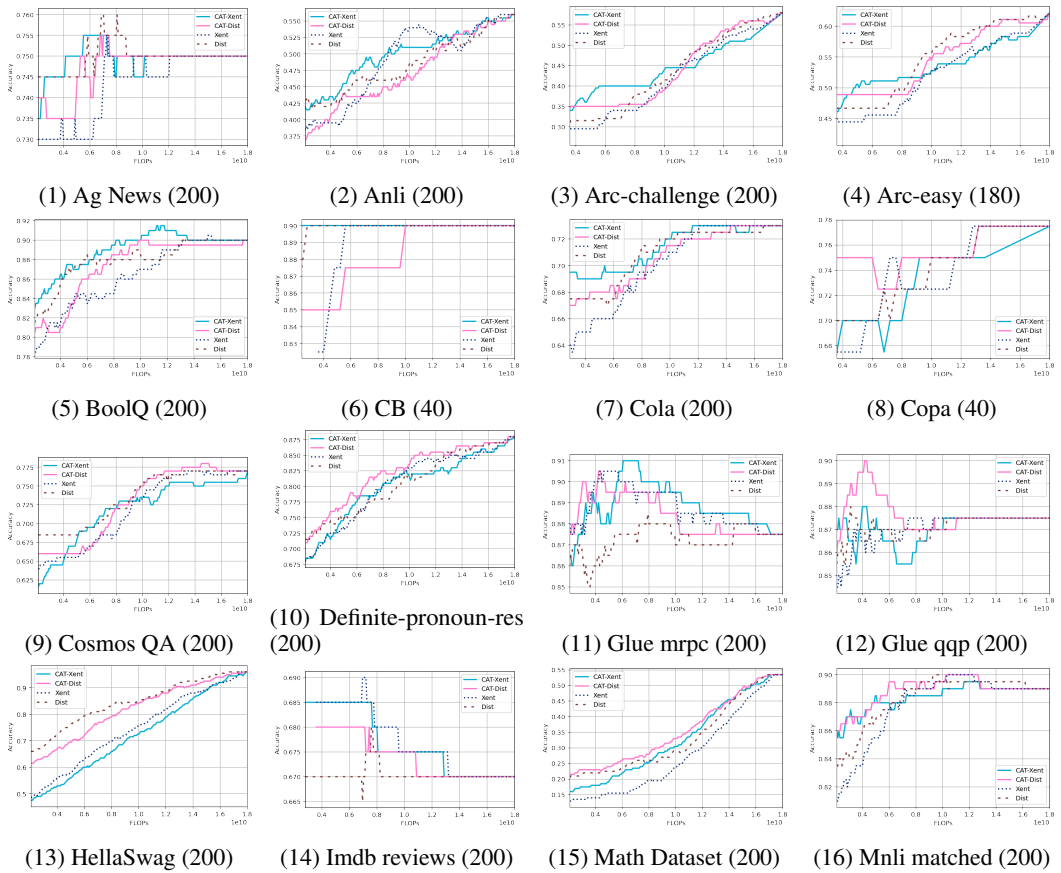


Figure 11: Task-specific Quality-FLOPs tradeoff on FLAN dataset with accuracy as quality measurement. Tasks 1-16 are listed here.

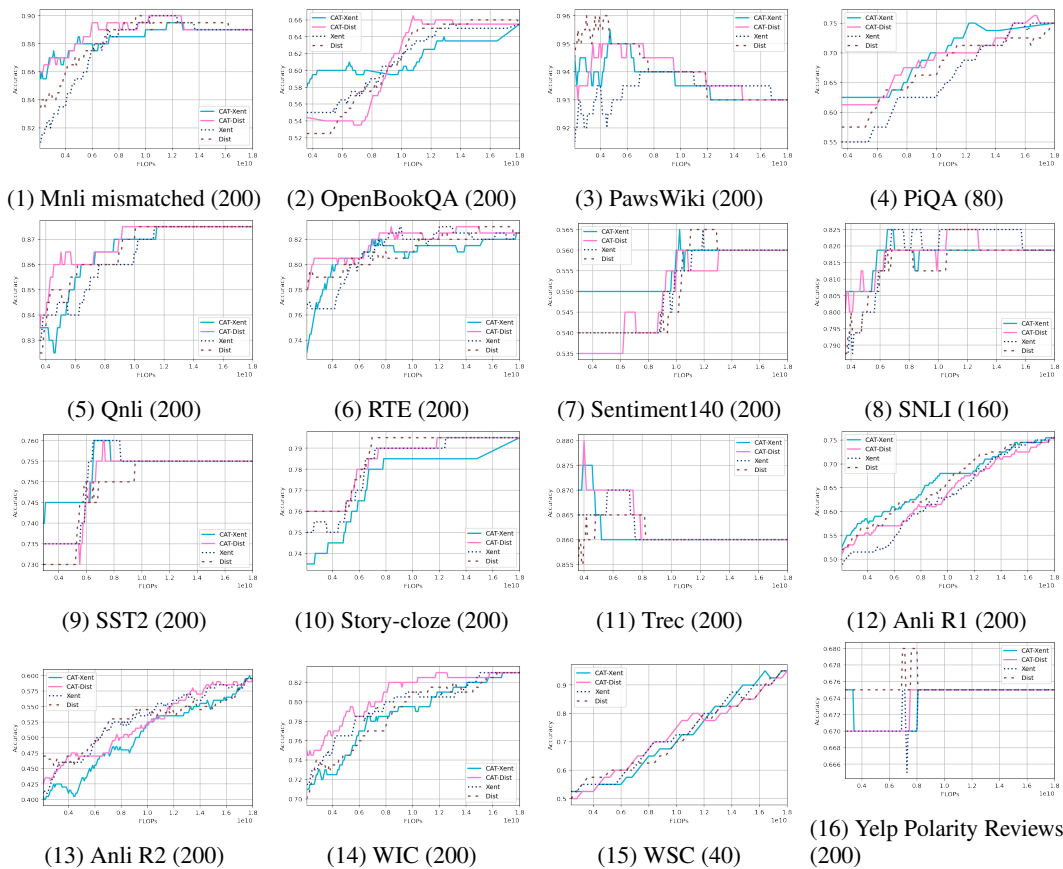


Figure 12: Task-specific Quality-FLOPs tradeoff on FLAN dataset with accuracy as quality measure. Task 17-32 are listed here.

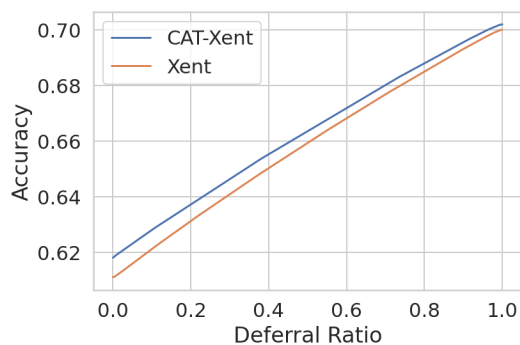


Figure 13: Next-token-prediction accuracy on C4, using T5-base and T5-large models [Raffel et al., 2020] for p_S and p_L . Here accuracy is for the next-token prediction. Decoding performed with teacher forcing.