
EffiQA: Efficient Question-Answering with Strategic Multi-Model Collaboration on Knowledge Graphs

Zixuan Dong, Baoyun Peng*, Yufei Wang, Jia Fu, Xiaodong Wang, Yongxue Shan, and Xin Zhou

*National Key Laboratory of Parallel and Distributed Computing, College of Computer Science and Technology
National University of Defense Technology*

Abstract

While large language models (LLMs) have shown remarkable capabilities in natural language processing, they struggle with complex, multi-step reasoning tasks involving knowledge graphs (KGs). Existing approaches that integrate LLMs and KGs either underutilize the reasoning abilities of LLMs or suffer from prohibitive computational costs due to tight coupling. To address these limitations, we propose a novel collaborative framework named EffiQA that can strike a balance between performance and efficiency via an iterative paradigm. EffiQA consists of three stages: global planning, efficient KG exploration, and self-reflection. Specifically, EffiQA leverages the commonsense capability of LLMs to explore potential reasoning pathways through global planning. Then, it offloads semantic pruning to a small plug-in model for efficient KG exploration. Finally, the exploration results are fed to LLMs for self-reflection to further improve the global planning and efficient KG exploration. Empirical evidence on multiple KBQA benchmarks shows EffiQA’s effectiveness, achieving an optimal balance between reasoning accuracy and computational costs. We hope the proposed new framework will pave the way for efficient, knowledge-intensive querying by redefining the integration of LLMs and KGs, fostering future research on knowledge-based question answering.

1 Introduction

Large language models (LLMs) [1–4] have demonstrated remarkable capabilities across various natural language processing tasks, adeptly generating coherent and context-sensitive responses that manifest deep linguistic insights [5]. Yet, these models struggle with complex, multi-step reasoning tasks, such as complex arithmetic [6], commonsense [7], symbolic reasoning [8] and multi-hop question answering [9, 10].

To enhance the reasoning abilities of LLMs, techniques like chain-of-thought (CoT) [5] prompting have been developed, enabling LLM to generate step-by-step rationales before producing the final answer. Although CoT prompting and its variants have shown improved performance on various reasoning tasks [11–13], it occasionally misses generating enough sub-questions to obtain all the relevant information required to answer the question and struggles in generating credible rationales, frequently succumbing to errors such as hallucinations [14, 15], opaque reasoning [16], and reliance on outdated data [17–19].

To address these limitations, researchers have proposed alternative approaches that integrate external knowledge sources, such as knowledge graphs (KGs) [9, 10, 20–22], into the reasoning process. These methods typically follow a routine of retrieving information from KGs, augmenting the prompt accordingly, and feeding the augmented prompt into LLMs. Predominantly, these loose-coupling paradigms either reformat input queries for simple data retrieval, failing to leverage their full reasoning capabilities. Consequently, the success of these approaches heavily depends on the completeness and

*Corresponding author

quality of the KGs. Recently, several works have explored the tight-coupling integration of LLMs and KGs, e.g. the Think-on-Graph (ToG) [23], Reasoning-on-Graph [24], Chain-of-Knowledge [22]. These strategies employ heavy LLMs to interactively explore related entities and relations on KGs in each reasoning step. Although achieving better performance, it consumes excessive computational resources and risks inefficiency due to potential path explosion, which may confine the reasoning to local optima and undermine performance in dynamic queries. Striking a balance between the coupling degree of LLMs and KGs, such that it can fully utilize their respective capabilities to enhance KBQA performance while maintaining efficiency, remains a challenge.

To address this challenge, we propose a novel collaborative framework EffiQA for LLM-based KBQA, which leverages the commonsense capability of LLMs for global planning while offloading semantic pruning to a small plug-in model. Specifically, EffiQA consists of the following stages:

Global Planning. In this stage, LLM is employed to decompose the question into several semantically coherent trajectories and generate exploration instructions for exploring potential reasoning pathways and extending search space beyond the knowledge graph’s structural limits.

Efficient KG exploration. In this stage, a plug-in model is employed for semantic pruning based on global planning to remove irrelevant nodes and paths during the KG search process.

Self-reflection. In this stage, LLM will proceed to self-reflect on the exploration results to refine the global planning, leading to improved planning and exploration in the subsequent iteration.

To strike a balance between performance and efficiency, EffiQA introduces an enhanced querying strategy that tightly couples the LLM’s instructions with constrained semantic pruning of the KG. This allows EffiQA to selectively expand the most promising graph regions based on semantics and type of entities, substantially reducing the search space while maintaining relevance. A fine-grained semantic matching process further focuses the pruning on conceptually relevant relationships. By having the LLM provide high-level guidance while offloading computationally expensive KG traversal to a specialized model, EffiQA achieves a balanced integration.

Different from previous methods, this collaborative approach can not only enhance the reasoning performance by combining the strengths of LLMs and KGs but also improve operational efficiency. Figure 1 shows the difference between the proposed method and previous methods. By striking a balanced integration between LLMs and KGs, EffiQA redefines the standards for efficient, knowledge-intensive querying in KBQA tasks.

2 Related Work

2.1 Integration of External Knowledge Sources

Recent advancements in large language models (LLMs) have focused on enhancing reasoning capabilities by integrating external information [25, 26]. Notable examples include BlenderBot3[27] and Atlas[19], which achieves marked enhancements in its performance on the Knowledge Intensive Language Tasks (KILT) benchmark [28]. These developments illustrate a growing trend towards the dynamic incorporation of external data sources into LLMs, which serves to enrich their foundational knowledge base and diminish the frequency of inaccuracies in generated content[29, 30].

2.2 Knowledge-Enhanced Reasoning in LLMs

LLMs enhanced with structured external knowledge have shown immense potential for accurately understanding user intentions [31]. Nevertheless, these models often struggle with complex reasoning tasks, such as multi-hop Knowledge Base Question Answering (KBQA), primarily due to their limited capability in decomposing multi-step problems into essential intermediate steps needed to derive an answer [32]. In response to this challenge, the Chain of Thought (CoT) method was introduced [5], further developed into variations such as Auto-CoT and Zero-Shot-CoT [33, 34]. This method exemplifies a structured prompting technique that significantly enhances the efficiency of LLMs in navigating complex reasoning tasks. Concurrently, innovative frameworks like Chain-of-Knowledge (CoK) [22] and Think-on-Graph (ToG) [23] have been developed, integrating knowledge retrieval directly into the reasoning process, thereby enriching the depth and improving the factual accuracy of the generated responses.

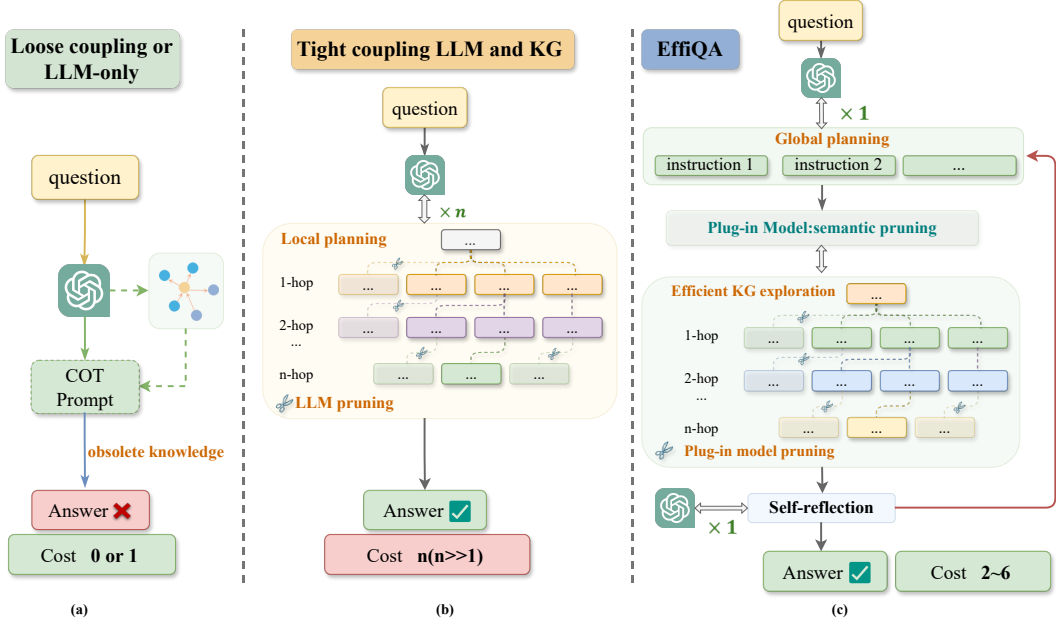


Figure 1: Three paradigms for LLM-based KBQA: (a) loose-coupling or LLM-only, (b) tight-coupling like ToG, LLM is employed to explore KGs in each reasoning step, (c) moderate-coupling where LLM is employed for global planning based on question and self-reflection on exploration results, while small plug-in model for exploration on KG.

2.3 Advanced Frameworks for Structured Knowledge Utilization

The evolution of knowledge integration strategies has significantly advanced the development of frameworks that facilitate more profound interactions between LLMs and knowledge graphs. For instance, a work[35] has introduced a method in which LLMs employ a greedy search algorithm to navigate KGs, enabling more nuanced interactions with data. In a related development, the Clue-Guided Path Exploration (CGPE)[36] framework, which effectively combines a knowledge base with an LLM, using clues from queries to guide systematic exploration, which in turn helps reduce computational loads. Concurrently, the Verification and Editing (VE) framework has been developed by [37]. This framework seeks to refine the reasoning outputs of LLMs, which consequently increases both the fidelity and reliability of the model’s responses.

3 Method

The EffiQA framework consists of three main components that are executed iteratively: global planning, efficient KG exploration, and self-reflection. In the global planning stage, LLM is leveraged to decompose the input question into semantically coherent trajectories and generate exploration instructions, which helps explore potential reasoning pathways and extend the search space beyond the structural limits of the KG. Then, a small plug-in model is employed for efficient KG exploration, performing breadth-first search and semantic pruning on KG with the help of exploration instructions. In the self-reflection stage, LLM will reflect on the exploration results to revamp global planning and KG exploration for further improvement. Figure 2 shows the overall framework of the proposed method.

3.1 Global Planning

In the global planning phase, the LLM leverages its powerful reasoning abilities to globally plan the exploration pathway. At this stage, LLM will give a set of instructions based on the given question and initial entity to guide the plug-in model to explore the graph.

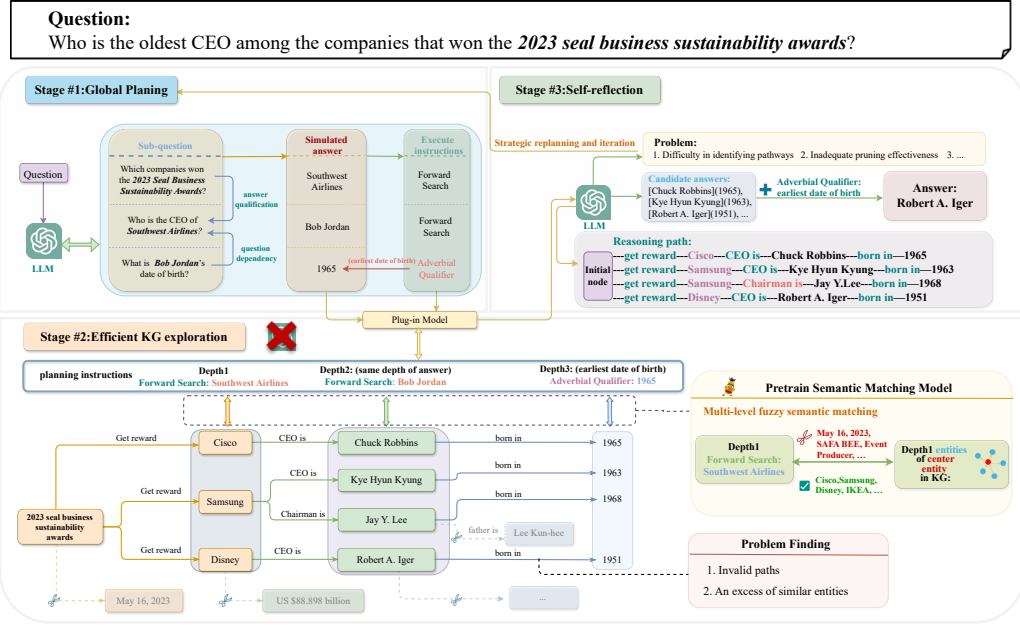


Figure 2: An example workflow of EffiQA consists of three stages. In Stage 1, LLM breaks down the problem and generates instructions consisting of simulated answers and actions based on the logic of the problem. In Stage 2, EffiQA uses a plug-in model to execute instructions, perform efficient KG exploration and use strategies to find problems in exploration. In Stage 3, LLM reflects on the problems in the exploration process, performs self-iterative re-planning, and outputs answers when sufficient information is provided.

3.1.1 Query Decomposition

Initially, the LLM identifies the primary subject entity e_0 from the query. The query is subsequently deconstructed into a set of M hierarchical sub-questions $Q = \{q_1, q_2, \dots, q_M\}$, each accompanied by specific adverbial qualifiers $R = \{r_1, r_2, \dots, r_N\}$, ($N \leq M$), which serves to refine the search at distinct hierarchical levels. For common KBQA datasets, generally $N \leq 1$, that is, certain adverbial qualifier restrictions are generally only applied to entities at the end of the inference path. The decomposition process is mathematically formulated as: $Q, R \leftarrow \text{Decompose}(query, e_0)$. While decomposing the question, LLM also predicts the potential depth of knowledge graph reasoning.

3.1.2 Instruction Generation and Optimization

Following the query decomposition, the LLM simulates potential responses $A = \{A_1, A_2, \dots, A_M\}$ for each sub-question and corresponding qualifier: $A_i \leftarrow \text{Simulate}(e_i, q_i, r_i)$. In parallel, targeted navigational instructions are generated for the small language model, we call this small language model as plug-in model. These instructions, derived from a strategic function S , enable the plug-in model to efficiently traverse and retrieve relevant data from the knowledge graph. Specifically, the "forward search" instruction is generated for sub-questions, while the "adverbial qualifier" instruction is designed for qualifiers. The instruction generation process is expressed as: $\text{Instruction} \leftarrow S(e_i, q_i, r_i)$. These directives ensure that the plug-in model navigates the knowledge graph with optimal efficiency and accuracy.

3.2 Efficient KG exploration

The simulated answers and actions generated by Global Planning can effectively guide the plug-in model based on an intuitive prior premise: when LLM answers a question, the content of the answer may be inaccurate, but will generate simulated answers of the same type or with similar semantics as the answer. Based on this, we introduce an enhanced querying strategy that incorporates a constrained search strategy in knowledge graphs, augmented by semantic pruning based on simulated

answers. This efficient knowledge graph-enhanced query strategy can be understood as a tool in the intelligent agent. LLM gives instructions through global planning and is executed by efficient KG exploration. This approach selectively expands the most promising entities, optimizing both efficiency and effectiveness.

3.2.1 Initialization and Systematic Exploration

Graph Initialization and Entity Representation: The knowledge graph is defined as $G = (E, R)$, where E represents the entities and $R \subseteq E \times E$ denotes the directed relationships. The search commences with the entity e_0 , identified during the Global Planning stage. The BFS starts as $\text{Queue} \leftarrow \{e_0\}$. This structure ensures a systematic evaluation of each entity and relationship, facilitating a comprehensive traversal of the graph.

Exploration and Semantic Pruning Mechanism: During the breadth-first search (BFS), each entity e_{current} in the queue undergoes evaluation concerning its diverse relationships. A representative entity from the tail of each identified relationship is selected for a semantic matching process using the simulated answers. This procedure uses the context provided by the knowledge graph’s entity descriptions and the triple information alongside the simulated context from the LLM-generated sub-problem.

3.2.2 Semantic Matching and Graph Traversal

Fine-grain Semantic Matching: EffiQA employs the Ontonotes dataset for detailed entity typing through the Fine-grained Entity Typing (FGET) method, we use the Context-Dependent Fine-Grained Entity Type Tagging method[38] to perform fine-grained typing of entities. The concise and hierarchical structure of this method balances the accuracy required for effective semantic matching with the complexity of entity classification. This dataset provides a clear framework, facilitating structured and relevant exploration of the graph and ensuring that only the most pertinent relations are pursued. For example, as shown in Figure 3, even if inaccurate instruction content is given due to large model time constraints, plug-in model execution instructions still allow the search for premises that are conceptually consistent despite being inaccurate in the simulation Continuing below, we demonstrate the robustness of the semantic matching process in managing time-sensitive inaccuracies by focusing on categorical relevance rather than precise data accuracy.

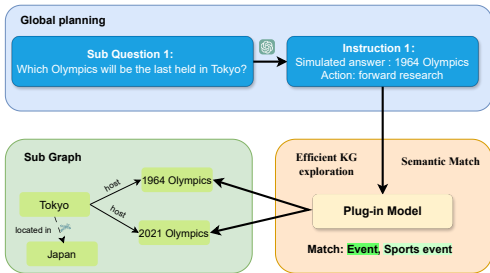


Figure 3: Despite the challenges associated with the temporal constraints of the training corpus (up to March 2021), the plug-in model effectively executes accurate match pruning. The detailed entity typing depicted in the figure serves solely for illustrative purposes

Iterative Expansion: The exploration involves using different representative entities for each relationship to achieve a comprehensive search of the entire graph, which essentially uses a priori knowledge: entities with the same relationship to the same entity are of the same category, which helps prevent the plug-in model semantic matching efficiency from being reduced by too many neighboring entities of the same type. This strategy also mitigates the risk of path explosion and over-classification of entities. Other entities within the same relationship are directly assigned the category of their representative entity for consistency, the formal expression is: if A'_{rep} matches A_i , the exploration extends to include all entities linked by r_i , controlled by a threshold to prevent excessive branching. If no match occurs, the relationship r is pruned to optimize the search process. Additionally, each entity on the retrieval path is checked for

its adverbial qualifier. The process entails exploring nodes within one hop on the knowledge graph, conducting semantic matching with the adverbial qualifier produced during the Global Planning phase, and associating the matched adverbial qualifier with the entity to address the effects of adverbial qualifiers on exploration strategies in complex structural scenarios.

3.2.3 Result compilation and problem collection

Once the predefined reasoning depth set by the number of sub-problems in the global planning is reached, the search ends and all qualifying paths are collected. During the path exploration process, problems that cannot be solved by plug-in model will inevitably arise. For example, the plug-in model cannot match a valid path according to the instructions, or there are too many semantically matched entities of the same type, the next step is too expensive to explore. The subgraph of the problem entity will be collected by efficient KG exploration according to the strategy and handed over to subsequent steps together with the search problem.

3.3 Self-reflection

3.3.1 Detailed Answer Aggregation

In the answer aggregation phase, LLM synthesizes results from efficient KG exploration, ensuring that the final answers are contextually relevant and meet the query’s precise specifications. This phase involves a detailed analysis of each reasoning path. Every node in the path is checked to ensure it conforms to its respective adverbial qualifiers R_i , thus validating the legitimacy of each reasoning step within the context of the original query.

For each reasoning path that aligns with the adverbial qualifiers, the LLM evaluates entities at the terminal nodes to ensure they meet the constraints imposed by the adverbial qualifiers Q_{final} of the final sub-question and the broader context of the initial query. This dual-layered validation V_{dual} ensures that selected entities are logically consistent within their paths and address the query directly.

When multiple initial entities E_0 are involved, the aggregation process validates the paths from each entity independently. These paths are then intersected, based on set theory principles, suggesting that common elements across multiple sets or paths are likely the most valid across various logical constructs. This intersection emphasizes entities that consistently meet the query’s criteria across different reasoning trajectories, thus enhancing the robustness of the final answer.

3.3.2 Strategic Replanning and Iteration

To tackle issues like an excess of similar entities, inadequate pruning effectiveness, and the challenge large models face in identifying pathways that meet specific conditions, While exploring path pruning, plug-in model will also collect path exploration problems that plug-in model cannot solve through our strategy and bind them to the corresponding reasoning paths. Problematic paths are flagged for comprehensive re-evaluation and replanning R_{plan} by the LLM during the answer aggregation phase.

This integrated approach ensures the systematic resolution of potential inaccuracies or inefficiencies, thereby enhancing the robustness of the final answer selection. The final selection of the answer is based on a comprehensive evaluation of intersected entities E'_{final} , ensuring that the result is not only derived from a validated path but also universally applicable as per the initial query requirements.

4 Experiments

4.1 Experimental Setup

4.1.1 Datasets and Metrics

To rigorously evaluate the performance of the EffiQA framework, we selected five benchmark datasets: Complex Web Questions (CWQ) [39], WebQuestionSP (WebQSP) [40], GrailQA [41], QALD10-en [42], and Simple Questions [43]. These datasets were chosen for their varying complexity and the different types of reasoning challenges they present, ranging from simple fact retrieval to sophisticated multi-hop questions. We assessed the framework on two primary metrics: cost efficiency, which measures the resource consumption per query, and answer accuracy (Hits@1), defined by the precision of responses compared to the gold standards. At the same time, since the recall rate is crucial during path exploration, incorrect pruning will cause errors in path exploration and lead to wrong answers. Therefore, to retain the correct path when exploring the knowledge graph without incorrect pruning, we define pruning recall as one of the important indicators of its path exploration. When calculating efficiency, we use the average question consumption of floating-point operations (FLOPs) as an indicator of computational overhead. Cost efficiency is defined as the ratio of the pruning recall rate to FLOPs.

Table 1: Comparison between EffiQA and related methods on KBQA tasks

Method	CWQ	WebQSP	GrailQA	QALD10-en	Simple Questions
Without external knowledge					
IO prompt w/ChatGPT[23]	37.6	63.3	29.4	42.0	20.0
CoT w/ChatGPT[23]	38.8	62.2	28.1	42.9	20.3
SC w/ChatGPT[23]	45.4	61.1	29.6	45.3	18.9
With external knowledge					
Prior FT SOTA	70.4[44]	82.1[45]	75.4[46]	45.4[47]	85.8[48]
Prior Prompting SOTA	-	74.4[49]	53.2[49]	-	-
Prior tight-coupling SOTA[23]	<u>72.5</u>	82.6	<u>81.4</u>	<u>54.7</u>	66.7
EffiQA(ours) w/Deepseek-V2	61.7	67.4	69.1	50.2	69.4
EffiQA(ours) w/ChatGPT	52.1	65.2	63.3	46.2	65.7
EffiQA(ours) w/GPT-4	69.5	82.9	78.4	51.4	76.5

4.1.2 Baselines

EffiQA is benchmarked against key established methods, including methods of reasoning without external knowledge, such as standard prompts (IO prompts) [50] and CoT prompts [33], as well as some state-of-the-art methods using external knowledge reasoning. These comparisons cover hint-based methods, fine-tuning methods, and different KBQA architectures. IO prompts and CoT prompts are two methods that do not require external knowledge, whereas the tight-coupling KBQA method is the most advanced approach for KBQA. These comparisons help illustrate the necessity of external knowledge in answering complex queries and demonstrate the cost-effectiveness of EffiQA compared to existing state-of-the-art methods. Through these comparisons, the flexibility and cost-effectiveness of EffiQA across various datasets can be proven.

4.1.3 Experiment Details

Experiments on EffiQA were performed using three distinct large language models: ChatGPT, GPT-4², and DeepSeek-V2 [51], which is a 236B mixture-of-experts (MoE) model with 21B inference activation parameters. These models were selected to assess the framework’s scalability and performance across varying computational capabilities. Specifically, an open-source MoE model, DeepSeek-V2, was chosen to evaluate whether it can maintain good reasoning capabilities when the number of activation parameters is small, while GPT-4 was utilized to explore the limits of performance in more complex scenarios. To ensure consistent and reproducible results, the temperature setting for all interactions with these models was fixed at 0, eliminating randomness in responses.

The plug-in model used for node semantic matching and path pruning utilizes RoBERTa [52], fine-tuned on the modified OntoNotes v5 dataset³, and a 10,000 entity typing training set generated using GPT-4 for fine-tuning. The dataset is generated using the classification standards from the Context-Dependent Fine-Grained Entity Type Tagging method [38] as the basis for entity typing. Since only the path pruning process involves entity typing, to ensure accurate recognition of the named entity recognition (NER) part, we use special markers to mark the entities that need to be classified and then fine-tune the model to ensure that the specified entities can be correctly identified.

4.2 Main Results

4.2.1 Comparison to Other Methods

We compare EffiQA with some frameworks without external knowledge. As a baseline for large model capabilities, that is, the knowledge contained in the large models themselves, as can be seen from Table 1, the methods without external knowledge generally perform poorly, reflecting the large language models’ (LLMs’) dependence on knowledge graphs for answering knowledge-based

²Both ChatGPT and GPT-4 can be accessed at <https://openai.com/>

³OntoNotes v5 can be downloaded at https://huggingface.co/datasets/conl12012_ontonotesv5

questions. EffiQA leverages both large and smaller specialized language models integrated with external knowledge graphs, surpassing all methods that do not use external knowledge. At the same time, EffiQA provides a distinctive advantage over traditional fine-tuning approaches with its plug-and-play capability that requires no dataset-specific training.

Comparison with methods using external knowledge shows that even without any fine-tuning, EffiQA still outperforms existing fine-tuning methods. Particularly noteworthy is its performance on single-hop datasets. In comparison to ToG, which tightly couples with LLMs and KGs, EffiQA demonstrates competitive strength. Notably, EffiQA excels in single-hop datasets like SimpleQuestions, where it achieves 65.7% accuracy with ChatGPT and 76.5% with GPT-4, underscoring its effective global planning for enhancing accuracy without sacrificing recall—a common shortfall in larger models that heavily prune data. The framework’s strategy for addressing simple questions enhances accuracy without compromising the recall rate, a common issue in large models that employ aggressive pruning techniques, where EffiQA’s global planning proves highly effective.

EffiQA also demonstrates competitive results on multi-hop datasets such as ComplexWebQuestions (CWQ) and WebQuestionsSP (WebQSP), scoring 69.5% and 82.9% respectively when using GPT-4. These results demonstrate that EffiQA’s strategy of leveraging external knowledge significantly improves large language models’ (LLMs’) deep reasoning capabilities, effectively managing complex queries that often pose challenges to tighter-coupling approaches that integrate LLMs and knowledge graphs.

4.2.2 Performance with Different Backbone Models

In exploring the integration of EffiQA with different LLM backbones, we conducted ablation studies using a range of models in table 2, Since EffiQA relies heavily on LLM with powerful reasoning capabilities to give accurate instructions, we chose ChatGPT, Deepseek-V2, and GPT-4 as our planning and aggregation iteration modules. These studies aim to evaluate how the underlying LLM affects the overall accuracy of the system on multiple datasets such as CWQ and WebQSP.

The results show that the performance of EffiQA generally improves with the capacity and complexity of the adopted model. It is worth noting that although the number of parameters activated per inference of Deepseek-V2 is not as much as that of ChatGPT, the overall performance has improved, this illustrates the effectiveness of the MOE architectural model. GPT4 has always outperformed other models in complex multi-hop query scenarios with its powerful inference capabilities. It is worth noting that EffiQA is very sensitive to the performance of LLM, when the LLM reasoning capabilities as global planning and self-reflection are increased, the overall performance of the EffiQA system will be greatly improved. The excellent reasoning of LLM will give more correct instructions and more accurate self-reflection, making the PLM pruning accuracy in subsequent steps higher, thus reducing the process of repeated reasoning and improving the overall accuracy rate.

4.3 Ablation study

4.3.1 Model scale, Efficiency and Performance

In order to prove that when PLM obtains LLM instructions, the recall rate of semantic matching and path pruning can achieve equivalent effects to LLM direct pruning, but its cost-effectiveness has obvious advantages compared with large models, we compare Models of different sizes perform in path pruning and semantic matching tasks through

Table 2: Performances comparison with different LLMs on CWQ and WebQSP.

Method	CWQ	WebQSP
Fine-tuned		
NSM [53]	53.9	74.3
CBR-KBQA [44]	67.1	-
TIARA [54]	-	75.2
DeCAF [45]	70.4	82.1
Prompting		
KD-CoT [55]	50.5	73.7
StructGPT [31]	-	72.6
KB-BINDER [49]	-	74.4
DeepSeek-V2		
COT	41.2	57.8
EffiQA	61.7	67.4
Gain	(+20.5)	(+9.6)
ChatGPT		
COT[23]	38.8	62.2
EffiQA	52.1	65.2
Gain	(+13.3)	(+3.0)
GPT-4		
COT[23]	46.0	67.3
EffiQA	69.5	82.9
Gain	(+23.5)	(+15.6)

pruning during efficient KG traversal, reducing search spaces. Exploration results then refine the global plan iteratively. Extensive experiments demonstrate EffiQA's ability to optimally balance accuracy and costs.

References

- [1] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*, 2018.
- [2] Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, et al. Language models are unsupervised multitask learners. *OpenAI blog*, 1(8):9, 2019.
- [3] Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. Training language models to follow instructions with human feedback. *Advances in neural information processing systems*, 35:27730–27744, 2022.
- [4] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023.
- [5] Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Fei Xia, Ed Chi, Quoc V Le, Denny Zhou, et al. Chain-of-thought prompting elicits reasoning in large language models. *Advances in neural information processing systems*, 35:24824–24837, 2022.
- [6] Xuezhi Wang, Jason Wei, Dale Schuurmans, Quoc Le, Ed Chi, Sharan Narang, Aakanksha Chowdhery, and Denny Zhou. Self-consistency improves chain of thought reasoning in language models. *arXiv preprint arXiv:2203.11171*, 2022.
- [7] Zirui Zhao, Wee Sun Lee, and David Hsu. Large language models as commonsense knowledge for large-scale task planning. *Advances in Neural Information Processing Systems*, 36, 2024.
- [8] Liangming Pan, Alon Albalak, Xinyi Wang, and William Yang Wang. Logic-lm: Empowering large language models with symbolic solvers for faithful logical reasoning. *arXiv preprint arXiv:2305.12295*, 2023.
- [9] Michihiro Yasunaga, Hongyu Ren, Antoine Bosselut, Percy Liang, and Jure Leskovec. Qa-gnn: Reasoning with language models and knowledge graphs for question answering. *arXiv preprint arXiv:2104.06378*, 2021.
- [10] Shirui Pan, Linhao Luo, Yufei Wang, Chen Chen, Jiapu Wang, and Xindong Wu. Unifying large language models and knowledge graphs: A roadmap. *IEEE Transactions on Knowledge and Data Engineering*, 2024.
- [11] Shunyu Yao, Dian Yu, Jeffrey Zhao, Izhak Shafran, Tom Griffiths, Yuan Cao, and Karthik Narasimhan. Tree of thoughts: Deliberate problem solving with large language models. *Advances in Neural Information Processing Systems*, 36, 2024.
- [12] Maciej Besta, Nils Blach, Ales Kubicek, Robert Gerstenberger, Michal Podstawski, Lukas Gianinazzi, Joanna Gajda, Tomasz Lehmann, Hubert Niewiadomski, Piotr Nyczyk, et al. Graph of thoughts: Solving elaborate problems with large language models. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 17682–17690, 2024.
- [13] Miles Turpin, Julian Michael, Ethan Perez, and Samuel Bowman. Language models don’t always say what they think: unfaithful explanations in chain-of-thought prompting. *Advances in Neural Information Processing Systems*, 36, 2024.
- [14] Qing Lyu, Shreya Havaldar, Adam Stein, Li Zhang, Delip Rao, Eric Wong, Marianna Apidianaki, and Chris Callison-Burch. Faithful chain-of-thought reasoning. *arXiv preprint arXiv:2301.13379*, 2023.
- [15] Stephanie Lin, Jacob Hilton, and Owain Evans. Truthfulqa: Measuring how models mimic human falsehoods. *arXiv preprint arXiv:2109.07958*, 2021.
- [16] Mirac Suzgun, Nathan Scales, Nathanael Schärli, Sebastian Gehrmann, Yi Tay, Hyung Won Chung, Aakanksha Chowdhery, Quoc V Le, Ed H Chi, Denny Zhou, et al. Challenging big-bench tasks and whether chain-of-thought can solve them. *arXiv preprint arXiv:2210.09261*, 2022.

- [17] Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, et al. Retrieval-augmented generation for knowledge-intensive nlp tasks. *Advances in Neural Information Processing Systems*, 33:9459–9474, 2020.
- [18] Sebastian Borgeaud, Arthur Mensch, Jordan Hoffmann, Trevor Cai, Eliza Rutherford, Katie Millican, George Bm Van Den Driessche, Jean-Baptiste Lespiau, Bogdan Damoc, Aidan Clark, et al. Improving language models by retrieving from trillions of tokens. In *International conference on machine learning*, pages 2206–2240. PMLR, 2022.
- [19] Gautier Izacard, Patrick Lewis, Maria Lomeli, Lucas Hosseini, Fabio Petroni, Timo Schick, Jane Dwivedi-Yu, Armand Joulin, Sebastian Riedel, and Edouard Grave. Atlas: Few-shot learning with retrieval augmented language models. *Journal of Machine Learning Research*, 24(251):1–43, 2023.
- [20] Yueqing Sun, Qi Shi, Le Qi, and Yu Zhang. Jointlk: Joint reasoning with language models and knowledge graphs for commonsense question answering. *arXiv preprint arXiv:2112.02732*, 2021.
- [21] Xikun Zhang, Antoine Bosselut, Michihiro Yasunaga, Hongyu Ren, Percy Liang, Christopher D Manning, and Jure Leskovec. Greaselm: Graph reasoning enhanced language models for question answering. *arXiv preprint arXiv:2201.08860*, 2022.
- [22] Xingxuan Li, Ruochen Zhao, Yew Ken Chia, Bosheng Ding, Lidong Bing, Shafiq Joty, and Soujanya Poria. Chain of knowledge: A framework for grounding large language models with structured knowledge bases. *arXiv preprint arXiv:2305.13269*, 2023.
- [23] Jiashuo Sun, Chengjin Xu, Lumingyuan Tang, Saizhuo Wang, Chen Lin, Yeyun Gong, Heung-Yeung Shum, and Jian Guo. Think-on-graph: Deep and responsible reasoning of large language model with knowledge graph. *arXiv preprint arXiv:2307.07697*, 2023.
- [24] Linhao Luo, Yuan-Fang Li, Gholamreza Haffari, and Shirui Pan. Reasoning on graphs: Faithful and interpretable large language model reasoning. *arXiv preprint arXiv:2310.01061*, 2023.
- [25] Tiezheng Guo, Qingwen Yang, Chen Wang, Yanyi Liu, Pan Li, Jiawei Tang, Dapeng Li, and Yingyou Wen. Knowledgenavigator: Leveraging large language models for enhanced reasoning over knowledge graph. *arXiv preprint arXiv:2312.15880*, 2023.
- [26] Linyao Yang, Hongyang Chen, Zhao Li, Xiao Ding, and Xindong Wu. Give us the facts: Enhancing large language models with knowledge graphs for fact-aware language modeling. *IEEE Transactions on Knowledge and Data Engineering*, pages 1–20, 2024.
- [27] Kurt Shuster, Jing Xu, Mojtaba Komeili, Da Ju, Eric Michael Smith, Stephen Roller, Megan Ung, Moya Chen, Kushal Arora, Joshua Lane, et al. Blenderbot 3: a deployed conversational agent that continually learns to responsibly engage. *arXiv preprint arXiv:2208.03188*, 2022.
- [28] Fabio Petroni, Aleksandra Piktus, Angela Fan, Patrick Lewis, Majid Yazdani, Nicola De Cao, James Thorne, Yacine Jernite, Vladimir Karpukhin, Jean Maillard, et al. Kilt: a benchmark for knowledge intensive language tasks. *arXiv preprint arXiv:2009.02252*, 2020.
- [29] Jinheon Baek, Alham Fikri Aji, and Amir Saffari. Knowledge-augmented language model prompting for zero-shot knowledge graph question answering. *arXiv preprint arXiv:2306.04136*, 2023.
- [30] Shirui Pan, Linhao Luo, Yufei Wang, Chen Chen, Jiapu Wang, and Xindong Wu. Unifying large language models and knowledge graphs: A roadmap. *IEEE Transactions on Knowledge and Data Engineering*, pages 1–20, 2024.
- [31] Jinhao Jiang, Kun Zhou, Zican Dong, Keming Ye, Wayne Xin Zhao, and Ji-Rong Wen. Structgpt: A general framework for large language model to reason over structured data. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 9237–9251, 2023.

- [32] Xinyan Guan, Yanjiang Liu, Hongyu Lin, Yaojie Lu, Ben He, Xianpei Han, and Le Sun. Mitigating large language model hallucinations via autonomous knowledge graph-based retrofitting. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 18126–18134, 2024.
- [33] Zhuosheng Zhang, Aston Zhang, Mu Li, and Alex Smola. Automatic chain of thought prompting in large language models. *arXiv preprint arXiv:2210.03493*, 2022.
- [34] Takeshi Kojima, Shixiang Shane Gu, Machel Reid, Yutaka Matsuo, and Yusuke Iwasawa. Large language models are zero-shot reasoners. *Advances in neural information processing systems*, 35:22199–22213, 2022.
- [35] Jeff Z Pan, Simon Razniewski, Jan-Christoph Kalo, Sneha Singhania, Jiaoyan Chen, Stefan Dietze, Hajira Jabeen, Janna Omeliyanenko, Wen Zhang, Matteo Lissandrini, et al. Large language models and knowledge graphs: Opportunities and challenges. *arXiv preprint arXiv:2308.06374*, 2023.
- [36] Dehao Tao, Feng Huang, Yongfeng Huang, and Minghu Jiang. Clue-guided path exploration: An efficient knowledge base question-answering framework with low computational resource consumption. *arXiv preprint arXiv:2401.13444*, 2024.
- [37] Ruochen Zhao, Xingxuan Li, Shafiq Joty, Chengwei Qin, and Lidong Bing. Verify-and-edit: A knowledge-enhanced chain-of-thought framework. *arXiv preprint arXiv:2305.03268*, 2023.
- [38] Gillick Dan, Lazic Nevena, Ganchev Kuzman, Kirchner Jesse, and Huynh David. Context-dependent fine-grained entity type tagging. *arXiv preprint arXiv:1412.1820*, 2014.
- [39] Alon Talmor and Jonathan Berant. The web as a knowledge-base for answering complex questions. *arXiv preprint arXiv:1803.06643*, 2018.
- [40] Wen-tau Yih, Matthew Richardson, Christopher Meek, Ming-Wei Chang, and Jina Suh. The value of semantic parse labeling for knowledge base question answering. In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 201–206, 2016.
- [41] Yu Gu, Sue Kase, Michelle Vanni, Brian Sadler, Percy Liang, Xifeng Yan, and Yu Su. Beyond iid: three levels of generalization for question answering on knowledge bases. In *Proceedings of the Web Conference 2021*, pages 3477–3488, 2021.
- [42] Aleksandr Perevalov, Dennis Diefenbach, Ricardo Usbeck, and Andreas Both. Qald-9-plus: A multilingual dataset for question answering over dbpedia and wikidata translated by native speakers. In *2022 IEEE 16th International Conference on Semantic Computing (ICSC)*, pages 229–234. IEEE, 2022.
- [43] Antoine Bordes, Nicolas Usunier, Sumit Chopra, and Jason Weston. Large-scale simple question answering with memory networks. *arXiv preprint arXiv:1506.02075*, 2015.
- [44] Rajarshi Das, Manzil Zaheer, Dung Thai, Ameya Godbole, Ethan Perez, Jay-Yoon Lee, Lizhen Tan, Lazaros Polymenakos, and Andrew McCallum. Case-based reasoning for natural language queries over knowledge bases. *arXiv preprint arXiv:2104.08762*, 2021.
- [45] Donghan Yu, Sheng Zhang, Patrick Ng, Henghui Zhu, Alexander Hanbo Li, Jun Wang, Yiqun Hu, William Wang, Zhiguo Wang, and Bing Xiang. Decaf: Joint decoding of answers and logical forms for question answering over knowledge bases. *arXiv preprint arXiv:2210.00063*, 2022.
- [46] Yu Gu, Xiang Deng, and Yu Su. Don’t generate, discriminate: A proposal for grounding language models to real-world environments. *arXiv preprint arXiv:2212.09736*, 2022.
- [47] Manuel Borroto, Francesco Ricca, Bernardo Cuteri, and Vito Barbara. Sparql-qa enters the qald challenge. In *Proceedings of the 7th Natural Language Interfaces for the Web of Data (NLIWoD) co-located with the 19th European Semantic Web Conference, Hersonissos, Greece*, volume 3196, pages 25–31, 2022.

- [48] Jinheon Baek, Alham Fikri Aji, Jens Lehmann, and Sung Ju Hwang. Direct fact retrieval from knowledge graphs without entity linking. *arXiv preprint arXiv:2305.12416*, 2023.
- [49] Tianle Li, Xueguang Ma, Alex Zhuang, Yu Gu, Yu Su, and Wenhui Chen. Few-shot in-context learning for knowledge base question answering. *arXiv preprint arXiv:2305.01750*, 2023.
- [50] Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901, 2020.
- [51] DeepSeek-AI. Deepseek-v2: A strong, economical, and efficient mixture-of-experts language model, 2024.
- [52] Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. Roberta: A robustly optimized bert pretraining approach. *arXiv preprint arXiv:1907.11692*, 2019.
- [53] Gaole He, Yunshi Lan, Jing Jiang, Wayne Xin Zhao, and Ji-Rong Wen. Improving multi-hop knowledge base question answering by learning intermediate supervision signals. In *Proceedings of the 14th ACM international conference on web search and data mining*, pages 553–561, 2021.
- [54] Yiheng Shu, Zhiwei Yu, Yuhan Li, Börje F Karlsson, Tingting Ma, Yuzhong Qu, and Chin-Yew Lin. Tiara: Multi-grained retrieval for robust question answering over large knowledge bases. *arXiv preprint arXiv:2210.12925*, 2022.
- [55] Keheng Wang, Feiyu Duan, Sirui Wang, Peiguang Li, Yunsen Xian, Chuantao Yin, Wenge Rong, and Zhang Xiong. Knowledge-driven cot: Exploring faithful reasoning in llms for knowledge-intensive question answering. *arXiv preprint arXiv:2308.13259*, 2023.