

# Enhance Image-to-Image Generation with LLaVA Prompt and Negative Prompt

1<sup>st</sup> Zhicheng Ding

*Fu Foundation School of Engineering and Applied Science  
Columbia University  
New York, USA  
zhicheng.ding@columbia.edu*

3<sup>rd</sup> Qikai Yang

*Department of Computer Science  
University of Illinois Urbana-Champaign  
Urbana, USA  
qikaiy2@illinois.edu*

2<sup>nd</sup> Panfeng Li

*Department of Electrical and Computer Engineering  
University of Michigan  
Ann Arbor, USA  
pfli@umich.edu*

4<sup>th</sup> Siyang Li

*Lubin School of Business  
Pace University  
New York, USA  
lisiyang98@hotmail.com*

**Abstract**—This paper presents a novel approach to enhance image-to-image generation by leveraging the multimodal capabilities of the Large Language and Vision Assistant (LLaVA). We propose a framework where LLaVA analyzes input images and generates textual descriptions, hereinafter LLaVA-generated prompts. These prompts, along with the original image, are fed into the image-to-image generation pipeline. This enriched representation guides the generation process towards outputs that exhibit a stronger resemblance to the input image. Extensive experiments demonstrate the effectiveness of LLaVA-generated prompts in promoting image similarity. We observe a significant improvement in the visual coherence between the generated and input images compared to traditional methods. Future work will explore fine-tuning LLaVA prompts for increased control over the creative process. By providing more specific details within the prompts, we aim to achieve a delicate balance between faithfulness to the original image and artistic expression in the generated outputs.

**Index Terms**—Large Language and Vision Assistant; Image-to-Image Generation; Large Language Model

## I. INTRODUCTION

The field of artificial intelligence is experiencing a surge in the development of multifaceted assistants capable of solving many real-life problems. Large language models play an important part of it, showing their great in multiple fields such as natural language processing [1–7] and computer vision [8–17]. Among those fields, one such example is Stable Diffusion [18], a powerful model that generates novel and imaginative images based on user-provided starting points. However, relying solely on the input image presents limitations. The generated image may deviate significantly from the user’s intent, resulting in outputs that lack the desired level of control or fidelity. In addition, the inaccuracy and instability of generated images from large language models are also problems observed in past studies that necessitate careful consideration and mitigation strategies moving forward [19].

To address the problems mentioned as above, this paper explores a novel approach that bridges this gap and empowers Stable Diffusion for more precise image generation by incorporating the capabilities of the Large Language and Vision Assistant (LLaVA). LLaVA excels in image understanding,

allowing it to analyze existing images and extract key features and concepts. This visual interpretation capability can be leveraged to generate accurate and detailed textual prompts that inform the image generation process.

We propose a novel framework where LLaVA analyzes an input image and generates a refined text prompt, along with a negative prompt, that captures the essence of the original image. This enhanced prompt is then fed into Stable Diffusion, guiding it to create a new image that faithfully reflects the content and style of the original image, potentially with creative variations. By incorporating LLaVA’s image understanding capabilities, this approach aims to address the shortcomings of solely image-based generation, leading to outputs that exhibit a higher degree of similarity to the user’s initial input.

This paper contributes to the field of AI-powered image-to-image generation [20, 21]. We seek to advance the state-of-the-art in AI-powered image generation, enabling users to achieve a higher degree of control and fidelity in the creative process in several keyways.

- **Integration Exploration:** We explore the integration of LLaVA’s image understanding capabilities with Stable Diffusion’s image generation prowess.
- **Refined Prompting Framework:** We introduce a framework for refining text and negative prompts based on the visual content of the input image.
- **Experimental Evaluation:** We conduct extensive experiments to evaluate the impact of LLaVA-generated prompts on the quality and similarity of image-to-image generation.

## II. METHODS

Figure [1] showcases the framework of our proposed approach, which utilizes LLaVA-generated prompts for image-to-image generation. This method deviates from directly feeding Stable Diffusion with input images. Instead, it seamlessly integrates prompts to enhance the generation process [22–24]. The workflow starts with feeding the input image (Figure 1(a)) to LLaVA. We query LLaVA to “generate prompt and negative prompt for this image.” Subsequently, LLaVA generates a

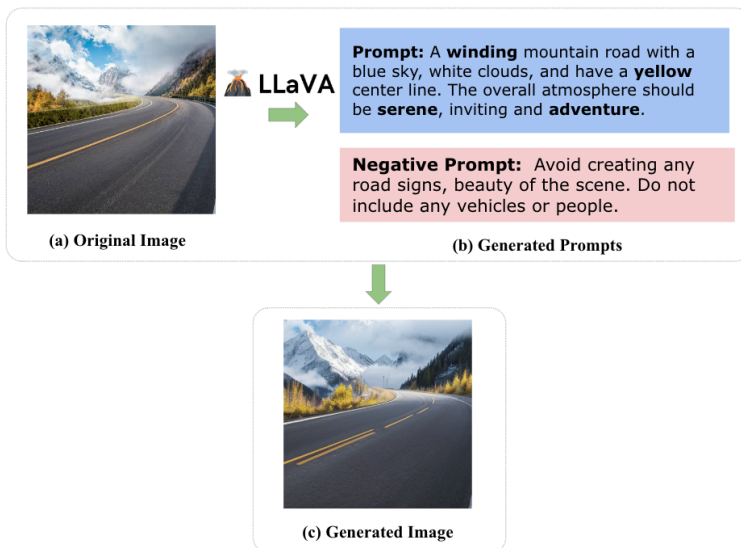


Fig. 1: Framework of LLaVA-prompts-based image-to-image generation

prompt and a negative prompt (Figure 1(b)) tailored to the specific content of the input image. Finally, both the generated prompts and the original image are fed into the image-to-image generation model (e.g., Stable Diffusion). The model then takes all inputs into consideration when generating the final output image (Figure 1(c)). The following sections will dive into the greater details of how each module works.

#### A. Prompt Generation using LLaVA

This study investigates the potential of LLaVA, a powerful large language model (LLM) known for its proficiency in understanding and describing visual content, for multimodal prompt generation [25, 26]. We explore a novel pipeline that use LLaVA as an image interpreter that generates the prompts to enhance image-to-image generations. We will also consider combining SVM [27], a popular and efficient machine learning method, to boost the performance of our model. The core concept involves presenting LLaVA with an original image along with a task instruction. In our experiment, the instruction was "Generate prompt and negative prompt for this image." This text serves a dual purpose: (1) it defines the specific task for LLaVA and (2) guides its analysis of the image by explicitly stating the desired output format. While the descriptions generated by LLaVA can be lengthy, there is a possibility that they might not fully capture all the necessary details required for an effective textual prompt. Our findings suggest that incorporating additional, more specific task instructions within the input text could significantly enhance the precision and focus of the generated prompts.

#### B. Image-to-Image Generation with Prompts

Our methodology utilizes the StableDiffusion-Img2ImgPipeline, a component within Stable Diffusion 2.0. This pipeline employs a diffusion-denoising mechanism, granting us fine-grained control over the image editing

process. We incorporate input images alongside prompts generated by LLaVA. These prompts aim to capture the essence of the input image. Additionally, negative prompts are employed to guide the model away from unintended visual elements. By combining the input image, LLaVA-generated prompts, and negative prompts, we instruct the image-to-image pipeline to generate a new image that closely resembles the original input image but incorporates the specified modifications [28–31]. The fine-grained control offered by text prompts and the integration with LLaVA-generated prompts provide a robust approach for manipulating and generating new visuals [32–40].

### III. EXPERIMENTAL SETUP

#### A. Prompt Generation using LLaVA

In this research, we utilized a pre-trained Large Language Model (LLM), specifically the LLaVA v1.6-34b model, to generate both positive and negative prompts based on input images. Figure 1(b) showcases an example of LLaVA's output for a specific input image. The analysis of the generated prompts provides insights into LLaVA's capability to understand visual content and translate it into textual descriptions. In this case, the positive prompt captures key aspects of the image:

- **Overall Ambiance:** The scene should evoke a sense of serenity.
- **Background Details:** The bridge is surrounded by lush and towering mountains.
- **Excluded Elements:** People, boats, and other similar objects should be absent from the generated image.

However, it is important to acknowledge potential limitations in the generated negative prompts. The example in Figure 1(b) might contain misleading elements. The SVM [27] approach from this article helped design our experimental methods and the model can solve the problems like constraints.

Images	RMSE ↓	PSNR ↑	FSIM ↑	SSIM ↑	UIQ ↑	SRE ↑
w/o prompt	0.01931	34.2736	0.28770	0.78507	0.03133	48.7848
with prompts	<b>0.01008</b>	<b>39.8750</b>	<b>0.36375</b>	<b>0.92199</b>	<b>0.07616</b>	<b>51.6555</b>

TABLE I: Metric comparison between image-to-image generation with and without LLaVA generated prompts

Images	Approach	RMSE ↓	PSNR ↑	FSIM ↑	SSIM ↑	UIQ ↑	SRE ↑
dog	w/o prompt	0.01952	34.1125	0.28610	0.78434	0.00179	52.8297
	w prompt (ours)	<b>0.01265</b>	<b>37.9437</b>	<b>0.39774</b>	<b>0.88115</b>	<b>0.05121</b>	<b>55.0153</b>
astronaut	w/o prompt	0.01798	34.9009	0.27823	0.79330	0.00104	51.0724
	w prompt (ours)	<b>0.01262</b>	<b>37.9785</b>	<b>0.30214</b>	<b>0.88230</b>	<b>0.02420</b>	<b>52.6086</b>
plane	w/o prompt	0.01275	37.7418	0.31769	0.92368	0.00861	53.8197
	w prompt (ours)	<b>0.00767</b>	<b>42.2708</b>	<b>0.40353</b>	<b>0.96597</b>	<b>0.10995</b>	<b>55.7809</b>
skyscraper	w/o prompt	0.02603	31.6809	0.27245	0.58362	-0.00236	43.1745
	w prompt (ours)	<b>0.01839</b>	<b>34.6985</b>	<b>0.31015</b>	<b>0.74276</b>	<b>0.03159</b>	<b>44.6849</b>

TABLE II: Extensive experiment of comparison with and without LLaVA generated prompts



Fig. 2: Comparison between image-to-image generation with and without LLaVA generated prompts

Further investigation is necessary to understand the effectiveness and accuracy of LLaVA’s negative prompt generation in various scenarios (detailed in Future Work). Overall, LLaVA shows great potential as a tool for generating text prompts for image-to-image generation tasks.

### B. Image-to-Image Generation with Prompts

This study utilizes the pre-trained open-source Stable Diffusion v2 model for image generation based on user-provided input images and prompts. Figure 1(c) presents a sample output of the generated image. The generated image exhibits a high degree of correspondence with the prompts and maintains a strong visual similarity to the input image. The subsequent section will conduct a comparative analysis of generated images produced with and without prompts generated by the LLaVA model. This comparison aims to further elucidate the advantages of our proposed approach.

### C. Image-to-Image Generation without Prompts

Similar to previous section, we use the open source Stable Diffusion v2 model [18] to generate the image solely on an input image, without the incorporation of additional prompts. Figure 2(b) presents a representative example of the pipeline’s output. While the generated image exhibits a high degree of stylistic and thematic similarity to the input image, it introduces a degree of noise. Specifically, the generated image

deviates from the input in the following aspects: (1) the presence of two yellow lines on the road (as opposed to a single line in the original), (2) the transformation of the single-lane road into a dual-lane road, and (3) the diminished visibility of the background mountains. These observations warrant further investigation into the noise generation characteristics of the pipeline.

### D. Comparison w/wo Prompt

Figure 2 (b) and (c) visually demonstrate the distinction between images generated with and without LLaVA prompts. To quantify this observed difference in image similarity, we calculate the image similarity metrics, including Root Mean Square Error (RMSE), Peak Signal-to-Noise Ratio (PSNR), Feature-based Similarity Index (FSIM), Structural Similarity Index (SSIM), Universal Image Quality Index (UIQ), and Signal to Reconstruction Error Ratio (SRE) [41–44]. The results, presented in Table 1, substantiate the qualitative observations, indicating that LLaVA-generated prompts contribute to the generation of more similar images.

### E. Extensive Experiments

To comprehensively demonstrate the effectiveness of our proposed approach in generating visually similar images, we conducted a supplementary evaluation. This evaluation involved the creation of more input images in different scenarios, encompassing both those generated with the aid of prompts

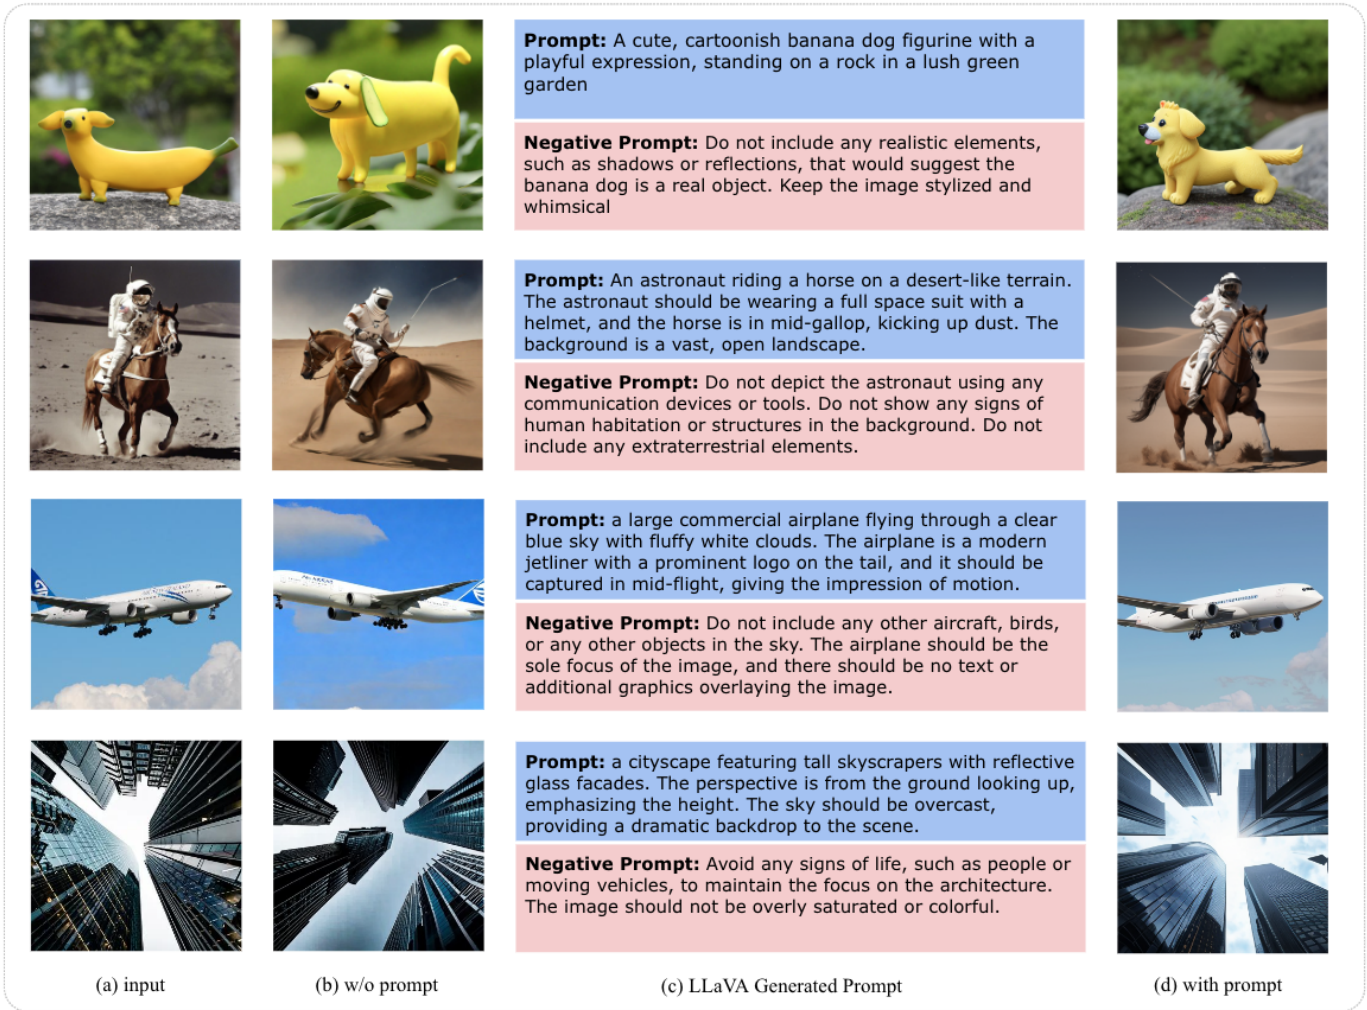


Fig. 3: Framework of LLaVA-prompts-based image-to-image generation

and those produced without. This additional analysis strengthens the generalizability of our proposed approach. Figure 3 demonstrates the images generated with and without LLaVA-generated prompts. Similarly, to better quantify similarity between generated images, we use image similarity metrics, RMSE, PSNR, FSIM, SSIM, UIQ, SRE for comparison. Table 2 showcases that our proposed approach generates more similar images in all these scenarios.

#### IV. CONCLUSIONS AND FUTURE WORK

In this work, we propose a novel framework for enhancing image-to-image generation by leveraging the multimodal capabilities of LLaVA. Our approach capitalizes on LLaVA’s ability to analyze and comprehend visual content by generating textual descriptions of input image. The LLaVA-generated prompts serve as additional input to the image-to-image generation pipeline. This enriched representation guides the generation process towards outputs that exhibit a better similarity to original image.

Extensive experimentation demonstrates the effectiveness of LLaVA-generated prompts in promoting image similarity.

Our results reveal a significant improvement in the visual coherence between the generated image and the input image compared to traditional, prompt-less generation methods.

For the future work, we envision further exploration into fine-tuning LLaVA prompts for increased control over the creative process. By providing more detailed specifications within the prompts, we aim to guide the image-to-image pipeline towards emphasizing specific aspects of the input image while maintaining creative freedom in other areas [45–49]. This refined approach holds promise for achieving a delicate balance between similarity and creativity.

#### REFERENCES

- [1] Z. Pan, H. Luo, M. Li, and H. Liu, “Chain-of-action: Faithful and multimodal question answering through large language models,” *arXiv preprint arXiv:2403.17359*, 2024.
- [2] A. Guo, Y. Hao, C. Wu, P. Haggi, Z. Pan, M. Si, D. Tao, A. Li, M. Herbordt, and T. Geng, “Software-hardware co-design of heterogeneous smartnic system for recommendation models inference and training,” in *Proceedings of the 37th International Conference on Supercomputing*, 2023, pp. 336–347.
- [3] R. Zhang, Z. Zeng, Z. Guo, and Y. Li, “Can language understand depth?” in *Proceedings of the 30th ACM International Conference on Multimedia*, 2022, pp. 6868–6874.



- [4] Z. Zeng, D. Wang, F. Yang, H. Park, Y. Wu, S. Soatto, B.-W. Hong, D. Lao, and A. Wong, "Wordepth: Variational language prior for monocular depth estimation," *arXiv preprint arXiv:2404.03635*, 2024.
- [5] X. Chen, K. Li, T. Song, and J. Guo, "Mix of experts language model for named entity recognition," *arXiv preprint arXiv:2404.19192*, 2024.
- [6] P. Li, Q. Yang, X. Geng, W. Zhou, Z. Ding, and Y. Nian, "Exploring diverse methods in visual question answering," *arXiv preprint arXiv:2404.13565*, 2024.
- [7] Q. Yang, P. Li, Z. Ding, W. Zhou, Y. Nian, and X. Xu, "A comparative study on enhancing prediction in social network advertisement through data augmentation," *arXiv preprint arXiv:2404.13812*, 2024.
- [8] H. Liu, Y. Shen, W. Zhou, Y. Zou, C. Zhou, and S. He, "Adaptive speed planning for unmanned vehicle based on deep reinforcement learning," *arXiv preprint arXiv:2404.17379*, 2024.
- [9] Y. Shen, H. Liu, X. Liu, W. Zhou, C. Zhou, and Y. Chen, "Localization through particle filter powered neural network estimated monocular camera poses," *arXiv preprint arXiv:2404.17685*, 2024.
- [10] M. Liu, H. Zhang, J. Song, and M. Lu, "Using generative model for intelligent design of dielectric resonator antennas," *Microwave and Optical Technology Letters*, vol. 66, no. 1, p. e34013, 2024.
- [11] Z. Ding, M. K. Turkcan, and A. Boulanger, "Using an ancillary neural network to capture weekends and holidays in an adjoint neural network architecture for intelligent building management," *arXiv preprint arXiv:1902.06778*, 2018.
- [12] A. Zhu, K. Li, T. Wu, P. Zhao, W. Zhou, and B. Hong, "Cross-task multi-branch vision transformer for facial expression and mask wearing classification," *arXiv preprint arXiv:2404.14606*, 2024.
- [13] K. Li, A. Zhu, P. Zhao, J. Song, and J. Liu, "Utilizing deep learning to optimize software development processes," *arXiv preprint arXiv:2404.13630*, 2024.
- [14] Y. Ge, Z. Xu, Y. Xiao, G. Xin, Y. Pang, and L. Itti, "Encouraging disentangled and convex representation with controllable interpolation regularization," in *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision*, 2023, pp. 4761–4769.
- [15] A. Zhu, J. Li, and C. Lu, "Pseudo view representation learning for monocular rgb-d human pose and shape estimation," *IEEE Signal Processing Letters*, vol. 29, pp. 712–716, 2021.
- [16] Y. Ge, S. Abu-El-Hajja, G. Xin, and L. Itti, "Zero-shot synthesis with group-supervised learning," *arXiv preprint arXiv:2009.06586*, 2020.
- [17] Z. Ding, P. Li, Q. Yang, S. Li, and Q. Gong, "Regional style and color transfer," *arXiv preprint arXiv:2404.13880*, 2024.
- [18] R. Rombach, A. Blattmann, D. Lorenz, P. Esser, and B. Ommer, "High-resolution image synthesis with latent diffusion models," *arXiv preprint arXiv:2112.10752*, 2021.
- [19] H. Liu, C. Li, Q. Wu, and Y. J. Lee, "Visual instruction tuning," in *NeurIPS*, 2023.
- [20] S. Minaee, T. Mikolov, N. Nikzad, M. Chenaghlu, R. Socher, X. Amatriain, and J. Gao, "Large language models: A survey," *arXiv preprint arXiv:2402.06196*, 2024.
- [21] C. Saharia, W. Chan, S. Saxena, L. Li, J. Whang, E. Denton, S. K. S. Ghasemipour, B. K. Ayan, S. S. Mahdavi, R. G. Lopes, T. Salimans, J. Ho, D. J. Fleet, and M. Norouzi, "Photorealistic text-to-image diffusion models with deep language understanding," *arXiv preprint arXiv:2205.11487*, 2022.
- [22] Z. Pan, A. Sharma, J. Y.-C. Hu, Z. Liu, A. Li, H. Liu, M. Huang, and T. Geng, "Ising-traffic: Using ising machine learning to predict traffic congestion under uncertainty," in *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 37, no. 8, 2023, pp. 9354–9363.
- [23] H. Ma, D. Zeng, and Y. Liu, "Learning individualized treatment rules with many treatments: A supervised clustering approach using adaptive fusion," *Advances in Neural Information Processing Systems*, vol. 35, pp. 15 956–15 969, 2022.
- [24] J. Wang, X. Li, Y. Jin, Y. Zhong, K. Zhang, and C. Zhou, "Research on image recognition technology based on multimodal deep learning," *arXiv preprint arXiv:2405.03091*, 2024.
- [25] H. Hu, K. C. K. Chan, Y.-C. Su, W. Chen, Y. Li, K. Sohn, Y. Zhao, X. Ben, B. Gong, W. Cohen, M.-W. Chang, and X. Jia, "Instruct-imagen: Image generation with multi-modal instruction," *arXiv preprint arXiv:2401.01952*, 2024.
- [26] A. Ramesh, M. Pavlov, G. Goh, S. Gray, C. Voss, A. Radford, M. Chen, and I. Sutskever, "Zero-shot text-to-image generation," *arXiv preprint arXiv:2102.12092*, 2021.
- [27] R. Liu, X. Xu, Y. Shen, A. Zhu, C. Yu, T. Chen, and Y. Zhang, "Enhanced detection classification via clustering svm for various robot collaboration task," *arXiv preprint arXiv:2405.03026*, 2024.
- [28] X. Yan, W. Wang, M. Xiao, Y. Li, and M. Gao, "Survival prediction across diverse cancer types using neural networks," *arXiv preprint arXiv:2404.08713*, 2024.
- [29] M. Xiao, Y. Li, X. Yan, M. Gao, and W. Wang, "Convolutional neural network classification of cancer cytopathology images: taking breast cancer as an example," *arXiv preprint arXiv:2404.08279*, 2024.
- [30] J. He, C. I. Kanatsoulis, and A. Ribeiro, "Network alignment with transferable graph autoencoders," *arXiv preprint arXiv:2310.03272*, 2023.
- [31] J. He, "Performance analysis of facial recognition: A critical review through glass factor," in *2021 2nd International Conference on Computing and Data Science (CDS)*. IEEE, 2021, pp. 429–436.
- [32] Q. Xu, X. Zhang, N. S. Aybat, and M. Gürbüzbalaban, "A stochastic gda method with backtracking for solving nonconvex (strongly) concave minimax problems," *arXiv preprint arXiv:2403.07806*, 2024.
- [33] D. Zou, Y. Zhu, S. Xu, Z. Li, H. Jin, and H. Ye, "Interpreting deep learning-based vulnerability detector predictions based on heuristic searching," *ACM Transactions on Software Engineering and Methodology (TOSEM)*, vol. 30, no. 2, pp. 1–31, 2021.
- [34] T. Hang, S. Gu, C. Li, J. Bao, D. Chen, H. Hu, X. Geng, and B. Guo, "Efficient diffusion training via min-snr weighting strategy," in *2023 IEEE/CVF International Conference on Computer Vision (ICCV)*. IEEE, 2023, pp. 7407–7417.
- [35] J. Liu, X. Jin, R. Feng, Z. Chen, and W. Zeng, "Composable image coding for machine via task-oriented internal adaptor and external prior," in *2023 IEEE International Conference on Visual Communications and Image Processing (VCIP)*, 2023, pp. 1–5.
- [36] Z. J. Wang, E. Montoya, D. Munechika, H. Yang, B. Hoover, and D. H. Chau, "Diffusiondb: A large-scale prompt gallery dataset for text-to-image generative models," in *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics*, 2023, pp. 893–911.
- [37] X. Chen, K. Li, T. Song, and J. Guo, "Few-shot name entity recognition on stackoverflow," *arXiv preprint arXiv:2404.09405*, 2024.
- [38] X. Chen, A. T. Z. Kasgari, and W. Saad, "Deep learning for content-based personalized viewport prediction of 360-degree vr videos," *IEEE Networking Letters*, vol. 2, no. 2, pp. 81–84, 2020.
- [39] Y. Li, X. Yan, M. Xiao, W. Wang, and F. Zhang, "Investigation of creating accessibility linked data based on publicly available accessibility datasets," in *Proceedings of the 2023 13th International Conference on Communication and Network Security*, 2024, p. 77–81.
- [40] W. Dai, J. Tao, X. Yan, Z. Feng, and J. Chen, "Addressing unintended bias in toxicity detection: An lstm and attention-based approach," in *2023 5th International Conference on Artificial Intelligence and Computer Applications (ICAICA)*, 2023, pp. 375–379.
- [41] Z. Pan, A. Gilani, E.-J. Kuo, and Z. Liu, "Cormf: Criticality-ordered recurrent mean field ising solver," *arXiv preprint arXiv:2403.03391*, 2024.
- [42] A. Xiang, J. Zhang, Q. Yang, L. Wang, and Y. Cheng, "Research on splicing image detection algorithms based on natural image statistical characteristics," *arXiv preprint arXiv:2404.16296*, 2024.
- [43] J. Zhang, A. Xiang, Y. Cheng, Q. Yang, and L. Wang, "Research on detection of floating objects in river and lake based on ai intelligent image recognition," *arXiv preprint arXiv:2404.06883*, 2024.
- [44] H. Ma, D. Zeng, and Y. Liu, "Learning optimal group-structured individualized treatment rules with many treatments," *Journal of Machine Learning Research*, vol. 24, no. 102, pp. 1–48, 2023.
- [45] Z. Li, B. Wan, C. Mu, R. Zhao, S. Qiu, and C. Yan, "Ad-aligning: Emulating human-like generalization for cognitive domain adaptation in deep learning," *arXiv preprint arXiv:2405.09582*, 2024.
- [46] H. Peng, X. Xie, K. Shivdikar, M. A. Hasan, J. Zhao, S. Huang, O. Khan, D. Kaeli, and C. Ding, "Maxk-gnn: Extremely fast gpu kernel design for accelerating graph neural networks training," in *ASPLoS*, 2024, pp. 683–698.
- [47] H. Peng, S. Huang, T. Zhou, Y. Luo, C. Wang, Z. Wang, J. Zhao, X. Xie, A. Li, T. Geng *et al.*, "Autorep: Automatic relu replacement for fast private network inference," in *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023, pp. 5178–5188.
- [48] C. Jin, T. Che, H. Peng, Y. Li, and M. Pavone, "Learning from teaching regularization: Generalizable correlations should be easy to imitate," *arXiv preprint arXiv:2402.02769*, 2024.
- [49] L. Ma and M. Li, "A quantitative way to utilise the social network in social status: A study using cdbb song dynasty data," in *10th International Conference of Digital Archives and Digital Humanities*, 2019.