
Demystifying the Compression of Mixture-of-Experts Through a Unified Framework

Shwai He*
University of Maryland, College Park
shwaihe@umd.edu

Daize Dong*
The University of Sydney
dzdong2019@gmail.com

Liang Ding
The University of Sydney
liangding.liam@gmail.com

Ang Li
University of Maryland, College Park
angli@umd.edu

Abstract

Scaling large language models has revolutionized the performance across diverse domains, yet the continual growth in model size poses significant challenges for real-world deployment. The Mixture of Experts (MoE) approach addresses this by dynamically selecting and activating only a subset of experts, significantly reducing computational costs while maintaining high performance. However, MoE introduces potential redundancy (e.g., parameters) and extra costs (e.g., communication overhead). Despite numerous compression techniques developed for mitigating the redundancy in dense models, the compression of MoE remains under-explored. We first bridge this gap with a cutting-edge unified framework that not only seamlessly integrates mainstream compression methods but also helps systematically understand MoE compression. This framework approaches compression from two perspectives: *Expert Slimming* which compresses individual experts and *Expert Trimming* which removes structured modules. Within this framework, we explore the optimization space unexplored by existing methods, and further introduce aggressive Expert Trimming techniques, i.e., Layer Drop and Block Drop, to eliminate redundancy at larger scales. Based on these insights, we present a comprehensive recipe to guide practitioners in compressing MoE effectively. Extensive experimental results demonstrate the effectiveness of the compression methods under our framework and the proposed recipe, achieving a $6.05\times$ speedup and only 20.0GB memory usage while maintaining over 92% of performance on Mixtral-8 \times 7B. Code is released at <https://github.com/DaizeDong/Unified-MoE-Compression>.

1 Introduction

While scaling large language models has shown exceptional performance across various domains [1, 2, 3], the increasing model size poses significant challenges in real-world deployments [4, 5] due to excessive computational demands and associated costs. The Mixture of Experts (MoE) [6], which selectively activates a subset of parameters during inference, offers a promising solution to reduce these computational burdens. Additionally, integrating MoE with Large Language Models (LLMs) [7, 8] has been shown to enhance performance further.

Despite these advancements, existing MoE models still exhibit redundancies that increase deployment costs. Common MoE approaches often replicate feedforward layers multiple times, leading

*Equal contribution

to parameter redundancy. For example, He *et al.* [9] observed that expert parameters could be compressed through parameter-sharing, Liu *et al.* [10] revealed extremely high representational similarity between experts, while Lu *et al.* [11] noted that not all experts are essential, with some being safely removable. Additionally, MoE models introduce communication overheads compared to dense models [12, 13, 14] in distributed settings, as tokens must be distributed among different experts and their outputs subsequently combined.

In this paper, we investigate the issues through the lens of compression to enhance the efficiency of MoE [15, 16]. Specifically, we propose a unified framework that integrates two complementary perspectives: (1) *Expert Slimming* that compresses individual experts and (2) *Expert Trimming* that structurally removes experts. In the case of Expert Slimming, network pruning [17, 18] and quantization [19, 20] are the most widely used techniques, where quantization is hardware-friendly for implementations. In terms of existing Expert Trimming, we utilize Expert Drop [11, 21], which removes unimportant experts.

This framework facilitates us to systematically understand the efficiency issue of MoE and identify the new design space to further improve the performance. With the framework, we first reveal the efficiency bottlenecks of existing methods, specifically the communication between experts and costly computation. Based on this insight, we propose aggressive Expert Trimming methods to enhance MoE efficiency. Specifically, to mitigate communication and computation costs, we present Layer Drop that removes all experts in an MoE layer, i.e., the entire MoE layer. Additionally, given the computation-intensive nature of the attention mechanism within transformer blocks, we propose Block Drop, which removes both attention layers and MoE layers. We use similarity-based metrics to demonstrate the feasibility of Layer Drop and Block Drop. Surprisingly, these two coarse-grained methods outperform fine-grained Expert Drop by a large margin in balancing performance and efficiency. Furthermore, since Expert Slimming can be seamlessly integrated with Expert Trimming, we further utilize the unified framework to propose a comprehensive compression recipe that integrates both strategies.

Experimental results on two widely-used MoE models (i.e., Mixtral-8×7B [7] and DeepSeek-MoE-16B [8]) demonstrate the effectiveness of our methods. For Expert Slimming, quantization performs best, since it significantly compresses by a large margin practically while maintaining comparable performance. For Expert Trimming, Expert Drop significantly reduces the memory usage but only accelerates the inference marginally; Layer Drop and Block Drop result in both faster inference speed and less memory usage while maintaining comparable performance. The combined strategy of Expert Slimming and Expert Trimming achieves a **6.05× speedup and only 20.0GB memory usage while maintaining over 92% of the performance on Mixtral-8×7B**. These findings offer valuable insights for enhancing the efficiency of MoE models.

2 Related Work

Mixture of Experts. The Mixture of Experts (MoE) is a kind of dynamic neural network with an extended set of parameters (referred to as “experts”) controlled by a router, which is first introduced in the context of conditional computation [22, 23, 24]. The potential of sparse activation in MoE is subsequently exploited by [6] for efficient training and inference on pretrained models with special designs, opening the door for MoE in various vision [25] and language [26, 27, 28] scenarios. Attributed to its exceptional efficiency, MoE has been adopted as a foundational framework in the designs of large language models (LLMs) [7, 8, 29, 30], achieving superior scaling laws at low costs [31]. Further investigations emerge in developing improved expert structures [8, 32, 33], router designs [34, 35, 36, 37], and training strategies [10, 38, 39, 40], propelling the continuous evolution on the representation capability and computational efficiency of MoE models. Despite the success, MoE also suffers from efficiency issues. For instance, MoE replicates the experts, significantly increasing the parameter budget [9]. On the other hand, adopting multiple experts to process input tokens introduces communication costs and enhances latency [13, 41].

Compression Methods. The escalating size of large language models presents considerable hurdles for their practical implementation. Consequently, a range of efficient methods has emerged to address the high-cost deployment issues. Among them, model quantization [5, 42, 43, 44] and network pruning [4, 45, 46, 47] are widely utilized. Model quantization reduces the precision of neural network weights to lower bits [19], while network pruning [17] removes redundant parameters or

architectures. Although these methods have shown promising results on dense models, they lack consideration for the inductive bias inherent in MoE. To bridge this gap, Expert Drop, as proposed in studies like [11, 21], addresses the unique nature of MoE by removing unimportant experts. By eliminating redundant experts, the MoE architecture becomes more compact and can be deployed at a lower cost. However, while Expert Drop leads to a more compact architecture, it may also lead to non-negligible performance drop and rely on post-training procedures for recovery.

3 Preliminary

3.1 Mixture of Experts

A standard Mixture of Experts layer comprises a set of n experts $\{\mathbf{E}_1, \mathbf{E}_2, \dots, \mathbf{E}_n\}$ associated with corresponding weights $\{\mathbf{W}_1, \mathbf{W}_2, \dots, \mathbf{W}_n\}$ and a router \mathbf{G} . The router determines which experts to activate for a given input \mathbf{x} by calculating selection scores $\mathbf{G}(\mathbf{x}) \in \mathbb{R}^n$ for all experts. It then selects the top k experts with the highest scores, resulting in a sparse activation pattern. The input \mathbf{x} is then sent to the selected experts, and their outputs are combined into a weighted sum based on the selection scores provided by the router. This process can be described by the following equations:

$$\mathcal{K} = \text{TopK}(\text{Softmax}(\mathbf{G}(\mathbf{x})), k), \tag{1}$$

$$\mathbf{y} = \sum_{i \in \mathcal{K}} \mathbf{G}(\mathbf{x})_i \cdot \mathbf{E}_i(\mathbf{x} | \mathbf{W}_i), \tag{2}$$

where \mathcal{K} denotes the indices of selected experts, $\mathbf{G}(\mathbf{x})_i$ represents the selection score for the i -th expert, and $\mathbf{E}_i(\mathbf{x})$ is the output from the i -th expert. In transformer models, the MoE layer is often used as a replacement for the feed-forward network (FFN). In this context, each expert functions as an independent FFN module, enhancing the model’s capacity without a proportional increase in computational cost [48].

Challenges. While MoE models have demonstrated strong performance across various tasks [7, 8], they also encounter significant deployment issues: On one hand, MoE replicates expert networks multiple times, increasing model size and memory costs. On the other hand, the complexity of managing multiple expert networks and the associated communication between them leads to increased latency and slower inference speeds.

3.2 Overview of Previous Compression Methods

To address the challenges arising from MoE, we investigate several mainstream and state-of-the-art efficient methods for MoE.

Pruning: For a MoE layer that includes multiple experts $\{\mathbf{E}_i\}_{i=1}^n$ with corresponding weights $\{\mathbf{W}_i\}_{i=1}^n$, pruning uses binary masks $\{\mathbf{M}_i\}_{i=1}^n$ to selectively disable parts of weights:

$$\hat{\mathbf{W}}_i = \mathbf{M}_i \odot \mathbf{W}_i. \tag{3}$$

Masking can exhibit unstructured [49, 50], semi-structured, or structured properties, each resulting in different sparsity patterns. Unstructured sparsity often exhibits superior performance, while semi-structured sparsity offers a balance between performance and efficiency. Structured sparsity is hardware-friendly, but its performance is currently deemed insufficient.

Quantization: Unlike pruning, which involves masking out unimportant parameters, quantization transforms weights into low-bit representations, thereby reducing memory requirements.

$$\hat{\mathbf{W}}_i = \text{Quant}(\mathbf{W}_i), \tag{4}$$

where “Quant” denotes the quantization function. Quantization reduces the complexity of data types but does not impact the FLOPs (floating point operations) or the total number of parameters.

Expert Drop: Different from fine-grained pruning and quantization, Expert Drop entails the removal of expert networks, based on the observation that not all experts are equally important [11, 21]. Given expert-wise importance scores \mathbf{S} (e.g., the routing scores, $\mathbf{S}(\mathbf{E}_i) = \mathbf{G}(\mathbf{x})_i$), Expert Drop retains only the experts with the highest n' scores:

$$\mathcal{T}' = \text{TopK}(\mathbf{S}(\{\mathbf{E}_i\}_{i=1}^n), n'), \tag{5}$$

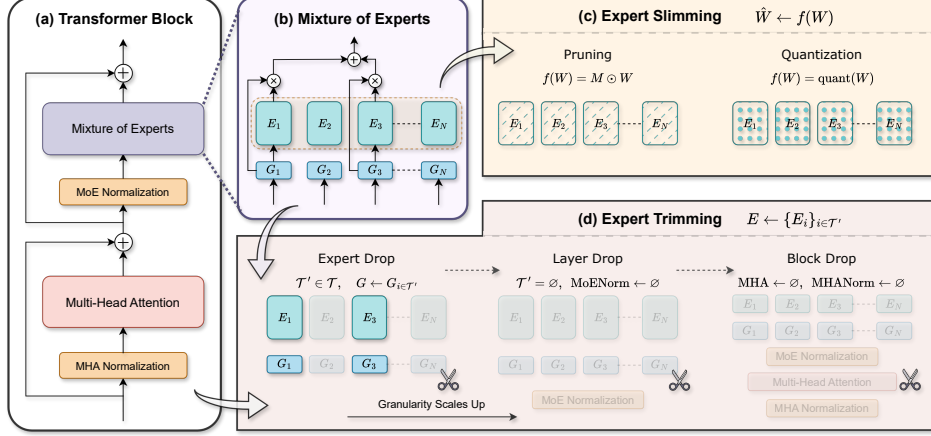


Figure 1: **The Unified View of MoE Compression.** The view integrates two complementary perspectives: Expert Slimming and Expert Trimming. Expert Slimming compresses individual experts, while Expert Trimming directly drops structured modules.

$$E \leftarrow \{E_i\}_{i \in \mathcal{T}'}, \quad G \leftarrow \{G_i\}_{i \in \mathcal{T}'}. \quad (6)$$

Here, \mathcal{T}' denotes the subset of the original expert indices $\mathcal{T} = \{1, 2, \dots, n\}$. Expert Drop reduces FLOPs conditionally: when \mathcal{T}' contains more than or equal to k indices, MoE still utilizes the top k experts for each input; otherwise, it uses all remaining experts. While this approach reduces communication between experts, the resulting speedup is not always significant.

Others: Other efficient methods include Low-Rank compression [51, 52], which decomposes model weights into smaller weights. In this paper, we mainly focus on the widely-used methods (i.e., pruning, quantization, dropping), deferring discussion on other methods for future exploration.

4 A Unified View on MoE Compression

In this section, we propose a general framework that unifies the efficient methods on MoE. This framework enables us to systematically understand the efficiency issues of MoE models and identify new design opportunities to further improve performance.

4.1 Unified View for MoE Compression

Existing compression methods address these challenges by focusing on either the **internal** compression of individual experts or the **structural** simplification of the model. Inspired by this insight, we unify the MoE compression into two complementary perspectives: Expert Slimming that compresses individual experts (e.g., Pruning and Quantization), and Expert Trimming that directly removes experts (e.g., Expert Drop). In doing so, we can better understand their contributions and limitations. An overview of these perspectives is illustrated in Figure 1.

The compression of individual experts (Expert Slimming) focuses on the transformation and reduction of expert weights, denoted as \mathbf{W} . We utilize a transformation function $f(\mathbf{W})$ to represent this process. The transformation function $f(\mathbf{W})$ can be understood as a general mapping that applies various compression techniques to the weights of the model. For example, in pruning, $f(\mathbf{W})$ could be a function that sets a subset of the weights to zero. In quantization, $f(\mathbf{W})$ might reduce the precision of the weights from 32-bit floats to 8-bit integers. On the other hand, Expert Trimming deals with compressing structured modules by selecting and retaining only a subset of the experts, denoted as \mathcal{T}' . This is represented by the transformation $\mathcal{T} \leftarrow \mathcal{T}'$. Methods like Expert Drop, which selectively drops entire experts or layers, are examples of this approach. By integrating these two perspectives, we can derive a general form for efficient MoE models. The compression **within** and **across** experts can be expressed as follows:

$$\mathbf{y} = \sum_{i \in \mathcal{T}'} \mathbf{G}_i \cdot \mathbf{E}_i(x | f(\mathbf{W}_i)). \quad (7)$$

Table 1: **Summary of Compression Methods.** “✓” means effective and “✗” means ineffective, while “○” represents conditionally effective, depending on specific settings and environments.

Hierarchy	Method	Formulation	Parameter	Memory	FLOPs	Speedup
Expert Slimming	Pruning	$M \odot W$	✓	○	✓	○
	Quantization	$\text{Quant}(W)$	✗	✓	✗	✓
Expert Trimming	Expert Layer	$\mathcal{T} \leftarrow \mathcal{T}'$	✓	✓	○	○
	Block	$\mathcal{T} \leftarrow \emptyset$	✓	✓	✓	✓

In the following sections, we will elaborate on how this framework incorporates existing methods and inspires us to identify new design space for compression.

4.2 Expert Slimming

Given that employing multiple experts in MoE significantly escalates parameters and inference costs, Expert Slimming, stemming from single-model compression techniques, targets the compression of individual expert weights W exclusively. We denote any efficient transformation function as $f(\cdot)$, which encompasses pruning $M \odot W$ and quantization $\text{Quant}(W)$. Through the application of such functions, we reduce the redundancy within each expert and create several light-weighted slim experts, thus improving their intrinsic efficiency. However, it is important to note that Expert Slimming primarily focuses on compressing individual experts without addressing the redundancy across multiple experts. This brings us to another aspect of the unified framework, which deals with the structural redundancy present across the expert networks. To achieve comprehensive compression and efficiency, we need to consider both within-expert and across-expert redundancies, which will be explored further in the following sections.

4.3 Expert Trimming

Expert Trimming, which removes experts, is complementary to Expert Slimming. Therefore, we include Expert Trimming in our framework to provide a comprehensive view of MoE compression. The core operation of Expert Trimming involves updating the set of remaining experts denoted as $\mathcal{T} \leftarrow \mathcal{T}'$, where \mathcal{T}' is a subset of the original expert indices \mathcal{T} . Specifically, Expert Drop updates the experts and their corresponding routing weights as follows: $E \leftarrow \{E_i\}_{i \in \mathcal{T}'}$ and $G \leftarrow G_{i \in \mathcal{T}'}$.

However, Expert Drop carries the risk of collapsing feature transformation. The absence of certain experts can lead to incorrect selections for given inputs, thereby degrading model performance [39]. Additionally, partially reducing experts can disrupt routing patterns, negatively impacting the model’s overall efficiency and effectiveness. Despite its benefits, Expert Drop still retains the costly computation within each expert and the complex communication between experts. These limitations highlight the need for further optimization of Expert Trimming within our unified framework. By systematically analyzing the redundancies and inefficiencies inherent in MoE models, our framework helps identify new design spaces for more efficient approaches, i.e., we propose extending beyond expert-level optimizations to identify new design spaces for efficiency improvements.

We propose two novel techniques: **Layer Drop** and **Block Drop**. Layer Drop focuses on removing entire MoE layers, which significantly reduces both computation and communication overhead. Block Drop extends this concept by eliminating entire transformer blocks, including attention layers and MoE layers, within transformer models. These advanced techniques aim to streamline the model architecture, improve performance, and enhance overall efficiency.

Layer Drop. Inspired by [53, 54], we consider a special scenario of Expert Drop where all experts are dropped ($\mathcal{T} \leftarrow \mathcal{T}' = \emptyset$), effectively removing entire MoE layers. We refer to this approach as Layer Drop. To perform Layer Drop, we use a similarity-based metric

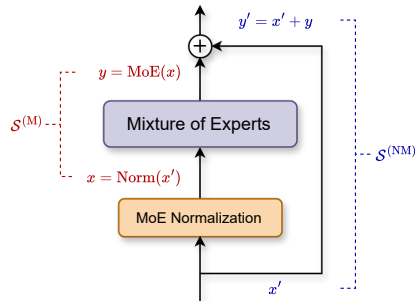


Figure 2: **Illustration of Similarity Measurements in Layer Drop.** Features for calculating $S^{(M)}$ and $S^{(NM)}$ are colored with red and blue, respectively.

where high similarity indicates high redundancy in transformation. One straightforward metric is the cosine similarity between the input \mathbf{x} and the output $\mathbf{y} = \text{MoE}(\mathbf{x})$:

$$S^{(M)} = \frac{\mathbf{x} \cdot \mathbf{y}}{\|\mathbf{x}\|_2 \|\mathbf{y}\|_2}, \text{ where } \mathbf{y} = \text{MoE}(\mathbf{x}). \quad (8)$$

However, this metric alone does not adequately capture the impact of the MoE layer within the context of a transformer block, which includes a layer normalization module ("Norm") [55] and residual connections [56]. To address this, we propose concurrently removing both the MoE and Norm layers. This approach ensures that the similarity metric more accurately reflects the combined functionality of these layers, allowing for a more precise identification of redundancy and a streamlined model architecture, as illustrated in Figure 1. By considering the similarity between the normalized input and output, we can better evaluate the necessity of the MoE layer in the overall architecture:

$$S^{(NM)} = \frac{\mathbf{x}' \cdot \mathbf{y}'}{\|\mathbf{x}'\|_2 \|\mathbf{y}'\|_2}, \text{ where } \mathbf{y}' = \mathbf{x}' + \text{MoE}(\text{Norm}(\mathbf{x}')). \quad (9)$$

Block Drop. Within a transformer block, Layer Drop removes the MoE layers but retains the computation-costly attention layers [57, 58]. To address this issue, we further utilize the same similarity-based metrics to investigate whether the attention layer can be dropped without a significant performance drop. If feasible, this allows us to drop the entire block within MoE models, thus enhancing efficiency. We introduce Block Drop as an extension of Layer Drop, which also removes the attention layers.

Compared to Expert Drop, both Layer Drop and Block Drop focus on structures beyond expert-level. Additionally, we summarize the efficiency contributions of all the discussed Expert Slimming and Expert Trimming methods in Table 1, highlighting the unique advantages of each approach. Since Expert Trimming is complementary to Expert Slimming, they can be seamlessly integrated to compress both individual experts and high-level structures, further enhancing overall efficiency.

5 Experiments

In this section, we first evaluate Expert Slimming and Expert Trimming separately, then investigate their integration for further efficiency. Lastly, we discuss the potential of future works inspired by our proposed framework and experimental results. Implementation details are provided in Appendix A.

5.1 Expert Slimming

Table 2: **Performance of Pruning on MoE.** We consider two mainstream pruning methods (i.e., Wanda [4] and SparseGPT [45]) under 50% unstructured sparsity and 2:4 semi-structured sparsity.

Mixtral-8×7B										
Method	Sparsity	ARC-C	BoolQ	HellaSwag	MMLU	OBQA	PIQA	RTE	WinoGrande	Avg.
Baseline	0%	59.4	84.2	84.0	67.9	46.8	83.8	70.4	75.6	<u>71.5</u>
Wanda	50%	56.1	85.8	81.7	64.3	46.4	82.2	65.0	76.0	<u>69.7</u>
SparseGPT		56.4	85.7	81.5	64.6	45.0	82.4	66.8	75.8	<u>69.8</u>
Wanda	2:4	51.4	79.4	77.8	60.3	44.0	80.7	65.3	74.1	<u>66.6</u>
SparseGPT		49.2	81.0	77.6	59.2	44.0	80.6	63.9	74.8	<u>66.3</u>
DeepSeek-MoE-16B										
Method	Sparsity	ARC-C	BoolQ	HellaSwag	MMLU	OBQA	PIQA	RTE	WinoGrande	Avg.
Baseline	0%	48.1	72.4	77.3	37.9	44.0	80.4	63.9	70.3	<u>61.8</u>
Wanda	50%	43.6	74.3	72.6	31.1	43.0	79.5	58.1	69.4	<u>59.0</u>
SparseGPT		43.9	73.5	74.0	33.8	41.4	79.0	61.0	68.3	<u>59.4</u>
Wanda	2:4	38.2	66.1	67.3	27.6	39.4	77.0	53.8	66.7	<u>54.5</u>
SparseGPT		43.1	68.9	71.6	27.6	41.6	78.3	57.4	66.6	<u>56.9</u>

Pruning Maintains Performance but Faces Deployment Limitations. In Table 2, we evaluate representative pruning algorithms (i.e., Wanda [4], SparseGPT [45]) on Mixtral-8×7B and DeepSeek-MoE-16B. Since DeepSeek-MoE-16B utilizes both shared experts and normal experts, we conduct an ablation study on whether to prune shared experts, as discussed in Appendix D. We find that unstructured pruning preserves more than 95% of performance. However, it is not compatible

Table 3: **Performance of Quantization on MoE.** We utilize GPTQ [5] and AWQ [42] as the quantization methods for 4-bit compression.

Mixtral-8×7B											
Method	Bits	Memory	ARC-C	BoolQ	HellaSwag	MMLU	OBQA	PIQA	RTE	WinoGrande	Avg.
Baseline	16	87.7GB	59.4	84.2	84.0	67.9	46.8	83.8	70.4	75.6	71.5
GPTQ	4	24.4GB	59.0	84.4	83.4	67.1	45.2	83.1	70.1	75.2	70.9
AWQ	4	24.4GB	58.4	84.2	83.3	66.6	45.8	83.0	69.0	76.3	70.8
DeepSeek-MoE-16B											
Method	Bits	Memory	ARC-C	BoolQ	HellaSwag	MMLU	OBQA	PIQA	RTE	WinoGrande	Avg.
Baseline	16	30.8GB	48.1	72.4	77.3	37.9	44.0	80.4	63.9	70.3	61.8
GPTQ	4	9.8GB	46.3	71.8	76.8	36.4	43.4	80.0	63.9	70.2	61.1
AWQ	4	9.8GB	46.8	71.2	76.6	36.4	43.6	80.1	62.1	70.1	60.9

with existing hardware. Conversely, the hardware-friendly semi-structured pruning (i.e., 4:8 and 2:4 patterns) undergoes a significant performance drop. Nevertheless, according to Lu *et al.* [11], semi-structured sparsity is ineffective in speeding up MoE models.

Quantization Demonstrates Promising Performance and Efficiency. In Table 3, we evaluate the impact of 4-bit quantization on MoE. Quantization offers two major benefits: it maintains the comparable performance of the original models and significantly reduces memory costs. Specifically, the quantized models achieve over 98% of the original performance while using less than 30% of the memory. Moreover, when quantized with AWQ [42], Mixtral-8×7B and DeepSeek-MoE-16B achieve impressive speedups of ×5.08 and ×3.16, respectively. This demonstrates that 4-bit quantization is an effective technique for deploying MoE models in resource-constrained environments.

5.2 Expert Trimming

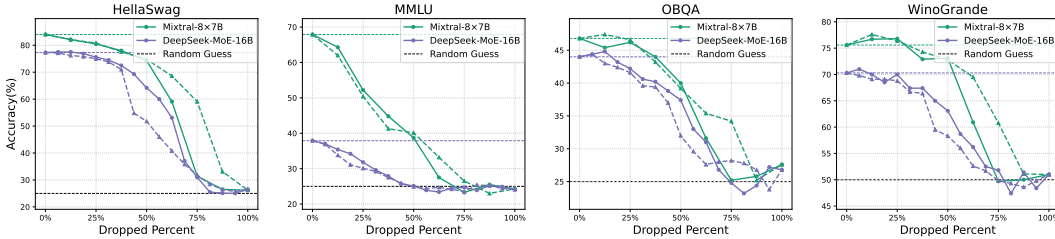


Figure 3: **Evaluation of Expert Drop.** We consider two strategies: layer-wise (dotted lines) and global (solid lines).

Expert Drop Degrades Performance and Offers Limited Efficient Gains. While experts are specific structures in MoE, not all experts hold equal significance. Figure 9 visualizes the distribution of expert-wise importance scores, highlighting this variability. To systematically drop experts at varying proportions, we conduct experiments using both layer-wise and global dropping approaches (see Appendix A.3). Given the importance of shared experts in DeepSeek-MoE-16B, we only dropped normal experts. Under both settings, Expert Drop causes consistent performance degradation. For example, dropping 25% of experts in Mixtral-8×7B results in a 23% performance drop on the MMLU task. The efficiency improvement from Expert Drop is also marginal. For instance, dropping 12.5% of experts results in less than a 1% speedup, despite significant performance losses. More results are available in Appendix E.

Layer Drop Preserves the Performance Efficiently. To verify the feasibility of Layer Drop, we visualize feature similarity across different modules in Figure 4. This visualization shows a high level of similarity between the inputs of the MoE layer normalization module (Norm) and the outputs of the MoE layer. In contrast, the low similarity between the inputs and outputs of MoE layers indicates the infeasibility of removing only the MoE layers. Results from

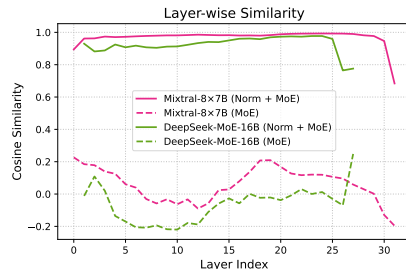


Figure 4: **Layer-Wise Similarity.** We consider two scenarios, i.e., for “MoE” and “Norm + MoE”.

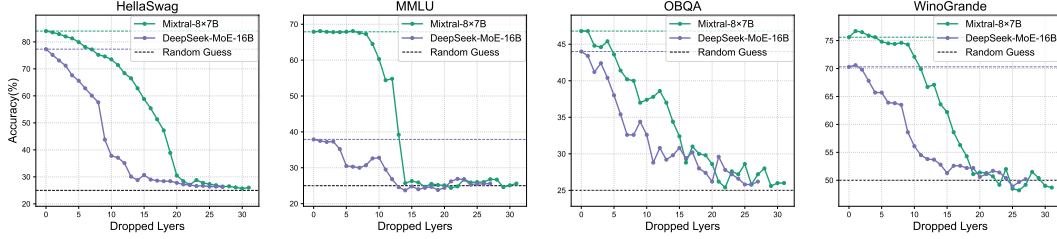


Figure 5: **Evaluation of Layer Drop.** We show results on Mixtral-8×7B and DeepSeek-MoE-16B (solid lines), along with the baseline and random guess performances (dotted lines).

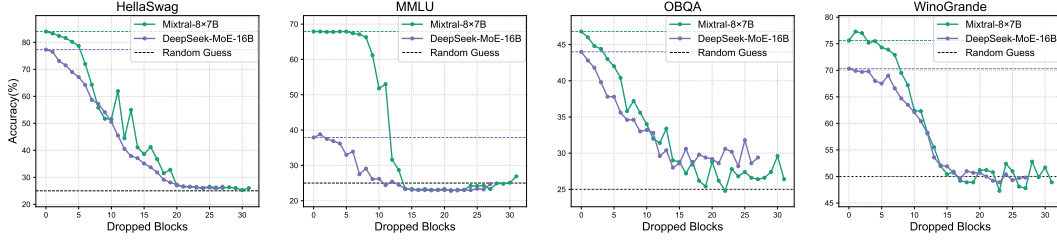


Figure 6: **Evaluation of Block Drop.** We show results on Mixtral-8×7B and DeepSeek-MoE-16B (solid lines), along with the baseline and random guess performances (dotted lines).

Figure 5 show that Layer Drop preserves performance within a wide range of compression ratio, e.g. 1% performance drop on MMLU when dropping 8 layers for Mixtral-8×7B, revealing significant redundancy in MoE layers.

Block Drop Further Promotes Efficiency. While Layer Drop maintains the performance of the original models, it still retains the computation-costly attention layers. To address this, we extend the approach by dropping larger structures, specifically blocks that include both FFN and attention layers. We first visualized the similarity for different blocks in Figure 7, where both Mixtral-8×7B and DeepSeek-MoE-16B demonstrate high similarity between specific blocks. Based on this, we conduct the empirical study by varying the number of dropped blocks. Surprisingly, as shown in Figure 6, even after removing 4 blocks, the models maintained over 90% of the original performance. Since Block Drop removes computationally expensive attention layers, it outperforms Layer Drop by a large margin in terms of both memory and inference cost, as illustrated in Figure 8. By focusing on higher-level structures, Block Drop and Layer Drop provide significant efficiency improvements while maintaining acceptable performance levels.

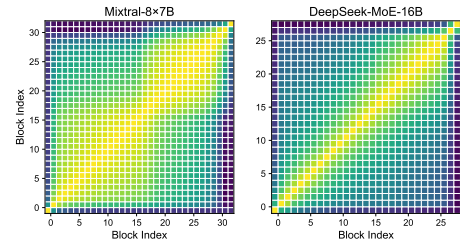


Figure 7: **Normalized Block-Wise Similarity.** We measure the cosine similarity among hidden features between blocks.

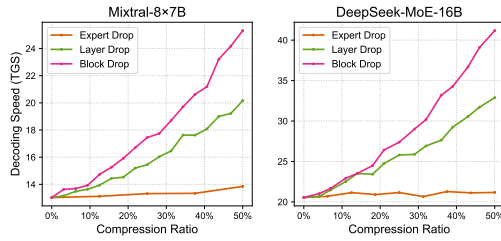


Figure 8: **Speedup Scaling Curves of Expert Trimming Methods.** where we measure the averaged decoding speed during generation.

5.3 Integration of Expert Slimming and Expert Trimming

We further investigate the integration of Expert Slimming and Expert Trimming techniques. Given the superior average performance and practical efficiency of quantization, we use it for Expert Slimming. For Expert Trimming, we include all three methods to offer a comprehensive comparison.

Quantization Preserves the Performance of Expert Trimming. As shown in Table 4, the integration of Expert Slimming and Expert Trimming significantly enhances overall efficiency. Quantization can

be seamlessly combined with three different levels of dropping, achieving comparable performance. For instance, after quantization, the average performance of Layer Drop and Block Drop is nearly the same, maintaining more than 90% of the performance of the original models.

The Integration Significantly Promotes Efficiency. For efficiency considerations, we measure speedup, FLOPs, and memory usage. Since the original Mixtral-8×7B cannot be deployed on a single Nvidia A100 GPU, we utilize two GPUs for all models to ensure a fair comparison. In Table 4, quantization promotes efficiency by a large margin. Different Expert Trimming strategies showcase different advantages. Specifically, Expert Drop contributes to reducing memory usage but its speedup is marginal. Layer Drop and Block Drop excel in speedup as illustrated in Figure 8, with Block Drop demonstrating both higher performance and greater speedup. Considering all settings, the combination of Block Drop and quantization offers the best efficiency with comparable performance: a $6.05\times$ speedup with only 20.0GB memory usage, while maintaining over 92% of the performance on Mixtral-8×7B, making it available to be deployed on a NVIDIA RTX 3090 GPU.

Table 4: **Experimental Results of the Integration of Expert Slimming and Expert Trimming.** “-En/m” denotes dropping n out of m experts per MoE layer on average. “-Ln/m”, “-Bn/m” represents dropping n out of m corresponding modules with Layer Drop and Block Drop, respectively. The FLOPs are measured using an input with the 2,048 sequence length.

Mixtral-8×7B												
Method	SpeedUp	FLOPs	Memory	ARC-C	BoolQ	HellaSwag	MMLU	OBQA	PIQA	RTE	WinoGrande	Avg.
Baseline	–	54.4T	87.7GB	59.4	84.2	84.0	67.9	46.8	83.8	70.4	75.6	71.5
w/AWQ	$5.08\times$	54.4T	24.4GB	58.4	84.2	83.3	66.6	45.8	83.0	69.0	76.3	70.8
+ E2/8	$1.02\times$	54.4T	66.7GB	53.2	77.7	80.5	52.2	46.2	81.7	55.6	76.8	65.5
w/AWQ	$5.18\times$	54.4T	20.1GB	50.7	79.1	78.9	52.4	44.2	81.2	55.6	75.9	64.8
+ L8/32	$1.19\times$	42.9T	66.6GB	47.7	85.3	75.2	67.3	40.0	75.8	69.7	74.6	67.0
w/AWQ	$6.05\times$	42.9T	20.0GB	46.2	84.2	74.2	66.2	39.0	75.5	69.3	74.2	66.1
+ B5/32	$1.17\times$	46.0T	74.1GB	51.3	85.3	78.7	67.9	42.0	79.3	69.7	74.3	68.6
w/AWQ	$5.94\times$	46.0T	21.9GB	50.6	85.1	77.5	66.9	41.4	76.1	71.8	74.5	68.0

DeepSeek-MoE-16B												
Method	SpeedUp	FLOPs	Memory	ARC-C	BoolQ	HellaSwag	MMLU	OBQA	PIQA	RTE	WinoGrande	Avg.
Baseline	–	11.7T	30.8GB	48.1	72.4	77.3	37.9	44.0	80.4	63.9	70.3	61.8
w/AWQ	$3.16\times$	11.7T	9.8GB	46.8	71.2	76.6	36.4	43.6	80.1	62.1	70.1	60.9
+ E16/64	$1.03\times$	11.7T	23.9GB	45.0	67.1	75.6	31.8	42.2	80.2	59.9	70.0	59.0
w/AWQ	$3.25\times$	11.7T	7.7GB	44.0	66.0	74.5	27.9	42.6	78.5	56.3	67.3	57.1
+ L4/28	$1.14\times$	10.6T	26.6GB	39.5	70.2	67.6	35.2	40.4	75.8	48.4	65.7	55.3
w/AWQ	$3.60\times$	10.6T	8.5GB	42.1	72.0	69.2	33.7	39.8	75.1	47.7	66.5	55.8
+ B4/28	$1.16\times$	10.1T	26.4GB	40.3	71.3	69.0	36.2	37.8	75.8	51.6	68.0	56.3
w/AWQ	$3.67\times$	10.1T	8.4GB	40.1	70.2	68.6	36.1	38.4	76.2	51.6	66.4	56.0

6 Discussion

With the advent of open-source LLMs incorporated with MoE (e.g., Mixtral [7]), the machine learning community has rallied around the philosophy of utilizing MoE to scale large language models and making MoE models more accessible to real-life applications. Our research delves into making MoE models more efficient and accessible, bringing forth significant discoveries and future pathways:

Expert Slimming Exhibits Superior Compression Performance. Although MoE scales models with multiple experts, it causes excessive memory usage and slows down the inference. Expert Slimming mitigates this by directly compressing individual experts, significantly promoting inference speed and memory.

Expert Trimming Further Creates Efficient Architectures. Scaling with MoE architectures also introduces redundant structures that showcase highly similar hidden features. Expert Trimming removes unimportant modules and creates more efficient architectures.

Model/Task-Specific Compression. Mixtral and DeepSeek-MoE exhibit different properties of redundancy: compared to Mixtral, DeepSeek-MoE has higher expert-redundancy (more experts with low importance scores in Figure 9) and lower hidden feature similarities at both layer and block

levels, which is shown in Figure 4 and 7. On the other hand, MoE models can be compressed by varying ratios depending on the task. Establishing an under-explored correlation between the specific task and the corresponding optimal compression ratio.

Post-Compression Training. In this work, we compress MoE models in a training-free manner. However, our framework facilitates the acquisition of compressed, efficient MoE architectures that can be continuously trained to enhance performance [4, 21, 30, 59]. This approach enables MoE architectures to be improved in both efficiency and performance.

7 Conclusion

In this paper, we introduced a unified framework of MoE compression, facilitating to systematically understand the efficiency issue of MoE and identify the new design space to further improve the performance. Based on this framework, we propose a comprehensive recipe that integrates Expert Slimming and Expert Trimming to further enhance efficiency. Our proposed methods and insights not only address current challenges but also set the stage for future advancements in the field of MoE.

References

- [1] Aditya Ramesh, Mikhail Pavlov, Gabriel Goh, Scott Gray, Chelsea Voss, Alec Radford, Mark Chen, and Ilya Sutskever. Zero-shot text-to-image generation, 2021.
- [2] OpenAI. Gpt-4 technical report, 2024.
- [3] Gemini Team. Gemini 1.5: Unlocking multimodal understanding across millions of tokens of context, 2024.
- [4] Mingjie Sun, Zhuang Liu, Anna Bair, and J. Zico Kolter. A simple and effective pruning approach for large language models. *arXiv preprint arXiv:2306.11695*, 2023.
- [5] Elias Frantar, Saleh Ashkboos, Torsten Hoefer, and Dan Alistarh. GPTQ: Accurate post-training compression for generative pretrained transformers. *arXiv preprint arXiv:2210.17323*, 2022.
- [6] Noam Shazeer, Azalia Mirhoseini, Krzysztof Maziarz, Andy Davis, Quoc Le, Geoffrey Hinton, and Jeff Dean. Outrageously large neural networks: The sparsely-gated mixture-of-experts layer. *arXiv preprint arXiv:1701.06538*, 2017.
- [7] Albert Q Jiang, Alexandre Sablayrolles, Antoine Roux, Arthur Mensch, Blanche Savary, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Emma Bou Hanna, Florian Bressand, et al. Mixtral of experts. *arXiv preprint arXiv:2401.04088*, 2024.
- [8] Damai Dai, Chengqi Deng, Chenggang Zhao, RX Xu, Huazuo Gao, Deli Chen, Jiashi Li, Wangding Zeng, Xingkai Yu, Y Wu, et al. Deepseekmoe: Towards ultimate expert specialization in mixture-of-experts language models. *arXiv preprint arXiv:2401.06066*, 2024.
- [9] Shwai He, Liang Ding, Daize Dong, Boan Liu, Fuqiang Yu, and Dacheng Tao. PAD-net: An efficient framework for dynamic networks. In Anna Rogers, Jordan Boyd-Graber, and Naoaki Okazaki, editors, *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 14354–14366, Toronto, Canada, July 2023. Association for Computational Linguistics. doi: 10.18653/v1/2023.acl-long.803. URL <https://aclanthology.org/2023.acl-long.803>.
- [10] Boan Liu, Liang Ding, Li Shen, Keqin Peng, Yu Cao, Dazhao Cheng, and Dacheng Tao. Diversifying the mixture-of-experts representation for language models with orthogonal optimizer. *arXiv preprint arXiv:2310.09762*, 2023.
- [11] Xudong Lu, Qi Liu, Yuhui Xu, Aojun Zhou, Siyuan Huang, Bo Zhang, Junchi Yan, and Hongsheng Li. Not all experts are equal: Efficient expert pruning and skipping for mixture-of-experts large language models, 2024.
- [12] Sneha Kudugunta, Yanping Huang, Ankur Bapna, Maxim Krikun, Dmitry Lepikhin, Minh-Thang Luong, and Orhan Firat. Beyond distillation: Task-level mixture-of-experts for efficient inference, 2021.

- [13] Yixin Song, Zeyu Mi, Haotong Xie, and Haibo Chen. Powerinfer: Fast large language model serving with a consumer-grade gpu, 2023.
- [14] Zhixu Du, Shiyu Li, Yuhao Wu, Xiangyu Jiang, Jingwei Sun, Qilin Zheng, Yongkai Wu, Ang Li, Hai "Helen" Li, and Yiran Chen. Sida: Sparsity-inspired data-aware serving for efficient and scalable large mixture-of-experts models, 2023.
- [15] Yu Cheng, Duo Wang, Pan Zhou, and Tao Zhang. A survey of model compression and acceleration for deep neural networks, 2020.
- [16] Tailin Liang, John Glossner, Lei Wang, Shaobo Shi, and Xiaotong Zhang. Pruning and quantization for deep neural network acceleration: A survey, 2021.
- [17] Song Han, Huizi Mao, and William J. Dally. Deep compression: Compressing deep neural networks with pruning, trained quantization and huffman coding, 2016.
- [18] Michael Zhu and Suyog Gupta. To prune, or not to prune: exploring the efficacy of pruning for model compression, 2017.
- [19] Benoit Jacob, Skirmantas Kligys, Bo Chen, Menglong Zhu, Matthew Tang, Andrew Howard, Hartwig Adam, and Dmitry Kalenichenko. Quantization and training of neural networks for efficient integer-arithmetic-only inference, 2017.
- [20] Markus Nagel, Marios Fournarakis, Rana Ali Amjad, Yelysei Bondarenko, Mart van Baalen, and Tijmen Blankevoort. A white paper on neural network quantization, 2021.
- [21] Alexandre Muzio, Alex Sun, and Churan He. Seer-moe: Sparse expert efficiency through regularization for mixture-of-experts, 2024.
- [22] Robert A Jacobs, Michael I Jordan, Steven J Nowlan, and Geoffrey E Hinton. Adaptive mixtures of local experts. *Neural computation*, 3(1):79–87, 1991.
- [23] Michael I Jordan and Robert A Jacobs. Hierarchical mixtures of experts and the em algorithm. *Neural computation*, 6(2):181–214, 1994.
- [24] David Eigen, Marc’Aurelio Ranzato, and Ilya Sutskever. Learning factored representations in a deep mixture of experts. *arXiv preprint arXiv:1312.4314*, 2013.
- [25] Carlos Riquelme, Joan Puigcerver, Basil Mustafa, Maxim Neumann, Rodolphe Jenatton, André Susano Pinto, Daniel Keysers, and Neil Houlsby. Scaling vision with sparse mixture of experts. *Advances in Neural Information Processing Systems*, 34:8583–8595, 2021.
- [26] Dmitry Lepikhin, HyoukJoong Lee, Yuanzhong Xu, Dehao Chen, Orhan Firat, Yanping Huang, Maxim Krikun, Noam Shazeer, and Zhifeng Chen. Gshard: Scaling giant models with conditional computation and automatic sharding. *arXiv preprint arXiv:2006.16668*, 2020.
- [27] Nan Du, Yanping Huang, Andrew M Dai, Simon Tong, Dmitry Lepikhin, Yuanzhong Xu, Maxim Krikun, Yanqi Zhou, Adams Wei Yu, Orhan Firat, et al. Glam: Efficient scaling of language models with mixture-of-experts. In *International Conference on Machine Learning*, pages 5547–5569. PMLR, 2022.
- [28] William Fedus, Barret Zoph, and Noam Shazeer. Switch transformers: Scaling to trillion parameter models with simple and efficient sparsity. *Journal of Machine Learning Research*, 23(120):1–39, 2022.
- [29] Fuzhao Xue, Zian Zheng, Yao Fu, Jinjie Ni, Zangwei Zheng, Wangchunshu Zhou, and Yang You. Openmoe: An early effort on open mixture-of-experts language models. *arXiv preprint arXiv:2402.01739*, 2024.
- [30] LLaMA-MoE Team. Llama-moe: Building mixture-of-experts from llama with continual pre-training, Dec 2023. URL <https://github.com/pjlab-sys4nlp/llama-moe>.

- [31] Aidan Clark, Diego de Las Casas, Aurelia Guy, Arthur Mensch, Michela Paganini, Jordan Hoffmann, Bogdan Damoc, Blake Hechtman, Trevor Cai, Sebastian Borgeaud, et al. Unified scaling laws for routed language models. In *International conference on machine learning*, pages 4057–4086. PMLR, 2022.
- [32] Suchin Gururangan, Mike Lewis, Ari Holtzman, Noah A Smith, and Luke Zettlemoyer. Demix layers: Disentangling domains for modular language modeling. In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 5557–5576, 2022.
- [33] Samyam Rajbhandari, Conglong Li, Zhewei Yao, Minjia Zhang, Reza Yazdani Aminabadi, Ammar Ahmad Awan, Jeff Rasley, and Yuxiong He. Deepspeed-moe: Advancing mixture-of-experts inference and training to power next-generation ai scale. In *International conference on machine learning*, pages 18332–18346. PMLR, 2022.
- [34] Mike Lewis, Shruti Bhosale, Tim Dettmers, Naman Goyal, and Luke Zettlemoyer. Base layers: Simplifying training of large, sparse models. In *International Conference on Machine Learning*, pages 6265–6274. PMLR, 2021.
- [35] Stephen Roller, Sainbayar Sukhbaatar, Jason Weston, et al. Hash layers for large sparse models. *Advances in Neural Information Processing Systems*, 34:17555–17566, 2021.
- [36] Yanqi Zhou, Tao Lei, Hanxiao Liu, Nan Du, Yanping Huang, Vincent Zhao, Andrew M Dai, Quoc V Le, James Laudon, et al. Mixture-of-experts with expert choice routing. *Advances in Neural Information Processing Systems*, 35:7103–7114, 2022.
- [37] Barret Zoph, Irwan Bello, Sameer Kumar, Nan Du, Yanping Huang, Jeff Dean, Noam Shazeer, and William Fedus. St-moe: Designing stable and transferable sparse expert models. *arXiv preprint arXiv:2202.08906*, 2022.
- [38] Yikang Shen, Zheyu Zhang, Tianyou Cao, Shawn Tan, Zhenfang Chen, and Chuang Gan. Moduleformer: Learning modular large language models from uncurated data. *arXiv preprint arXiv:2306.04640*, 2023.
- [39] Tianlong Chen, Zhenyu Zhang, AJAY KUMAR JAISWAL, Shiwei Liu, and Zhangyang Wang. Sparse moe as the new dropout: Scaling dense and self-slimmable transformers. In *The Eleventh International Conference on Learning Representations*, 2022.
- [40] Shwai He, Run-Ze Fan, Liang Ding, Li Shen, Tianyi Zhou, and Dacheng Tao. Merging experts into one: Improving computational efficiency of mixture of experts. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 14685–14691, 2023.
- [41] Leyang Xue, Yao Fu, Zhan Lu, Luo Mai, and Mahesh Marina. Moe-infinity: Activation-aware expert offloading for efficient moe serving, 2024.
- [42] Ji Lin, Jiaming Tang, Haotian Tang, Shang Yang, Wei-Ming Chen, Wei-Chen Wang, Guangxuan Xiao, Xingyu Dang, Chuang Gan, and Song Han. Awq: Activation-aware weight quantization for llm compression and acceleration. In *MLSys*, 2024.
- [43] Miaoxi Zhu, Qihuang Zhong, Li Shen, Liang Ding, Juhua Liu, Bo Du, and Dacheng Tao. Zero-shot sharpness-aware quantization for pre-trained language models. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 11305–11327, 2023.
- [44] Hong Chen, Chengtao Lv, Liang Ding, Haotong Qin, Xiabin Zhou, Yifu Ding, Xuebo Liu, Min Zhang, Jinyang Guo, Xianglong Liu, et al. Db-llm: Accurate dual-binarization for efficient llms. *arXiv preprint arXiv:2402.11960*, 2024.
- [45] Elias Frantar and Dan Alistarh. SparseGPT: Massive language models can be accurately pruned in one-shot. *arXiv preprint arXiv:2301.00774*, 2023.
- [46] Shwai He, Liang Ding, Daize Dong, Jeremy Zhang, and Dacheng Tao. Sparseadapter: An easy approach for improving the parameter-efficiency of adapters. In *Findings of the Association for Computational Linguistics: EMNLP 2022*, pages 2184–2190, 2022.

- [47] Shwai He, Chenbo Jiang, Daize Dong, and Liang Ding. Sd-conv: Towards the parameter-efficiency of dynamic convolution. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision*, pages 6454–6463, 2023.
- [48] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. *Advances in neural information processing systems*, 30, 2017.
- [49] Jaeho Lee, Sejun Park, Sangwoo Mo, Sungsoo Ahn, and Jinwoo Shin. Layer-adaptive sparsity for the magnitude-based pruning. In *International Conference on Learning Representations*, 2021. URL <https://openreview.net/forum?id=H6ATjJ0TKdf>.
- [50] Yue Bai, Huan Wang, ZHIQIANG TAO, Kunpeng Li, and Yun Fu. Dual lottery ticket hypothesis. In *International Conference on Learning Representations*, 2022. URL <https://openreview.net/forum?id=f0sN52jn251>.
- [51] Pingzhi Li, Zhenyu Zhang, Prateek Yadav, Yi-Lin Sung, Yu Cheng, Mohit Bansal, and Tianlong Chen. Merge, then compress: Demystify efficient SMoe with hints from its routing policy. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=eFWG9Cy3WK>.
- [52] Guangyan Li, Yongqiang Tang, and Wensheng Zhang. Lorap: Transformer sub-layers deserve differentiated structured compression for large language models, 2024.
- [53] David Raposo, Sam Ritter, Blake Richards, Timothy Lillicrap, Peter Conway Humphreys, and Adam Santoro. Mixture-of-depths: Dynamically allocating compute in transformer-based language models, 2024.
- [54] Mostafa Elhoushi, Akshat Shrivastava, Diana Liskovich, Basil Hosmer, Bram Wasti, Liangzhen Lai, Anas Mahmoud, Bilge Acun, Saurabh Agarwal, Ahmed Roman, Ahmed A Aly, Beidi Chen, and Carole-Jean Wu. Layerskip: Enabling early exit inference and self-speculative decoding, 2024.
- [55] Jimmy Lei Ba, Jamie Ryan Kiros, and Geoffrey E. Hinton. Layer normalization, 2016.
- [56] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition, 2015.
- [57] Luka Ribar, Ivan Chelombiev, Luke Hudlass-Galley, Charlie Blake, Carlo Luschi, and Douglas Orr. Sparq attention: Bandwidth-efficient llm inference, 2024.
- [58] Zhenyu Zhang, Ying Sheng, Tianyi Zhou, Tianlong Chen, Lianmin Zheng, Ruisi Cai, Zhao Song, Yuandong Tian, Christopher Ré, Clark Barrett, Zhangyang Wang, and Beidi Chen. H₂O: Heavy-hitter oracle for efficient generative inference of large language models, 2023.
- [59] Tim Dettmers, Artidoro Pagnoni, Ari Holtzman, and Luke Zettlemoyer. Qlora: Efficient finetuning of quantized llms, 2023.
- [60] Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. Exploring the limits of transfer learning with a unified text-to-text transformer. *arXiv e-prints*, 2019.
- [61] Peter Clark, Isaac Cowhey, Oren Etzioni, Tushar Khot, Ashish Sabharwal, Carissa Schoenick, and Oyvind Tafjord. Think you have solved question answering? try arc, the ai2 reasoning challenge, 2018.
- [62] Christopher Clark, Kenton Lee, Ming-Wei Chang, Tom Kwiatkowski, Michael Collins, and Kristina Toutanova. Boolq: Exploring the surprising difficulty of natural yes/no questions, 2019.
- [63] Rowan Zellers, Ari Holtzman, Yonatan Bisk, Ali Farhadi, and Yejin Choi. Hellaswag: Can a machine really finish your sentence?, 2019.
- [64] Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. Measuring massive multitask language understanding, 2021.

- [65] Todor Mihaylov, Peter Clark, Tushar Khot, and Ashish Sabharwal. Can a suit of armor conduct electricity? a new dataset for open book question answering, 2018.
- [66] Yonatan Bisk, Rowan Zellers, Ronan Le Bras, Jianfeng Gao, and Yejin Choi. Piqa: Reasoning about physical commonsense in natural language, 2019.
- [67] Alex Wang, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel R. Bowman. GLUE: A multi-task benchmark and analysis platform for natural language understanding. 2019. In the Proceedings of ICLR.
- [68] Winogrande: An adversarial winograd schema challenge at scale. 2019.
- [69] Leo Gao, Jonathan Tow, Baber Abbasi, Stella Biderman, Sid Black, Anthony DiPofi, Charles Foster, Laurence Golding, Jeffrey Hsu, Alain Le Noac’h, Haonan Li, Kyle McDonell, Niklas Muennighoff, Chris Ociepa, Jason Phang, d Laria Reynolds, Hailey Schoelkopf, Aviya Skowron, Lintang Sutawika, Eric Tang, Anish Thite, Ben Wang, Kevin Wang, and Andy Zou. A framework for few-shot language model evaluation, 12 2023. URL <https://zenodo.org/records/10256836>.
- [70] Rohan Taori, Ishaan Gulrajani, Tianyi Zhang, Yann Dubois, Xuechen Li, Carlos Guestrin, Percy Liang, and Tatsunori B. Hashimoto. Stanford alpaca: An instruction-following llama model. https://github.com/tatsu-lab/stanford_alpaca, 2023.
- [71] Leo Gao, Stella Biderman, Sid Black, Laurence Golding, Travis Hoppe, Charles Foster, Jason Phang, Horace He, Anish Thite, Noa Nabeshima, Shawn Presser, and Connor Leahy. The pile: An 800gb dataset of diverse text for language modeling, 2020.
- [72] Xin Men, Mingyu Xu, Qingyu Zhang, Bingning Wang, Hongyu Lin, Yaojie Lu, Xianpei Han, and Weipeng Chen. Shortgpt: Layers in large language models are more redundant than you expect, 2024.
- [73] Chunting Zhou, Pengfei Liu, Puxin Xu, Srini Iyer, Jiao Sun, Yuning Mao, Xuezhe Ma, Avia Efrat, Ping Yu, Lili Yu, Susan Zhang, Gargi Ghosh, Mike Lewis, Luke Zettlemoyer, and Omer Levy. Lima: Less is more for alignment, 2023.
- [74] Longhui Yu, Weisen Jiang, Han Shi, Jincheng Yu, Zhengying Liu, Yu Zhang, James T Kwok, Zhenguo Li, Adrian Weller, and Weiyang Liu. Metamath: Bootstrap your own mathematical questions for large language models. *arXiv preprint arXiv:2309.12284*, 2023.

A Implementation Details

A.1 Models and Datasets

Models. For our experiments, we employed Mixtral-8×7B [7] and DeepSeek-MoE-16B [8]. Mixtral-8×7B utilizes 8 experts for MoE layers and activates the top two for each input token. In contrast, DeepSeek-MoE-16B employs an MLP in the first block and utilizes two shared experts with additional 64 experts within MoE layers in other blocks.

Datasets. For compression experiments, we used the C4 dataset [60], with 128 samples and an input sequence length of 2,048, following the setup in [4, 5, 11, 42]. To evaluate model performance, we report normalized zero-shot accuracy on the LM-harness benchmark, which includes multiple tasks: ARC-C [61], BoolQ [62], HellaSwag [63], MMLU [64], OBQA [65], PIQA [66], RTE [67], and WinoGrande [68]. The evaluation code is based on EleutherAI LM Harness [69].

A.2 Implementation Details of Expert Slimming

Both Expert Slimming methods (i.e., pruning and quantization) require calibration data to estimate input statistics. To control this variable, we use 128 samples from the C4 dataset [60] as the calibration dataset for pruning. For quantization, we follow the default settings of GPTQ² and AWQ³, using 128 random samples from Alpaca [70] and Pile [71], respectively. We use the default group size 128 for Mixtral-8×7B and 64 for DeepSeek-MoE-16B.

A.3 Implementation Details of Expert Drop

The Expert Drop compresses MoE by preserving only important experts $\{\mathbf{E}_i\}_{i \in \mathcal{T}'}$ while removing others, where \mathcal{T}' is determined by the importance scores $\{\mathbf{S}(\mathbf{E}_i)\}_{i \in \mathcal{T}}$. Following Muzio *et al.* [21], we measure the importance scores through the averaged routing scores of a batched data \mathcal{X} , i.e., $\{\mathbf{S}(\mathbf{E}_i)\} = \frac{1}{|\mathcal{X}|} \sum_{\mathbf{x} \in \mathcal{X}} \mathbf{G}_i(\mathbf{x})$, and consider two dropping strategies for Expert Drop: layer-wise dropping and global dropping.

Layer-Wise dropping removes the same number of experts for each layer. Given the total number of experts $n = |\mathcal{T}|$ and the preserved number of experts $n' = |\mathcal{T}'| < n$ in layer l , the preserved expert set $\mathcal{T}'^{(l)}$ is obtained by:

$$\mathcal{T}'^{(l)} = \{\mathbf{E}_t^{(l)}\}, \quad \text{where } \mathbf{S}(\mathbf{E}_t^{(l)}) \in \text{TopK}(\{\mathbf{S}(\mathbf{E}_i^{(l)})\}_{i=1}^n, n'). \quad (10)$$

Global dropping constrains the total number of preserved experts for the entire model. Given the total number of layers L in the model, the preserved expert set $\mathcal{T}'^{(l)}$ for layer l is obtained by:

$$\mathcal{T}'^{(l)} = \{\mathbf{E}_t^{(l)}\}, \quad \text{where } \mathbf{S}(\mathbf{E}_t^{(l)}) \in \text{TopK}\left(\bigcup_{j=1}^m \{\mathbf{S}(\mathbf{E}_i^{(j)})\}_{i=1}^n, n'L\right). \quad (11)$$

For the integration of Expert Slimming and Expert Trimming, we choose the global dropping as the strategy of Expert Drop, which shows competitive performance compared to the layer dropping for Mixtral-8×7B under low dropping ratios, as well as consistent better performance for DeepSeek-MoE-16B in Figure 13.

²<https://github.com/AutoGPTQ/AutoGPTQ>

³<https://github.com/casper-hansen/AutoAWQ>

B Analysis on the Dropping Patterns

In this section, we make further analysis on the dropping patterns of Expert Trimming methods.

B.1 Expert Drop

Score Distribution Directs Expert Drop.

The distribution of importance scores is informative to determine the proportion of dropped experts. In Figure 9, we visualize the score distribution of Expert Drop for Mixtral-8×7B and DeepSeek-MoE-16B, respectively. DeepSeek-MoE-16B, which allocates more experts, shows a left-skewed distribution where more experts have low importance scores. In contrast, Mixtral-8×7B demonstrates a right-skewed distribution, with only a few experts being deemed unimportant. This significantly different distribution results in different resistance capability against Expert Drop, where DeepSeek-MoE-16B can drop much more experts than Mixtral-8×7B while maintaining competitive performance, as demonstrated in Table 4 and Figure 13.

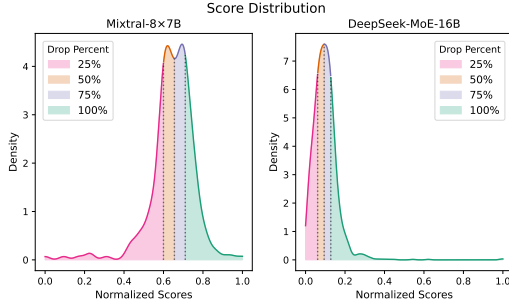


Figure 9: **Distribution of Normalized Importance Scores S for Expert Drop.** We highlight the density of scores under different drop ratios with different colors.

Global Expert Drop Removes Experts Fine-Grainedly.

We employed two different strategies for Expert Drop, namely layer-wise and global. Layer-wise dropping treats each layer equally by dropping the same number of experts, while global dropping results in different proportions of remaining experts across layers. We visualize the distribution of remaining experts after global dropping in Figure 10. We find the global dropping shows a more fine-grained pattern on dropping experts, where the bottom layers are more vulnerable under lower dropping ratios (yellow part).



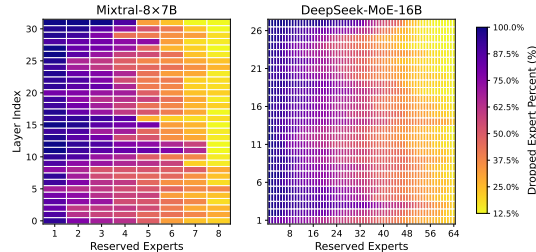


Figure 10: **Distribution of Dropped Experts for Expert Drop.** We visualize of the dropped experts under different drop ratios, where the dropped experts are colored from yellow to blue as the drop ratio increases.

B.2 Layer Drop & Block Drop

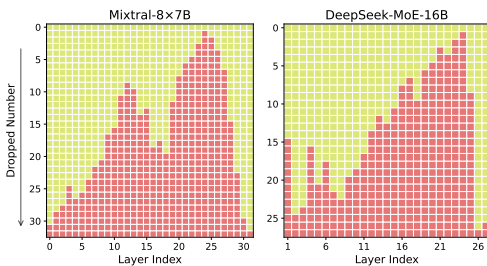

(a) Layer Drop

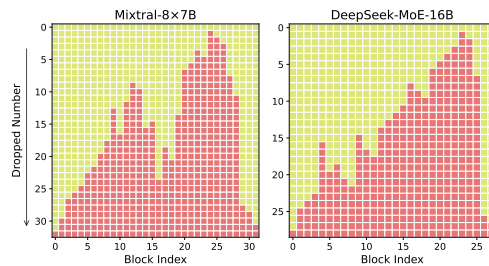

(b) Block Drop

Figure 11: **Dropping Patterns for Layer Drop and Block Drop.** We visualize of the remaining layers and blocks under different dropped numbers, where yellow areas represent the retained portions and red areas indicate the dropped layers/blocks.

Figure 11 visualizes the remaining and dropped layers/blocks as the number of dropped modules increases. Both MoE architectures exhibit similar patterns in Layer Drop and Block Drop: initially, both models tend to drop the deeper layers, followed by the shallower ones. These findings are consistent with Xu *et al.* [72], which suggests that deeper layers tend to be more redundant.

C Ablation Study on the Data Choices

The routing scores in MoE models exhibit a significant correlation with the input data, as evidenced by [8, 11, 30]. This relationship underscores the importance of data selection in the application of Expert Drop, which assesses the importance of experts by examining their routing scores. Similarly, the same question holds for Layer Drop and Block Drop: Does data selection affect the feature similarity across different layers? To address this, we performed ablation studies on Mixtral-8×7B, scrutinizing both the number of samples and the dataset types used for feature extraction, to determine how data choice impacts decisions to drop layers or blocks. Results are shown in Figure 12.

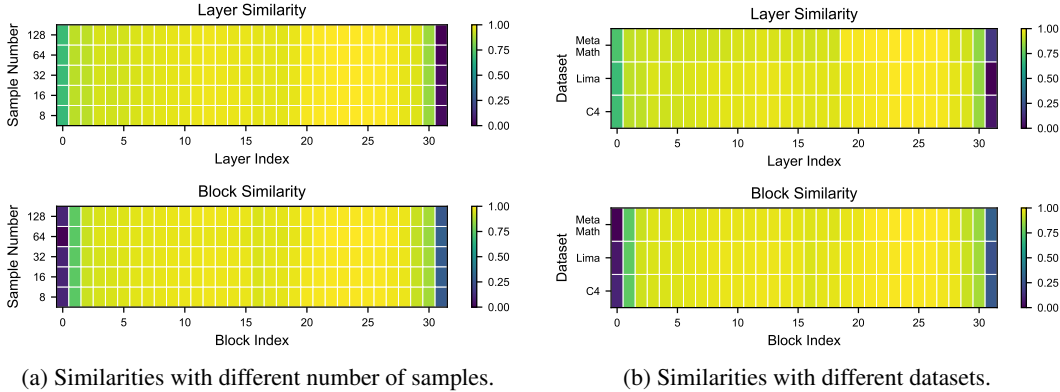


Figure 12: **Influence of Data Choices on Feature Similarity.** We measure the similarity among layers and blocks on Mixtral-8×7B. **(a)** The normalized similarity calculated using different number of samples from C4 [60]. **(b)** The normalized similarity calculated using 1,024 samples from different datasets, i.e., C4, Lima [73] and MetaMathQA [74].

Layer Drop and Block Drop are Data Robust. In Figure 12a, we note that feature similarity remains relatively stable across different layers as the sample size increases, indicating that Layer Drop and Block Drop maintain consistency regardless of sample quantity. This confirms that using 128 samples suffices for computing similarity, which is adopted for all our experiments. Similarly, Figure 12b shows that varying the datasets, from pretraining with C4 to instruction tuning with Lima and MetaMathQA, does not significantly alter feature similarity. This demonstrates the resilience of Layer Drop and Block Drop to variations in data distribution.

D Ablation Study on Shared Experts in DeepSeek-MoE-16B

While most MoE models follow Equation 2 to implement the experts, models like DeepSeek-MoE-16B adopt a residual [33] form of experts, which brings a special scenario to discuss. In the residual MoE, an extra set of m shared experts $\{\bar{E}_1, \bar{E}_2, \dots, \bar{E}_m\}$ are always selected by the router G and activated for all inputs. Given an input x , the output can be represented as a degenerated form of Equation 2, where the scores of shared experts are fixed to 1:

$$y = \sum_{i \in \mathcal{K}} G(x)_i \cdot E_i(x) + \sum_{j=1}^m \bar{E}_j(x). \tag{12}$$

This special form of expert routing may bring a difference in the redundancy distribution of MoE. Here we discuss the influence of shared experts through pruning and present the results in Table 5. We find that pruning without the shared experts will boost the performance at a considerable scale, i.e., +3.6% and +1.5% of the averaged accuracy for unstructured pruning with Wanda and SparseGPT, respectively. This finding reveals a different pattern of the inner redundancy in that the shared experts are less compressible compared to the others in residual MoE models, which may inform future work.

Table 5: **Ablation Study of Pruning Shared Experts on DeepSeek-MoE-16B.** We consider two scenarios, i.e., pruning both shared experts and normal experts (“w/Pruning Shared Experts”) and pruning normal experts only (“w/o Pruning Shared Experts”). We use two mainstream pruning methods (i.e., Wanda [4] and SparseGPT [45]) under both unstructured sparsity (50%) and semi-structured sparsity (2:4).

DeepSeek-MoE-16B										
Method	Sparsity	ARC-C	BoolQ	HellaSwag	MMLU	OBQA	PIQA	RTE	WinoGrande	Avg.
Baseline	0%	48.1	72.4	77.3	37.9	44.0	80.4	63.9	70.3	<u>61.8</u>
w/ Pruning Shared Experts										
Wanda	50%	43.6	74.3	72.6	31.1	43.0	79.5	58.1	69.4	<u>59.0</u>
SparseGPT		43.9	73.5	74.0	33.8	41.4	79.0	61.0	68.3	<u>59.4</u>
Wanda	2:4	38.2	66.1	67.5	27.6	39.4	77.0	53.8	66.7	<u>54.5</u>
SparseGPT		43.1	68.9	71.6	27.6	41.6	78.3	57.4	66.6	<u>56.9</u>
w/o Pruning Shared Experts										
Wanda	50%	44.0	76.3	73.5	36.2	41.0	79.3	59.9	70.2	<u>60.0</u>
SparseGPT		45.0	75.5	74.4	36.3	41.0	79.4	64.3	69.3	<u>60.7</u>
Wanda	2:4	40.1	75.7	69.9	33.5	40.0	77.9	58.8	68.6	<u>58.1</u>
SparseGPT		40.7	75.7	69.9	33.3	39.0	77.7	61.4	69.4	<u>58.4</u>

E Full Experimental Results

We provide the full results of Expert Trimming, including Expert Drop, Layer Drop and Block Drop, in Figure 13, 14, and 15, respectively.

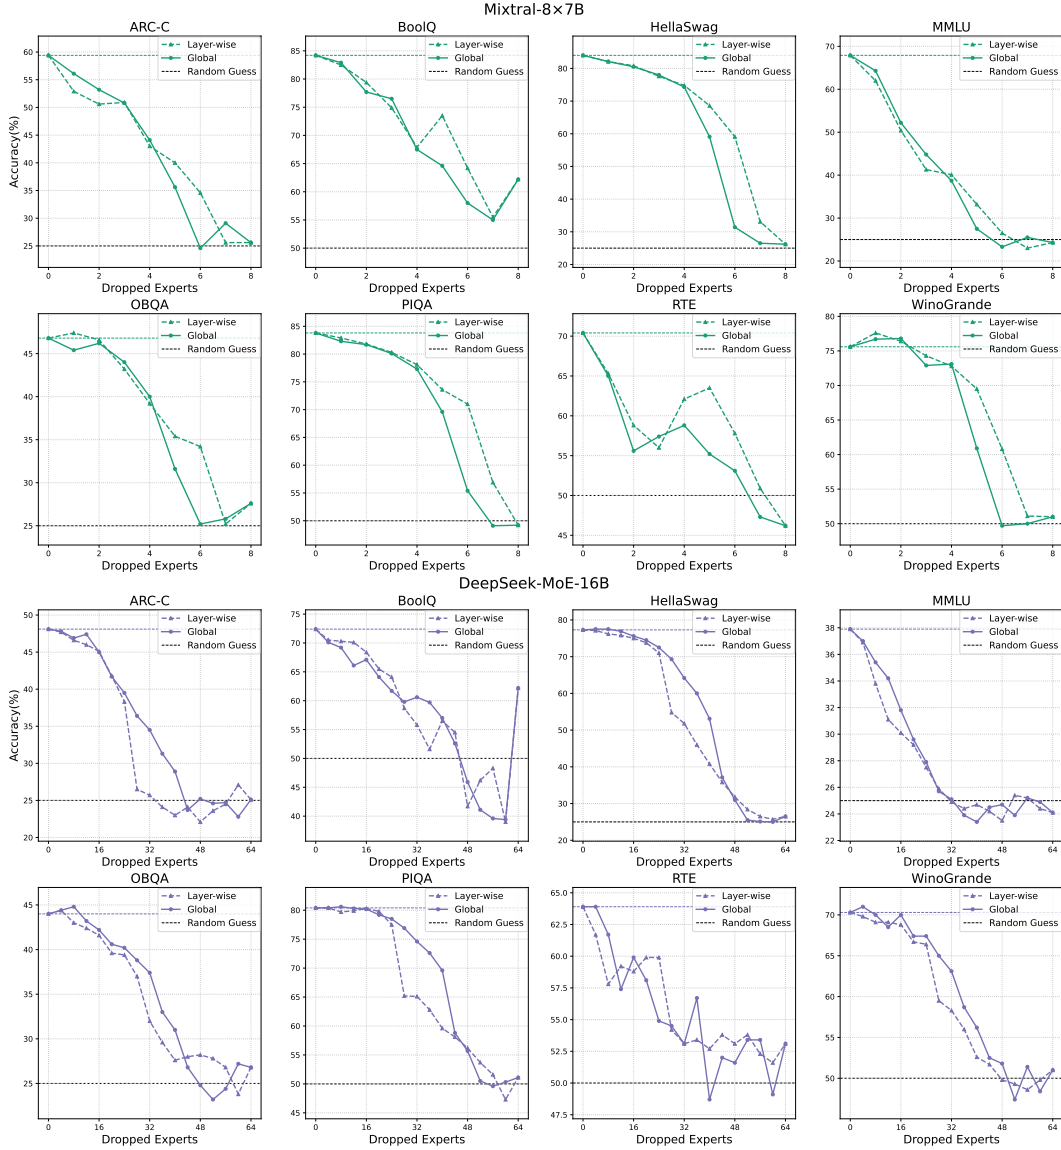


Figure 13: Full Results for Expert Drop. We consider two strategies: layer-wise (dotted lines) and global (solid lines).

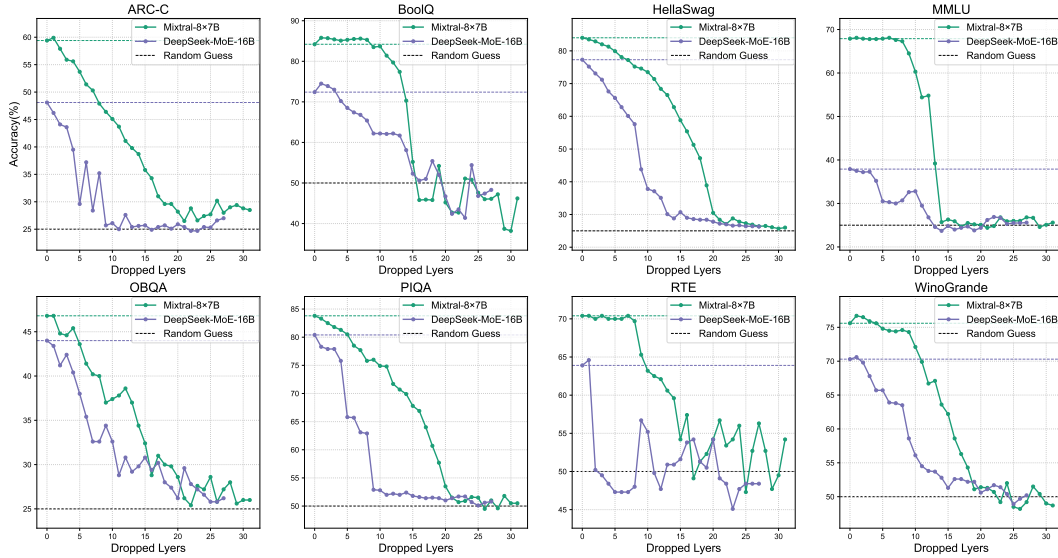


Figure 14: **Full Results for Layer Drop.** We show results on Mixtral-8×7B and DeepSeek-MoE-16B (solid lines), along with the baseline and random guess performances (dotted lines).

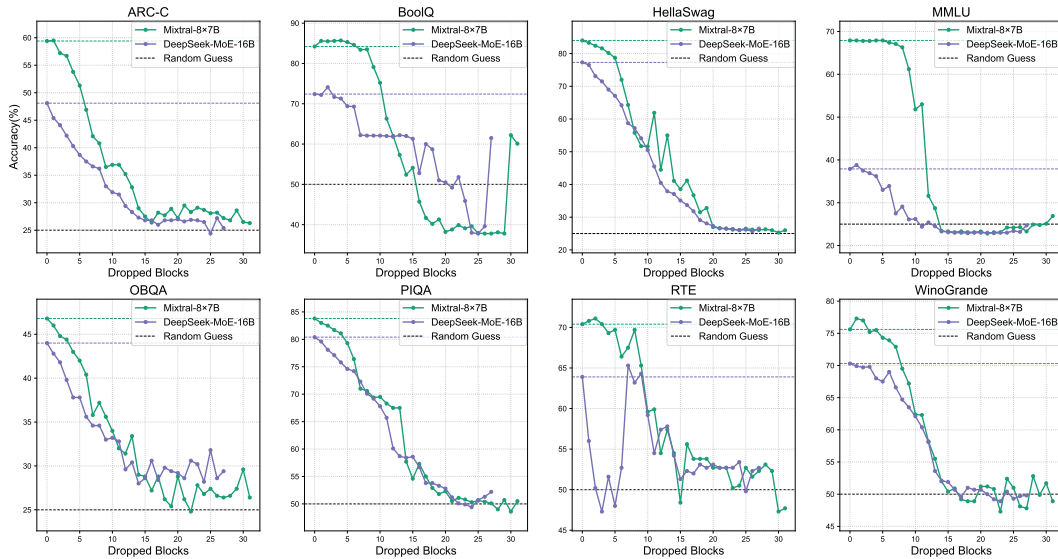


Figure 15: **Full Results for Block Drop.** We show results on Mixtral-8×7B and DeepSeek-MoE-16B (solid lines), along with the baseline and random guess performances (dotted lines).