
WINGS: Learning Multimodal LLMs without Text-only Forgetting

Yi-Kai Zhang^{1,2,3*} Shiyin Lu³ Yang Li³ Yanqing Ma³ Qing-Guo Chen³
Zhao Xu³ Weihua Luo³ Kaifu Zhang³ De-Chuan Zhan^{1,2} Han-Jia Ye^{1,2†}

¹School of Artificial Intelligence, Nanjing University

²National Key Laboratory for Novel Software Technology, Nanjing University

³AI Business, Alibaba Group

Abstract

Multimodal large language models (MLLMs), initiated with a trained LLM, first align images with text and then fine-tune on multimodal mixed inputs. However, the MLLM catastrophically forgets the text-only instructions, which do not include images and can be addressed within the initial LLM. In this paper, we present WINGS, a novel MLLM that excels in both text-only dialogues and multimodal comprehension. Analyzing MLLM attention in multimodal instructions reveals that *text-only forgetting* is related to the attention shifts from pre-image to post-image text. From that, we construct extra modules that act as the boosted learner to compensate for the attention shift. The complementary visual and textual learners, like “wings” on either side, are connected in parallel within each layer’s attention block. Initially, image and text inputs are aligned with visual learners operating alongside the main attention, balancing focus on visual elements. Textual learners are later collaboratively integrated with attention-based routing to blend the outputs of the visual and textual learners. We design the Low-Rank Residual Attention (LoRRA) to guarantee high efficiency for learners. Our experimental results demonstrate that WINGS outperforms equally-scaled MLLMs in both text-only and visual question-answering tasks. On a newly constructed Interleaved Image-Text (IIT) benchmark, WINGS exhibits superior performance from text-only-rich to multimodal-rich question-answering tasks.

1 Introduction

Large Language Models (LLMs) [22, 34, 52, 90, 112, 113] are making significant strides toward Artificial General Intelligence (AGI) systems. Multimodal Large Language Models (MLLMs), as a visual expansion of LLMs, have demonstrated astonishing performance in vision-related captioning [15, 17, 66, 68], understanding [8, 19, 33, 91, 100, 106, 118, 141], and reasoning [1, 114, 122, 126, 133]. Common MLLMs build upon powerful pre-trained LLMs that take mixed textual and visual tokens as inputs. The visual ones are acquired using an image encoder and a projector. We describe instructions processed by the LLM without images as *text-only instructions*. In comparison, *multimodal instructions* incorporate visual feature tokens into text-only sequences. Modality fusing at the token level provides a flexible and effective pipeline for training MLLMs to comprehend visual information [76, 79, 80, 125]. However, training on multimodal instructions seems to impair the pre-existing profound knowledge, especially making MLLM forget how to respond to text-only instructions like the initial LLM [85, 87]. MLLM experiences a drastic performance decline on text-only evaluation. We term it as the *text-only forgetting* of MLLM.

*Work done during the internship at AI Business, Alibaba Group.

†Corresponding author, email: yehj@lamda.nju.edu.cn.

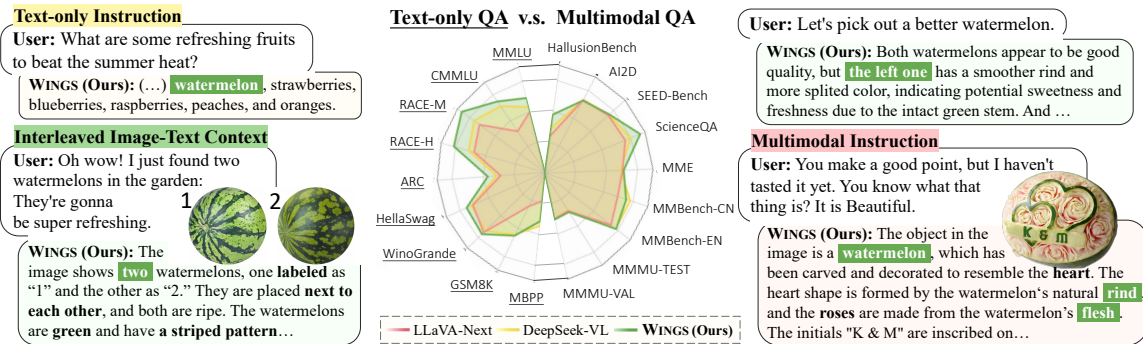


Figure 1: **Examples of text-only and multimodal conversations.** From left to right: Interacting with MLLM through *text-only* and *interleaved instructions*; Performance radar charts for WINGS, LLaVA-Next [80], and DeepSeek-VL [85] in text-only and multimodal QA tasks, with dark green indicating WINGS with the comprehensive performance; Interacting with *multimodal instructions*.

In practical applications, MLLMs also require engaging in text-only or interleaved conversations. As demonstrated in Figure 1, users often start with text-only inquiries and then, if not fully satisfied with the response, proceed to supplement questions with image content. For multimodal instructions, MLLMs are still prompted to capture critical elements from text within a multimodal instruction, as images may provide redundant cues [16, 18, 84]. The first existing approaches replay extensive text-only or interleaved [59, 142] training data to mitigate catastrophic forgetting in MLLMs [14, 71, 85, 87]. However, increasing training data incurs additional computational overhead and data collection challenges. Secondly, switching between LLM and MLLM based on whether images are included, as an intuitive solution, inevitably demands more deployment memory [2, 3] and is less cache-friendly in long vision-and-language interleaved conversations [41, 75, 99, 101]. Therefore, it is crucial to train MLLM while preserving the text-only performance efficiently.

Given that the image feature tokens can be inserted at any position within the text sequence, we begin by examining the text before and after the inserted position. Considering that MLLM’s attention weights reflect the focus on tokens and influence the decision-making process, we first analyze the attention weights across each layer of the MLLM. Specifically, for each layer, we compute the attention weight proportion on all text tokens before and after the inserted image, termed as Layer-level Attention Weights (LAWS) of the before and after image text. From this, we examine the dynamic of attention across all layers as MLLM-Laws. Through training and sampling over 100 diverse MLLMs, we find that a well-trained one with superior text-only performance shows a positive correlation of MLLM-LAWS between before and after image. Given the similarity of feature space in the text surrounding the image, an MLLM’s attention to both front and rear parts should be correspondingly similar. A closer similarity indeed suggests a more minor disruption to the essential attention of MLLM. Conversely, a negative correlation implies a shift in token attention across the image content, *i.e.*, an MLLM overly concentrates on visual tokens and neglects textual ones.

Based on this observation, we propose WINGS, which introduces an extra module that acts as the boosted learner to compensate for the attention shift. We integrate complementary visual and textual learners in parallel at each layer’s attention block, with visual learners enhancing focus on visual tokens and textual learners on text, respectively. In the first stage, visual features align with textual feature tokens, with all visual learners operating parallel to the main branch attention. The visual learners allocate some attention to visual tokens, mitigating the attention shift in the main branch. Subsequently, textual learners are integrated in parallel. We implement soft routing based on shifted attention weights to harmonize the learning on visual and textual tokens. We design the Low-Rank Residual Attention (LoRRA) as the architecture for learners to ensure high efficiency. Figure 3 shows that the visual and textual learners on either side, like light feathers woven into “wings”. Experiments show that our WINGS comprehensively achieves superior performance in text-only under the same training condition and exceeds other equal-level MLLMs on multimodal benchmarks. In addition, we construct the Interleaved Image-Text (IIT) benchmark with multi-turn evaluations towards a general mixed-modality scenario. The samples are from text-only questions to strongly image-related conversations. WINGS achieve leading performance across various vision-relevance partitions. Overall, our contributions are as follows: (1) We claim and verify the text-only forgetting phenomenon of MLLM is related to the attention shift of cross-layer MLLM-LAWS before and after the image. (2) WINGS construct the visual and textual learners and introduce a router based on shifted attention weights for collaborative learning to compensate for attention shifts. (3) Experiments on

text-only, visual-question-answering, and newly constructed Interleaved Image-Text (IIT) benchmarks demonstrate the comprehensive and versatile performance of WINGS.

2 A Closer Look at Attention Shift in Multimodal LLMs

In this section, we introduce the development from initialized LLM to MLLM. Next, we devise the MLLM-LAWS metric for representing attention shift and discuss the insights in building WINGS.

2.1 Granting Sight to Large Language Models

Large Language Models (LLMs). Even though existing Transformer-based [117] models [21, 82, 98, 127] like BERT [56] and OPT [136] have demonstrated profound language understanding capabilities, there has been a recent surge in powerful Generative Pre-trained Transformers (GPT) [11] under the auto-regressive language modeling paradigm. Both public [52, 53, 112, 113] and private [4, 90, 92, 110] solutions show remarkable progress in language comprehension and generation [88, 121]. These LLMs generally exceed a billion parameters, including pre-training [23, 32, 48, 54], supervised fine-tuning with instructions [27, 103, 109, 120], and reinforcement learning from human feedback [24, 93, 107, 143] on massive training data.

Multimodal LLMs (MLLMs). Integrating visual inputs into foundational LLMs to create MLLMs is becoming increasingly popular [19, 20, 61, 71, 129]. Unlike vision-centric multimodal frameworks [67, 130] such as CLIP series [97], MLLMs aim to align new modality features as the input of LLM with an additional encoder [74, 79, 80, 123, 135, 140]. As illustrated in Figure 2 (a), it enables the combined training of mixed multimodal tokens, facilitating rapid deployment across various applications [25, 26, 43, 81, 118]. One example of this pipeline is the LLaVA [79] series, which integrates a CLIP vision encoder with a linear projection to Vicuna [22] and innovatively introduces instruction-following training data. Following this, some methods consider the richness of the vision-related training context [15, 44, 60], the scaled visual backbone [50, 72, 78], or the enhanced connectors [12, 119] to boost the visual effectiveness of MLLMs. With commonplace text-only challenges in conversations, it is essential to enhance the language abilities of MLLMs [87]. The training process of MLLMs, as continued learning on newly introduced visual features, causes competitive modality shift [38, 73, 96] and catastrophic text-only forgetting. Recent studies acknowledge this issue, *e.g.*, DeepSeek-VL [85] suggests that supplementing additional text-only training data can mitigate this forgetting. Others [77, 87] try to incorporate interleaved visual-textual data into training to retain language knowledge. However, these methods are limited by training resources and data collection costs. We aim to preserve or even boost performance with text-related training data as little as possible. Some studies [53, 64, 76, 105, 111, 128, 137] also consider expanding the scalability of LLM, such as using Mixture-of-Expert (MoE) with numerous parallel FFNs in the Transformer block alongside a sparse gating network for efficient selection. These methods, however, require a massive increase in training parameters. In WINGS, the newly designed parallel learners of Low-Rank Residual Attention (LoRRA) are similar to MoE but with at least three orders of magnitude less in resource consumption.

2.2 Capturing the Attention Shift with MLLM-LAWS

The significant decline in text-only performance is closely linked to the observed related shift during the training process. Research on cross-modal learning [35, 65, 73] shows that transferring to new modalities affects feature distribution, output values, and activation levels. Considering attention weights highlight where MLLM’s focus depends on visual or textual tokens for decision-making [95], we investigate how attention shifts among *different parts of the sequences*, mainly where divided by the visual feature tokens. Specifically, we study over 100 diverse MLLMs to uncover how attention is allocated to each part for a text-only better MLLM. We take a closer look at the cross-layer dynamic curve of attention proportion on all text tokens *before* and *after* the inserted image.

For a instruction \mathbf{x} and its hidden states in MLLM as $\mathbf{h} = [\mathbf{h}_1, \mathbf{h}_2, \dots, \mathbf{h}_s]$ consisting of s mixed visual and textual tokens. Let a_{ij}^l represent the attention weight between the i^{th} and j^{th} tokens in the l^{th} of the L -layers MLLM. We have, for $\forall i, \sum_{j=0}^s a_{ij}^l (\mathbf{h}^{l-1}) = 1$. As shown in Figure 2 (a), since the sequence of flattened visual tokens is continuously interleaved with the textual sequence, we denote the index set of the visual tokens as $\mathcal{V}_{\text{itself}} = \{v_{\text{start}}, v_{\text{start}} + 1, \dots, v_{\text{end}}\}$. We refer to the

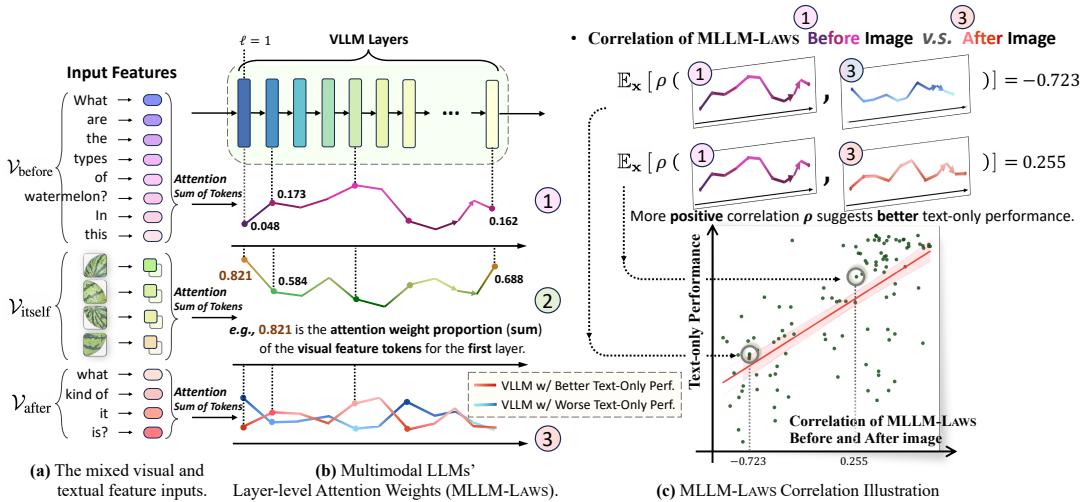


Figure 2: **Illustration of mixed visual-and-textual inputs and the Layer-level Attention Weights (LAWS) with its properties.** (a) The visual feature tokens from the visual encoder and projector are inserted into the textual feature sequence. (b) The attention weight proportion on textual tokens before-image, image-itself, and after-image across layers. The red curve is from the superior text-only MLLM, while the blue curve is from the inferior one. (c) Experiments on over 100 MLLMs show a positive correlation from the ρ for MLLM-LAWS before and after the visual tokens (x -axis) to the text-only performance of the MLLM (y -axis).

textual sequence before the visual tokens as $\mathcal{V}_{\text{before}}$, and similarly, after the visual part as $\mathcal{V}_{\text{after}}$. For an MLLM with L layers, we define the Layer-level Attention Weights (MLLM-LAWS) as:

$$\text{LAWS}_{\mathcal{V}_*} = [a_{\mathcal{V}_*}^1, a_{\mathcal{V}_*}^2, \dots, a_{\mathcal{V}_*}^L], \quad a_{\mathcal{V}_*}^l = \sum_{i=0}^s \sum_{j \in \mathcal{V}_*} a_{ij}^l (\mathbf{h}^{l-1}), \quad (1)$$

where token index set \mathcal{V}_* can be $\mathcal{V}_{\text{itself}}$, $\mathcal{V}_{\text{before}}$, or $\mathcal{V}_{\text{after}}$ as mentioned above, and for simplicity, we omit \mathbf{h}^{l-1} in $\text{LAWS}_{\mathcal{V}_*}$. In practice, $\text{LAWS}_{\mathcal{V}_*}$ characterizes the MLLM’s attention on the current sequence \mathcal{V}_* regarding the dynamic curve over all MLLM-layers. As shown in Figure 2 (b), the attention to the textual part initially increases and then decreases, while the trend for the visual one is often the opposite. We find that when the MLLM forgets the text-only instructions, the LAWS of the textual sequence after the visual ones show a deviation from the initial trend of rising and then declining. This implies a shift in the text following the image $\mathcal{V}_{\text{after}}$ compared to that preceding the image $\mathcal{V}_{\text{before}}$. The dynamics labeled as ③ in Figure 2 (b) show the red curve for better text-only performance towards the worse blue one. To quantify this, we compute the Pearson Correlation Coefficient [89] between LAWS before and after the visual sequence. Formally,

$$\text{Attention Shift} = \mathbb{E}_x [-\rho(\text{LAWS}_{\mathcal{V}_{\text{before}}}, \text{LAWS}_{\mathcal{V}_{\text{after}}})] + 1.$$

Studying the attention shift of over 100 diverse MLLMs, we find a positive correlation between the shift and the text-only performance degradation. In Figure 2 (c), each point represents a trained MLLM, and we demonstrate how the attention shift influences the text-only performance with the correlations. Next, We focus on how to mitigate the shifted attention weights. Starting with LAWS we give the MLLM “wings”.

3 WINGS: Flying to Generality with Low-Rank Residual Attention Learners

From the attention shift, we seek a sufficiently reliable and convenient mechanism to address text-only forgetting. The WINGS architecture is intuitive – we construct visual and textual learners to mitigate shifted attention. An attention-weight-based router dynamically adjusts the outputs of visual and textual learners to compensate for the main branch’s attention outputs. WINGS aims to excel in text-only and visual question-answering tasks with high generality. In this section, we start with the typical training pipeline for MLLM (subsection 3.1). Following this, we explore the motivation behind employing parallel modality learners and explain its implementation (subsection 3.2). Finally, we describe the training process for WINGS (subsection 3.3).

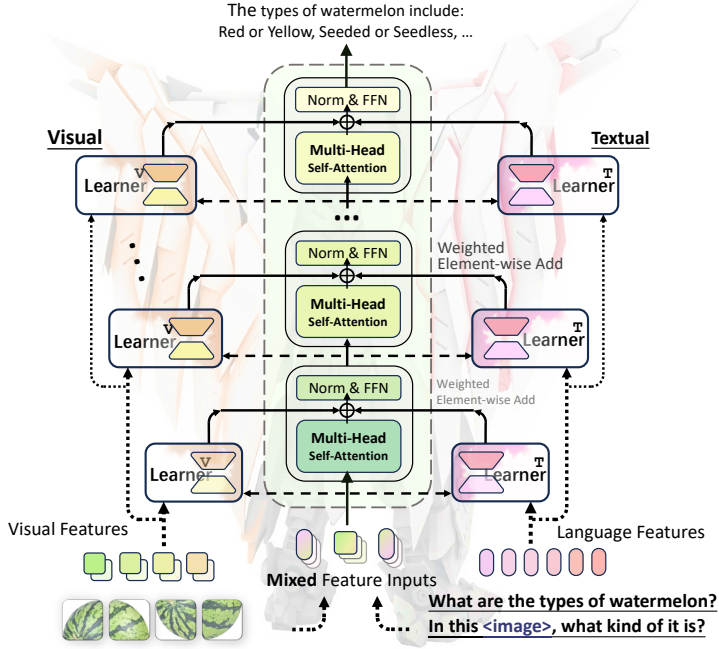


Figure 3: **The WINGS - model architecture.** We introduce extra modules parallel to the main attention, serving as boosted learners to compensate for the attention shift. We train the visual learners on one side, alleviating some shifted attention. Then, we collaboratively learn visual and textual learners based on routing shifted attention weights. They are like light feathers woven “wings”.

3.1 Revisit the Training Pipeline of the MLLM

Following the mainstream architecture of MLLM, we take mixed visual and textual features as inputs. For a one-turn conversation, the sequence of the visual feature tokens may appear at any position in the input \mathbf{x} . We represent the feature tokens as:

$$\mathbf{x} = [\mathbf{x}_V, \mathbf{x}_T] = \left[\mathbf{h}_1, \dots, \underbrace{\mathbf{h}_{v_{\text{start}}}, \mathbf{h}_{v_{\text{start}}+1}, \dots, \mathbf{h}_{v_{\text{end}}}}_{\text{visual features}}, \dots, \mathbf{h}_s \right], \quad (2)$$

where we omit the superscript of layer-index l for the 0^{th} layer. The v_{start} and v_{end} represent the starting and ending indices of the visual feature tokens, usually obtained through the vision encoder ψ and projector \mathbf{W}_{proj} , as $\mathbf{x}_V = \mathbf{W}_{\text{proj}} \cdot \psi(\mathbf{x}_{\text{image}})$. Correspondingly, \mathbf{x}_T = the remaining 0 to v_{start} and v_{end} to length s denote features of the textual instruction. We consider the posterior of the ground-truth answer as:

$$\Pr(\mathbf{x}_a | \mathbf{x}) = \prod_{i=1}^s \mathbb{1}_{[1, v_{\text{start}}) \cup (v_{\text{end}}, s]} \cdot \varphi(\mathbf{h}_i | [\mathbf{h}_1, \dots, \mathbf{h}_{i-1}]). \quad (3)$$

Here, φ represents the main branch LLM, which consists of Transformer decoder layers [116].

3.2 Visual and Textual Learners Weave WINGS

Motivation: Learning to mitigate the attention shift with modality-specific auxiliary structures.

As mentioned in subsection 2.2, MLLM-Laws demonstrates the attention shift in the sequence following the visual features. The shift results from excessive dependency on visual features. This issue may stem from the insufficient alignment within mixed inputs [8, 16], where new modalities can obscure existing knowledge. It suggests adding a small, adjustable factor to the shifted mixed modality features and regulating unnecessary fluctuations in MLLM-LAWS. Consequently, we aim to adopt an efficient, learnable module as the visual “wing”. Compared to the image-text mixed feature inputs of the main branch, it should focus on extracting visual information to share the burden of overly shifted attention. The interaction between the current hidden state and visual features is

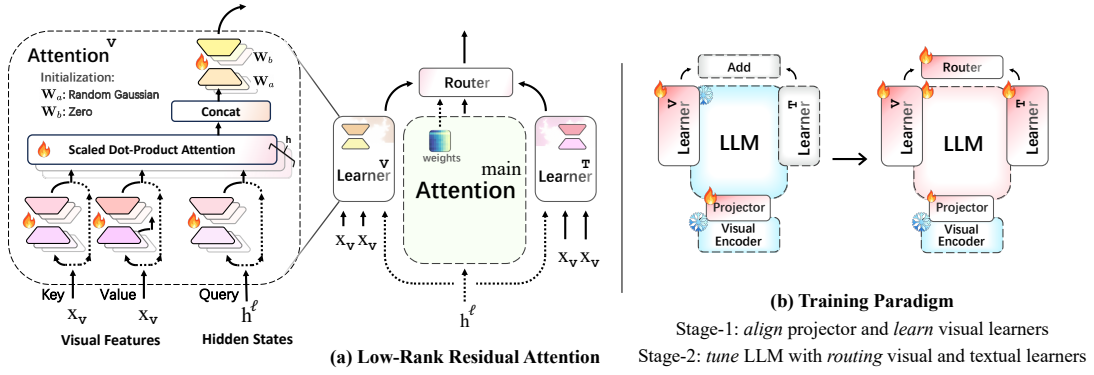


Figure 4: **Illustrations of the detailed WINGS structure, and training strategies.** WINGS is constructed by the Low-Rank Residual Attention (LoRRA) module where the previous hidden state acts as the query and the visual/textual features serve as the key and value. Training starts with visual learners and projectors, followed by the dynamic attention-based routing.

conducted within this module. Similarly, to balance the auxiliary function of the visual learner, we also construct a symmetrical textual learner. Moreover, we should appropriately distribute the two learners across both modalities to operate collectively.

Structure: parallel learner & router of attention outputs. To capture key information in shifted modalities while ensuring efficiency, we design a multihead Low-Rank Residual Attention (LoRRA) learner at every layer. It takes input from the hidden state and interacts with the initial visual or text-only feature. The learner facilitates cross-cascading with the initial projected information. Specifically, for the l^{th} layer, the visual/text-only learner is formulated as:

$$\text{Learner}^* \left(Q=h^l, K, V=x_* \right)_{* \in \{V, T\}} = \text{Softmax} \left(\frac{\mathbf{h}^l (\mathbf{1} + \mathbf{W}^Q) \cdot (\mathbf{x}_* (\mathbf{1} + \mathbf{W}^K))^T}{\sqrt{d_{\text{head}}}} \right) \mathbf{x}_* (\mathbf{1} + \mathbf{W}^V) \mathbf{W}^O, \quad (4)$$

where the matrix \mathbf{W}^Q , \mathbf{W}^K , \mathbf{W}^V , and \mathbf{W}^O is low-rank and is obtained by the dot product of $\mathbf{W}_a \in \mathbb{R}^{d \times d}$ and $\mathbf{W}_b \in \mathbb{R}^{d \times d}$, and d is relatively small enough. $\mathbf{1}$ is represented as the identity matrix. Following LoRA [45], LoRRA learners also employ random Gaussian initialization for \mathbf{W}_a and sets \mathbf{W}_b to zero. Given that \mathbf{W}^Q lacks a residual, the learner’s output is zero at the beginning of training. Multihead LoRRA preserves the effectiveness of the cross-attention structure and employs efficient low-rank mapping to reduce computational demands. As shown in Figure 3, the visual and textual features are fed into their respective side learners, like two “wings” woven together. The outputs of two learners from each layer are then weighted sum to the attention of the main branch. As illustrated in the left part of Figure 4, a router receives attention weights to generate the balance weights of the visual and textual learners. In summary, we formulate the WINGS block as:

$$\text{Att}^{\text{WINGS}} = \text{Att}^{\text{main}} + \sum_{* \in \{V, T\}} \text{Router}(\mathbf{a}) \cdot \text{Learner}^*(\mathbf{h}^l, \mathbf{x}_*), \quad (5)$$

where $\mathbf{a} \in \mathbb{R}^{s \times s}$ represents the attention weights of the current main branch. The router receives the attention weights \mathbf{a} and then processes through a single-layer MLP with Softmax.

3.3 Stable Training Recipe

The architecture of WINGS comprises four elements: vision encoder, projector, initialized LLM, and the learners with a router. During the training process, the vision encoder is consistently fixed. Firstly, we only fine-tune the projector and visual learners. We primarily employ image-text pairs for visual alignment, while the outputs of visual learners are directly added to the main branch. Subsequently, the LLM branch is updated with small steps. Concurrently, textual learners are paralleled with visual learners on the attention block of LLMs. The router learns to allocate visual and textual learners from the attention weights of the main branch. At this stage, the textual and visual learners work better together to direct attention to the key tokens. To summarize, WINGS prioritizes enhancing visual learners first. Subsequently, it “spreads its wings” by concurrently learning and routing visual and textual learners based on shifted attention weights.

Dataset	Model	Vicuna	Vicuna	LoRA _{Vicu.}	Vicuna	Qwen	Qwen	LoRAQ	Qwen	WINGS	Text-only	Our
		LLM	+ CLIP	+ CLIP	+ SigLIP	LLM	+ CLIP	+ CLIP	+ SigLIP	(Ours)	Forgetting	Impro.
Exam	MMLU	51.18	51.12	48.89	50.63	60.86	50.83	59.67	51.16	<u>60.53</u>	9.70	9.37
	CMMLU	38.60	38.29	37.24	38.73	<u>69.37</u>	62.58	67.87	60.46	69.82	8.91	9.36
	ARC-E	57.62	53.63	55.82	53.95	59.96	56.93	<u>59.35</u>	55.87	54.29	4.09	-1.58
	ARC-C	33.75	34.60	34.68	35.17	38.90	39.14	38.64	<u>39.50</u>	43.39	-0.60	3.89
Under-standing	Winogrande	68.01	64.97	67.83	65.21	71.38	69.82	<u>71.03</u>	69.05	69.28	2.33	0.23
	OpenbookQA	77.10	73.28	77.15	72.12	81.73	78.31	<u>81.29</u>	77.51	81.05	4.22	3.54
	Race-Middle	63.99	60.10	62.84	59.45	74.82	68.25	72.06	68.34	<u>74.24</u>	6.48	5.90
	Race-High	58.74	53.24	54.91	52.69	71.05	59.20	65.67	57.72	<u>69.62</u>	13.33	11.90
	WSC	51.30	47.21	51.06	47.72	<u>56.17</u>	54.18	57.30	55.23	66.35	0.94	11.12
	CHID	39.05	49.66	45.26	53.49	71.94	71.82	72.92	74.29	<u>74.06</u>	-2.35	-0.23
Reasoning	HellaSwag	63.11	63.08	62.58	63.02	65.70	61.90	64.32	63.24	<u>65.12</u>	2.46	1.88
	SIQA	42.37	44.06	43.27	44.52	45.57	<u>50.20</u>	46.83	51.71	49.64	-6.14	-2.07
	PIQA	71.92	71.95	70.35	71.84	<u>76.59</u>	74.60	73.77	75.19	78.06	1.40	2.87
	OCNLI	33.89	37.74	39.41	40.46	49.73	48.31	48.07	<u>50.29</u>	50.39	-0.56	0.10
Math	GSM8K	25.19	23.72	22.68	23.05	56.77	50.10	54.25	<u>51.37</u>	52.08	5.40	0.71
Code	MBPP	13.80	11.29	13.92	10.80	<u>37.50</u>	34.82	36.72	33.20	38.92	4.30	5.72
Multimodal	MMMU-VAL	-	35.67	30.78	35.56	-	34.56	32.33	35.11	39.89	-	4.78
	MMMU-TEST	-	34.40	30.90	35.33	-	34.90	31.80	35.10	37.30	-	2.20
	MMBench	-	63.18	59.83	65.14	-	66.05	62.84	70.94	<u>70.53</u>	-	-0.41
	ScienceQA	-	67.72	64.49	71.50	-	74.26	69.09	<u>74.89</u>	78.76	-	3.87

Table 1: **Performance comparisons of WINGS and the baseline MLLMs under the same training data.** We consider 8 baseline MLLMs, including LLMs as Vicuna_{v1.5} & Qwen1.5, visual encoders as CLIP [97] & SigLIP [134], and training strategies as full-parameter & LoRA fine-tuning. The first entry represents the initial LLM, upon which each MLLM is trained. Our evaluation spans 6 domains with 20 datasets. WINGS is based on the Qwen1.5 and SigLIP, and the column “Our Improvement” highlights how much WINGS surpasses its baseline with the same backbones.

4 Experiments

In this section, we first introduce the benchmarks for evaluating WINGS, including Table 1: text-only forgetting on the same multimodal training data, Table 2: comparison with general MLLMs, and Figure 7: analysis on the Interleaved Image-Text (IIT) benchmark with varying levels of vision-related conversation. Following that, we outline the training details and configurations of the WINGS, and delve into experimental analysis across each benchmark. Moreover, we perform an ablation study on various learning rates with different training parts.

Evaluation Setups. We aim to assess through MLLM how much visual information is required for evaluation. For example, generic multimodal instructions require MLLMs to strongly capture image aspects, whereas text-only instructions focus on the text. We introduce three types of benchmarks:

- **Standard text-only benchmarks.** We are particularly interested in the text-only performance improvement of WINGS under the same training data and resource conditions. Different datasets including *interdisciplinary exams* like MMLU [42], CMMLU [63], ARC-Easy, ARC-Challenge [28], language *understanding* and *knowledge* such as WinoGrande [102], OpenbookQA [9], Race-Middle, Race-High [58], WSC [124], CHID [138], *reasoning* such as HellaSwag [132], SIQA [104], PIQA [10], OCNLI [46], and *math* and *code*-related tasks such as GSM8K [29] and MBPP [5] are comprehensively evaluated.
- **General multimodal benchmarks.** We evaluate on MMMU [131], MME [37], MMBench [83] (MMB) in English (EN) and Chinese (CN), ScienceQA [86] for test (SciQA), SEED-Bench [62] for image part (SEED), AI2D [55] for test, and HallusionBench [40] (HallB).
- **Our Interleaved Image-Text (IIT) benchmark** with diverse text-only, interleaved, and image-related multi-turn conversations. It includes sampling for MMLU, CMMLU, OpenbookQA, HellaSwag, MMMU, MMBench, SEED-Bench, and AI2D datasets.

Model Summaries & Implementation Details. We release the WINGS_{base} and WINGS_{pro}, with Qwen1.5-7B LLM [7] and SigLIP [134] visual encoder as the foundations. We also introduce the WINGS_{1.8B} version, adapted to Qwen1.5-1.8B LLM for edge device compatibility. As illustrated in Figure 4, we only optimize the projector and the image learners of WINGS for the first alignment

Method	Dataset	Text-Only QAs								Multimodal QAs							
	MMLU/C*	RACE-M/H	ARC	HellaSwag	Winog.	GSM8K	MBPP	MMMU-V/T	MMB-EN/CN	MME	SciQA	SEED	A12D	HallB			
<i>Equal-Scale Open-Source 7B Multimodal LLMs</i>																	
O-Flamingo _{v2} [6]	26.9 / 27.1	40.3 / 32.6	31.0	55.4	58.3	10.2	9.1	29.1 / 28.7	10.9 / 13.3	803.9	55.8	30.2	32.6	30.4			
IDEFICS [49]	33.0 / 26.4	38.2 / 36.9	33.2	58.9	60.2	11.7	8.1	17.6 / 20.2	49.6 / 27.3	1239.3	62.4	44.8	43.4	24.6			
InstructBLIP [30]	43.2 / 35.7	52.8 / 49.7	39.5	55.7	54.9	18.3	10.3	32.7 / 32.1	38.5 / 26.8	1425.6	61.3	45.7	41.1	33.3			
ShareGPT4V [15]	47.6 / 36.9	55.9 / 51.0	41.6	54.7	60.1	18.0	8.9	35.5 / 35.2	67.4 / 63.1	1915.3	68.9	68.1	58.2	26.6			
Qwen-VL [8]	49.7 / 58.3	65.2 / 64.8	34.4	58.2	61.0	49.0	34.6	36.4 / 35.9	60.3 / 57.4	1806.2	69.6	62.0	61.9	34.1			
Monkey [72]	52.8 / 66.9	65.6 / 62.1	38.2	60.6	59.3	51.8	37.1	40.3 / 37.1	71.9 / 67.8	<u>1815.4</u>	78.3	69.1	62.5	42.1			
LLaVA _{v1.5} [79]	51.1 / 38.3	60.1 / 53.2	34.6	63.1	65.0	23.7	11.3	35.7 / 34.4	63.2 / 57.7	1518.6	67.7	63.7	56.4	29.7			
LLaVA _{next} [80]	50.2 / 39.7	65.1 / 58.3	36.0	63.7	68.9	30.3	23.0	37.6 / 35.8	67.8 / 61.8	1760.3	70.1	69.1	<u>66.4</u>	29.6			
DeepSeek-VL [85]	53.9 / 64.0	70.6 / 63.8	39.2	<u>65.1</u>	67.2	<u>55.3</u>	43.1	37.6 / 35.3	<u>72.7 / 72.5</u>	1716.8	<u>80.6</u>	<u>70.0</u>	66.5	36.2			
WINGS (Ours)	<u>60.5 / 69.8</u>	<u>74.2 / 69.6</u>	<u>43.4</u>	<u>65.1</u>	<u>69.3</u>	52.1	38.9	<u>39.9 / 37.3</u>	70.5 / 68.3	1753.8	78.8	69.5	62.7	<u>45.8</u>			
WINGS_{pro} (Ours)	61.3 / 68.5	82.8 / 76.3	46.3	69.2	70.9	56.3	<u>39.3</u>	38.2 / 36.9	<u>73.1 / 69.0</u>	1786.1	83.1	70.2	65.8	47.3			
<i>Advanced Private Multimodal LLMs</i>																	
GPT-4 [92]	83.5 / 71.2	93.2 / 87.8	93.6	88.4	75.6	91.6	56.2 [†]	-	-	-	-	-	-	-			
GPT-4V [91]	79.3 / 69.4	93.7 / 89.2	92.9	84.7	76.1	88.4	72.4	58.9 / 56.8	77.0 / 74.4	2153.6	68.4	73.7	75.5	46.5			
Gemini _{pro vision} [100]	85.9 / 73.7	88.9 / 83.2	85.0	78.8	71.5	86.4	61.5	60.6 / 62.2	73.6 / 74.3	2193.2	58.3	70.8	70.2	45.2			
<i>Efficient Multimodal LLMs with WINGS_{1.8B}</i>																	
DeepSeek-VL _{1.3B} [85]	31.7 / 38.2	63.6 / 58.4	35.8	52.9	45.7	17.6	16.3	33.8 / 32.3	<u>65.1 / 60.7</u>	1483.4	<u>65.4</u>	<u>63.3</u>	50.1	25.0			
MiniCPM-V _{2.4B} [47]	<u>42.4 / 40.9</u>	68.8 / 62.6	<u>37.0</u>	48.3	<u>51.7</u>	<u>32.5</u>	<u>24.2</u>	37.2 / 34.4	65.7 / 64.1	1584.1	64.9	64.7	<u>54.9</u>	31.8			
WINGS_{1.8B} (Ours)	44.9 / 50.9	<u>68.5 / 63.2</u>	37.1	<u>50.5</u>	53.0	40.6	28.5	<u>35.7 / 33.9</u>	64.2 / 61.2	<u>1527.3</u>	67.5	62.8	55.2	<u>30.2</u>			

Table 2: **Performance comparisons of the equal-scale MLLMs and the efficient multimodal LLMs** on text-only and multimodal datasets. We evaluate the open-source, efficient, and private API MLLMs. We select 18 representative evaluation datasets. C* represents the CMMLU dataset.

stage. The LLM branch adaptation is incorporated during the second instruction tuning stage. We train for 1 epoch with the AdamW optimizer and the Cosine learning schedule. Typically, the learning rates for the first and second stages are set at $1e^{-3}$ and $2e^{-6}$ (with the projector part as $1e^{-5}$), respectively. For WINGS_{base}, approximately 1m training data to align image learners and about 0.6m supervised fine-tuning instructions for the next stage (the same as LLaVA_{v1.5} [79]). In the WINGS_{pro}, we use the same aligned data and approximately 2m training data for learning image-text learners. These two types of MLLM require about 1.5 and 6 days of training on $8 \times$ A100 GPUs, respectively. The training datasets for WINGS_{mini} are consistent with the WINGS_{pro}. It takes approximately 5 days to run on $4 \times$ A100 GPUs.

4.1 Toward Comprehensive Text-only and Multimodal Performance

Text-only Comparison in Fair Data and Resource Environments. As shown in Table 1, “Vicuna-v1.5 + CLIP” corresponds to LLaVA_{v1.5}, and “Qwen1.5 + SigLIP” serves as the foundation for WINGS. When comparing LLM itself and the rest of MLLMs, we observe that fine-tuning with multimodal instructions, compared to the “Qwen LLM”, there is text-only forgetting in 12 out of 16 datasets, with notable decreases of up to 9.70, 8.91, and 13.33 in MMLU, CMMLU, and RACE-High, respectively. WINGS significantly improve performance on datasets such as MMLU, CMMLU, RACE-High, and WSC, despite the potential for severe text-only forgetting on baselines. Additionally, we find that the forgetting effects of CLIP and SigLIP are similar. In contrast, parameter-efficient fine-tuning methods like LoRA result in less text-only forgetting but underperform on multimodal questions. Overall, WINGS’ visual and textual learners are credibly demonstrated to retain performance on text-only tasks while also performing well on visual-related questions. In datasets like CHID, OCNLI, and SIQA, MLLMs show improved text-only performance due to increased language diversity (*e.g.*, Chinese context) or semantic similarity in their fine-tuning data.

General Evaluation in Text-Only and Multimodal Tasks. We present the performance of 9, roughly 8B open-source MLLMs, 2 roughly 2B, and 2 private API ones evaluated in the general text-only and multimodal tasks. Table 2 shows that WINGS series can perform better on text-only and multimodal question-answering datasets. It achieves state-of-the-art performance on 13 out of 18 datasets, significantly surpassing LLaVA_{v1.5} with the same architecture. We find that WINGS is

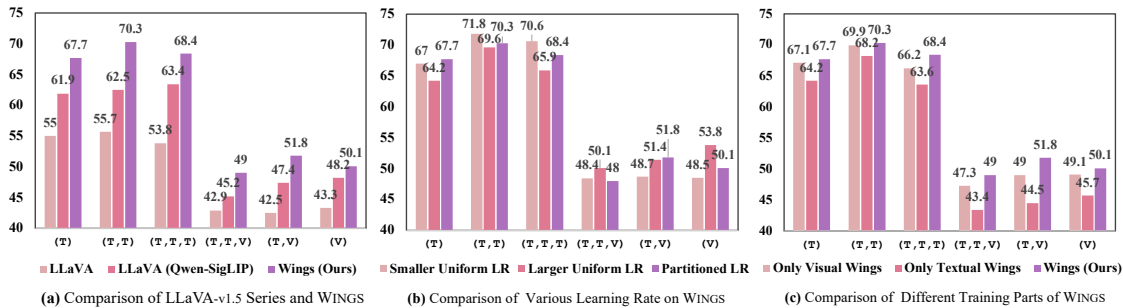


Figure 5: **Performance comparison** on the newly constructed **Interleaved Image and Text (IIT) Benchmark** of the **LLaVA series**, **different learning rate** and **fine-tuning parts**. The horizontal axis represents different multimodal question settings. The horizontal axis shows different multimodal setups, *e.g.*, (T, T, I) represents a visual question after two text-only QAs. The three subfigures represent different ablation settings, with the violet color representing our WINGS.

equally effective for more efficient foundations, as shown in the “Efficient Multimodal LLMs” parts. WINGS can still capture key elements and demonstrate good scalability as the parameter increases. Although WINGS_{base} does not receive additional training for the text-only component, it is still able to achieve comparable performance.

4.2 Interleaved Image-Text (IIT) Benchmark

To finely evaluate MLLMs, we construct a series of text-only and multimodal mixed multi-turn conversations. We extract instructions from MMLU, CMMLU, OpenbookQA, HellaSwag, MMMU, MMBench, SEED-Bench, and AI2D datasets with similar semantics by chroma [39]. We then polish the connection between some instructions using GPT-3.5 Turbo to make them closer to real-world conversations. We set up 6 vision-content configurations, categorized by the multi-turn content as: (T), (T, T), (T, T, T), (T, T, V), (T, V), and (V). For instance, (T, T, V) indicates two consecutive text-only queries followed by a visual question requiring a response.

4.3 Ablation Studies

Referencing Figure 7, we address three questions to comprehensively analyse WINGS:

- Can WINGS sustain performance with interleaved evaluation? We find that part (a) highlights WINGS surpassing LLaVA_{v1.5} and the same-backbone as LLaVA_{v1.5} (Qwen-SigLIP) for each multi-turn setting, especially in text-centric dialogues.
- How do WINGS fare with different learning rate settings? Part (b) demonstrates that using a lower learning rate maintains proficiency in text-only tasks but falls short in multimodal questions, while a higher rate boosts multimodal abilities but not text-only. Applying a higher learning rate to the projector and a lower one to the others achieves the optimal.
- Are all components of WINGS equally effective? In part (c), we examine that incorporating visual learners alone slightly preserves text-only abilities, likely by minimizing disruption to the LLM, but diminishes performance on multimodal tasks.

In the diverse IIT bench, which ranges from text-rich to multimodal contexts, the effectiveness of WINGS is particularly evident. As shown in Figure 1, within real-world applications, textual content offers insights for following visual tasks. WINGS excels in handling text-only tasks while improving performance on visual-related instructions.

5 Conclusion

We propose WINGS, which includes visual and textual learners, to alleviate text-only forgetting. The learner is composed of efficient Low-Rank Residual Attention (LoRRA). We start by considering the shifted attention weights in MLLM and, in the first stage, focus on learning the visual learner. Then, we co-train the visual and textual learners with routing based on the shifted attention weights. WINGS demonstrates remarkable performance on text-only, visual-question-answering, and newly constructed Interleaved Image-Text (IIT) benchmarks. WINGS allows for maintaining text-only performance with limited resources and further enhances performance in well-resourced settings.

References

- [1] Jean-Baptiste Alayrac, Jeff Donahue, Pauline Luc, Antoine Miech, Iain Barr, Yana Hasson, Karel Lenc, Arthur Mensch, Katherine Millican, Malcolm Reynolds, et al. Flamingo: a visual language model for few-shot learning. *NeurIPS*, 35:23716–23736, 2022.
- [2] Keivan Alizadeh, Iman Mirzadeh, Dmitry Belenko, Karen Khatamifard, Minsik Cho, Carlo C. Del Mundo, Mohammad Rastegari, and Mehrdad Farajtabar. LLM in a flash: Efficient large language model inference with limited memory. *CoRR*, abs/2312.11514, 2023.
- [3] Reza Yazdani Aminabadi, Samyam Rajbhandari, Ammar Ahmad Awan, Cheng Li, Du Li, Elton Zheng, Olatunji Ruwase, Shaden Smith, Minjia Zhang, Jeff Rasley, and Yuxiong He. Deepspeed- inference: Enabling efficient inference of transformer models at unprecedented scale. In *SC22*, pages 46:1–46:15, 2022.
- [4] Anthropic. Introducing Claude, 2023. URL <https://www.anthropic.com/index/introducing-claude>.
- [5] Jacob Austin, Augustus Odena, Maxwell Nye, Maarten Bosma, Henryk Michalewski, David Dohan, Ellen Jiang, Carrie Cai, Michael Terry, Quoc Le, et al. Program synthesis with large language models. *arXiv preprint arXiv:2108.07732*, 2021.
- [6] Anas Awadalla, Irena Gao, Josh Gardner, Jack Hessel, Yusuf Hanafy, Wanrong Zhu, Kalyani Marathe, Yonatan Bitton, Samir Yitzhak Gadre, Shiori Sagawa, Jenia Jitsev, Simon Kornblith, Pang Wei Koh, Gabriel Ilharco, Mitchell Wortsman, and Ludwig Schmidt. Openflamingo: An open-source framework for training large autoregressive vision-language models. *CoRR*, abs/2308.01390, 2023.
- [7] Jinze Bai, Shuai Bai, Yunfei Chu, Zeyu Cui, Kai Dang, Xiaodong Deng, Yang Fan, Wenbin Ge, Yu Han, Fei Huang, et al. Qwen technical report. *arXiv preprint arXiv:2309.16609*, 2023.
- [8] Jinze Bai, Shuai Bai, Shusheng Yang, Shijie Wang, Sinan Tan, Peng Wang, Junyang Lin, Chang Zhou, and Jingren Zhou. Qwen-vl: A frontier large vision-language model with versatile abilities. *arXiv preprint arXiv:2308.12966*, 2023.
- [9] Pratyay Banerjee, Kuntal Kumar Pal, Arindam Mitra, and Chitta Baral. Careful selection of knowledge to solve open book question answering. In *ACL*, pages 6120–6129. Association for Computational Linguistics, 2019. doi: 10.18653/V1/P19-1615. URL <https://doi.org/10.18653/v1/p19-1615>.
- [10] Yonatan Bisk, Rowan Zellers, Ronan Le Bras, Jianfeng Gao, and Yejin Choi. PIQA: reasoning about physical commonsense in natural language. In *AAAI*, pages 7432–7439, 2020.
- [11] Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. Language models are few-shot learners. *NeurIPS*, 33:1877–1901, 2020.
- [12] Junbum Cha, Wooyoung Kang, Jonghwan Mun, and Byungseok Roh. Honeybee: Locality-enhanced projector for multimodal llm. *arXiv preprint arXiv:2312.06742*, 2023.
- [13] Yingshan Chang, Guihong Cao, Mridu Narang, Jianfeng Gao, Hisami Suzuki, and Yonatan Bisk. Webqa: Multihop and multimodal QA. In *CVPR*, pages 16474–16483. IEEE, 2022.
- [14] Guiming Hardy Chen, Shunian Chen, Ruifei Zhang, Junying Chen, Xiangbo Wu, Zhiyi Zhang, Zhihong Chen, Jianquan Li, Xiang Wan, and Benyou Wang. Allava: Harnessing gpt4v-synthesized data for a lite vision-language model. *arXiv preprint arXiv:2402.11684*, 2024.
- [15] Lin Chen, Jisong Li, Xiaoyi Dong, Pan Zhang, Conghui He, Jiaqi Wang, Feng Zhao, and Dahua Lin. Sharegpt4v: Improving large multi-modal models with better captions. *arXiv preprint arXiv:2311.12793*, 2023.
- [16] Lin Chen, Jinsong Li, Xiaoyi Dong, Pan Zhang, Yuhang Zang, Zehui Chen, Haodong Duan, Jiaqi Wang, Yu Qiao, Dahua Lin, and Feng Zhao. Are we on the right way for evaluating large vision-language models? *arXiv preprint arXiv:2403.20330*, 2024.
- [17] Xinlei Chen, Hao Fang, Tsung-Yi Lin, Ramakrishna Vedantam, Saurabh Gupta, Piotr Dollar, and C. Lawrence Zitnick. Microsoft coco captions: Data collection and evaluation server, 2015.
- [18] Yunkai Chen, Qimeng Wang, Shiwei Wu, Yan Gao, Tong Xu, and Yao Hu. Tomgpt: Reliable text-only training approach for cost-effective multi-modal large language model. *ACM Trans. Knowl. Discov. Data*, 2024.

- [19] Zhe Chen, Jiannan Wu, Wenhai Wang, Weijie Su, Guo Chen, Sen Xing, Zhong Muyan, Qinglong Zhang, Xizhou Zhu, Lewei Lu, et al. Internvl: Scaling up vision foundation models and aligning for generic visual-linguistic tasks. *arXiv preprint arXiv:2312.14238*, 2023.
- [20] Zhe Chen, Weiyun Wang, Hao Tian, Shenglong Ye, Zhangwei Gao, Erfei Cui, Wenwen Tong, Kongzhi Hu, Jiapeng Luo, Zheng Ma, et al. How far are we to gpt-4v? closing the gap to commercial multimodal models with open-source suites. *arXiv preprint arXiv:2404.16821*, 2024.
- [21] Po-Han Chi, Pei-Hung Chung, Tsung-Han Wu, Chun-Cheng Hsieh, Yen-Hao Chen, Shang-Wen Li, and Hung-yi Lee. Audio albert: A lite bert for self-supervised learning of audio representation. In *IEEE SLT*, pages 344–350, 2021.
- [22] Wei-Lin Chiang, Zhuohan Li, Zi Lin, Ying Sheng, Zhanghao Wu, Hao Zhang, Lianmin Zheng, Siyuan Zhuang, Yonghao Zhuang, Joseph E. Gonzalez, Ion Stoica, and Eric P. Xing. Vicuna: An open-source chatbot impressing gpt-4 with 90%* chatgpt quality, March 2023. URL <https://lmsys.org/blog/2023-03-30-vicuna/>.
- [23] Aakanksha Chowdhery, Sharan Narang, Jacob Devlin, Maarten Bosma, Gaurav Mishra, Adam Roberts, Paul Barham, Hyung Won Chung, Charles Sutton, Sebastian Gehrmann, et al. Palm: Scaling language modeling with pathways. *J. Mach. Learn. Res.*, 24:240:1–240:113, 2023.
- [24] Paul F. Christiano, Jan Leike, Tom B. Brown, Miljan Martic, Shane Legg, and Dario Amodei. Deep reinforcement learning from human preferences. In *NeurIPS*, pages 4299–4307, 2017.
- [25] Xiangxiang Chu, Limeng Qiao, Xinyang Lin, Shuang Xu, Yang Yang, Yiming Hu, Fei Wei, Xinyu Zhang, Bo Zhang, Xiaolin Wei, et al. Mobilevlm: A fast, reproducible and strong vision language assistant for mobile devices. *arXiv preprint arXiv:2312.16886*, 2023.
- [26] Xiangxiang Chu, Limeng Qiao, Xinyu Zhang, Shuang Xu, Fei Wei, Yang Yang, Xiaofei Sun, Yiming Hu, Xinyang Lin, Bo Zhang, et al. Mobilevlm v2: Faster and stronger baseline for vision language model. *arXiv preprint arXiv:2402.03766*, 2024.
- [27] Hyung Won Chung, Le Hou, Shayne Longpre, Barret Zoph, Yi Tay, William Fedus, Eric Li, Xuezhi Wang, Mostafa Dehghani, Siddhartha Brahma, et al. Scaling instruction-finetuned language models. *CoRR*, abs/2210.11416, 2022.
- [28] Peter Clark, Isaac Cowhey, Oren Etzioni, Tushar Khot, Ashish Sabharwal, Carissa Schoenick, and Oyvind Tafjord. Think you have solved question answering? try arc, the AI2 reasoning challenge. *CoRR*, abs/1803.05457, 2018.
- [29] Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, et al. Training verifiers to solve math word problems. *arXiv preprint arXiv:2110.14168*, 2021.
- [30] Wenliang Dai, Junnan Li, Dongxu Li, Anthony Meng Huat Tiong, Junqi Zhao, Weisheng Wang, Boyang Li, Pascale N Fung, and Steven Hoi. Instructblip: Towards general-purpose vision-language models with instruction tuning. *NeurIPS*, 36, 2024.
- [31] Ning Ding, Yulin Chen, Bokai Xu, Yujia Qin, Zhi Zheng, Shengding Hu, Zhiyuan Liu, Maosong Sun, and Bowen Zhou. Enhancing chat language models by scaling high-quality instructional conversations. *arXiv preprint arXiv:2305.14233*, 2023.
- [32] Qingxiu Dong, Lei Li, Damai Dai, Ce Zheng, Zhiyong Wu, Baobao Chang, Xu Sun, Jingjing Xu, Lei Li, and Zhifang Sui. A survey for in-context learning. *CoRR*, abs/2301.00234, 2023.
- [33] Xiaoyi Dong, Pan Zhang, Yuhang Zang, Yuhang Cao, Bin Wang, Linke Ouyang, Xilin Wei, Songyang Zhang, Haodong Duan, Maosong Cao, et al. Internlm-xcomposer2: Mastering free-form text-image composition and comprehension in vision-language large model. *arXiv preprint arXiv:2401.16420*, 2024.
- [34] Zhengxiao Du, Yujie Qian, Xiao Liu, Ming Ding, Jiezhong Qiu, Zhilin Yang, and Jie Tang. Glm: General language model pretraining with autoregressive blank infilling. In *ACL*, pages 320–335, 2022.
- [35] Haoyi Duan, Yan Xia, Mingze Zhou, Li Tang, Jieming Zhu, and Zhou Zhao. Cross-modal prompts: Adapting large pre-trained models for audio-visual downstream tasks. In *NeurIPS*, 2023.
- [36] Wenfeng Feng, Chuzhan Hao, Yuewei Zhang, Yu Han, and Hao Wang. Mixture-of-loras: An efficient multitask tuning for large language models. *CoRR*, abs/2403.03432, 2024.

- [37] Chaoyou Fu, Peixian Chen, Yunhang Shen, Yulei Qin, Mengdan Zhang, Xu Lin, Zhenyu Qiu, Wei Lin, Jinrui Yang, Xiawu Zheng, et al. Mme: A comprehensive evaluation benchmark for multimodal large language models. *arXiv preprint arXiv:2306.13394*, 2023.
- [38] Shashank Goel, Hritik Bansal, Sumit Bhatia, Ryan A. Rossi, Vishwa Vinay, and Aditya Grover. Cyclip: Cyclic contrastive language-image pretraining. In *NeurIPS*, 2022.
- [39] Chroma Group. Chroma - the open-source embedding database. <https://github.com/chroma-core/chroma>, 2017.
- [40] Tianrui Guan, Fuxiao Liu, Xiyang Wu, Ruiqi Xian, Zongxia Li, Xiaoyu Liu, Xijun Wang, Lichang Chen, Furong Huang, Yaser Yacoob, et al. Hallusionbench: An advanced diagnostic suite for entangled language hallucination & visual illusion in large vision-language models. *arXiv preprint arXiv:2310.14566*, 2023.
- [41] Bo He, Hengduo Li, Young Kyun Jang, Menglin Jia, Xuefei Cao, Ashish Shah, Abhinav Shrivastava, and Ser-Nam Lim. Ma-lmm: Memory-augmented large multimodal model for long-term video understanding. In *CVPR*, 2024.
- [42] Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. Measuring massive multitask language understanding. *arXiv preprint arXiv:2009.03300*, 2020.
- [43] Wenyi Hong, Weihang Wang, Qingsong Lv, Jiazheng Xu, Wenmeng Yu, Junhui Ji, Yan Wang, Zihan Wang, Yuxiao Dong, Ming Ding, et al. Cogagent: A visual language model for gui agents. *arXiv preprint arXiv:2312.08914*, 2023.
- [44] Anwen Hu, Yaya Shi, Haiyang Xu, Jiabo Ye, Qinghao Ye, Ming Yan, Chenliang Li, Qi Qian, Ji Zhang, and Fei Huang. mplug-paperowl: Scientific diagram analysis with the multimodal large language model. *arXiv preprint arXiv:2311.18248*, 2023.
- [45] Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. Lora: Low-rank adaptation of large language models. In *ICLR*, 2022.
- [46] Hai Hu, Kyle Richardson, Liang Xu, Lu Li, Sandra Kübler, and Lawrence S. Moss. OCNLI: original chinese natural language inference. In *EMNLP*, volume EMNLP 2020 of *Findings of ACL*, pages 3512–3526, 2020.
- [47] Shengding Hu, Yuge Tu, Xu Han, Chaoqun He, Ganqu Cui, Xiang Long, Zhi Zheng, Yewei Fang, Yuxiang Huang, Weilin Zhao, et al. Minicpm: Unveiling the potential of small language models with scalable training strategies. *arXiv preprint arXiv:2404.06395*, 2024.
- [48] Jie Huang and Kevin Chen-Chuan Chang. Towards reasoning in large language models: A survey. In *ACL*, 2023.
- [49] IDEFICS. Introducing idefics: An open reproduction of state-of-the-art visual language model. <https://huggingface.co/blog/idefics>, 2023.
- [50] Jitesh Jain, Jianwei Yang, and Humphrey Shi. Vcoder: Versatile vision encoders for multimodal large language models. *CoRR*, abs/2312.14233, 2023.
- [51] Yunjie Ji, Yong Deng, Yan Gong, Yiping Peng, Qiang Niu, Lei Zhang, Baochang Ma, and Xiangang Li. Exploring the impact of instruction data scaling on large language models: An empirical study on real-world use cases. *arXiv preprint arXiv:2303.14742*, 2023.
- [52] Albert Q. Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, L  lio Renard Lavaud, Marie-Anne Lachaux, Pierre Stock, Teven Le Scao, Thibaut Lavril, Thomas Wang, Timoth  e Lacroix, and William El Sayed. Mistral 7b, 2023.
- [53] Albert Q Jiang, Alexandre Sablayrolles, Antoine Roux, Arthur Mensch, Blanche Savary, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Emma Bou Hanna, Florian Bressand, et al. Mixtral of experts. *arXiv preprint arXiv:2401.04088*, 2024.
- [54] Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B. Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. Scaling laws for neural language models. *CoRR*, abs/2001.08361, 2020.
- [55] Aniruddha Kembhavi, Mike Salvato, Eric Kolve, Minjoon Seo, Hannaneh Hajishirzi, and Ali Farhadi. A diagram is worth a dozen images. In *ECCV*, pages 235–251, 2016.

- [56] Jacob Devlin Ming-Wei Chang Kenton and Lee Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. In *NAACL*, pages 4171–4186, 2019.
- [57] Geewook Kim, Teakgyu Hong, Moonbin Yim, JeongYeon Nam, Jinyoung Park, Jinyeong Yim, Won-seok Hwang, Sangdoon Yun, Dongyoon Han, and Seunghyun Park. Ocr-free document understanding transformer. In *ECCV*, 2022.
- [58] Guokun Lai, Qizhe Xie, Hanxiao Liu, Yiming Yang, and Eduard H. Hovy. RACE: large-scale reading comprehension dataset from examinations. In *EMNLP*, pages 785–794, 2017.
- [59] Hugo Laurençon, Lucile Saulnier, Léo Tronchon, Stas Bekman, Amanpreet Singh, Anton Lozhkov, Thomas Wang, Siddharth Karamcheti, Alexander M. Rush, Douwe Kiela, Matthieu Cord, and Victor Sanh. Obelics: An open web-scale filtered dataset of interleaved image-text documents, 2023.
- [60] Bo Li, Peiyuan Zhang, Jingkang Yang, Yuanhan Zhang, Fanyi Pu, and Ziwei Liu. Otterhd: A high-resolution multi-modality model. *arXiv preprint arXiv:2311.04219*, 2023.
- [61] Bo Li, Yuanhan Zhang, Liangyu Chen, Jinghao Wang, Jingkang Yang, and Ziwei Liu. Otter: A multi-modal model with in-context instruction tuning. *arXiv preprint arXiv:2305.03726*, 2023.
- [62] Bohao Li, Rui Wang, Guangzhi Wang, Yuying Ge, Yixiao Ge, and Ying Shan. Seed-bench: Benchmarking multimodal llms with generative comprehension. *arXiv preprint arXiv:2307.16125*, 2023.
- [63] Haonan Li, Yixuan Zhang, Fajri Koto, Yifei Yang, Hai Zhao, Yeyun Gong, Nan Duan, and Timothy Baldwin. CMMLU: Measuring massive multitask language understanding in Chinese. *arXiv preprint arXiv:2306.09212*, 2023.
- [64] Jiachen Li, Xinyao Wang, Sijie Zhu, Chia-wen Kuo, Lu Xu, Fan Chen, Jitesh Jain, Humphrey Shi, and Longyin Wen. Cumo: Scaling multimodal llm with co-upcycled mixture-of-experts. *arXiv*, 2024.
- [65] Junnan Li, Ramprasaath R. Selvaraju, Akhilesh Gotmare, Shafiq R. Joty, Caiming Xiong, and Steven Chu-Hong Hoi. Align before fuse: Vision and language representation learning with momentum distillation. In *NeurIPS*, pages 9694–9705, 2021.
- [66] Junnan Li, Dongxu Li, Caiming Xiong, and Steven Hoi. Blip: Bootstrapping language-image pre-training for unified vision-language understanding and generation. In *ICML*, pages 12888–12900, 2022.
- [67] Junnan Li, Silvio Savarese, and Steven C. H. Hoi. Masked unsupervised self-training for zero-shot image classification. *CoRR*, abs/2206.02967, 2022.
- [68] Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. In *ICML*, pages 19730–19742. PMLR, 2023.
- [69] Lei Li, Yuqi Wang, Runxin Xu, Peiyi Wang, Xiachong Feng, Lingpeng Kong, and Qi Liu. Multimodal arxiv: A dataset for improving scientific comprehension of large vision-language models. *CoRR*, abs/2403.00231, 2024.
- [70] Xiang Lisa Li and Percy Liang. Prefix-tuning: Optimizing continuous prompts for generation. In *ACL/IJCNLP*, pages 4582–4597, 2021.
- [71] Yanwei Li, Yuechen Zhang, Chengyao Wang, Zhisheng Zhong, Yixin Chen, Ruihang Chu, Shaoteng Liu, and Jiaya Jia. Mini-gemini: Mining the potential of multi-modality vision language models. *arXiv preprint arXiv:2403.18814*, 2024.
- [72] Zhang Li, Biao Yang, Qiang Liu, Zhiyin Ma, Shuo Zhang, Jingxu Yang, Yabo Sun, Yuliang Liu, and Xiang Bai. Monkey: Image resolution and text label are important things for large multi-modal models. *arXiv preprint arXiv:2311.06607*, 2023.
- [73] Weixin Liang, Yuhui Zhang, Yongchan Kwon, Serena Yeung, and James Y. Zou. Mind the gap: Understanding the modality gap in multi-modal contrastive representation learning. In *NeurIPS*, 2022.
- [74] Bin Lin, Bin Zhu, Yang Ye, Munan Ning, Peng Jin, and Li Yuan. Video-llava: Learning united visual representation by alignment before projection. *arXiv preprint arXiv:2311.10122*, 2023.
- [75] Bin Lin, Tao Peng, Chen Zhang, Minmin Sun, Lanbo Li, Hanyu Zhao, Wencong Xiao, Qi Xu, Xiafei Qiu, Shen Li, Zhigang Ji, Yong Li, and Wei Lin. Infinite-llm: Efficient LLM service for long context with distattention and distributed kvcache. *CoRR*, abs/2401.02669, 2024.

- [76] Bin Lin, Zhenyu Tang, Yang Ye, Jiayi Cui, Bin Zhu, Peng Jin, Junwu Zhang, Munan Ning, and Li Yuan. Moe-llava: Mixture of experts for large vision-language models. *arXiv preprint arXiv:2401.15947*, 2024.
- [77] Ji Lin, Hongxu Yin, Wei Ping, Yao Lu, Pavlo Molchanov, Andrew Tao, Huizi Mao, Jan Kautz, Mohammad Shoeybi, and Song Han. VILA: on pre-training for visual language models. *CoRR*, abs/2312.07533, 2023.
- [78] Ziyi Lin, Chris Liu, Renrui Zhang, Peng Gao, Longtian Qiu, Han Xiao, Han Qiu, Chen Lin, Wenqi Shao, Keqin Chen, et al. Sphinx: The joint mixing of weights, tasks, and visual embeddings for multi-modal large language models. *arXiv preprint arXiv:2311.07575*, 2023.
- [79] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. *NeurIPS*, 36, 2023.
- [80] Haotian Liu, Chunyuan Li, Yuheng Li, Bo Li, Yuanhan Zhang, Sheng Shen, and Yong Jae Lee. Llava-next: Improved reasoning, ocr, and world knowledge, January 2024. URL <https://llava-v1.github.io/blog/2024-01-30-llava-next/>.
- [81] Shilong Liu, Hao Cheng, Haotian Liu, Hao Zhang, Feng Li, Tianhe Ren, Xueyan Zou, Jianwei Yang, Hang Su, Jun Zhu, Lei Zhang, Jianfeng Gao, and Chunyuan Li. Llava-plus: Learning to use tools for creating multimodal agents. *arXiv:2311.05437*, 2023.
- [82] Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. Roberta: A robustly optimized bert pretraining approach. *arXiv preprint arXiv:1907.11692*, 2019.
- [83] Yuan Liu, Haodong Duan, Yuanhan Zhang, Bo Li, Songyang Zhang, Wangbo Zhao, Yike Yuan, Jiaqi Wang, Conghui He, Ziwei Liu, et al. Mmbench: Is your multi-modal model an all-around player? *arXiv preprint arXiv:2307.06281*, 2023.
- [84] Yuliang Liu, Biao Yang, Qiang Liu, Zhang Li, Zhiyin Ma, Shuo Zhang, and Xiang Bai. Textmonkey: An ocr-free large multimodal model for understanding document. *arXiv preprint arXiv:2403.04473*, 2024.
- [85] Haoyu Lu, Wen Liu, Bo Zhang, Bingxuan Wang, Kai Dong, Bo Liu, Jingxiang Sun, Tongzheng Ren, Zhuoshu Li, Yaofeng Sun, et al. Deepseek-vl: Towards real-world vision-language understanding. *arXiv preprint arXiv:2403.05525*, 2024.
- [86] Pan Lu, Swaroop Mishra, Tanglin Xia, Liang Qiu, Kai-Wei Chang, Song-Chun Zhu, Oyvind Tafjord, Peter Clark, and Ashwin Kalyan. Learn to explain: Multimodal reasoning via thought chains for science question answering. *NeurIPS*, 35:2507–2521, 2022.
- [87] Brandon McKinzie, Zhe Gan, Jean-Philippe Fauconnier, Sam Dodge, Bowen Zhang, Philipp Dufer, Dhruvi Shah, Xianzhi Du, Futang Peng, Floris Weers, et al. Mm1: Methods, analysis & insights from multimodal llm pre-training. *arXiv preprint arXiv:2403.09611*, 2024.
- [88] Shervin Minaee, Tomás Mikolov, Narjes Nikzad, Meysam Chenaghlu, Richard Socher, Xavier Amatriain, and Jianfeng Gao. Large language models: A survey. *CoRR*, abs/2402.06196, 2024.
- [89] Cuong V Nguyen, Tal Hassner, Cedric Archambeau, and Matthias Seeger. LEEP: A new measure to evaluate transferability of learned representations. In *ICML*, 2020.
- [90] OpenAI. Chatgpt. <https://openai.com/blog/chatgpt>, 2022.
- [91] OpenAI. Gpt-4v(ision) system card. https://cdn.openai.com/papers/GPT_System_Card.pdf, 2023.
- [92] OpenAI. GPT-4 technical report. *CoRR*, abs/2303.08774, 2023.
- [93] Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll L. Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. Training language models to follow instructions with human feedback. In *NeurIPS*, 2022.
- [94] Baolin Peng, Chunyuan Li, Pengcheng He, Michel Galley, and Jianfeng Gao. Instruction tuning with gpt-4. *arXiv preprint arXiv:2304.03277*, 2023.
- [95] Ethan Perez, Florian Strub, Harm de Vries, Vincent Dumoulin, and Aaron C. Courville. Film: Visual reasoning with a general conditioning layer. In *AAAI*, pages 3942–3951, 2018.
- [96] Qi Qian, Yuanhong Xu, and Juhua Hu. Intra-modal proxy learning for zero-shot visual categorization with CLIP. In *NeurIPS*, 2023.

- [97] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *ICML*, pages 8748–8763, 2021.
- [98] Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J Liu. Exploring the limits of transfer learning with a unified text-to-text transformer. *The J. Mach. Learn. Res.*, 21(1):5485–5551, 2020.
- [99] Samyam Rajbhandari, Olatunji Ruwase, Jeff Rasley, Shaden Smith, and Yuxiong He. Zero-infinity: breaking the GPU memory wall for extreme scale deep learning. In *International Conference for High Performance Computing, Networking, Storage and Analysis, SC 2021, St. Louis, Missouri, USA, November 14–19, 2021*, page 59. ACM, 2021.
- [100] Machel Reid, Nikolay Savinov, Denis Teplyashin, Dmitry Lepikhin, Timothy Lillicrap, Jean-baptiste Alayrac, Radu Soricut, Angeliki Lazaridou, Orhan Firat, Julian Schrittwieser, et al. Gemini 1.5: Unlocking multimodal understanding across millions of tokens of context. *arXiv preprint arXiv:2403.05530*, 2024.
- [101] Shuhuai Ren, Linli Yao, Shicheng Li, Xu Sun, and Lu Hou. Timechat: A time-sensitive multimodal large language model for long video understanding. *ArXiv*, abs/2312.02051, 2023.
- [102] Keisuke Sakaguchi, Ronan Le Bras, Chandra Bhagavatula, and Yejin Choi. Winogrande: An adversarial winograd schema challenge at scale, 2019.
- [103] Victor Sanh, Albert Webson, Colin Raffel, Stephen H. Bach, Lintang Sutawika, Zaid Alyafeai, Antoine Chaffin, Arnaud Stiegler, Arun Raja, et al. Multitask prompted training enables zero-shot task generalization. In *ICLR*, 2022.
- [104] Maarten Sap, Hannah Rashkin, Derek Chen, Ronan Le Bras, and Yejin Choi. SocialQA: Commonsense reasoning about social interactions. *CoRR*, abs/1904.09728, 2019.
- [105] Noam Shazeer, Azalia Mirhoseini, Krzysztof Maziarz, Andy Davis, Quoc Le, Geoffrey Hinton, and Jeff Dean. Outrageously large neural networks: The sparsely-gated mixture-of-experts layer, 2017.
- [106] StepFun Research Team. Step-1v: A hundred billion parameter multimodal large model. <https://platform.stepfun.com>, 2024.
- [107] Nisan Stiennon, Long Ouyang, Jeffrey Wu, Daniel M. Ziegler, Ryan Lowe, Chelsea Voss, Alec Radford, Dario Amodei, and Paul F. Christiano. Learning to summarize with human feedback. In *Advances in Neural Information Processing Systems 33: Annual Conference on Neural Information Processing Systems 2020, NeurIPS 2020, December 6–12, 2020, virtual*, 2020.
- [108] Rohan Taori, Ishaan Gulrajani, Tianyi Zhang, Yann Dubois, Xuechen Li, Carlos Guestrin, Percy Liang, and Tatsunori B. Hashimoto. Stanford alpaca: An instruction-following llama model. https://github.com/tatsu-lab/stanford_alpaca, 2023.
- [109] Rohan Taori, Ishaan Gulrajani, Tianyi Zhang, Yann Dubois, Xuechen Li, Carlos Guestrin, Percy Liang, and Tatsunori B Hashimoto. Alpaca: A strong, replicable instruction-following model. *Stanford Center for Research on Foundation Models*. <https://crfm.stanford.edu/2023/03/13/alpaca.html>, 3(6):7, 2023.
- [110] Gemini Team, Rohan Anil, Sebastian Borgeaud, Yonghui Wu, Jean-Baptiste Alayrac, Jiahui Yu, Radu Soricut, Johan Schalkwyk, Andrew M Dai, Anja Hauth, et al. Gemini: a family of highly capable multimodal models. *arXiv preprint arXiv:2312.11805*, 2023.
- [111] The Mosaic Research Team. Introducing dbrx: A new state-of-the-art open llm, March 2024. URL <https://www.databricks.com/blog/introducing-dbrx-new-state-art-open-llm>.
- [112] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023.
- [113] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023.
- [114] Maria Tsimpoukelli, Jacob L Menick, Serkan Cabi, SM Eslami, Oriol Vinyals, and Felix Hill. Multimodal few-shot learning with frozen language models. *Advances in Neural Information Processing Systems*, 34: 200–212, 2021.

- [115] Mojtaba Valipour, Mehdi Rezagholizadeh, Ivan Kobzyev, and Ali Ghodsi. Dylora: Parameter efficient tuning of pre-trained models using dynamic search-free low-rank adaptation. *arXiv preprint arXiv:2210.07558*, 2022.
- [116] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention is all you need. In *NeurIPS*, 2017.
- [117] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. *NeurIPS*, 30, 2017.
- [118] Weihan Wang, Qingsong Lv, Wenmeng Yu, Wenyi Hong, Ji Qi, Yan Wang, Junhui Ji, Zhuoyi Yang, Lei Zhao, Xixuan Song, et al. Cogvlm: Visual expert for pretrained language models. *arXiv preprint arXiv:2311.03079*, 2023.
- [119] Haoran Wei, Lingyu Kong, Jinyue Chen, Liang Zhao, Zheng Ge, Jinrong Yang, Jianjian Sun, Chunrui Han, and Xiangyu Zhang. Vary: Scaling up the vision vocabulary for large vision-language models. *arXiv preprint arXiv:2312.06109*, 2023.
- [120] Jason Wei, Maarten Bosma, Vincent Zhao, Kelvin Guu, Adams Wei Yu, Brian Lester, Nan Du, Andrew M. Dai, and Quoc V Le. Finetuned language models are zero-shot learners. In *ICLR*, 2022.
- [121] Jason Wei, Yi Tay, Rishi Bommasani, Colin Raffel, Barret Zoph, Sebastian Borgeaud, Dani Yogatama, Maarten Bosma, Denny Zhou, Donald Metzler, Ed H. Chi, Tatsunori Hashimoto, Oriol Vinyals, Percy Liang, Jeff Dean, and William Fedus. Emergent abilities of large language models. *Trans. Mach. Learn. Res.*, 2022, 2022.
- [122] Chenfei Wu, Shengming Yin, Weizhen Qi, Xiaodong Wang, Zecheng Tang, and Nan Duan. Visual chatgpt: Talking, drawing and editing with visual foundation models. *arXiv preprint arXiv:2303.04671*, 2023.
- [123] Shengqiong Wu, Hao Fei, Leigang Qu, Wei Ji, and Tat-Seng Chua. Next-gpt: Any-to-any multimodal llm. *arXiv preprint arXiv:2309.05519*, 2023.
- [124] Liang Xu, Hai Hu, Xuanwei Zhang, Lu Li, Chenjie Cao, Yudong Li, Yechen Xu, Kai Sun, Dian Yu, Cong Yu, Yin Tian, Qianqian Dong, Weitang Liu, Bo Shi, Yiming Cui, Junyi Li, Jun Zeng, Rongzhao Wang, Weijian Xie, Yanting Li, Yina Patterson, Zuoyu Tian, Yiwen Zhang, He Zhou, Shaowei Hua Liu, Zhe Zhao, Qipeng Zhao, Cong Yue, Xinrui Zhang, Zhengliang Yang, Kyle Richardson, and Zhenzhong Lan. CLUE: A chinese language understanding evaluation benchmark. In *COLING*, pages 4762–4772, 2020.
- [125] Ruyi Xu, Yuan Yao, Zonghao Guo, Junbo Cui, Zanlin Ni, Chunjiang Ge, Tat-Seng Chua, Zhiyuan Liu, Maosong Sun, and Gao Huang. Llava-uhd: an lmm perceiving any aspect ratio and high-resolution images. *arXiv preprint arXiv:2403.11703*, 2024.
- [126] Zhengyuan Yang, Linjie Li, Jianfeng Wang, Kevin Lin, Ehsan Azarnasab, Faisal Ahmed, Zicheng Liu, Ce Liu, Michael Zeng, and Lijuan Wang. Mm-react: Prompting chatgpt for multimodal reasoning and action. *arXiv preprint arXiv:2303.11381*, 2023.
- [127] Zhilin Yang, Zihang Dai, Yiming Yang, Jaime Carbonell, Russ R Salakhutdinov, and Quoc V Le. Xlnet: Generalized autoregressive pretraining for language understanding. In *NeurIPS*, 2019.
- [128] Chao Yi, De-Chuan Zhan, and Han-Jia Ye. Bridge the modality and capacity gaps in vision-language model selection. *CoRR*, abs/2403.13797, 2024.
- [129] Alex Young, Bei Chen, Chao Li, Chengen Huang, Ge Zhang, Guanwei Zhang, Heng Li, Jiangcheng Zhu, Jianqun Chen, Jing Chang, et al. Yi: Open foundation models by 01. ai. *arXiv preprint arXiv:2403.04652*, 2024.
- [130] Lu Yuan, Dongdong Chen, Yi-Ling Chen, Noel Codella, Xiyang Dai, Jianfeng Gao, Houdong Hu, Xuedong Huang, Boxin Li, Chunyuan Li, et al. Florence: A new foundation model for computer vision. *arXiv preprint arXiv:2111.11432*, 2021.
- [131] Xiang Yue, Yuansheng Ni, Kai Zhang, Tianyu Zheng, Ruoqi Liu, Ge Zhang, Samuel Stevens, Dongfu Jiang, Weiming Ren, Yuxuan Sun, et al. Mmmu: A massive multi-discipline multimodal understanding and reasoning benchmark for expert agi. *arXiv preprint arXiv:2311.16502*, 2023.
- [132] Rowan Zellers, Ari Holtzman, Yonatan Bisk, Ali Farhadi, and Yejin Choi. HellaSwag: Can a machine really finish your sentence? In *ACL*, pages 4791–4800, 2019.

- [133] Andy Zeng, Maria Attarian, Brian Ichter, Krzysztof Choromanski, Adrian Wong, Stefan Welker, Federico Tombari, Aavek Purohit, Michael Ryoo, Vikas Sindhwani, et al. Socratic models: Composing zero-shot multimodal reasoning with language. *arXiv preprint arXiv:2204.00598*, 2022.
- [134] Xiaohua Zhai, Basil Mustafa, Alexander Kolesnikov, and Lucas Beyer. Sigmoid loss for language image pre-training. In *ICCV*, pages 11975–11986, 2023.
- [135] Jun Zhan, Junqi Dai, Jiasheng Ye, Yunhua Zhou, Dong Zhang, Zhigeng Liu, Xin Zhang, Ruibin Yuan, Ge Zhang, Linyang Li, et al. Anygpt: Unified multimodal llm with discrete sequence modeling. *arXiv preprint arXiv:2402.12226*, 2024.
- [136] Susan Zhang, Stephen Roller, Naman Goyal, Mikel Artetxe, Moya Chen, Shuohui Chen, Christopher Dewan, Mona Diab, Xian Li, Xi Victoria Lin, et al. Opt: Open pre-trained transformer language models. *arXiv:2205.01068*, 2022.
- [137] Yi-Kai Zhang, Ting-Ji Huang, Yao-Xiang Ding, De-Chuan Zhan, and Han-Jia Ye. Model spider: Learning to rank pre-trained models efficiently. In *NeurIPS*, 2023.
- [138] Chujie Zheng, Minlie Huang, and Aixin Sun. Chid: A large-scale chinese idiom dataset for cloze test. In *ACL*, pages 778–787, 2019.
- [139] Chunting Zhou, Pengfei Liu, Puxin Xu, Srinivasan Iyer, Jiao Sun, Yuning Mao, Xuezhe Ma, Avia Efrat, Ping Yu, Lili Yu, Susan Zhang, Gargi Ghosh, Mike Lewis, Luke Zettlemoyer, and Omer Levy. LIMA: less is more for alignment. In *NeurIPS*, 2023.
- [140] Bin Zhu, Bin Lin, Munan Ning, Yang Yan, Jiayi Cui, Hongfa Wang, Yatian Pang, Wenhao Jiang, Junwu Zhang, Zongwei Li, Wancai Zhang, Zhifeng Li, Wei Liu, and Li Yuan. Languagebind: Extending video-language pretraining to n-modality by language-based semantic alignment. *CoRR*, abs/2310.01852, 2023.
- [141] Deyao Zhu, Jun Chen, Xiaoqian Shen, Xiang Li, and Mohamed Elhoseiny. Minigpt-4: Enhancing vision-language understanding with advanced large language models. In *ICLR*, 2024.
- [142] Wanrong Zhu, Jack Hessel, Anas Awadalla, Samir Yitzhak Gadre, Jesse Dodge, Alex Fang, Youngjae Yu, Ludwig Schmidt, William Yang Wang, and Yejin Choi. Multimodal C4: an open, billion-scale corpus of images interleaved with text. In *NeurIPS*, 2023.
- [143] Daniel M. Ziegler, Nisan Stiennon, Jeffrey Wu, Tom B. Brown, Alec Radford, Dario Amodei, Paul F. Christiano, and Geoffrey Irving. Fine-tuning language models from human preferences. *CoRR*, abs/1909.08593, 2019.

Supplementary Material

A Experimental Setups and Implementation Details


Training Datasets. The training datasets for the first and second stage of WINGS_{base} are consistent with LLaVA_{v1.5} [79]. For the second stage, WINGS_{pro} extends the training dataset to include some visual QA datasets as ALLaVA [14], SynthDog [57], and ArXivQA [69], and text-only QA datasets as Stanford Alpaca [108], Alpaca GPT-4 [94], LIMA [139], UltraChat [31], WebQA [13], and BELLE-0.5M [51]. WINGS_{1.8B} shares the same training set as WINGS_{pro}.

Model Structures. We employ Qwen1.5 [7] and SigLIP [134] as our foundations.

Training Hyperparameters. We utilize a batch size of 32, along with the AdamW optimizer and a cosine schedule. For all WINGS-series, the learning rate is set at $1e^{-3}$ for the first stage and adjusts to $2e^{-6}$ for the second stage, except for the projector as $1e^{-5}$.

Training Environment. WINGS_{base} and WINGS_{pro} are trained over approximately 1.5 or 6 days on $8 \times$ A100 GPUs. WINGS_{1.8B} require approximately 5 days of training on $4 \times$ A100 GPUs.

B Additional Experimental Results

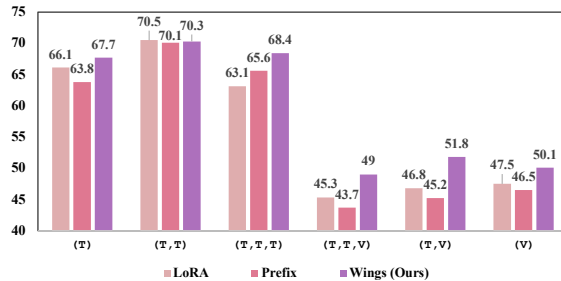

(a) Comparison of Parameter Efficient Modules and WINGS

Figure 6: **Performance comparison** on the newly constructed **Interleaved Image and Text (IIT) Benchmark** of the **Parameter Efficient Modules**. The horizontal axis represents different multimodal question settings. The horizontal axis shows different multimodal setups, *e.g.*, (T, T, I) represents a visual question after two text-only QAs.

Should we only add additional modules on top of an LLM branch or, like WINGS, create two distinct learners for visual and textual modalities? We delve into the low-rank adaptation (LoRA) [45] and Prefix-tuning [70] for minimally adapt to the LLM component. These techniques introduce optimization parameters beyond the primary branch. These lightweight adjustments align with extensive modifications, effectively minimizing text-only forgetting but concurrently curbing cross-modal positive transfer.

C Discussion

WINGS is a universal plugin that can be integrated with any multimodal mixed-input MLLMs. Notably, it introduces a new concept of competitive reuse among multiple expert groups: we may not require the experts to the Transformer block’s MLP layer at a scale three orders of magnitude larger; instead, a minor update in the attention for better allocation may suffice. This idea is also found in some variants of LoRA [36, 115]. In the future, we will gradually explore the future of MLLMs.

D Limitation & Broader Impact

Despite WINGS’ strong adaptability for embedding auxiliary attention learners in various MLLMs, integrating visual learners requires restarting the feature alignment training, incurring extra costs.

Additionally, its deployment on edge devices faces limitations, with WINGS_{1.8B} offering a solution at the expense of performance. Furthermore, WINGS still requires some text-only data to replay and enhance overall performance, aiming for integration into more generic AI systems in the future.

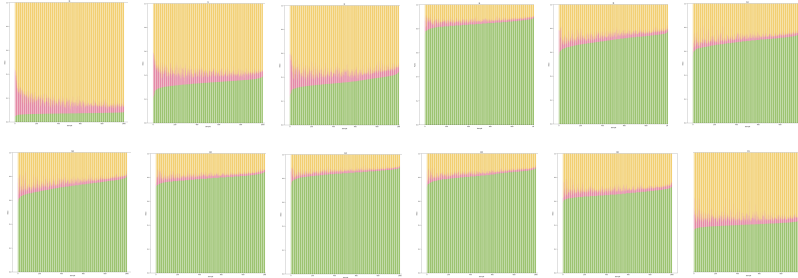


Figure 7: **Dynamics of Attention Weights from Shallow to Deep Layers.** We calculate the proportion of attention weights for the image-before (yellow), the image-itself (red), and the image-after (green) in each layer. From left to right, top to bottom, from shallow to deep layers.

QA1: Text-only Instruction (from MMLU)

User: There is a single choice question about **Sociology**. Answer the question by replying A, B, C or D.
 Question: Which of the following did the post-war welfare state of 1948 not aim to provide:
 A. free health care and education for all
 B. a minimum wage
 C. full employment
 D. universal welfare

QA2: Multimodal Instruction (from MMMU)

User: **Sociology** studies <image> and governmental relationships as.




Figure 8: **An Example of an Interleaved Image-Text Benchmark.** This dialogue is represented as (T, V), consisting of a text-only QA from MMLU [42] and a visual QA from MMMU [131]. It can be observed that, due to the sampling, both include questions from the *Sociology* category.