
TIDMAD: Time Series Dataset for Discovering Dark Matter with AI Denoising

J. T. Fry¹ *
jtfry@mit.edu

Aobo Li²
liaobo77@ucsd.edu

Lindley Winslow¹
lwinslow@mit.edu

Xinyi Hope Fu¹
hopefu@mit.edu

Zhenghao Fu¹
fuzh@mit.edu

Kaliroe M. W. Pappas¹
kaliroe@mit.edu

¹Department of Physics, Massachusetts Institute of Technology, Cambridge, MA 02139, USA
²Halcioğlu Data Science Institute, Department of Physics, UC San Diego, La Jolla, CA 92093, USA

Abstract

Dark matter makes up approximately 85% of total matter in our universe, yet it has never been directly observed in any laboratory on Earth. The origin of dark matter is one of the most important questions in contemporary physics, and a convincing detection of dark matter would be a Nobel-Prize-level breakthrough in fundamental science. The ABRACADABRA experiment was specifically designed to search for dark matter. Although it has not yet made a discovery, ABRACADABRA has produced several dark matter search results widely endorsed by the physics community. The experiment generates ultra-long time-series data at a rate of 10 million samples per second, where the dark matter signal would manifest itself as a sinusoidal oscillation mode within the ultra-long time series. In this paper, we present the TIDMAD — a comprehensive data release from the ABRACADABRA experiment including three key components: an ultra-long time series dataset divided into training, validation, and science subsets; a carefully-designed denoising score for direct model benchmarking; and a complete analysis framework which produces a community-standard dark matter search result suitable for publication as a physics paper. This data release enables core AI algorithms to extract the signal and produce real physics results thereby advancing fundamental science. The data downloading and associated analysis scripts are available at <https://github.com/jessicafry/TIDMAD>.

1 Introduction

The quest to uncover the nature of dark matter is one of the biggest challenges in contemporary physics. Several key observations in astrophysics and cosmology have confirmed the existence of dark matter, which constitutes approximately 85% of all mass in the universe [1, 2, 11, 14, 15]. However, dark matter has never been detected by any detector on Earth. Because the composition of dark matter is unknown, theoretical physicists propose various dark matter candidates — hypothetical particles that can be characterized by their physical parameters. Experimental physicists then design experiments to search for these candidates. A convincing detection of any dark matter candidate would be a Nobel-Prize-level breakthrough in fundamental science, but even if nothing is detected, the null results still play a significant role in advancing our understanding of physics by setting limits

*Corresponding author: jtfry@mit.edu

within the physical parameter space. This means that a particular experiment has eliminated the existence of a dark matter candidates within these limits and does not have sufficient sensitivity to test outside these limits. These limits can be reciprocally used by theoretical physicists to propose better dark matter candidates, thereby improving our understanding of this mysterious constituent of our universe.

Due to its extremely rare interactions with normal matter, the signal of dark matter is often submerged in a sea of noise from various sources internal and external to the experimental apparatus. Machine learning (ML) offers a promising means to reduce this noise. Advancements in denoising techniques using ML algorithms have the potential to significantly improve dark matter analyses [12]. These techniques enable the detection of weaker dark matter signals, or in the case of no observation, the setting of stronger limits. In other words, improvements in data denoising directly enhance the scientific reach of dark matter experiments. In this paper, we present an ultra-long time series dataset produced by a real dark matter detector: ABRACADABRA (A Broadband/Resonant Approach to Cosmic Axion Detection with an Amplifying B-field Ring Apparatus, abbrev. ABRA). ABRA is the world leading sub- μeV dark matter experiment that pioneered the quantum enabled lumped element dark matter detection technique [8, 9, 13]. We operated the ABRA detector in February 2024 to obtain a special time series dataset for these studies: TIDMAD (TIme series dataset for discovering Dark Matter with Ai Denoising). It can be partitioned into three parts: (1) training data, (2) validation data, and (3) science data.

The training data include time series data where a dark matter-like signal is injected by hardware. If dark matter enters ABRA, it will manifest itself as a sinusoidal oscillation mode within the time series; therefore, the injected signals are also sinusoidal oscillations at specific frequencies. Both the detected (noisy) time series and the injected (ground truth, clean) time series are provided with one-to-one temporal correspondence. This allows the training of machine learning algorithms to denoise the detector data and recover the injected signal. The validation data is used to produce Benchmark 1: Denoising Score, see Section 4.1. Algorithms that effectively dampen the detector noise while amplifying the injected signal will achieve a better denoising score. The science data is collected without the injected signal with an extended duration to produce Benchmark 2: Dark Matter Limits, as discussed in the previous paragraph. The limit generation procedure is detailed in Section 4.2. Several traditional and deep learning denoising algorithms are presented in Section 3 and Appendix B, where the resulting denoised data is benchmarked against the raw, un-denoised detector data.

1.1 Axion dark matter and ABRACADABRA

In recent years, the axion has emerged as one of the leading dark matter candidates due to its theoretical elegance. Axions interact with normal matter via electromagnetism, which can be characterized by a physics parameter $g_{a\gamma\gamma}$. Due to its small mass $m_a < 1eV$ (10^{-6} times smaller than electron), axions acts as a classical field oscillating at a frequency $f_a = m_a/2\pi$. Astrophysical measurements determine that the Earth exists in a bath of dark matter with a known local density of ρ_{DM} [4].

The latest advancements in quantum detector technology have facilitated new avenues to search for the axion. ABRA is one of the novel detectors designed to search for axions leveraging these advancements in quantum technologies [9]. ABRA capitalizes on the fact that we are immersed in a bath of a feebly electromagnetically-interacting, oscillating dark matter field to detect this elusive particle. Specifically, in the presences of a static magnetic field \mathbf{B}_0 , the axion, henceforth referred to as dark matter, induces an oscillating magnetic field \mathbf{B}_a . Thus, to detect dark matter ABRA provides a strong magnetic field $B_0 = 1T$ and uses a superconducting pickup loop to read out the oscillating dark matter signal. Read out by a superconducting quantum interference device (SQUID), the pickup loop detects the dark matter signal as a time-oscillating current given by

$$\mathbf{J}_{eff} = g_{a\gamma\gamma} \sqrt{2\rho_{DM}} \mathbf{B}_0 \cos(m_a t) \quad (1)$$

where the two parameters that define the theory, the coupling $g_{a\gamma\gamma}$ and mass m_a , appear as the relative strength of the signal and oscillation frequency respectively [8]. The total signal power expected in our detector is given by

$$A \equiv \langle |\Phi_a|^2 \rangle = g_{a\gamma\gamma}^2 \rho_{DM} \mathcal{G}^2 V^2 B_{max}^2 \quad (2)$$

where $\mathcal{G} \approx 0.0217$ is a geometric coupling, $V \approx 890\text{cm}^3$ is the magnetic field volume, and $B_{max} \approx 1\text{ T}$ is the maximum static magnetic field [8].

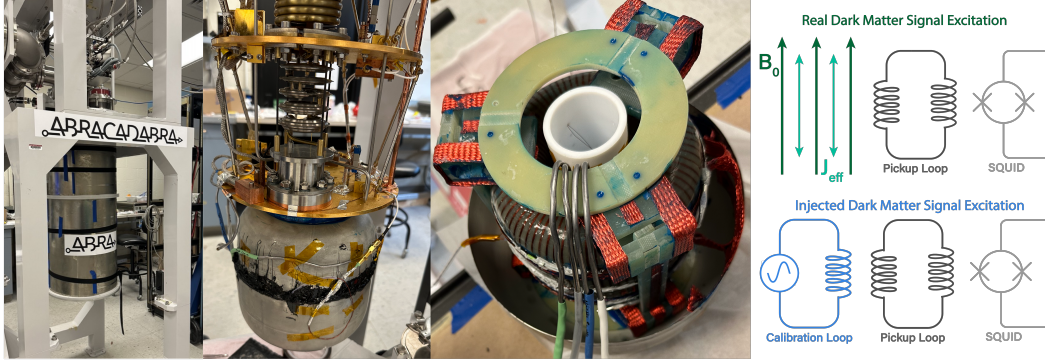


Figure 1: Left to right: ABRA dilution fridge with outer vacuum cans on; Coldest stage of ABRA fridge above shielded 1T superconducting toroidal magnet; Interior of ABRA magnet including pickup and calibration loop wires existing the center of the magnet; Effective circuit diagram for both dark matter and injected signals.

1.2 TIDMAD construction

In the classical analysis, we use a calibration procedure to determine the end-to-end response of our system for different signal frequencies. As shown in Figure 1, the ABRA detector contains a toroidal magnet equipped with both a pickup loop and a calibration loop. During calibration, we first inject a fake dark matter signal into the calibration loop at a specific frequency. This generates a sine wave with a known amplitude and frequency, creating a dark matter-like flux with our pickup loop. Finally, this flux is detected by the SQUID sensor for detector calibration.

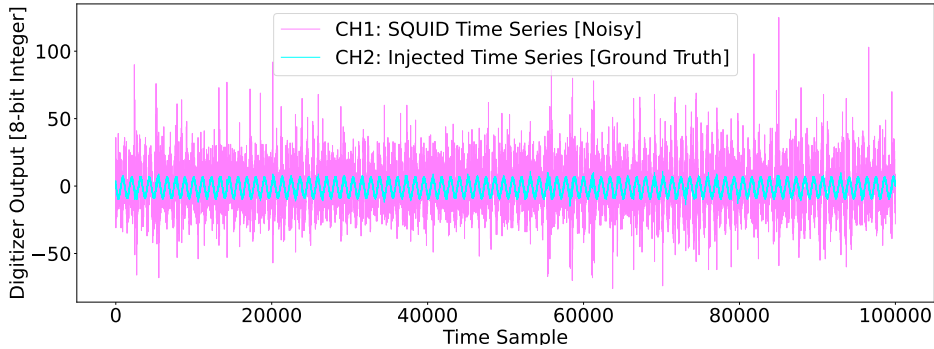


Figure 2: 10-millisecond snapshot of the time series in TIDMAD training dataset.

The TIDMAD dataset presented in this work is inspired by this calibration procedure. The ABRA detector hardware enables us to simultaneously record two types of ultra-long time series: the one injected into the calibration loop (referred to as the “injected time series”) and the one detected by the SQUID sensor coupled to the pickup loop (referred to as the “SQUID time series”). As shown in Figure 2, the injected time series exhibit a clear sinusoidal oscillatory signal, which can be considered the ground truth. Meanwhile, the SQUID time series contains the same ground truth submerged within a sea of detector noises. The two time series are exactly aligned at every time step. This defines the signal recovery task: a model could be applied to the SQUID time series to reproduce the injected signal in the injected time series. A model trained on this task will be efficient in rejecting noise of different kinds while retaining the dark-matter-like signal within the detector. We then collected a science dataset where no fake dark matter signal is injected. The trained denoising model can then be applied to the SQUID time series of the science dataset. If a sinusoidal signal is found after denoising, it could potentially be a real dark matter particle entering the detector.

2 Dataset construction

The data presented in this paper were acquired using the ABRACADABRA detector at MIT. The overall schematics of the data is shown in Figure 3. All data are saved as a series at 10 MS/s (Megasample per second), where each sample is a 8-bit integer ranging from -128 to 127. These integers can be converted into a physics units of mV (millivolts) with a scaling factor of 40/128. The procured datasets are stored at Open Science Data Federation (OSDF) in .hdf5 format and can be accessed via the `download_data.py` script in the github repository provided.

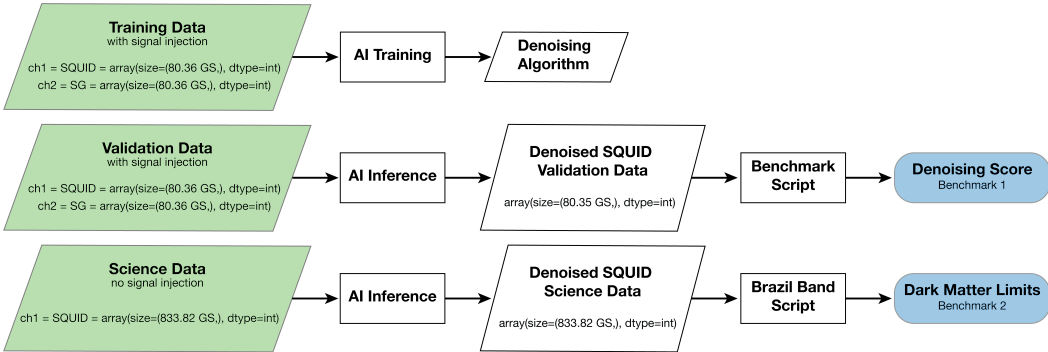


Figure 3: TIDMAD data flow explaining how data splits (green) result in benchmarks (blue). Rectangles correspond to provided scripts. Left to right, top to bottom the scripts are `train.py`, `inference.py`, `benchmark.py`, `process_science_data.py`, `brazilband.py`

Training dataset: The training dataset contains 80.23 Gigasamples of time series data, corresponding to roughly two hours of data collection. For training purposes, we injected a fake dark matter signal into the hardware as discussed in Section 1.2. The injected signal scans through dark matter frequencies from 1100 Hz to 5 MHz at two different amplitudes: 50 mV (standard) and 10 mV (weak). Only the standard injection was considered in the rest of this paper. However, the weak injection data is also available to download by using the additional `-w` flag with the `download_data.py` script, providing a more challenging scenario for signal recovery. All training data are partitioned into 20 files. Each file contains two channels: the injected time series is saved in the second channel (CH2), while the SQUID time series is saved in the first channel (CH1). As discussed in Section 1.2, the training task is to recover the CH2 ground truth time series using the CH1 noisy time series as input.

Validation dataset: The validation dataset, consisting of 80.23 Gigasamples, has the same format as the training dataset. The only difference is that the validation dataset was independently collected at a different time using the same detector apparatus, making it an out-of-sample dataset with slightly altered noise conditions. After training, users can perform model inference by running the `inference.py` script to denoise the CH1 time series while preserving the injected signal. The denosed SQUID time series in CH1 and the injected time series in CH2 are then processed through the `benchmark.py` script. To determine the efficacy of the model’s denoising, a benchmarking score called ‘denoising score’ is calculated, which will be discussed in detail in Section 4.1.

Science dataset: The science dataset comprises 833.82 Gigasamples of time series data collected over a 24-hour period. This data is distributed across 208 .hdf5 files. Unlike the training and validation datasets, there are no injected signals, meaning that only the CH1 time series is saved per file. The inference task for ML models is to denoise the SQUID time series in CH1. The denosed science data is then analyzed to obtain a dark matter limit, which will be discussed in Section 4.2.

3 Experiments

We adopted five different denoising algorithms to the dataset to achieve signal recovery, including two traditional algorithms and three deep learning models. The traditional model can be directly applied to the validation dataset using `inference.py`, while deep learning models need to be trained first on the training dataset with `train.py`. The five algorithms are listed below:

- **Moving average:** a simple moving average with a window size of 100, implemented using the numpy convolve function.
- **Savitzky-Golay filter:** with a window size of 100 and a polynomial order of 11.
- **FC net:** an autoencoder architecture designed for transforming input data. This model consists of an encoder and a decoder. The encoder encodes the input data into a low-dimensional representation, while the decoder reconstructs the original data from this encoded representation. Both the encoder and decoder are composed of multiple fully-connected layers and activation layers. FC-Net outputs a single float point number at each time step, and the training is conducted by minimizing the mean square error between this float point number and corresponding ground truth time series at every sample.
- **PU net:** a deep learning architecture based on the UNet architecture [10]. U-Net uses convolution layers as encoder and deconvolution layers as decoder, with contracting paths established between each pair of convolutional and deconvolution layers at the same level. This allows information at different encoding levels to flow to the decoding part. Positional encoding layers are introduced at all encoder layers to enhance the model’s ability to understand positions in the time series. Since every sample of the ground truth time series has to be 8-bit integers ranging from -128 to 127, we require the model to output a 256-class classification decision at every time step, where each class corresponds to one possible output value. This effectively redefines the denoising task into a semantic segmentation task.
- **Transformer:** the transformer utilizes a self-attention mechanism to capture long-distance dependencies in sequences [16]. After processing by the multi-layer Transformer encoder, the model effectively extracts features and represents the input sequence. Finally, the encoded sequence is mapped to the output dimension through a linear layer for the same 256-class classification decision as PU-Net. Positional encoding is also added before the time series is fed into Transformer layers. Both PU-Net and Transformer are trained using Focal Loss to handle class-imbalanced segmentation labels [6].

The benchmarking results of these models are discussed in Section 4. There are two additional constraints for the deep learning models. First, due to memory constraints, we segment the ultra-long SQUID and injected time series into smaller segments before feeding them into each model. The exact segment sizes are outlined in Table 1. Secondly, due to the large range of injected frequencies, training multiple versions of the same model to handle different frequency ranges is necessary. Both limitations and additional details of the deep learning models are discussed in Appendix A.

4 Evaluation metrics

We developed two benchmarking criteria to evaluate the performance of denoising algorithms. Benchmark 1: Denoising Score provides a quantitative measure of denoising performance based on the signal-to-noise ratio. This score is designed to be linear with respect to the noise level and equal to one when no denoising is applied. While Benchmark 1 offers a quick, straightforward assessment of model performance, it lacks direct relevance to fundamental science. To bridge this gap, we developed Benchmark 2: Dark Matter Limit, which directly links AI algorithms to community-standard physics result by automating the entire dark matter analysis on the science dataset. This benchmark allows AI algorithms to directly improve the physics reach of dark matter detectors.

4.1 Benchmark 1: denoising score

The denoising score is a modified signal-to-noise ratio (SNR) of the denoised CH1 SQUID time series. It is calculated over the validation dataset by first segmenting both the injected and SQUID time series into one-second segments. Each second of the time series is transformed into a power spectral density (PSD) using a squared fast Fourier transform. This frequency domain data records signal power at each frequency – $PSD(\nu)$. Since the injected dark matter signal is a clean sinusoidal oscillation, it should appear as a single-bin peak (ν_0) in the PSD, while noise in SQUID time series is distributed across all frequency bins. The location of ν_0 is identified by the PSD of the injected time series (ground truth) as the largest single bin peak relative to its nearest neighbors.

$$\nu_0 = \underset{\nu}{\operatorname{argmax}} \left(PSD_{\text{Injected}}(\nu) - (PSD_{\text{Injected}}(\nu - df) + PSD_{\text{Injected}}(\nu + df)) \right) \quad (3)$$

Table 1: Fine and coarse denoising score for raw data, traditional algorithms, and trained ML models

Algorithms	Segment Size	Parameters	Fine Score	Coarse Score
None			1.00	1.10
Moving Average	1×10^6	window = 100	0.52	0.64
SG Filter	1×10^6	window = 100, order = 11	-2.77	-2.35
FC Net	4×10^4	See Appendix A	6.43	6.55
PU Net	4×10^4	See Appendix A	3.69	3.84
Transformer	2×10^4	See Appendix A	3.95	4.18

where df is the sampling frequency of 10^{-7} Hz. Once ν_0 is identified in the injected time series, the signal region is defined by selecting $n_{sig} = \pm 1$ bins around the signal frequency to account for spectral leakage. Similarly, the noise region is defined by selecting $n_{bkgd} = \pm 50$ bins outside of the signal region. By taking the ratio of the PSD in the signal region to that in the noise region, we acquire the SNR for each one-second segment PSD.

$$SNR_i = \left(\frac{P_{sig}}{P_{noise}} \right)_i = \frac{\sum_{\nu=\nu_0-\nu_{sig}}^{\nu_0+\nu_{sig}} PSD_i(\nu)}{\sum_{\nu=\nu_0-\nu_{bkg}}^{\nu_0+\nu_{bkg}} PSD_i(\nu)} \quad (4)$$

Multiplying by the sampling frequency (df) turns bin range ($n_{sig,bkg}$) to frequency range ($\nu_{sig,bkg}$).

The hardware setup includes a bandpass filter between the pickups and the digitizer, resulting in a frequency dependence for the signal magnitude in both the injected and the SQUID time series. To account for this, we first calculate the normalized injected SNR:

$$(SNR'_{Injected})_i = \frac{(SNR_{Injected})_i}{\max(SNR_{Injected})} \quad (5)$$

The SQUID SNR then gets multiplied to the corresponding, normalized SQUID SNR in the the same one-second segments, and then summed over all one-second segments to produce Λ defined below:

$$\Lambda = \left(\frac{1}{n} \sum_{i=0}^n (SNR_{SQUID})_i \times (SNR'_{Injected})_i \right) \quad (6)$$

We examine the validity of Λ to represent denoising efficiency through a study involving added Gaussian noise. In this study, Gaussian noise is imposed on the injected time series, and Λ are calculated at different levels of Gaussian noise amplitudes and standard deviations. As shown in Figure 4 (right), Λ exhibits an exponential decay trend with increased Gaussian noise amplitude. To establish a linear correlation between the denoising score and noise, we apply a logarithmic transformation to Λ to calculate the final denoising score:

$$\text{Denoising Score} = \log_{5.27} \Lambda \quad (7)$$

The base of the logarithm is chosen to be 5.27 so that the denoising score equals 1 for the raw SQUID time series over the validation dataset (i.e., when no denoising algorithm is applied). We further examined this denoising score over a range of imposed Gaussian noise amplitude and STD, and observed a smooth linear response as shown in Figure 4 (left).

This denoising score is implemented in the provided script, `benchmark.py`, which takes as input the denoised SQUID time series of the validation dataset produced by model inference. The script is designed for parallelization and takes about 30 minutes to run on an 8-core CPU node. To further reduce the time required for calculating the denoising score, we defined this second-by-second scan as the Fine Score and introduced a new Coarse Score Denoising Score. The Coarse Score is a tenfold downsample of the full Fine Scan thereby providing a fast benchmarking score that users can leverage to get a rough estimate of model performance in 10% the computational time.

Table 1 shows the denoising scores for all algorithms discussed in Section 3. The case with no denoising is shown in the first row, with its fine denoising score calibrated to 1. We observed that

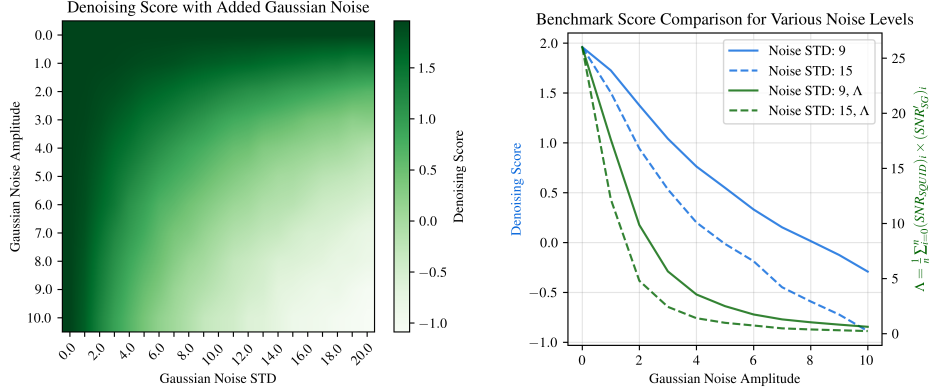


Figure 4: Left: The color bar represents the denoising score for 20s of raw data with added Gaussian noise showing that noisier data results in a lower score. Right: Denoising score and Λ for 20s of raw data with added Gaussian noise of variable noise amplitude. The exponential behavior of Λ can clearly be seen in contrast to the smooth linearity of the denoising score.

in all cases, the coarse denoising score is slightly higher than the fine denoising score. Based on the results, all traditional algorithms decrease the denoising score as time domain averaging erases high-frequency signals in the region of interest. Meanwhile, all deep learning algorithms efficiently boost the denoising score. Surprisingly, we observed that the FC Net model achieved the best performance with a denoising score of 6.43.

4.2 Benchmark 2: dark matter limit

The second benchmark empowers algorithm creators with the capability to conduct a community-standard dark matter search using the science dataset. Following the discussion in the Introduction, the two physics parameters for the dark matter candidate in this paper are the dark matter mass (m_a) and the dark matter to electromagnetic coupling ($g_{a\gamma\gamma}$). Null results from different dark matter experiments place limits within this parameter space expressed by the shaded regions in Figure 5. In the physics community, a better dark matter limit is represented by pushing towards lower values of $g_{a\gamma\gamma}$ at different m_a . We provide a comprehensive tool necessary for performing the statistical analysis to produce dark matter limits in Figure 5. The dark matter mass m_a is directly proportional to frequency, therefore the limit-setting procedure is repeated for 11.1 million independent m_a from 0.4 neV (100 kHz) to 8 neV (2 MHz). The dark matter limit at each m_a is obtained using a frequentist log-likelihood ratio test statistic (TS), with the results depicted as regions in Figure 5. The detail of this analysis can be found in Appendix B.

This analysis is performed twice on the SQUID time series of the science dataset: once without any denoising algorithm which produces the ABRA-TIDMAD Raw limit, and once with FC Net, the top-performing denoising algorithm, which produces the ABRA-TIDMAD Denoised limit. These limits can be directly compared to the previous world-leading ABRA Run 3 limit, limits obtained by other dark matter experiments, as well as theoretical predictions [13]. While the ABRA-TIDMAD Denoised limit does not outperform the ABRA Run 3 limit due to hardware and time constraints, it is evident that denoising algorithms significantly improved the dark matter limit by 1-2 orders of magnitude across different m_a . Although the size of the ABRA-TIDMAD science dataset is only 1% of the ABRA Run 3 science dataset, the AI denoising algorithm boosted the ABRA-TIDMAD limit to nearly the same level as ABRA Run 3 and even surpassed the ABRA Run 3 limits at small m_a .

5 Limitations and applications

Hardware and datataking period: As illustrated in Figure 5, the baseline models fail to surpass the results of ABRA Run 3. This is attributed to hardware limitations and changes since the last data run, including (1) replacing the dark matter pickup cylinder with a pickup loop, consequently reducing the geometric coupling to the dark matter signal, and (2) reducing the data-taking period to 24 hours from three months. The decision to implement these changes was driven by the aim to enable

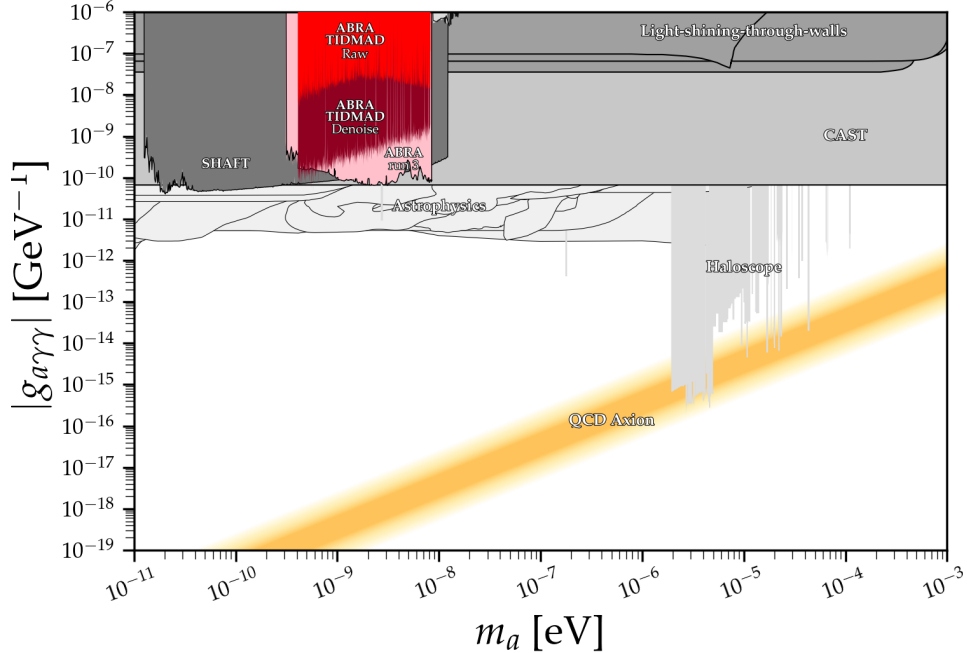


Figure 5: Plotted alongside the present, state-of-the-art axion dark matter limits (grey) are the 2σ exclusion limits for ABRA Run 3 (pink) [13], ABRA-TIDMAD Raw limit (red), and ABRA-TIDMAD Denoised limit from the trained FC net (maroon). Shaded regions correspond to pairing of dark matter model parameters $(m_a, g_{a\gamma\gamma})$ that are ruled out by the specified experiment or observation, and the bright yellow region indicates theoretical predictions. The plotting script is modified from the publicly available AxionLimits repository [7].

ABRA to simultaneously search for dark matter and gravitational waves, thereby enhancing the scientific scope of the experiment. The shortened data-taking duration was necessitated by operational constraints of the dilution refrigerator. While running time series models over the frequency domain data of ABRA Run 3 is not possible, reverting to the previous pickup structure and extending the data-taking period would enable us to generate time series data matching the results of ABRA Run 3.

Null result vs. potential discovery: In Section 4.2, we discussed how to set a dark matter limit using the provided analysis scripts. This script assumes a null result as no 5σ dark matter candidates were identified in this region of parameter space by ABRA Run 3. Therefore, we assume a null result for this much shorter (24 hr) data taking. This assumption enables us to establish upper limits on the coupling parameter $g_{a\gamma\gamma}$ for every mass point. As shown in Figure 5, the ABRA-TIDMAD Raw limit without denoising covers a smaller region than ABRA Run 3 [13].

However, with the denoising algorithm applied to the 24-hour science data, ABRA-TIDMAD could potentially reach beyond the ABRA Run 3 region, where a discovery of dark matter is possible. In this paper, we focused on increasing the experimental sensitivity and setting exclusion limits. A straightforward modification to the interpretation of the TS would unlock the discovery potential of this analysis framework. Future efforts will focus on employing a more extensive dataset and implementing dark matter discovery analysis code. Given that discovering dark matter would be a Nobel Prize-level breakthrough, it is crucial to not only claim discovery but also to convince the scientific community of its validity. If TIDMAD users find any anomalous signals in the science dataset, please contact the authors for further investigation and understandings of systematic uncertainties.

Generalizability: The findings of this study are relevant across a spectrum of physics and computer science applications. Axion dark matter is a subset of wave-like dark matter candidates, therefore the techniques developed in this paper are broadly applicable to all wave-like dark matter experiments. Furthermore, these time series denoising algorithms can be used to search for other wave-like physics

signals including gravitational waves. In nuclear and particle physics more broadly, noise reduction is a perennial problem; advancements in denoising can be deployed across a suite of these rare event searches in physics.

While the data released in this paper was tailored to our specific problem statement and benchmarks in physics, these ultra-long time series data hold potential for diverse applications beyond physics. Many long time series datasets, such as stock prices or weather data, exhibit relatively uniform frequency characteristics. As a complement, our data release and subsequent models are built on frequency-rich detector-generated, long time series data and could fill in this gap. If building a foundation model for time series predictions or anomaly detection, our data provide a unique abundance of spectral complexity.

6 Conclusions and other works

We present TIDMAD, the first dataset and benchmark designed to yield a community-standard dark matter search result. TIDMAD includes all necessary inputs and processing to train time series denoising algorithms and produce a science-level dark matter limit. Through a series of experiments, we developed three ultra-long time series deep learning algorithms, benchmarked their ability to recover hardware-injected signals, and set dark matter limits. Clear performance improvements were demonstrated on both benchmarks. Our future work will focus on enhancing the denoising algorithm to achieve better dark matter limits, expanding to other nuclear and particle experiments, and embedding these algorithms onto FPGA chips for real-time denoising during data taking.

The aim of this data release is to enable the ML community to use TIDMAD to develop algorithms tailored for data with highly coherent embedded signals. This development would not only extend the experimental reach of dark matter searches, leading to improved dark matter limits, but also allow the AI/ML community to make direct scientific advancements. This transparency aims to foster greater collaboration between the ML and particle physics communities, benefiting both fields.

Acknowledgements

J. T. Fry is supported by the National Science Foundation Graduate Research Fellowship under Grant No. 2141064. This material is based upon work supported by the National Science Foundation under Grant No. 2110720. We would like to thank San Diego Supercomputer Center (SDSC) and Open Science Data Federation (OSDF) for the data storage space and open access infrastructure. We'd like to thank Frank Wuerthwein for many insightful discussions and offering the OSDF storage space, as well as Fabio Andrijauskas for the technical support. The computation of this project was conducted on SDSC Expanse cluster as well as MIT's subMIT cluster. We would also like to thank Joshua Foster for his invaluable contributions to the axion analysis.

References

- [1] C. B. Adams and et. al. Axion dark matter, 2023.
- [2] N. Aghanim and et. al. Planck2018 results: I. overview and the cosmological legacy of planck. *Astronomy; Astrophysics*, 641:A1, September 2020. ISSN 1432-0746. doi: 10.1051/0004-6361/201833880. URL <http://dx.doi.org/10.1051/0004-6361/201833880>.
- [3] Mubashara Akhtar, Omar Benjelloun, Costanza Conforti, Pieter Gijbbers, Joan Giner-Miguel, Nitisha Jain, Michael Kuchnik, Quentin Lhoest, Pierre Marcenac, Manil Maskey, Peter Mattson, Luis Oala, Pierre Ruysen, Rajat Shinde, Elena Simperl, Geoffry Thomas, Slava Tykhonov, Joaquin Vanschoren, Jos van der Velde, Steffen Vogler, and Carole-Jean Wu. Croissant: A metadata format for ml-ready datasets. DEEM '24, page 1–6, New York, NY, USA, 2024. Association for Computing Machinery. ISBN 9798400706110. doi: 10.1145/3650203.3663326. URL <https://doi.org/10.1145/3650203.3663326>.
- [4] Pablo F de Salas and A Widmark. Dark matter local density determination: recent observations and future prospects. *Reports on Progress in Physics*, 84(10):104901, oct 2021. doi: 10.1088/1361-6633/ac24e7. URL <https://dx.doi.org/10.1088/1361-6633/ac24e7>.
- [5] Joshua W. Foster, Nicholas L. Rodd, and Benjamin R. Safdi. Revealing the dark matter halo with axion direct detection. *Phys. Rev. D*, 97:123006, Jun 2018. doi: 10.1103/PhysRevD.97.123006. URL <https://link.aps.org/doi/10.1103/PhysRevD.97.123006>.

- [6] Tsung-Yi Lin, Priya Goyal, Ross Girshick, Kaiming He, and Piotr Dollar. Focal loss for dense object detection. In *Proceedings of the IEEE International Conference on Computer Vision (ICCV)*, pages 2980–2988, 2017. URL https://openaccess.thecvf.com/content_ICCV_2017/papers/Lin_Focal_Loss_for_ICCV_2017_paper.pdf.
- [7] Ciaran O’Hare. `cajohare/axionlimits: Axionlimits`. URL <https://doi.org/10.5281/zenodo.3932430>.
- [8] Jonathan L. Ouellet and et. al. First results from abracadabra-10 cm: A search for sub- μeV axion dark matter. *Phys. Rev. Lett.*, 122:121802, Mar 2019. doi: 10.1103/PhysRevLett.122.121802. URL <https://link.aps.org/doi/10.1103/PhysRevLett.122.121802>.
- [9] Jonathan L. Ouellet and et. al. Design and implementation of the abracadabra-10 cm axion dark matter search. *Phys. Rev. D*, 99:052012, Mar 2019. doi: 10.1103/PhysRevD.99.052012. URL <https://link.aps.org/doi/10.1103/PhysRevD.99.052012>.
- [10] Olaf Ronneberger, Philipp Fischer, and Thomas Brox. U-net: Convolutional networks for biomedical image segmentation. 2015.
- [11] Vera C. Rubin and Jr. Ford, W. Kent. Rotation of the Andromeda Nebula from a Spectroscopic Survey of Emission Regions. *APJ*, 159:379, February 1970. doi: 10.1086/150317.
- [12] Muhammed Saleem, Alec Gunny, Chia-Jui Chou, Li-Cheng Yang, Shu-Wei Yeh, Andy Chen, Ryan Magee, William Benoit, Tri Nguyen, Pinchen Fan, Deep Chatterjee, Ethan Marx, Eric Moreno, Rafia Omer, Ryan Raikman, Dylan Rankin, Ritwik Sharma, Michael Coughlin, Philip Harris, and Erik Katsavounidis. Demonstration of machine learning-assisted real-time noise regression in gravitational wave detectors, 06 2023.
- [13] Chiara P. Salemi and et. al. Search for low-mass axion dark matter with abracadabra-10 cm. *Phys. Rev. Lett.*, 127:081801, Aug 2021. doi: 10.1103/PhysRevLett.127.081801. URL <https://link.aps.org/doi/10.1103/PhysRevLett.127.081801>.
- [14] Max Tegmark and et. al. Cosmological parameters from sdss and wmap. *Physical Review D*, 69(10), May 2004. ISSN 1550-2368. doi: 10.1103/physrevd.69.103501. URL <http://dx.doi.org/10.1103/PhysRevD.69.103501>.
- [15] J. Anthony Tyson, Greg P. Kochanski, and Ian P. Dell’Antonio. Detailed mass map of cl 0024+1654 from strong lensing. *The Astrophysical Journal*, 498(2):L107–L110, May 1998. ISSN 0004-637X. doi: 10.1086/311314. URL <http://dx.doi.org/10.1086/311314>.
- [16] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. *Advances in neural information processing systems*, 30, 2017.

A Details and limitations of deep learning model

There are two special treatments we took to train the three deep learning models:

Training segmentation: To feed the time series data into limited GPU memories, the training time series are segmented into 4 milliseconds. This imposes a fundamental lower limit on the frequencies that the models can detect. While this lower limit, approximately 250 Hz given the sampling frequency of 10 MS/s, is relatively small, it does establish a foundational lower threshold for frequency resolution in the model. The transformer model requires additional memory, therefore we have to further reduce the segment to 2 millisecond or 500 Hz. Both of these limits are well below the dark matter search range: 0.4 neV (100 kHz) to 8 neV (2 MHz).

Frequency splitting: Since the injected dark matter signal spans two orders of magnitude in frequency, the observed features in the injected time series significantly vary. During training, we noticed that a single deep learning model to denoise the entire dataset would fail to generalize across the different injected frequency ranges. To address this issue, we trained four deep learning models per architecture, each focusing on a specific frequency range: the first covering the low-frequency regime (training/validation files 0-3), the second covering the mid-low regime (training/validation files 4-9), the third covering the mid-high regime (training/validation files 10-14), and the fourth covering the high-frequency regime (training/validation files 15-19). During the benchmark 1 inference, we selected the input validation data corresponding to the frequency range for which each model was trained and averaged the results of the four models. For the benchmark 2 inference, we ran all four models on the science data and selected the highest-performing model, as represented in Figure 5. In future work, we aim to develop a single denoising model generalizable to wide frequency ranges. All trained models are made available in https://drive.google.com/drive/folders/16ORX1b2zo1_1OYYAcRBgddBuYImj0Bxs?usp=share_link.

The hyperparameter of FC Net is listed below:

```
AE(  
  (encoder): Sequential(  
    (0): Linear(in_features=40000, out_features=4000, bias=True)  
    (1): ReLU()  
    (2): Linear(in_features=4000, out_features=400, bias=True)  
    (3): ReLU()  
    (4): Linear(in_features=400, out_features=40, bias=True)  
  )  
  (decoder): Sequential(  
    (0): Linear(in_features=40, out_features=400, bias=True)  
    (1): ReLU()  
    (2): Linear(in_features=400, out_features=4000, bias=True)  
    (3): ReLU()  
    (4): Linear(in_features=4000, out_features=40000, bias=True)  
  )  
)
```

The output of FC Net at every time step is a single float point number. An MSE loss is calculated between the float point number and the ground truth value.

The PU Net model consists of four down layers and four up layers, with contracting paths between each pair of layers. The down layers include Max Pooling and two convolutional operations, while the up layers comprise Deconvolution and Convolution. Additionally, positional encoding is added after each down layer [16]. Lastly, the output is fed into a linear layer to produce 256-dimensional vector at each time step. The detailed model hyperparameter could be found within the `network.py` script in <https://github.com/jessicafry/TIDMAD>.

The transformer model processes the time series data by using an Embedding layer to encode each input, converting 8-bit integers in the range of $(-128, 127)$ into a 32-dimensional vector. Positional encoding is then added to the embedded time series [16]. This augmented data is fed into a Transformer Encoder with two layers, each containing two heads, 128 hidden dimensions, and a 0.1

dropout rate. Finally, the output is passed through a linear layer to produce a 256-dimensional vector at each time step.

For both PU Net and Transformer, the output at each time step is a 256-dimensional vector, corresponding to 256 possible output classes. This can be considered as a time series semantic segmentation task where there are 256 possible classes to choose from. We adopted Focal Loss in Object Detection to address the class imbalance problem in semantic segmentation task [6].

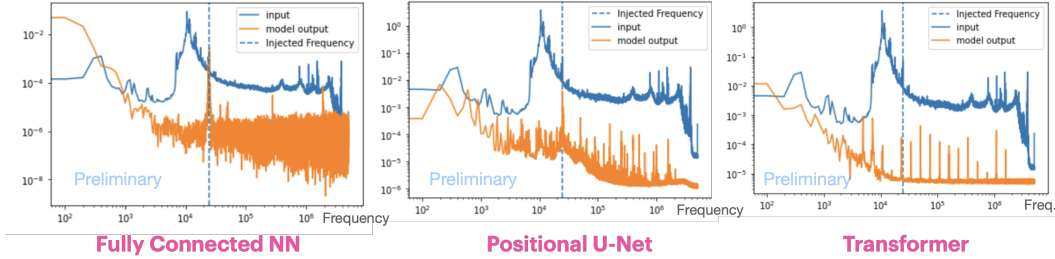


Figure 6: The denoising performance of FC Net (Left), PU Net (Middle), and Transformer (Right) at a single injected frequency. The plot is made by Fourier-transform the time series into frequency space.

The denoising performance of three models at a single injected frequency is illustrated in Figure 6. In this specific instance, the PU-Net model demonstrates superior denoising performance. However, when evaluated using the Denoising Score across all frequencies, the FC Net significantly outperforms the other two models by a large margin.

B Frequentist log-likelihood test statistics

The detailed analysis flow to produce the dark matter limit is depicted in Figure 7. The first step involves performing a fast Fourier transform on the time series data in 10-second segments to produce power spectral densities (PSDs). These PSDs are then averaged across the full dataset to generate our average PSD, reflecting the power in the pickup loop as a function of frequency. Since one of the physics parameters, dark matter mass (m_a), is directly proportional to the frequency, the analysis script conducts 11.1 million independent searches for dark matter with varying mass points from 0.4 neV (100 kHz) to 8 neV (2 MHz).

At each mass point, the dark matter limit is obtained using a frequentist log-likelihood ratio test statistic (TS) [5]. Given the local velocity distribution and density of dark matter from astrophysical measurements, as well as our choice of dark matter mass, we create a dark matter signal template for each mass point. These templates are compared to a chunked frequency subset of the average PSD, constructed using a sliding window whose width scales as $\delta f/f \approx 5.5 \times 10^{-6}$. We use equation 1.1 and calibration data to produce the other physics parameter $g_{a\gamma\gamma}$ given detector geometry. By floating the template signal amplitude and allowing the mean background level of noise to vary within each sliding window, we fit the signal template to the data to construct a likelihood as a function of $g_{a\gamma\gamma}$. We then use the TS to determine the 95% one-sided upper limits on $g_{a\gamma\gamma}$ for every mass point [5, 13]. The resulting limits on $g_{a\gamma\gamma}$ as a function of m_a (black line) as well as the $1/2\sigma$ containment (green, yellow) can be seen on the dark matter sensitivity plot, i.e. "Brazil band" in Figure 7.

Checklist

1. For all authors...
 - (a) Do the main claims made in the abstract and introduction accurately reflect the paper's contributions and scope? [Yes]
 - (b) Did you describe the limitations of your work? [Yes] See Section 5
 - (c) Did you discuss any potential negative societal impacts of your work? [Yes] See Supplemental Material.
 - (d) Have you read the ethics review guidelines and ensured that your paper conforms to them? [Yes]

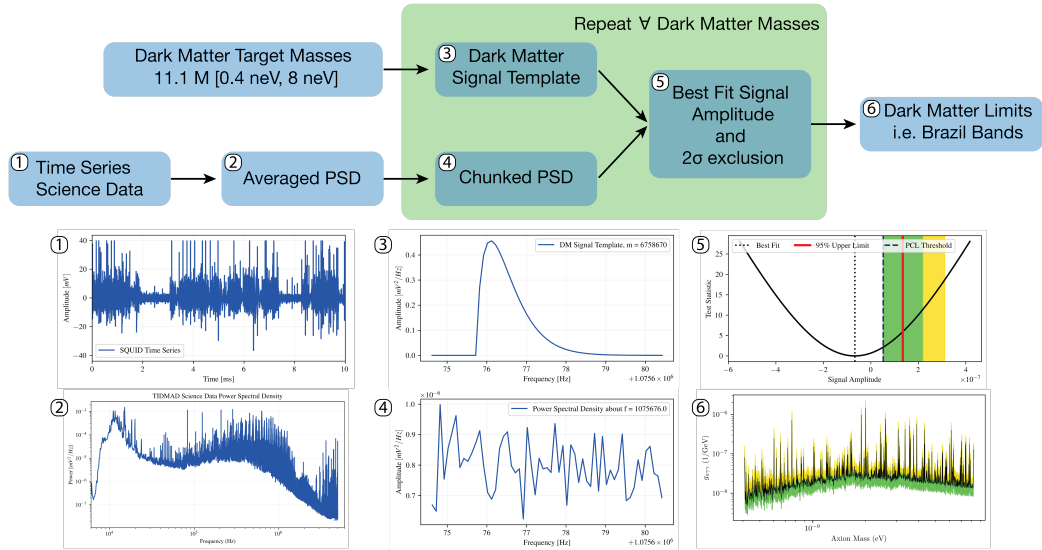


Figure 7: This represents the analysis flow for dark matter science data and the detection logic to build the brazil band limits from time series data (raw or denoised). Key types of data are plotted corresponding to their step in the analysis chain.

2. If you are including theoretical results...
 - (a) Did you state the full set of assumptions of all theoretical results? [Yes] See Section 1.1
 - (b) Did you include complete proofs of all theoretical results? [Yes] All theoretical physics proofs and equations can be found in our previous papers. See [8]
3. If you ran experiments (e.g. for benchmarks)...
 - (a) Did you include the code, data, and instructions needed to reproduce the main experimental results (either in the supplemental material or as a URL)? [Yes] See Supplemental and <https://github.com/jessicafry/TDMAD>.
 - (b) Did you specify all the training details (e.g., data splits, hyperparameters, how they were chosen)? [Yes] See Section 3
 - (c) Did you report error bars (e.g., with respect to the random seed after running experiments multiple times)? [Yes] See Section 3
 - (d) Did you include the total amount of compute and the type of resources used (e.g., type of GPUs, internal cluster, or cloud provider)? [Yes] See Section 3
4. If you are using existing assets (e.g., code, data, models) or curating/releasing new assets...
 - (a) If your work uses existing assets, did you cite the creators? [Yes]
 - (b) Did you mention the license of the assets? [Yes]
 - (c) Did you include any new assets either in the supplemental material or as a URL? [Yes]
 - (d) Did you discuss whether and how consent was obtained from people whose data you're using/curating? [N/A]
 - (e) Did you discuss whether the data you are using/curating contains personally identifiable information or offensive content? [N/A]
5. If you used crowdsourcing or conducted research with human subjects...
 - (a) Did you include the full text of instructions given to participants and screenshots, if applicable? [N/A]
 - (b) Did you describe any potential participant risks, with links to Institutional Review Board (IRB) approvals, if applicable? [N/A]
 - (c) Did you include the estimated hourly wage paid to participants and the total amount spent on participant compensation? [N/A]

TIDMAD: Supplemental Information

J. T. Fry^{1*}, Aobo Li², Lindley Winslow¹, Xinyi Hope Fu¹, Zhenghao Fu¹,
and Kaliroe M. W. Pappas¹

¹Department of Physics, Massachusetts Institute of Technology, Cambridge, MA 02139, USA
²Halicioğlu Data Science Institute, Department of Physics, UC San Diego, La Jolla, CA 92093, USA

Contents

1 Datasheet	2
1.1 Motivation	2
1.2 Composition	2
1.3 Collection process	2
1.4 Preprocessing/cleaning/labeling	3
1.5 Uses	3
1.6 Distribution	4
1.7 Maintenance	4
2 Dataset and code access	4
3 Croissant metadata	5
4 Author statement	5

*Corresponding author: jtfry@mit.edu

1 Datasheet

1.1 Motivation

1. **For what purpose was the dataset created?** Our datasets were created to train and benchmark ultra-long time series denoising frameworks for the discovery of dark matter.
2. **Who created the dataset and on behalf of which entity?** This dataset is the direct output of the ABRACADABRA detector on behalf of the researchers on the author list. The ABRACADABRA detector was built by the ABRACADABRA collaboration including J. T. Fry and the authors of [13].
3. **Who funded the creation of the dataset?** This work was generously funded by the National Science Foundation under grant numbers NSF-PHY-1658693, NSF-PHY-1806440. J. T. Fry is supported by the National Science Foundation Graduate Research Fellowship under Grant No. 2141064

1.2 Composition

1. **What do the instances that comprise the dataset represent?** Each instance represents a voltage at a moment in time read out by our detector. For the SQUID data, this voltage comes from flux on the pickup loop of wire, converted to a voltage by the SQUID detector, read out by our digitizer. For the SG data, this voltage comes directly from a signal generator passed through a power splitter.
2. **How many instances are there in total?** There are 867,260,000,000 voltage instances total.
3. **Does the dataset contain all possible instances or is it a sample of instances from a larger set?** The voltage produced by the SQUID and the SG are continuous. The instances are sampled from this continuous voltage stream at a constant rate of 10MS/s.
4. **What data does each instance consist of?** The data each instance consists of is a raw 8-bit integer from our digitizer. To convert the raw 8-bit integer to a voltage, each bit must be scaled by the ADC voltage i.e. multiply by $40mV/128$.
5. **Is there a label or target associated with each instance?** Yes, for the calibration data, each instance of the SQUID data corresponds to a target which is the instance in the SG data.
6. **Is any information missing from individual instances?** No.
7. **Are relationships between individual instances made explicit?** The instances are related because they come from the same detector just sampled at a different moment in time.
8. **Are there recommended data splits?** Yes, please see Section 2.1
9. **Are there any errors, sources of noise, or redundancies in the dataset?** There are no redundancies. Yes, there are many sources of detector noise.
10. **Is the dataset self-contained, or does it link to or otherwise rely on external resources?** The data is self-contained.
11. **Does the dataset contain data that may be considered confidential?** No
12. **Does the dataset contain data that, if viewed directly, might be offensive, insulting, threatening, or might otherwise cause anxiety?** No.

1.3 Collection process

1. **How was the data associated with each instance acquired?** The data associated with each instance is acquired by the ABRACADABRA detector. Full details can be viewed in Sections 1.1 and 2.
2. **What mechanisms or procedures were used to collect the data?** Full details can be viewed in Sections 1.1 and 2 and reference [13]. The hardware necessary for producing said data include, but are not limited to, an Oxford dilution refrigerator, 1T superconducting magnet, two-stage Magnicon SQUID, superconducting pickup loop, superconducting calibration loop, signal generator, digitizer, and data acquisition computer.

Table 2: Summary of critical information about this data release. These are the data files used for training and benchmarking of the baseline algorithms provided.

	Training Data	Validation Data	Science Data
File Name	abra_training_00{00-19}.h5	abra_validation_00{00-19}.h5	abra_science_0{000-207}.h5
No. Data Points per File	2.01e9	2.01e9	4.01e9
HDF5 File Size	2.2 GB	2.2 GB	2.7 GB
ch1 Hardware Input	SQUID	SQUID	SQUID
ch2 Hardware Input	SG	SG	
Injected frequencies (Hz)	[1100, 1200, ... , 4.8M, 4.9M]		
Injected amplitudes (mV)	50		

Table 3: Summary of auxiliary files in this data release. These files provide an interesting challenge for the user, however were not used in the training or validation of the baseline models.

	Aux Training Data	Aux Validation Data
File Name	abra_training_00{20-39}.h5	abra_validation_00{20-39}.h5
No. Data Points per File	2.01e9	2.01e9
HDF5 File Size	2.2 GB	2.2 GB
ch1 Hardware Input	SQUID	SQUID
ch2 Hardware Input	SG	SG
Injected Frequencies (Hz)	[1100, 1200, ... , 4.8M, 4.9M]	
Injected Amplitudes (mV)	10	

3. **If the dataset is sampled from a larger set, what was the sampling strategy?** The voltage produced by the SQUID and the SG are continuous. The instances are sampled from this continuous voltage stream at a constant rate of 10MS/s. The sampling strategy is deterministic and regular.
4. **Who was involved in the data collection process and how were they compensated?** To run the ABRACADABRA experiment, one graduate student, J. T. Fry, was needed. This graduate student was paid via NSF fellowship.
5. **Over what timeframe was the data collected?** The data were collected from 2/21/24 - 2/23/24.
6. **Were any ethical review processes conducted?** No. These data do not involve humans.
7. **Does this dataset relate to people?** No.

1.4 Preprocessing/cleaning/labeling

1. **Was any preprocessing/cleaning/labeling of the data done?** No.

1.5 Uses

1. **Has the dataset been used for any tasks already?** No, this dataset has not been used for any tasks yet.
2. **Is there a repository that links to any or all papers or systems that use the dataset?** No. This dataset has yet to be used outside of this paper.
3. **What other tasks could the dataset be used for?** As discussed in Section ??, these data can generally be used for training time series algorithms. Due to its high coherence and extensive length, it is perfect for cross cutting applications.
4. **Is there anything about the composition of the dataset or the way it was collected and preprocessed that might impact future use?** No.
5. **Are there tasks for which the dataset should not be used?** No.

1.6 Distribution

1. **Will the dataset be distributed to third parties outside of the entity on behalf of which the dataset was created?** Yes, the dataset is open to the public.
2. **How will the dataset be distributed?** The dataset is publically available to be downloaded from the Open Science Data Federation cache. For download instructions, please see Section 2.
3. **When will the dataset be distributed?** The dataset is presently available.
4. **Will the dataset be distributed under a copyright or other intellectual property (IP) license, and/or under applicable terms of use (ToU)?** No.
5. **Have any third parties imposed IP-based or other restriction on the data associated with the instances?** No.
6. **Do any export controls or other regulatory restrictions apply to the dataset or to individual instances?** No.

1.7 Maintenance

1. **Who will be supporting/hosting/maintaining the dataset?** The dataset is hosted at Open Science Data Federation (OSDF). The data storage at OSDF was offered to Dr. Aobo Li by the director of San Diego Supercomputer Center (SDSC). OSDF also provide distributed cache of the dataset across its global cache location. For more detail, please refer to OSDF Website[†]. Dr. Aobo Li will be maintaining the dataset.
2. **How can the owner/curator/mangager of the dataset be contacted?** Please email Dr. Aobo Li at (liaobo77@ucsd.edu).
3. **Is there an erratum?** No.
4. **Will the dataset be updated?** No, the dataset will not be updated.
5. **If the dataset relates to people, are there applicable limits on the retention of the data associated with the instances?** This dataset does not relate to people.
6. **Will older versions of the dataset continue to be supported?** Yes, they will continue to be supported.
7. **If others want to extend/augment/build on/contribute to the dataset, is there a mechanism for them to do so?** No. Access to the ABRACADABRA detector is controlled.

2 Dataset and code access

The data downloading and associated analysis scripts are available at <https://github.com/jessicafry/TIDMAD>. All data were uploaded to Open Science Data Federation and cached using their distributed cache system. The TIDMAD dataset can be downloaded using the `download_data.py` script provided in this GitHub repository. This script runs without any external dependencies. This script downloads data by generating a series of `wget` commands and executing them in a bash environment. `download_data.py` has the following argument:

- `-output_dir -o`: Destination directory where the file will be downloaded, default: current working directory.
- `-cache -c`: Which OSDF cache location should be used to download data. Options include [NY/NorCal/SoCal/Director(default)]:
 - NY: New York
 - NorCal: Sunnyvale
 - SoCal: San Diego
 - Director: automatically find the fastest cache location based on user’s location.
 - * **WARNING**: Director cache is sometimes unstable. We recommend switching to a different cache if the download fails.

[†]<https://osg-htc.org/services/osdf.html>

- `-train_files -t`: Number of training files to download, must be an integer between 0 and 20, default 20.
- `-validation_files -v`: Number of validation files to download, must be an integer between 0 and 20, default 20.
- `-science_files -s`: Number of science files to download, must be an integer between 0 and 208, default 208.
- `-f, -force`: Directly proceed to download without showing the file size and asking the confirmation question.
- `-sk, -skip_downloaded`: Skip the file that already exists at `-output_dir`.
- `-w, -weak`: Download the weak signal version of training and validation files. In this version, the injected signal is 1/5 the amplitude of the normal version. This is a more challenging denoising task. Note that the normal version has a file range 0000-0019, while the weak version has a file range of 0020-0039.
- `-p, -print`: Print out all wget commands instead of actually executing the download commands.

In the same github repository, we also provided a `filelist.dat` file which contains line-by-line wget command to download the entire dataset. An example wget command is given here:

```
wget https://osdf-director.osg-htc.org/ucsd/physics/ABRACADABRA/ABRA_aires_validation_data/abra_validation_0009.h5
```

We have also provided a link to download all trained models used to produce the results in the main manuscript. The models can be downloaded from https://drive.google.com/drive/folders/16ORX1b2zo1_1OYYAcRBgddBuYImj0Bxs?usp=share_link.

3 Croissant metadata

We created a croissant metadata file `TIDMAD_croissant.json` using protocol presented in [3].

4 Author statement

The authors of this paper all bear responsibility in the case of violation of rights. The information provided in the paper and supplementary material is truthful and accurate. The code from this paper is hosted, managed, and maintained by the paper author J. T. Fry at <https://github.com/jessicafry/TIDMAD>. The data from this paper is hosted, managed, and maintained by the paper author Aobo Li with download instructions in Section 2. The dataset is released under the Creative Commons Attribution (CC BY) license. The code is released under the GNU General Public License (GPL), version 3.