

MMFakeBench: A Mixed-Source Multimodal Misinformation Detection Benchmark for LVLMs

Xuannan Liu¹ Zekun Li² Peipei Li^{1*} Shuhan Xia¹
 Xing Cui¹ Linzhi Huang¹ Huaibo Huang³ Weihong Deng Zhaofeng He¹
¹ Beijing University of Posts and Telecommunications ² University of California, Santa Barbara
³ Center for Research on Intelligent Perception and Computing, NLPR, CASIA
 {liuxuannan, lipeipei}@bupt.edu.cn zekunli@cs.ucsb.edu
<https://liuxuannan.github.io/MMFakeBench.github.io/>

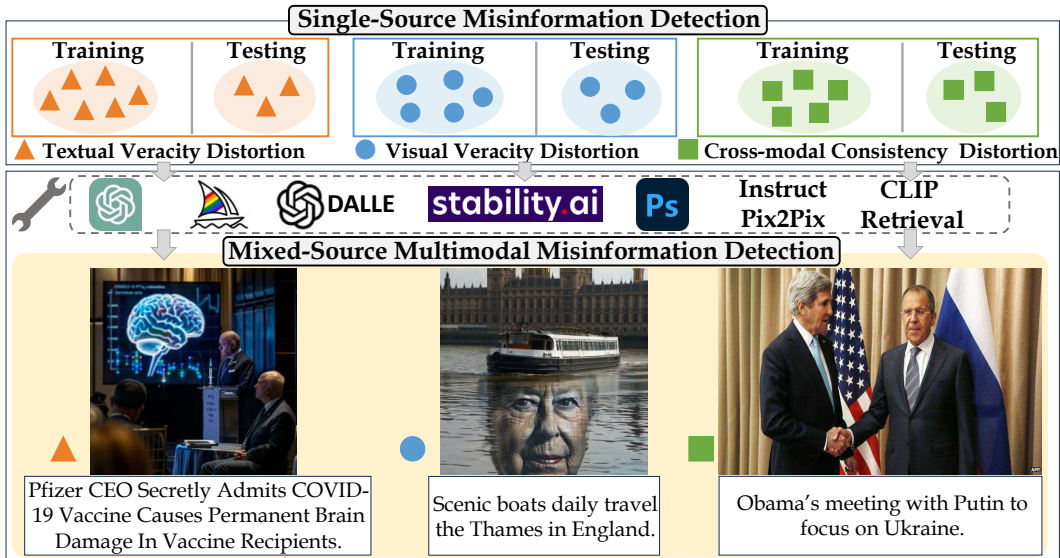


Figure 1: **Top:** Previous methods often assume a single misinformation source and conduct single-source detection. **Bottom:** We collaborate generative models and AI tools to build a mixed-source multimodal misinformation benchmark and achieve mixed-source detection.

Abstract

Current multimodal misinformation detection (MMD) methods often assume a single source and type of forgery for each sample, which is insufficient for real-world scenarios where multiple forgery sources coexist. The lack of a benchmark for mixed-source misinformation has hindered progress in this field. To address this, we introduce MMFakeBench, the first comprehensive benchmark for mixed-source MMD. MMFakeBench includes 3 critical sources: textual veracity distortion, visual veracity distortion, and cross-modal consistency distortion, along with 12 sub-categories of misinformation forgery types. We further conduct an extensive evaluation of 6 prevalent detection methods and 15 large vision-language models (LVLMs) on MMFakeBench under a zero-shot setting. The results indicate that current methods struggle under this challenging and realistic mixed-source MMD setting. Additionally, we propose an innovative unified framework, which integrates rationales, actions, and tool-use capabilities of LVLm agents, significantly

*Corresponding Author

enhancing accuracy and generalization. We believe this study will catalyze future research into more realistic mixed-source multimodal misinformation and provide a fair evaluation of misinformation detection methods.

1 Introduction

Recent advances in generative models for texts [1, 2] and images [3, 4] have significantly lowered the barrier to producing diverse multimodal misinformation, posing threats to politics, finance, and public health. For instance, the misinformation “COVID-19 vaccine causes brain damage”, shown in Fig. 1, accompanied by a highly convincing image, can lead to public distrust in medical treatments and vaccine refusal. Therefore, identifying multimodal misinformation on social media is urgent.

Most current multimodal misinformation detection (MMD) methods [5–10] typically assume that each sample has a single, known forgery source, as depicted in Fig. 1 **Top**. This assumption is overly simplistic and fails to capture the complexity of real-world scenarios, where misinformation often originates from multiple, random sources. To address this mixed-source MMD problem, two key challenges need to be solved. First, existing datasets primarily consist of single-source misinformation, lacking misinformation from multiple sources. This limitation prevents comprehensive evaluation of MMD methods. Second, there is a lack of general detectors capable of effectively handling mixed-source misinformation. Hence, we present MMFakeBench, encompassing the mixed-source MMD benchmark, evaluations, and framework.

Benchmark: We introduce MMFakeBench, the first comprehensive benchmark for evaluating mixed-source MMD. As shown in Fig. 1 **Bottom**, leveraging advanced AI tools, such as diffusion generators and ChatGPT, MMFakeBench provides 12 forgery types with 11,000 data pairs from three primary sources: textual veracity distortion, visual veracity distortion, and cross-modal consistency distortion. Textual veracity distortion encompasses three types of rumors: natural, artificial, and GPT-generated rumors. Unlike [11–14] that focus solely on single-source, text-only rumors, MMFakeBench incorporates text-image rumors using highly relevant real or AI-generated images. Visual veracity distortion filters existing PS-edited images [15, 16] according to misinformation standards and incorporates high-quality AI-generated images. Cross-modal consistency distortion integrates inconsistencies from both edited and repurposed perspectives into five distinct sub-categories.

Evaluations: To access the current advancements in mixed-source MMD, we conduct a comprehensive evaluation of 6 state-of-the-art detection methods and 15 large vision-language models (LVLMs) on MMFakeBench. Specifically, we evaluate 6 detection methods in a single-source setting and assess their combined performance (text, image, and cross-modal inconsistency detectors) in the mixed-source setting. Additionally, we evaluate 15 large vision-language models (LVLMs), including proprietary models such as GPT-4V [17]. The results indicate that existing detection methods exhibit poor generalization. Although LVLMs show robust generalization capabilities, their overall performance still requires improvement.

Framework: Based on our analysis, we propose a simple yet effective LVLm-based framework called MMD-Agent, which enhances detection performance and can serve as a new baseline for future research. MMD-Agent decomposes mixed-source detection into three stages: textual veracity check, visual veracity check, and cross-modal consistency reason. This decomposition ensures methodical and thorough reasoning. At each stage, MMD-Agent instructs LVLMs to generate multi-perspective rationales, integrating model actions for coherent decisions. Additionally, the models interact with external environments (e.g., Wikipedia) to incorporate supplementary information into their reasoning.

In summary, the main contributions are: (1) We introduce mixed-source multimodal misinformation detection (MMD), a challenging setting for detecting misinformation from diverse and uncertain sources, breaking free from single-source constraints, and advancing practical misinformation detection tasks. (2) We develop MMFakeBench, the first benchmark dataset for evaluating mixed-source MMD. The dataset contains 3 critical categories (textual veracity distortion, visual veracity distortion, and consistency reasoning) and 12 sub-categories of forgery types. (3) Using the newly collected dataset, we benchmark mixed-source MMD by evaluating 6 prevalent detection methods and 15 LVLMs. (4) We propose MMD-Agent, a simple yet effective LVLm-based framework. It outperforms previous methods and LVLMs on the MMFakeBench benchmark, highlighting the potential of mixed-source MMD and providing a new baseline for future research.

Table 1: Comparison of misinformation datasets. (k) denotes the number of rumor types.

Dataset	Textual Veracity Distortion			Visual Veracity Distortion			Cross-modal Consistency Distortion	
	Text	Supporting Image		Text	Fact-conflicting Image		Image/Text	Image/Text
	(Rumor)	Repurposed	AI-generated	(Veracity)	PS-edited	AI-generated	Repurposing	Editing
FEVER [11]	✓ (1)	✗	✗	✗	✗	✗	✗	✗
PolitiFact [12]	✓ (1)	✗	✗	✗	✗	✗	✗	✗
Gossipcop [12]	✓ (1)	✗	✗	✗	✗	✗	✗	✗
Snopes [13]	✓ (1)	✗	✗	✗	✗	✗	✗	✗
MOCHEG [18]	✓ (1)	✗	✗	✗	✗	✗	✗	✗
LLMFake [14]	✓ (1)	✗	✗	✗	✗	✗	✗	✗
EMU [15]	✗	✗	✗	✗	✓	✗	✗	✗
Fakeddit [16]	✗	✗	✗	✓	✓	✗	✗	✗
MAIM [19]	✗	✗	✗	✗	✗	✗	✓	✗
MEIR [20]	✗	✗	✗	✗	✗	✗	✗	✓
NewsCLIPpings [21]	✗	✗	✗	✗	✗	✗	✓	✗
COSMOS [22]	✗	✗	✗	✗	✗	✗	✓	✗
DGM4 [23]	✗	✗	✗	✗	✗	✗	✗	✓
MMFakeBench	✓ (3)	✓	✓	✓	✓	✓	✓	✓

2 Related Work

Misinformation Benchmarks. One group of misinformation datasets primarily focuses on distorting textual veracity. The Fever [11] dataset is constructed by manipulated Wikipedia sentences with manual annotation. Unlike these artificial rumors, other datasets, such as Snopes [13], FakeNewsNet [12], and MOCHEG [18], collect natural rumors from fact-checking websites. Recently, the LLMFake [14] dataset is curated by instructing large language models (LLMs) to generate diverse misinformation. Apart from textual veracity distortion, the EMU [15] and Fakeddit [16] datasets collect Photoshop-edited images from the Reddit platform. Another group of misinformation datasets focuses on disrupting cross-modal consistency. The MAIM [19] and MEIR [20] datasets employ caption replacement and entity swapping, respectively. The NewsCLIPpings [21] dataset retrieves out-of-context images to support certain narratives. COSMOS [22] is created by linking images with various captions. The recent dataset DGM⁴ [23] introduces global and local manipulation to alter semantics and sentiment. Different from these works containing only single-source misinformation, we propose the first benchmark dataset for evaluating mixed-source MMD, involving textual veracity distortion, visual veracity distortion, and cross-modal consistency distortion, shown in Table 1.

Misinformation Detection. Current misinformation detection approaches are mainly divided into two categories. The first is to check textual veracity. Earlier works focus on better-constructing features based on writing style [24], sentiment [25], user feedback [26]. Recent works utilize pre-trained language models [8–10] and their reasoning ability to assess the claim’s veracity. The second is to incorporate cross-modal features to detect semantic inconsistencies using contextual attention [27], multi-view [7], causal reasoning [28], instruction tuning [6, 29]. However, those work each target at a single-source problem, and evaluations are conducted in constrained scenarios. Our work is the first to introduce a comprehensive benchmark for mixed-source multimodal misinformation detection.

Large Vision-Language Models. Large language models (LLMs) such as GPT-3 [1] and Vicuna [30] have demonstrated remarkable performance on various linguistic tasks. Inspired by LLMs, models like LLaVA [31] and MiniGPT-4 [32] facilitate image-text feature alignment by leveraging visual instruction data for fine-tuning. More recently, the evolution of LVLMs has driven advancements in creating diverse and high-quality multimodal instruction datasets. Models such as InstructBLIP [33], mPLUG-Owl [34, 35], VILA [36], LLaVA-1.5 [37] exemplify these developments. In this paper, we explore the reasoning capabilities [38, 39] of LVLMs to address the challenge of mixed-source multimodal misinformation by integrating rationales, actions, and tool-use capabilities.

3 MMFakeBench Benchmark

In MMFakeBench, we address three critical multimodal misinformation sources: textual veracity distortion, visual veracity distortion, and cross-modal consistency distortion. For textual veracity

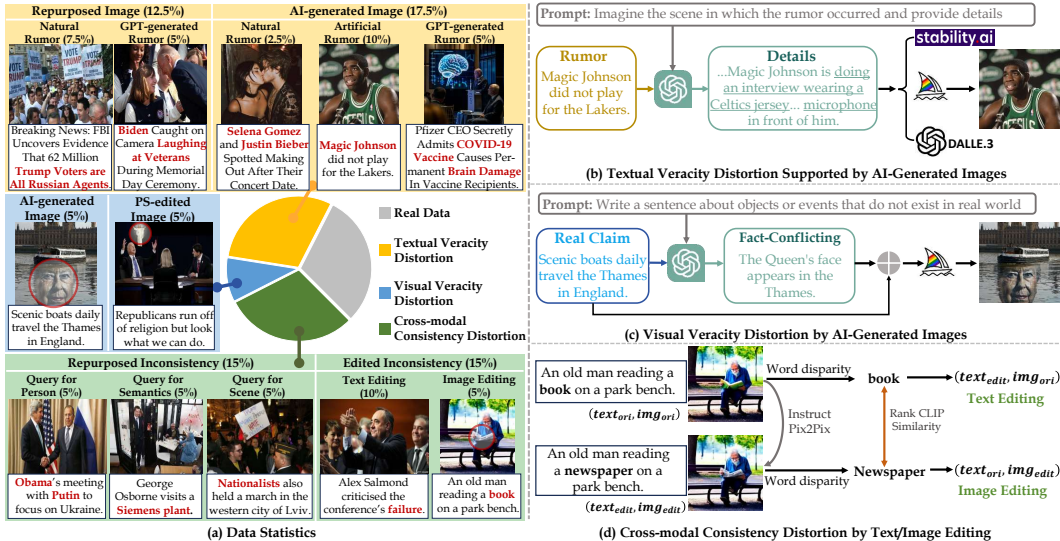


Figure 2: (a) Statistics of the MMFakeBench Benchmark. (b-d) Illustrations of using collaborative generative models and AI tools to generate different sources of misinformation.

distortion, it includes three types of text-based rumors paired with two types of supporting images to mimic real-world multimodal scenarios. For visual veracity distortion, we employ two visual techniques to introduce fact-conflicting information in images while the texts remain veracious. For cross-modal consistency distortion, both texts and images are veracious, yet cross-modal inconsistencies exist between them with three repurposed methods and two edited methods.

3.1 Three Misinformation Sources

3.1.1 Textual Veracity Distortion

Textual veracity distortion is a critical misinformation category. The dataset in this category comprises 3,300 samples. Previous works [11–14] focus on single-source and single-modal textual rumors. However, the types of real-world rumors are diverse, and those accompanied by images can have a significantly greater impact. To address this, MMFakeBench introduces a broader range of rumor types and augments them with highly relevant supporting images to enhance perceived credibility.

Textual Rumor. As shown in Table 1, unlike previous methods that consider only one type of textual rumor, we consider three distinct types: (1) Natural Rumor. We select natural rumors from Politifact [12] and Gossipcop [12], which provide political news and entertainment stories derived from fact-checking websites. (2) Artificial Rumor. We collect artificial rumors from the FEVER dataset [11], which is curated by manually modifying Wikipedia sentences. (3) GPT-Generated Rumor. We instruct ChatGPT² to produce GPT-generated rumors via three prompt approaches proposed by [14]: arbitrary generation, rewriting generation, and information manipulation. Arbitrary generation is utilized to generate misinformation in specific domains. Rewriting generation addresses the concise and synthetic traces of artificial rumors, while information manipulation involves altering factual information in real claims from Politifact and Gossipcop.

Supporting Image. We use either AI-generated images or carefully selected real images to support the content presented in the rumor text: (1) AI-Generated image. For artificial rumors and their derived GPT-generated rumors, as well as some less harmful gossip, we utilize generative models to create supporting images. We utilize three advanced models: Stable Diffusion XL [4], DALL-E3 [40], and Midjourney V6 [41] to enhance the diversity of the generated images. For each rumor, we randomly select a generative model to produce a corresponding supporting image. As many rumors are highly abstract and lack concrete descriptions of objects and scenes, directly using these texts as conditions often yields images that are neither realistic nor relevant. To address this, as shown in

²gpt-3.5-turbo: <https://platform.openai.com/docs/models/gpt-3-5>

Fig. 2 (b), we instruct ChatGPT to enrich the rumors with more detailed descriptions. These enriched contexts are then used as input for generative models, ensuring alignment with the textual rumors. (2) Repurposed image. To avoid creating new high-risk images, especially for sensitive topics like politics and gossip, we use repurposed images from the VisualNews [42] dataset, which contains numerous image-text pairs from real-world news sources. We select images with high semantic relevance to the textual rumors based on text-image CLIP similarity and text-text CLIP similarity. Images with similarity scores above a certain threshold are chosen as supporting images.

3.1.2 Visual Veracity Distortion

The visual veracity distortion dataset comprises 1,100 samples where the text is real and the misinformation exists in the image. Previous datasets [15, 16] focus solely on PS-edited (Photoshop-edited) images, containing both misleading and non-misleading content. In this study, we manually select the misleading ones and include them in MMFakeBench. Besides, we incorporate AI-generated images with veracity distortion, which is increasingly harmful due to advancements in diffusion generators.

PS-Edited Image. The PS-edited images are derived from the "manipulated content" samples in the Fakeddit dataset [16], which is designed for multimodal fake news detection. These samples originate from the "Photoshop battles comments" on Reddit. However, not all PS edits result in misinformation by our benchmark standards, as some are minor aesthetic modifications that do not compromise visual veracity. Thus, to build our visual veracity distortion dataset, we manually select 550 PS-edited images containing fact-conflicting content from the 7,693 samples of the "manipulated content" set.

AI-generated Image. We propose an automated pipeline that generates fact-conflicting descriptions from text captions and then creates high-quality images. Specifically, we first collect image-text pairs from the MS-COCO [43] and VisualNews datasets [42]. Based on the original text captions, we use ChatGPT to generate corresponding fact-conflicting descriptions, which are manually verified, as depicted in Fig. 2 (c). For example, from the caption "Scenic boats daily travel the Thames in England", we generate the description "The Queen's face appears in the Thames". These descriptions, combined with the original captions, are used as prompts in the Midjourney V6 model [41] to create corresponding images. The resulting text-image pairs contain original factual text and generated images with additional fact-conflicting information.

3.1.3 Cross-modal Consistency Distortion

In cross-modal consistency distortion, both the text and image with veracity, but either the text or image is replaced/manipulated to disrupt their overall consistency. Previous datasets [20, 21, 23] focus on inconsistencies from a single source, either edit-based or repurposed-based. In contrast, our MMFakeBench integrates inconsistencies from both edited and repurposed perspectives into five distinct sub-categories, a total of 3,300 image-text pairs.

Repurposed Inconsistency. Our dataset encompasses three types of repurposed inconsistency, curated directly from the NewsCLIPPings [21] dataset: semantic query, person query, and scene query. (1) Semantic query retrieves repurposed images based on specific semantic content. (2) Person query ensures the individual mentioned in the caption appears in the mismatched image. (3) Scene Query relies on spatial similarity to retrieve comparable scene information from repurposed images.

Edited Inconsistency. Our dataset contains two types of edited inconsistency: text editing and image editing. For text editing, we select samples from the DGM⁴ [23] dataset, which modifies sentiment words with their antonyms. Notably, some samples in DGM⁴ contain fact-conflicting content post-editing. To avoid redundancy with textual veracity distortion, we filter out these samples. For the remaining text editing and all image editing inconsistencies, we build upon the COCO-Counterfactuals [44] dataset. COCO-Counterfactuals dataset encompasses original image-text pairs ($text_{ori}, img_{ori}$) and edited image-text pairs ($text_{edit}, img_{edit}$) which are obtained via Instruct-Pix2Pix model [45]. As illustrated in Fig. 2 (d), we separately extract word disparities between $text_{ori}$ and $text_{edit}$ and select samples with significant semantic differences using CLIP similarity. Then, we reassemble the two pairs and obtain ($text_{edit}, img_{ori}$) as text-edited consistency distortion samples and ($text_{ori}, img_{edit}$) as image-edited consistency distortion samples.

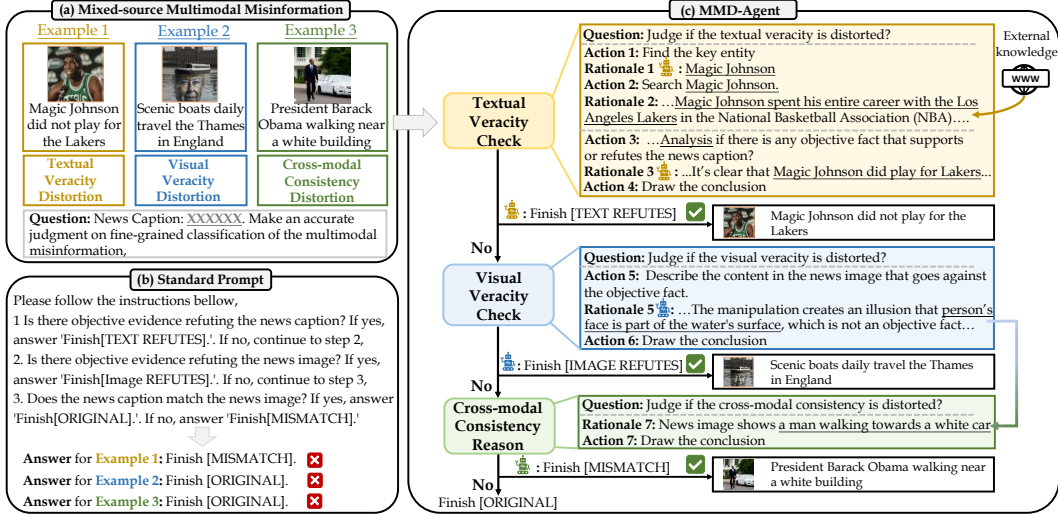


Figure 3: Comparison of standard prompt and proposed MMD-Agent methods, (a) Three examples of multimodal misinformation from distinct sources. (b) LVLMs with standard prompt methods fail to make correct judgments. (c) MMD-Agent instructs LVLMs to decompose complex mixed-source detection into smaller subtasks. Each subtask is addressed by integrating multi-perspective rationales.

3.2 Real Data Collection

In addition to the misinformation data, we collect 3,300 real data pairs, ensuring both textual and visual veracity and exhibiting strong image-text consistency. Given that our synthetic data is derived from multiple datasets, we construct the real dataset from the same corresponding sources, including MS-COCO [43], VisualNews [42], and real image-text pairs from Fakeddit [16]. We further divide VisualNews into four distinct news sources: The Guardian, BBC, USA TODAY, and The Washington Post. Finally, we build the real dataset by equally selecting from six distinct sources.

3.3 MMFakeBench Analysis

MMFakeBench consists of 11,000 image-text pairs, which are divided into a validation set and a test set following [46]. The validation set, comprising 1,000 image-text pairs, is intended for hyperparameter selection, while the test set contains 10,000 pairs. MMFakeBench encompasses one real category and three misinformation categories. Detailed statistics are shown in Figure 2 (a). MMFakeBench is partitioned into 30% for textual veracity distortion, 10% for visual veracity distortion, 30% for cross-modal consistency distortion, and 30% for real data. The three misinformation categories can be further subdivided into 12 detailed subcategories based on the sources of the text and images, as shown in Figure 2 (a). Such a comprehensive benchmark highlights the challenges of intertwining mixed-source and multiple-types multimodal misinformation in the real world.

4 Our MMD-Agent Framework

We present a simple yet effective framework called MMD-Agent, which integrates the rationales, actions, and tool-use capabilities of LVLm agents. As shown in Fig. 3, MMD-Agent involves two main processes: (1) Hierarchical decomposition and (2) Integration of multi-perspective rationales.

Specifically, we instruct LVLms \mathcal{M} to decompose the task of mixed-source multimodal misinformation detection into three smaller subtasks: textual veracity check, visual veracity check, and cross-modal consistency reasoning. During the intermediary phase, each subtask t is addressed by generating multi-perspective rationales \mathcal{R}_t and integrating them with model actions a_t to facilitate decision-making d_t :

$$d_t = \mathcal{M}(a_t, \mathcal{R}_t). \quad (1)$$

The rationales aim to provide valuable insights by reasoning within the current context, addressing the requirement of detecting diverse clues in misinformation. As depicted in Fig. 3 (c), these rationales can encompass multiple perspectives, such as textual key entity (Rationale 1), injecting retrieval knowledge (Rationale 2), factual analysis (Rationale 3), and commonsense analysis (Rationale 5 and Rationale 7). The model is guided to generate reasoning paths and make decisions for each subtask individually, leveraging its inherent understanding and capabilities.

5 Experiments

We select 6 state-of-the-art misinformation detection methods and 15 large vision-language models (LVLMs) for preliminary benchmarking using the MMFakeBench dataset, aiming to explore their applicability in the mixed-source MMD setting. Additionally, we evaluate the performance of our proposed framework, MMD-Agent. All evaluations are conducted under a zero-shot setting on our benchmark. All experiments are performed on NVIDIA GeForce 3090 GPUs with PyTorch.

5.1 Experimental Setting

Baseline Models. We select LVLMs of varying sizes as baseline models. (i) Language model with 7B parameter including Otter [47], MiniGPT-4 [32], InstructBLIP [33], Qwen-VL [48], VILA [36], PandaGPT [49], mPLUG-Owl2 [35], BLIP-2 [50] and LLaVA-1.6 [51]. (ii) Language model with 13B parameter including VILA, InstructBLIP, BLIP-2, and LLaVA-1.6. (iii) Language model with 34B parameter including LLaVA-1.6. (iv) Closed-source model including GPT-4V [17].

Evaluation Metrics. We evaluate the performance of different baselines using multi-class classification. Consistent with [9, 52, 28], we adopt the widely-used macro-F1 metric, which balances precision and recall through a harmonic mean. Beyond the F1 score, we also include macro-precision, macro-recall, and macro-accuracy as complementary evaluation metrics. Specifically, we construct robust regular expressions that are employed to extract key phrases from the long responses for accurate answer matching. If a model’s response lacks a valid answer, we classify it as a pseudo choice “Z” and consider the response incorrect, following [53].

5.2 Main Results

Comparison of Different LVLMs. We present a comprehensive comparison of different LVLMs using the MMFakeBench, detailed in Table 2. Our key findings are summarized as follows:

1) Challenges of MMFakeBench: The benchmark poses substantial challenges to current models. Notably, GPT-4V, despite its advancement, achieves an F1-score of only 51.0% with the standard prompt. This indicates considerable room for improvement and highlights the rigorous standards of this benchmark.

2) Disparity between Open-source Models and GPT-4V: Although LLaVA-1.6-34b is the leading open-source model, it achieves an F1-score of just 25.7% with the standard prompt, significantly lower than GPT-4V. This highlights a pronounced disparity in detection capabilities between open-source and proprietary models.

3) Impact of Parameter Quantity: Comparing models within the same series, such as LLaVA-1.6-Vicuna-7b and LLaVA-1.6-34b, we observe that models with larger parameter counts exhibit better performance. Smaller LVLMs face constraints in instruction-following and high predicted consistency, as detailed in the Appendix. These results indicate that 7B parameter models lack sufficient multimodal understanding to effectively combat misinformation.

4) Effectiveness of MMD-Agent: Given the limitations inherent in small-scale models, we selected moderately sized open-source and proprietary models as baselines to compare the proposed MMD-Agent with the standard prompt. MMD-Agent significantly improves the F1-score performance of both open-source models and GPT-4V. Notably, the LLaVA-1.6-34B using MMD-Agent achieves an F1-score of 49.9%, approaching the 51% score of GPT-4V with the standard prompt. This suggests that MMD-Agent could serve as a general framework for future research on the MMFakeBench benchmark.

Table 2: Overall results (%) of different models on the MMFakeBench validation and test set with the comparison of standard prompt (SP) and proposed MMD-Agent framework.

Model Name	Language Model	Prompt Method	Validation (1000)				Test (10000)			
			F1↑	Precision↑	Recall↑	ACC↑	F1↑	Precision↑	Recall↑	ACC↑
Language Model with 7B Parameter										
Otter-Image [47]	MPT-7B	SP	5.2	10.5	3.4	4.1	4.9	9.3	3.3	4.0
MiniGPT4 [32]	Vicuna-7B	SP	5.2	5.2	21.2	9.0	5.3	6.9	21.0	9.1
InstructBLIP [33]	Vicuna-7B	SP	7.1	7.9	6.5	7.8	8.1	16.4	7.2	8.5
Qwen-VL [48]	Qwen-7B	SP	7.5	10.3	24.3	11.0	8.0	35.9	25.5	11.6
VILA [36]	LLaMA2-7B	SP	11.5	7.5	25.0	30.0	11.5	7.5	25.0	30.0
PandaGPT [49]	Vicuna-7B	SP	11.8	9.8	25.0	30.0	11.6	8.6	25.0	30.0
mPLUG-Owl2 [35]	LLaMA2-7B	SP	14.5	22.2	25.9	31.1	15.1	25.2	26.3	31.5
BLIP2 [50]	FlanT5-XL	SP	16.4	20.1	27.5	33.0	16.7	17.3	27.7	33.2
LLaVA-1.6 [51]	Vicuna-7B	SP	17.4	14.8	25.7	30.8	19.0	16.5	26.9	32.3
Language Model with 13B Parameter										
VILA [36]	LLaMA2-13B	SP	11.5	7.5	25.0	30.0	11.6	32.5	25.0	30.0
		MMD-Agent	22.7	27.3	24.4	28.7	24.0	30.4	25.5	29.4
InstructBLIP [33]	Vicuna-13B	SP	13.7	13.2	24.0	28.8	13.9	25.5	24.3	29.1
		MMD-Agent	26.0	33.3	30.1	29.5	24.5	32.1	28.8	27.3
BLIP2 [50]	FlanT5-XXL	SP	16.7	34.9	27.3	32.8	16.3	34.6	27.3	32.8
		MMD-Agent	31.6	39.8	32.2	34.4	28.8	39.0	30.4	32.1
LLaVA-1.6 [51]	Vicuna-13B	SP	12.0	22.5	25.0	30.0	14.4	35.7	26.0	31.2
		MMD-Agent	38.0	44.5	41.0	40.6	34.5	42.7	37.5	37.4
Language Model with 34B Parameter										
LLaVA-1.6 [51]	Nous-Hermes-2	SP	25.7	44.5	33.7	40.4	25.4	44.1	33.8	40.5
		MMD-Agent	49.9	54.4	52.9	48.7	47.7	52.1	49.6	46.6
Proprietary LVLMS										
GPT-4V [17]	ChatGPT	SP	51.0	66.8	49.7	54.0	48.8	63.0	48.7	54.2
		MMD-Agent	61.6	67.8	59.3	62.1	61.5	67.7	59.1	61.0

Table 3: (a) Comparison with single-source detectors for MMFakeBench. (b) Ablation studies on hierarchical (Hier.) decomposition and rationales \mathcal{R}_t of each sub-task t . TVD, VVD, and CCD denote textual veracity distortion, visual veracity distortion, and cross-modal consistency distortion, respectively. Corpus denotes the general corpus in LVLMS that is not tailored for misinformation detection. * denotes each powerful single-source detector that is used for mixed detection.

(a)				(b)								
Existing Detector	Train Source	Binary Overall↑	Multiclass Overall↑	Hier.	\mathcal{R}_1	\mathcal{R}_2	\mathcal{R}_3	Real↑	TVD↑	VVD↑	CCD↑	Overall↑
FakingFakeNews* [8]	TVD	37.8	-					58.5	5.8	0.0	38.6	25.7
CNNSpot [54]	VVD	23.8	-									
UnivFD [55]	VVD	28.9	-	✓				45.8 (↓12.7)	16.5 (↑10.7)	32.5 (↑32.5)	49.0 (↑10.4)	36.0
LNP* [54]	VVD	33.0	-									
FakeNewsGPT4 [29]	CCD	41.7	-	✓	✓			46.4 (↑0.6)	37.6 (↑21.1)	32.8 (↑0.3)	47.2 (↓1.8)	41.0
HAMMER* [23]	CCD	43.0	-	✓	✓	✓		46.8 (↑0.4)	37.6 (↑0.0)	61.7 (↑28.9)	48.6 (↑1.4)	48.7
Mixed Detection	-	47.6	22.5	✓	✓	✓	✓	51.1 (↑4.3)	37.6 (↑0.0)	61.7 (↑0.0)	49.2 (↑0.6)	49.9
LLaVA-1.6-34B [51]	Corpus	67.2	49.9									
GPT-4V [17]	Corpus	74.0	61.6									

Comparison with Single-source Detectors. We compare LLaVA-1.6-34B and GPT-4V utilized in MMD-Agent, with several competitive single-source detectors [8, 54–56, 29, 23], which represent the SOTA methods for each single-source scenarios. The details of each detector are presented in the Appendix. For a fair comparison, in addition to the single-source misinformation detection via existing detectors, we integrate the three most powerful detectors in distinct sources (i.e., FakeingFakeNews [8], LNP [56] and HAMMER [23]) to assess the capability of mixed detection. Mixed detection utilizes our proposed hierarchical framework by replacing LVLMS with relevant detectors. The results in Table 3 (a) show that LLaVA-1.6-34B and GPT-4V perform better than single-source detectors for both binary and multiclass classification by a large margin. This demonstrates that LVLMS trained with a large general corpus achieve promising generalization performance in mixed-source MMD and can serve as potential baseline models for future study.

Table 4: Performance (F1 score (%)) of models on different sources of misinformation.

Model	Real [†]	TVD [†]	VVD [†]	CCD [†]	Overall [†]
VILA-13B [36]	32.4	13.4	4.3	37.6	21.9
InstructBLIP-13B [33]	41.9	18.8	19.6	23.8	26.0
BLIP2-FLAN-T5-XXL [50]	41.5	39.2	13.1	32.6	31.6
LLaVA-1.6-34B [51]	51.1	37.6	61.7	49.2	49.9
GPT-4V [17]	65.3	67.2	57.3	56.5	61.6

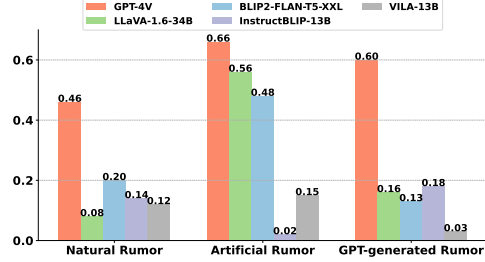


Figure 4: Performance (detection success rate) of models on different types of rumor.

5.3 Experimental Analysis

Ablation Study on Hierarchical Decomposition and Rationales. We first investigate the effects of instructing LVLMs only with hierarchical decomposition in comparison with standard prompts. In Table 3 (b), the decomposition method performs better for solving multi-task interference. Additionally, we conduct an ablation study by sequentially generating multi-perspective rationales for individual sub-tasks. Results in Table 3 (b) show that augmenting decisions with rationales outperform its ablation part, especially for textual veracity distortion and visual veracity distortion.

Analysis of Misinformation Sources and Types. We compare the F1 scores of various LVLMs across misinformation sources in Table 4. Across all sources, the majority of open-source models perform worse than GPT-4V by a huge margin, particularly in terms of textual veracity distortion. This indicates that open-source models are considerably challenged by textual veracity distortion. Within textual veracity distortion, we further report the detection accuracy of selected models across three types of textual rumors. Fig. 4 shows that all open-source models performed significantly worse in the “natural rumor” and “GPT-generated rumor” sub-categories. This indicates that GPT-generated rumors are challenging and closer to real-world rumors.

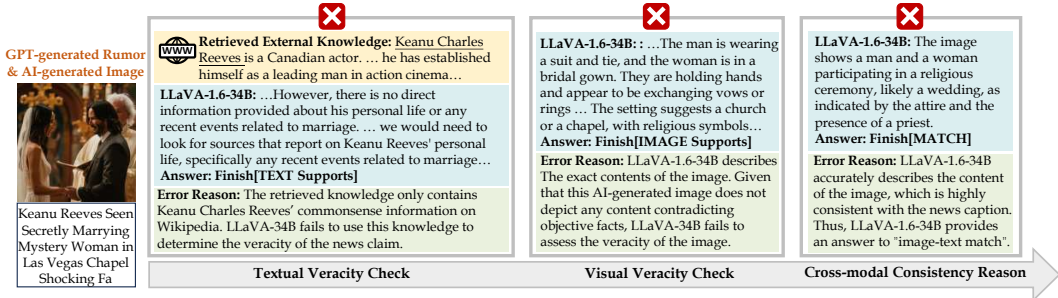


Figure 5: One of the most harmful examples involves a GPT-generated rumor supported by an AI-generated image, challenging for LLaVA-1.6-34B. More examples can be found in the Appendix.

Error Analysis. A fundamental root cause of textual veracity checking errors in the LLaVA-1.6-34B is the lack of useful external knowledge. This deficiency is exemplified in Fig.5, where the knowledge contains only commonsense information but fails to provide relevant events. Moreover, this AI-generated image in the image-text pair exhibits high fidelity and strong coherence, thus evading detection in visual veracity and cross-modal consistency. These instances underscore the dangers of using collaborative generative modes to automatically generate multimodal misinformation.

6 Conclusion

In this paper, we introduce MMFakeBench, the first comprehensive benchmark for detecting mixed-source multimodal misinformation. MMFakeBench contains three primary misinformation categories along with 12 sub-categories of forgery types. We conduct comprehensive evaluations of 6 prevalent detection methods and 15 LVLMs on the MMFakeBench dataset. Furthermore, we propose an innovative unified framework and perform extensive experiments to demonstrate its effectiveness.

References

- [1] Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. Language models are few-shot learners. In *NeurIPS*, 2020.
- [2] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023.
- [3] Prafulla Dhariwal and Alexander Nichol. Diffusion models beat gans on image synthesis. In *NeurIPS*, 2021.
- [4] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *CVPR*, 2022.
- [5] Sahar Abdelnabi, Rakibul Hasan, and Mario Fritz. Open-domain, content-based, multi-modal fact-checking of out-of-context images via online resources. In *CVPR*, 2022.
- [6] Peng Qi, Zehong Yan, Wynne Hsu, and Mong Li Lee. Sniffer: Multimodal large language model for explainable out-of-context misinformation detection. In *CVPR*, 2024.
- [7] Qichao Ying, Xiaoxiao Hu, Yangming Zhou, Zhenxing Qian, Dan Zeng, and Shiming Ge. Bootstrapping multi-view representations for fake news detection. In *AAAI*, 2023.
- [8] Kung-Hsiang Huang, Kathleen McKeown, Preslav Nakov, Yejin Choi, and Heng Ji. Faking fake news for real fake news detection: Propaganda-loaded training data generation. In *ACL*, 2023.
- [9] Xuan Zhang and Wei Gao. Towards llm-based fact verification on news claims with a hierarchical step-by-step prompting method. In *ACL*, 2023.
- [10] Nayeon Lee, Yejin Bang, Andrea Madotto, Madian Khabsa, and Pascale Fung. Towards few-shot fact-checking via perplexity. In *NACCL*, 2021.
- [11] James Thorne, Andreas Vlachos, Christos Christodoulopoulos, and Arpit Mittal. Fever: a large-scale dataset for fact extraction and verification. In *NAACL*, 2018.
- [12] Kai Shu, Deepak Mahudeswaran, Suhang Wang, Dongwon Lee, and Huan Liu. Fakenewsnet: A data repository with news content, social context, and spatiotemporal information for studying fake news on social media. *Big data*, 2020.
- [13] Andreas Hanselowski, Christian Stab, Claudia Schulz, Zile Li, and Iryna Gurevych. A richly annotated corpus for different tasks in automated fact-checking. In *CoNLL*, 2019.
- [14] Canyu Chen and Kai Shu. Can llm-generated misinformation be detected? In *ICLR*, 2024.
- [15] Jeff Da, Maxwell Forbes, Rowan Zellers, Anthony Zheng, Jena D Hwang, Antoine Bosselut, and Yejin Choi. Edited media understanding frames: Reasoning about the intent and implications of visual misinformation. In *ACL-IJCNLP*, 2021.
- [16] Kai Nakamura, Sharon Levy, and William Yang Wang. r/fakeddit: A new multimodal benchmark dataset for fine-grained fake news detection. In *LREC*, 2020.
- [17] OpenAI. Gpt-4v(ision) system card. <https://api.semanticscholar.org/CorpusID:263218031>, 2023.
- [18] Barry Menglong Yao, Aditya Shah, Lichao Sun, Jin-Hee Cho, and Lifu Huang. End-to-end multimodal fact-checking and explanation generation: A challenging dataset and models. In *SIGIR*, 2023.
- [19] Ayush Jaiswal, Ekraam Sabir, Wael AbdAlmageed, and Premkumar Natarajan. Multimedia semantic integrity assessment using joint embedding of images and text. In *ACM MM*, 2017.
- [20] Ekraam Sabir, Wael AbdAlmageed, Yue Wu, and Prem Natarajan. Deep multimodal image-repurposing detection. In *ACM MM*, 2018.
- [21] Grace Luo, Trevor Darrell, and Anna Rohrbach. Newsclippings: Automatic generation of out-of-context multimodal media. In *EMNLP*, 2021.
- [22] Shivangi Aneja, Chris Bregler, and Matthias Nießner. Cosmos: Catching out-of-context misinformation with self-supervised learning. In *AAAI*, 2023.

- [23] Rui Shao, Tianxing Wu, and Ziwei Liu. Detecting and grounding multi-modal media manipulation. In *CVPR*, 2023.
- [24] Piotr Przybyla. Capturing the style of fake news. In *AAAI*, 2020.
- [25] Bilal Ghanem, Simone Paolo Ponzetto, Paolo Rosso, and Francisco Rangel. Fakeflow: Fake news detection by modeling the flow of affective information. In *EACL*, 2021.
- [26] Erxue Min, Yu Rong, Yatao Bian, Tingyang Xu, Peilin Zhao, Junzhou Huang, and Sophia Ananiadou. Divide-and-conquer: Post-user interaction network for fake news detection on social media. In *WWW*, 2022.
- [27] Shengsheng Qian, Jinguang Wang, Jun Hu, Quan Fang, and Changsheng Xu. Hierarchical multi-modal contextual attention network for fake news detection. In *SIGIR*, 2021.
- [28] Ziwei Chen, Linmei Hu, Weixin Li, Yingxia Shao, and Liqiang Nie. Causal intervention and counterfactual reasoning for multi-modal fake news detection. In *ACL*, 2023.
- [29] Xuannan Liu, Peipei Li, Huaibo Huang, Zekun Li, Xing Cui, Jiahao Liang, Lixiong Qin, Weihong Deng, and Zhaofeng He. Fakenews-gpt4: Advancing multimodal fake news detection through knowledge-augmented llms. *arXiv preprint arXiv:2403.01988*, 2024.
- [30] Wei-Lin Chiang, Zhuohan Li, Zi Lin, Ying Sheng, Zhanghao Wu, Hao Zhang, Lianmin Zheng, Siyuan Zhuang, Yonghao Zhuang, Joseph E Gonzalez, et al. Vicuna: An open-source chatbot impressing gpt-4 with 90%* chatgpt quality. <https://vicuna.lmsys.org>, 2023.
- [31] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. In *NeurIPS*, 2023.
- [32] Deyao Zhu, Jun Chen, Xiaoqian Shen, Xiang Li, and Mohamed Elhoseiny. Minigpt-4: Enhancing vision-language understanding with advanced large language models. *arXiv preprint arXiv:2304.10592*, 2023.
- [33] Wenliang Dai, Junnan Li, Dongxu Li, Anthony Meng Huat Tiong, Junqi Zhao, Weisheng Wang, Boyang Li, Pascale N Fung, and Steven Hoi. Instructclip: Towards general-purpose vision-language models with instruction tuning. In *NeurIPS*, 2023.
- [34] Qinghao Ye, Haiyang Xu, Guohai Xu, Jiabo Ye, Ming Yan, Yiyang Zhou, Junyang Wang, Anwen Hu, Pengcheng Shi, Yaya Shi, et al. mplug-owl: Modularization empowers large language models with multimodality. *arXiv preprint arXiv:2304.14178*, 2023.
- [35] Qinghao Ye, Haiyang Xu, Jiabo Ye, Ming Yan, Haowei Liu, Qi Qian, Ji Zhang, Fei Huang, and Jingren Zhou. mplug-owl2: Revolutionizing multi-modal large language model with modality collaboration. In *CVPR*, 2024.
- [36] Ji Lin, Hongxu Yin, Wei Ping, Yao Lu, Pavlo Molchanov, Andrew Tao, Huizi Mao, Jan Kautz, Mohammad Shoeybi, and Song Han. Vila: On pre-training for visual language models. In *CVPR*, 2024.
- [37] Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. Improved baselines with visual instruction tuning. In *CVPR*, 2024.
- [38] Ge Zheng, Bin Yang, Jiajin Tang, Hong-Yu Zhou, and Sibe Yang. Ddcot: Duty-distinct chain-of-thought prompting for multimodal reasoning in language models. In *NeurIPS*, 2023.
- [39] Daoan Zhang, Junming Yang, Hanjia Lyu, Zijian Jin, Yuan Yao, Mingkai Chen, and Jiebo Luo. Cocot: Contrastive chain-of-thought prompting for large multimodal models with multiple image inputs. In *CVPR*, 2024.
- [40] Aditya Ramesh, Prafulla Dhariwal, Alex Nichol, Casey Chu, and Mark Chen. Hierarchical text-conditional image generation with clip latents. *arXiv preprint arXiv:2204.06125*, 2022.
- [41] Midjourney. <https://www.midjourney.com/home/>, 2022.
- [42] Fuxiao Liu, Yinghan Wang, Tianlu Wang, and Vicente Ordonez. Visual news: Benchmark and challenges in news image captioning. In *EMNLP*, 2021.
- [43] Tsung-Yi Lin, Michael Maire, Serge Belongie, James Hays, Pietro Perona, Deva Ramanan, Piotr Dollár, and C Lawrence Zitnick. Microsoft coco: Common objects in context. In *ECCV*, 2014.
- [44] Tiej Le, Vasudev Lal, and Phillip Howard. Coco-counterfactuals: Automatically constructed counterfactual examples for image-text pairs. In *NeurIPS*, 2023.

- [45] Tim Brooks, Aleksander Holynski, and Alexei A Efros. Instructpix2pix: Learning to follow image editing instructions. In *CVPR*, 2023.
- [46] Xiang Yue, Yuansheng Ni, Kai Zhang, Tianyu Zheng, Ruoqi Liu, Ge Zhang, Samuel Stevens, Dongfu Jiang, Weiming Ren, Yuxuan Sun, et al. Mmmu: A massive multi-discipline multimodal understanding and reasoning benchmark for expert agi. In *CVPR*, 2024.
- [47] Bo Li, Yuanhan Zhang, Liangyu Chen, Jinghao Wang, Jingkang Yang, and Ziwei Liu. Otter: A multi-modal model with in-context instruction tuning. *arXiv preprint arXiv:2305.03726*, 2023.
- [48] Jinze Bai, Shuai Bai, Shusheng Yang, Shijie Wang, Sinan Tan, Peng Wang, Junyang Lin, Chang Zhou, and Jingren Zhou. Qwen-vl: A frontier large vision-language model with versatile abilities. *arXiv preprint arXiv:2308.12966*, 2023.
- [49] Yixuan Su, Tian Lan, Huayang Li, Jialu Xu, Yan Wang, and Deng Cai. Pandagpt: One model to instruction-follow them all. *arXiv preprint arXiv:2305.16355*, 2023.
- [50] Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. In *ICML*, 2023.
- [51] Haotian Liu, Chunyuan Li, Yuheng Li, Bo Li, Yuanhan Zhang, Sheng Shen, and Yong Jae Lee. Llava-next: Improved reasoning, ocr, and world knowledge. <https://llava-vl.github.io/blog/2024-01-30-llava-next>, 2024.
- [52] Chen Qian, Fuli Feng, Lijie Wen, Chunping Ma, and Pengjun Xie. Counterfactual inference for text classification debiasing. In *ACL*, 2021.
- [53] Yuan Liu, Haodong Duan, Yuanhan Zhang, Bo Li, Songyang Zhang, Wangbo Zhao, Yike Yuan, Jiaqi Wang, Conghui He, Ziwei Liu, et al. Mmbench: Is your multi-modal model an all-around player? In *NeurIPS*, 2023.
- [54] Sheng-Yu Wang, Oliver Wang, Richard Zhang, Andrew Owens, and Alexei A Efros. Cnn-generated images are surprisingly easy to spot... for now. In *CVPR*, 2020.
- [55] Utkarsh Ojha, Yuheng Li, and Yong Jae Lee. Towards universal fake image detectors that generalize across generative models. In *CVPR*, 2023.
- [56] Bo Liu, Fan Yang, Xiuli Bi, Bin Xiao, Weisheng Li, and Xinbo Gao. Detecting generated images by real images. In *ECCV*, 2022.
- [57] Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. Roberta: A robustly optimized BERT pretraining approach. *arXiv preprint arXiv:1907.11692*, 2019.
- [58] Utkarsh Ojha, Yuheng Li, and Yong Jae Lee. Towards universal fake image detectors that generalize across generative models. In *CVPR*, 2023.
- [59] Junnan Li, Ramprasaath Selvaraju, Akhilesh Gotmare, Shafiq Joty, Caiming Xiong, and Steven Chu Hong Hoi. Align before fuse: Vision and language representation learning with momentum distillation. In *NeurIPS*, 2021.

7 Appendix

This appendix contains additional details for the paper, titled “MMFakeBench: A Mixed-Source Multimodal Misinformation Detection Benchmark for LVLMS”. The appendix is organized as follows:

- §7.1 Additional Experimental Results.
- §7.2 Existing Single-source Detectors Details.
- §7.3 Instruct Prompts for ChatGPT.
- §7.4 Example Analysis.
- §7.5 Broader Impact.
- §7.6 Limitations.

7.1 Additional Experimental Results

Instruction Following and Prediction Consistency. We evaluated the instruction following capabilities and prediction consistency to further study the multimodal understanding of LVLMS on mixed-source multimodal misinformation detection (MMD). We report the success rate in heuristic matching (Match) with regular expressions and prediction consistency rate (Consist.). The results are shown in the Table 5. Among all LVLMS, small-scale models like Otter-Image and Instruct-BLIP, achieve the lower matching success rate. While there exist small-scale LVLMS that perfectly follow the format of the regular expressions and achieve high success rates (>99%) in matching, most small-scale models exhibit high predicted consistency rates. This indicates small-scale models may prefer to predict a certain category answer among all given choices. Additionally, the leading open-source model, LLaVA-1.6-34B, and the proprietary model GPT-4V demonstrate superior instruction-following capabilities and lower prediction consistency. This indicates their significant potential in addressing mixed-source MMD, positioning them as valuable baseline models.

Table 5: Statistics of Instruction following capabilities and predicted consistency tendency of LVLMS.

Model	Match	Consist.	Model	Match	Consist.	Model	Match	Consist.
Language Model with 7B Parameter								
Otter-Image [47]	9.8	100	Qwen-VL [48]	88.6	92.9	mPLUG-Owl2 [35]	100	96.6
MiniGPT4 [32]	100	88.6	VILA [36]	100	100	BLIP2 [50]	100	93.6
InstructBLIP [33]	25.7	96.11	PandaGPT [49]	100	98.9	LLaVA-1.6 [51]	100	76.9
Language model with 13B Parameter								
VILA [36]	100	100	InstructBLIP [33]	99.9	91.0	BLIP2-FlanT5-XXL [50]	100	49.4
Language model with 34B Parameter								
LLaVA-1.6 [51]	100	52.6	-	-	-	-	-	-
Proprietary LVLMS								
GPT-4V [17]	99.9	36.5	-	-	-	-	-	-

Evaluation Results for Binary Classification. In addition to multi-class classification, we also provide binary classification performance to assess the overall detection capability of baseline models in mixed-source MMD. Based on the 4 categories in the mixed-source MMD settings, we develop binary evaluation metrics via mapping techniques. Specifically, we standardize the assignment of labels denoting “textual veracity distortion”, “visual veracity distortion”, and “cross-modal consistency distortion” to the classification of “Fake” while reserving the label “True” to denote real data. Similar to the multi-classification evaluation, we adopt the widely used F1 score. In addition to the F1 score, we also use precision, recall, and accuracy as supplementary evaluation metrics. The specific evaluation results are shown in Table 6. From the results, we make the following observations:

Table 6: Binary overall results of different models on the MM-FakeBench validation and test set with the comparison of standard prompt (SP) and proposed MMD-Agent framework.

Model Name	Language Model	Prompt Method	Validation (1000)				Test (10000)			
			F1	Precision	Recall	ACC	F1	Precision	Recall	ACC
Language Model with 7B Parameter										
Otter-Image[47]	MPT-7B	SP	7.9	4.1	4.5	7.9	8.6	32.4	5.0	8.6
MiniGPT4 [32]	Vicuna-7B	SP	40.4	38.2	45.7	63.1	41.7	41.0	47.4	65.2
InstructBLIP [33]	Vicuna-7B	SP	14.7	30.8	13.2	8.1	16.1	40.5	14.2	8.8
Qwen-VL [48]	Qwen-7B	SP	43.6	50.6	44.9	60.3	44.0	51.6	45.2	60.5
VILA [36]	LLaMA2-7B	SP	41.2	35.0	50.0	70.0	41.2	35.0	50.0	70.0
PandaGPT [49]	Vicuna-7B	SP	24.6	60.6	50.5	30.9	24.1	61.7	50.4	30.6
mPLUG-Owl2 [35]	LLaMA2-7B	SP	47.2	64.9	52.3	70.6	48.7	71.1	53.3	71.4
BLIP2 [50]	FlanT5-XL	SP	41.2	35.0	50.0	70.0	41.2	35.0	50.0	70.0
LLaVA-1.6 [51]	Vicuna-7B	SP	48.1	48.2	48.5	59.5	52.5	53.0	52.6	62.5
Language Model with 13B Parameter										
VILA [36]	LLaMA2-13B	SP	41.1	35.0	50.0	70.0	41.1	35.0	50.0	70.0
		MMD-Agent	56.5	62.2	56.9	70.3	56.6	64.3	57.2	71.2
InstructBLIP [33]	Vicuna-13B	SP	41.1	35.0	49.9	69.9	41.1	35.0	49.9	69.8
		MMD-Agent	51.3	53.4	54.0	53.1	47.9	50.1	50.1	49.9
BLIP2 [50]	FlanT5-XXL	SP	31.6	63.4	53.6	35.5	30.6	64.9	53.4	34.9
		MMD-Agent	51.5	53.4	54.0	53.6	51.8	54.0	54.7	53.5
LLaVA-1.6 [51]	Vicuna-13B	SP	41.1	35.0	50.0	69.7	42.3	57.3	50.1	69.5
		MMD-Agent	51.8	66.7	54.6	71.4	50.2	67.3	53.9	71.3
Language Model with 34B Parameter										
LLaVA-1.6 [51]	Nous-Hermes-2	SP	62.9	67.1	70.0	63.4	64.3	68.8	71.7	64.8
	-Yi-34B	MMD-Agent	67.2	70.4	66.0	75.1	68.1	71.1	67.0	75.6
Proprietary LVLMS										
GPT-4V [17]	ChatGPT	SP	72.3	72.1	72.8	75.6	74.2	73.5	76.9	76.4
		MMD-Agent	74.0	73.4	75.5	76.8	72.8	72.4	75.4	75.0

- Current models including open-source models and GPT-4V are challenged by the MM-FakeBench dataset in binary classification detection. Despite being an advanced modal, GPT-4V attains a mere F1-score of 72.3% using the standard prompt on the validation set.
- The proposed framework MMD-Agent yields substantial improvement on recent LVLMS, especially on open-source models. For instance, for the BLIP2-FlanT5-XXL model, MMD-Agent achieves a 19.9% increase in F1 score on the validation set. This may be credited to the effective integration of rationales, actions, and tool use in enhancing multimodal understanding in mixed-source MMD.

Analysis of More Misinformation Types. Within visual veracity distortion, we report the detection accuracy of selected models across two types of fact-conflicting images. Fig.6 shows the challenging nature of both types of such fact-conflicting images for existing models. Notably, even the advanced GPT-4V achieves a detection success rate of less than 50% on both types. Additionally, we present an analysis of the detection accuracy of selected models across different types of image-text inconsistency. As shown in Fig.7, edited inconsistency emerges as a more substantial challenge compared to repurposed inconsistency. This finding suggests that editing methods introduce minor alterations to images or text, necessitating enhanced multimodal reasoning capabilities.

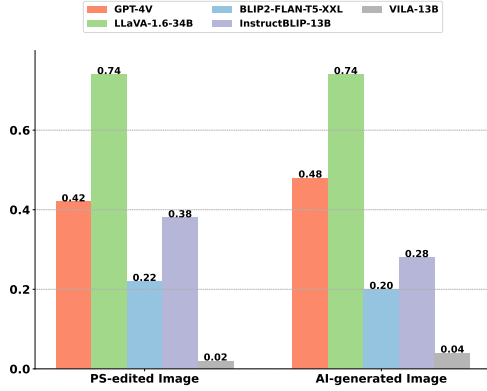


Figure 6: Performance (detection success rate) of models on different types of fact-conflicting images.

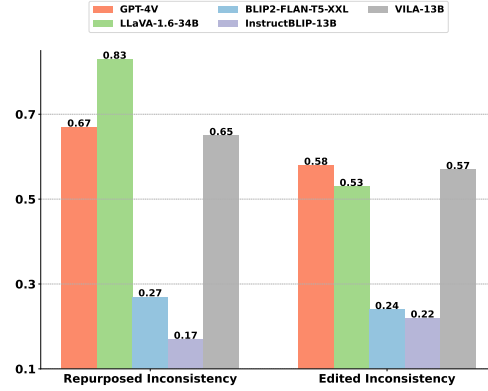


Figure 7: Performance (detection success rate) of models on different types of inconsistent image-text pairs.

7.2 Existing Single-source Detectors Details

FakingFakeNews. The FakingFakeNews [8] is designed for the detection of textual fake news, particularly for those natural human-written misinformation. It proposes an innovative approach for generating training instances, leveraging established styles and strategies commonly employed in human-authored propaganda. FakingFakeNews employs the ROBERTA [57] model as the backbone and trains it on its own proposed PROPANEWS dataset. In our experiments, we utilized the default configuration of the ROBERTA detector provided within the FakingFakeNews framework, retaining its default hyperparameters.

CNNSpot. CNNSpot [54] is an artificial image detector designed specifically for identifying images produced by generative models. It employs the ResNet-50 model as the classifier backbone. Notably, CNNSpot recognizes that data augmentation, including JPEG compression and Gaussian blur, can enhance the generalization capabilities of the detector. In our study, we utilize the pre-trained CNNSpot model with default hyperparameters to perform the detection of visual veracity distortion.

UnivFD. UnivFD [58] is a general-purpose fake image detector that uses a feature space not explicitly trained to distinguish between real from fake images. When given access to the feature space of a pre-trained vision-language model, UnivFD employs the nearest neighbor to identify fake images originating from various sources. The utilization of the large pre-trained model results in a smooth decision boundary, thereby enhancing the generalization capability of the detector. In our work, we use the pre-trained detector of UnivFD with default hyperparameters to conduct the visual veracity distortion detection task.

LNP. LNP [56] utilizes a well-trained denoising model to extract noise patterns from spatial images. Subsequently, it discerns fake images by analyzing the frequency domain of these noise patterns. Additionally, LNP employs the ResNet-50 model as the classifier backbone. In our study, we utilize the pre-trained LNP detector with default hyperparameters to conduct the visual veracity distortion detection task.

HAMMER. HAMMER [23] is a multimodal detector designed to identify multimedia manipulation. It is built upon the pre-trained vision-language model, ALBEF [59] which comprises two unimodal encoders and a multimodal Aggregator. To accomplish the multimodal manipulation detection task, HAMMER employs hierarchical manipulation reasoning consisting of shallow and deep manipulation reasoning. Shallow manipulation reasoning involves semantic alignment between image and text embeddings, while deep manipulation reasoning performs deep cross-modal fusion for forgery detection. In our paper, we employ the off-the-shelf HAMMER detector with default hyperparameters to detect cross-modal consistency distortion.

FakeNewsGPT4. FakeNewsGPT4 [29] is developed based on large vision language models (LVLMs) to detect multimodal fake news. It identifies two types of forgery-specific knowledge:

semantic correlation and artifact tract, and augments LVLMs with these two knowledge. Specifically, it extracts semantic correlations using a multi-level cross-modal reasoning module and comprehends unimodal localized details through a dual-branch fine-grained verification model. In our study, we employed the off-the-shelf FakeNewsGPT4 with default hyperparameters to accomplish the cross-modal consistency distortion detection task.

Mixed Detection We combine the three most powerful models on each single-source detection task (i.e., FakingFakeNews for textual veracity distortion, LNP for visual veracity distortion, and HAMMER for cross-modal consistency distortion) to perform mixed detection. Specifically, utilizing our proposed hierarchical decomposition framework, we sequentially assess textual veracity, visual veracity, and cross-modal consistency with three single-source detectors and assign corresponding multi-class labels.

7.3 Instruct Prompt for ChatGPT

The construction of MMFakeBench employs the advanced ChatGPT to assist us in generating textual rumors, expanding detailed descriptions, and generating fact-conflicting descriptions. The specific prompts provided in this work are summarized as follows.

Instruct Prompts to Ask ChatGPT to Generate Textual Rumors. Fig. 8 illustrates the prompt utilized for asking ChatGPT to generate textual rumors with different prompt methods. These methods include arbitrary generation, rewriting generation, and information manipulation.

(1) Arbitrary Generation Prompt

Please write a piece of misinformation title. The domain should be one of gossip, science, health and politics. The time period should be within the past ten years. The type should be fake news/rumors/misleading claims. Avoid answering words like fake, rumor, confusion, disbelief, misinformation, etc.
#query
 Misinformation title is:

(2) Rewriting Generation Prompt

Given a sentence, please write a piece of misinformation title. The content should be the same. The writing style should be serious, informative and convincing. Avoid answering words like fake, rumor, confusion, disbelief, misinformation, etc.
#query
 Sentence:_____.
 Misinformation title is:

(3) Information Manipulation Prompt

Given a true claim, please write a piece of misinformation. It should be long enough, convincing and detailed. The error type should be fake news/rumors/misleading claims. Avoid answering words like fake, rumor, confusion, disbelief, misinformation, etc.
#query
 The true claim is:_____.
 The answer is:

Figure 8: Prompt used to ask ChatGPT to generate textual rumors with arbitrary generation, rewriting generation, and information manipulation methods.

Instruct Prompts to ask ChatGPT to Expand Detailed Descriptions. Fig. 9 illustrates the prompt utilized for asking ChatGPT to expand detailed descriptions for textual rumors. Based on the responses, we prompt the stage-of-art diffusion generators to generate realistic and relevant supporting images.

Instruct Prompts to ask ChatGPT to Generate Fact-conflicting Descriptions. Fig. 10 illustrates the prompt utilized for asking ChatGPT to generate fact-conflicting descriptions. Then, we combine

Given a news rumor that is not consistent with reality, I need you to imagine the scene in which the rumor occurred and provide details about the characters, famous buildings, physical objects, etc. in the scene. Avoid sentences that state opinions and only describe physical objects. Avoid words like false, rumor, confusion, disbelief, misinformation, etc.

in-context examples

Rumor: Peking University is in Thailand.

The answer is: A Thai university in the real world, with the Thai flag flying above, including the landmark building of Peking University, the gate of Peking University, a plaque with the name of Peking University, the Boya Tower of Peking University, and Weiming Lake of Peking University.

Rumor: Carlos Santana is a US president.

The answer is: This a realistic photo of Carlos Santana in the white house in the real world. Carlos Santana stands at a podium adorned with the presidential seal. Behind him, an American flag hangs proudly. A row of microphones and a table are set before him, as cameras flash around the room.

Rumor: The Chrysler Building has yet to be surpassed in height.

The answer is: This is a realistic photo of the center of New York City in the real world. The Chrysler Building stands tall. The slope of the Chrysler Building forms a crown. There are many high-rise buildings on the side.

#query

Rumor: _____.

The answer is:

Figure 9: Prompt used to ask ChatGPT to expand detailed descriptions of rumors.

Imagine you as a science fiction writer. Given a true claim, please write a piece of misinformation. The error type should be contrary to objective facts, that is, objects or events that do not exist in the real scene, etc. Avoid answering words like fake, rumor, confusion, disbelief, misinformation, etc.

in-context examples

The true claim is: People are standing on top of a snowy mountain.

The answer is: There are angels with wings welcoming these people.

The true claim is: A person sailing in the air on a snow board.

The answer is: A person is snowboarding in the clouds.

The true claim is: A man wearing a blue tie with the ten commandments on it.

The answer is: This man is holding a huge fireball in his hand.

#query

The true claim is: _____.

The answer is:

Figure 10: Prompt used to ask ChatGPT to generate fact-conflicting descriptions.

these descriptions with original captions as prompts in the Midjourney V6 model [41] to create corresponding images with additional fact-conflicting information.

7.4 Example Analysis

In this section, we conduct a comparative analysis of the leading open-source model LaVA-1.6-34B and the proprietary GPT-4V performance across different mixed-source multimodal misinformation examples. This analysis is accompanied by an examination of particular error instances to explore underlying causes.

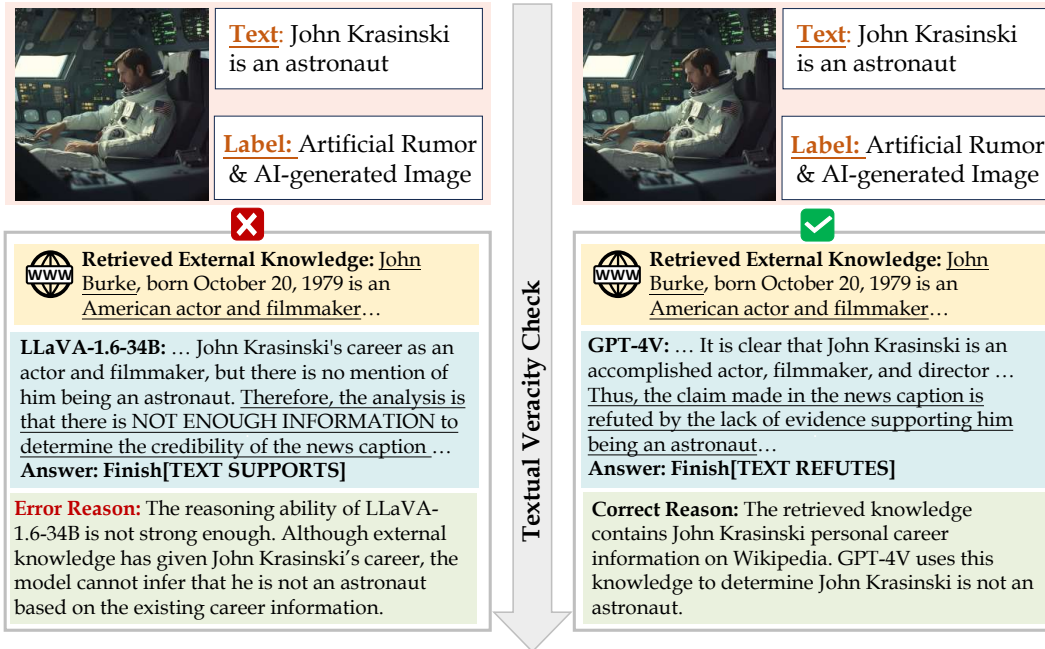


Figure 11: An error example of the textual veracity distortion with the comparison between LLaVA-1.6-34B and GPT-4V.

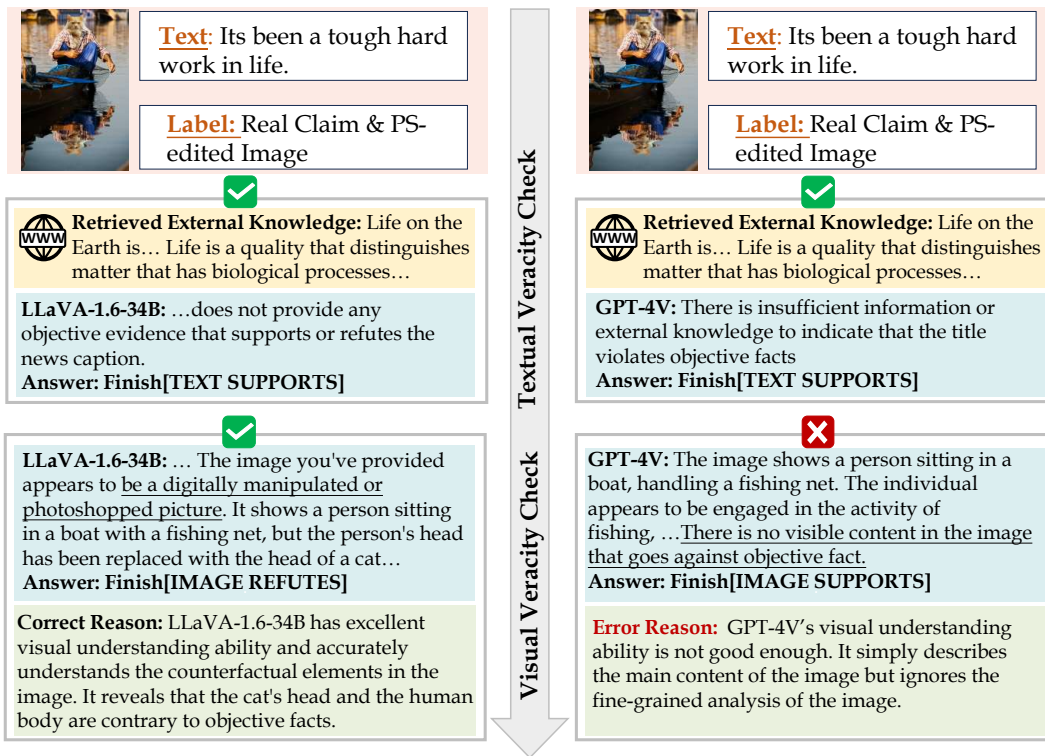


Figure 12: An error example of the visual veracity distortion with the comparison between LLaVA-1.6-34B and GPT-4V.

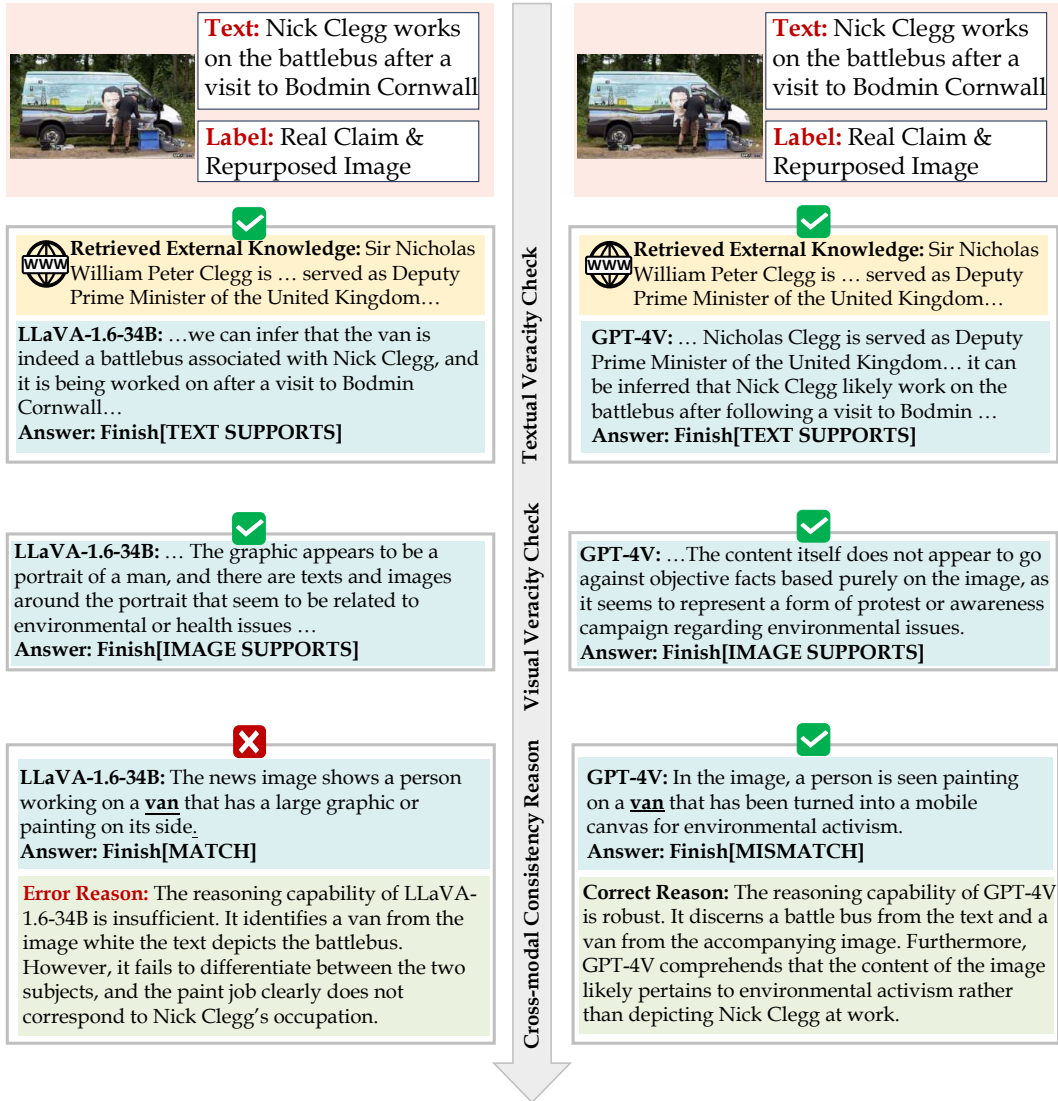


Figure 13: An error example of the cross-modal consistency distortion with the comparison between LLaVA-1.6-34B and GPT-4V.) .

Analysis of Textual Veracity Distortion. Fig. 11 exemplifies a typical example pertaining to the textual veracity distortion within the mixed-source multimodal misinformation. It underscores the discernible proficiency of different models in leveraging external knowledge. Specifically, in Fig. 11, GPT-4V effectively utilizes external knowledge, as denoted by the assertion “John Burke is an American actor and filmmaker” to deduce the inaccuracy of the claim regarding “John Burke” being an astronaut. In contrast, LLaVA-1.6-34B exhibits an incapacity to achieve comparable inference in this regard. This reflects the GPT-4V’s superiority in integrating external knowledge and multimodal understanding.

Analysis of Visual Veracity Distortion. Fig. 11 exemplifies a typical example pertaining to the visual veracity distortion within the mixed-source multimodal misinformation. We find that LLaVA-1.6-34B exhibits superior acumen in visual perception. As shown in figure 12, LLaVA-1.6-34B successfully discerns the substitution of a person’s head with that of a cat. Conversely, GPT-4V offers a rudimentary depiction of the image content, lacking the nuanced perception demonstrated by LLaVA-1.6-34B. This discrepancy underscores the subtle perceptual capabilities in addressing the visual veracity distortion challenge.

Analysis of Cross-modal Consistency Distortion. Fig. 11 exemplifies a typical example pertaining to the cross-modal consistency distortion within the mixed-source multimodal misinformation. It reveals that GPT-4V exhibits robust cross-modal comprehension and reasoning abilities. Specifically, GPT-4V can not only extract semantic elements such as a “battlebus” from the textual context and a “van” from the paired image but also discern the likelihood of the image depicting a protest rather than “Nick Clegg at work” as indicated in the text. In contrast, LLaVA-1.6-34B solely provides descriptions of the content present in the image and text, without showcasing adequate reasoning capabilities. This discrepancy emphasizes the importance of advanced reasoning capability in addressing cross-modal consistency distortion challenges.

7.5 Broader Impact

This paper contains examples of harmful texts or images, raising concerns about the manipulation of public opinion and the potential defamation of individuals. To reduce its social impact, we avoid creating new high-risk images, especially for sensitive topics like politics and gossip. Additionally, addressing these concerns necessitates the establishment of robust regulatory frameworks and ethical guidelines to ensure the technology is used responsibly and for the benefit of society. Therefore, we are committed to incorporating safeguards when releasing our benchmark. Specifically, we will require users to adhere to usage guidelines.

Despite the challenges, the impact of our MMFakeBench is profound. This study is expected to stimulate future research focusing on addressing more realistic instances of mixed-source multimodal misinformation. Additionally, it endeavors to furnish a comprehensive and impartial evaluation platform for the diverse array of misinformation detection methodologies. Thus, MMFakeBench can foster advancements in the field and contribute to the development of more robust and effective techniques for combating the proliferation of mixed-source multimodal misinformation in the real world.

7.6 Limitations

While our MMFakeBench marks a critical advancement in mixed-source multimodal misinformation detection, it is important to recognize certain limitations. Our proposed framework utilizes external knowledge retrieved from the Wikipedia API. While the integration of such external knowledge has enhanced the performance of our baseline models, it may not always provide useful information for particularly challenging natural rumors and GPT-generated rumors. Future research should explore the use of a more advanced retrieval augmentation generation (RAG), which could lead to further performance improvements.