

# Enhancing In-Context Learning with Semantic Representations for Relation Extraction

Peitao Han<sup>1\*</sup>, Lis Kanashiro Pereira<sup>2\*</sup>, Fei Cheng<sup>3</sup>, Wan Jou She<sup>4</sup>, Eiji Aramaki<sup>1</sup>

<sup>1</sup> Nara Institute of Science and Technology, Japan

<sup>2</sup> National Institute of Information and Communications Technology (NICT), Japan

<sup>3</sup> Kyoto University, Japan

<sup>4</sup> Kyoto Institute of Technology, Japan

han.peitao.hr3@is.naist.jp, liskanashiro@nict.go.jp, feicheng@i.kyoto-u.ac.jp  
wjs2004@kit.ac.jp, aramaki@is.naist.jp

## Abstract

In this work, we employ two AMR-enhanced semantic representations for ICL on RE: one that explores the AMR structure generated for a sentence at the subgraph level (shortest AMR path), and another that explores the full AMR structure generated for a sentence. In both cases, we demonstrate that all settings benefit from the fine-grained AMR’s semantic structure. We evaluate our model on four RE datasets. Our results show that our model can outperform the GPT-based baselines, and achieve SOTA performance on two of the datasets, and competitive performance on the other two.

## 1 Introduction

Large language models (LLMs) have shown remarkable ability for in-context learning (ICL) on many nlp tasks, such as natural language inference (He et al., 2023) and text classification (Sun et al., 2023). ICL enables LLMs to perform new tasks without updating any of the model’s weights, by simply providing the model with a few demonstrations of the task, along with the desired outputs (Brown et al., 2020).

However, downstream tasks that require high precision, such as relation extraction (RE), can still be challenging for ICL. RE consists of finding a predefined semantic relation among entity pairs mentioned in the input sentence, or NULL if no relation is found (Wan et al., 2023). Relations between entity pairs are often implicitly expressed in text. In addition to entity mentions, entities are associated with their arguments, which in turn relate to other semantic elements (Hu et al., 2023). Existing ICL methods for RE underestimate the semantic associations, as they commonly rely on entity mentions or overall sentence semantics for representation (Han et al., 2023; Wan et al., 2023).

\* Equal contribution.

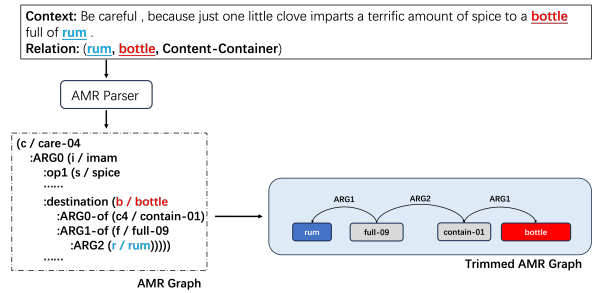


Figure 1: Overview of the Trimmed AMR graph construction.

Abstract Meaning Representation (AMR) (Banasescu et al., 2013) represents relations in a semantic graph structure, with nodes corresponding to semantic elements in the text (e.g., events, entities, concepts) and edges indicating the relations between them. AMR graphs provide precise descriptions of entities by incorporating their arguments and semantic roles, making it suitable for the RE task (Hu et al., 2023; Zhang and Ji, 2021; Gururaja et al., 2023). Figure 1 exemplifies the AMR graph representation of one input sentence. Its concise relations and AMR graph intuitively indicate the "Content-Container" relation between the entities "rum" and "bottle".

We hypothesize that the AMR’s explicit representation of semantic structures can improve the quality of few-shot demonstrations, and further enhance LLMs’ ICL ability for RE. To exploit the potential utilization of AMR graphs for RE in ICL, we propose two novel semantic structure-enhanced ICL frameworks: one that explores the AMR structure generated for a sentence at the subgraph level (shortest AMR path), and another that explores the full AMR structure generated for a sentence. In both cases, we demonstrate that all settings benefit from the fine-grained AMR’s entity structure. We evaluate our methods on four standard RE datasets. Our results indicate that our model

consistently achieves higher F1 scores than other sentence embedding-based ICL baselines; incorporating supervised fine-tuning and LLM’s capability can even outperforms SOTA baselines on two of the evaluated datasets. We further observe that our method can achieve promising performance in a more cost-efficient manner.

## 2 Methodology

In this section, we first show the prompt construction for formalizing RE into a language generation task (Section 2.2). Then to investigate whether the AMR graph can improve the quality of the retrieved ICL demonstrations, we propose two structure-aware demonstration retrieval frameworks that benefit from the fine-grained relational semantic structure information: one in non fine-tuned and another one in fine-tuned settings. An overview of our proposed method is shown in Figure 2.

### 2.1 Task Definition

Given a set of pre-defined relation classes  $\mathbb{R}$ , relation extraction aims to predict the relation  $y \in \mathbb{R}$  between the given pair of subject and object entities  $(e_{sub}, e_{obj})$  within the input context  $\mathbf{C}$ , or if there is no pre-defined relation between them, predict  $y = \text{NULL}$ .

### 2.2 Prompt Construction

Following Wan et al. (2023), we construct a prompt for each test example. Each prompt consists of the following three components:

**Instructions:** We provide a precise description of the RE task and a set of pre-defined relation classes. The model is required to output the relation corresponding to these predefined classes; if the relation does not belong to any of these classes, the model will output NULL.

**ICL Demonstrations:** Given one test example, We search  $k$ -nearest neighbor ( $k$ NN) demonstrations via two different types of retrieval proposal: non fine-tuned TAGSim (Section 2.4) and fine-tuned FTSim (Section 2.5). All demonstrations are included in the prompt.

**Test Input:** We provide the test input in the same format as ICL Demonstrations, and GPT is expected to output the relation.

### 2.3 AMR Graph

We propose to explicitly model semantic associations between two entities by integrating semantic

structure for RE. To get explicit semantic structures from texts we adopt an off-the-shelf AMR parser<sup>1</sup> to process the sentence into an AMR graph. We parse the input sentence into an AMR graph  $G = \{V, E, R\}$ , where  $V$ ,  $E$ ,  $R$  are the sets of nodes, edges and relation types, respectively. In AMR graph  $G$ , the labeled edge  $(u, r, v) \in E$ , where  $u, v \in V$  and  $r \in R$  is a relation type, means that there is an edge labeled as  $r$  from node  $u$  to node  $v$ .

### 2.4 Trimmed AMR Representation for ICL

Recent works (Jimenez Gutierrez et al., 2022; Liu et al., 2022; Wan et al., 2023) adopt the  $k$ NN method to retrieve the most similar examples in the training set as the few-shot demonstrations for each test input using sentence embedding obtained by the PLM. Since  $k$ NN relies on the choice of the embedding space, previous works use various methods, such as SimCSE (Gao et al., 2021), SentenceBERT (Reimers and Gurevych, 2019), and fine-tuned relation representation (Wan et al., 2023) to improve performance on the RE task.

As relation extraction focuses on pair-wise entities, existing methods focus on entire sentence similarity or only capture implicit associations between two entities by directly modeling the texts with pre-trained language models, which underestimate the explicit semantic associations. In this section, we introduce a Trimmed AMR Graph (TAG) representation based demonstration retrieval method that leverages fine-grained semantic graphs to enhance the quality of retrieved demonstrations.

#### 2.4.1 Trimmed AMR Graph Representation

In an AMR graph, we hypothesize that the shortest path between two entities consistently contains information that reflects their semantic relationship. Therefore, the shortest AMR path is regarded as the trimmed AMR graph, which is the most informative subgraph in the AMR for representing semantic relations. Formally, TAG is defined as  $G_T = \{V_T, E_T, R_T\}$ , where  $V_T \in V$ ,  $E_T \in E$ ,  $R_T \in R$ . Figure 1 shows an overview of the trimmed AMR graph construction. Consequently, the TAG benefits not only from the information of the entities but also from the semantic associations between them.

We adopt a graph encoder for linearized AMR graphs to effectively assess the TAG similarity between train and test samples. In this work, we adopt AMRSim (Shou and Lin, 2023), a PLM that

<sup>1</sup><https://github.com/IBM/transition-amr-parser>

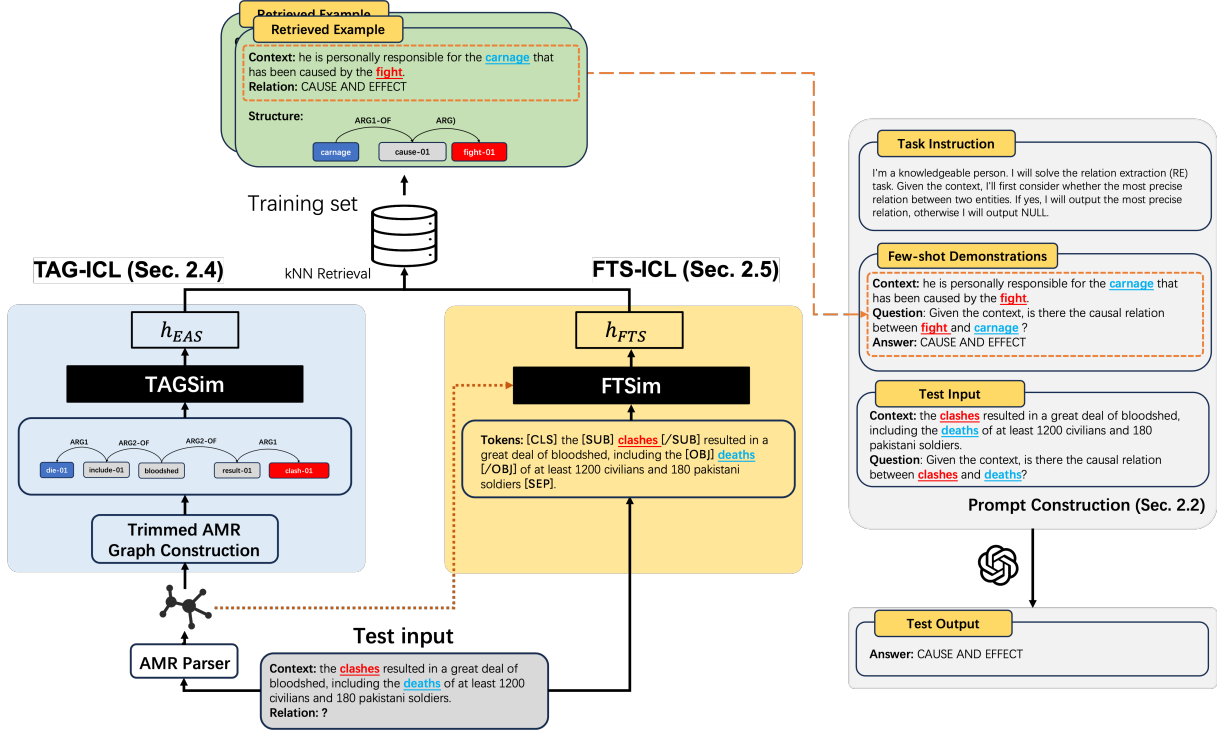


Figure 2: An illustration of our proposed method. Given an input, we first adopt two distinct structure-enhanced demonstration retrieval methods to select proper demonstrations from the training set. Subsequently, all retrieved demonstrations are included in the prompt construction to facilitate the prediction.

was self-supervised trained on AMR graphs, as the graph encoder.

## 2.4.2 Self-supervised Training for Trimmed AMR Graphs

As mentioned, the original AMRSim is a self-supervised approach for optimizing the representation of the entire AMR graph. In our work, we adapt this approach to the subgraph level to obtain representations of the trimmed AMR graphs.

We adopt the self-supervised training process Contrastive Tension (CT; Carlsson et al., 2021) on TAG to ensure that the model accurately performs on such structures following Shou and Lin (2023). The training objective is to maximize the dot product between positive pairs while minimizing the dot product between negative pairs. For each randomly selected TAG  $G_T$ , we create a positive instance by duplicating  $G_T$  into an identical pair. Then, we construct negative instances by pairing  $G_T$  with  $K$  randomly sampled different graphs. The  $K + 1$  instances are included in the same batch. In CT, two independent encoders are initialized identically. The training contrastive loss  $\mathcal{L}$  is binary cross-entropy from the similarity scores

and labels.

$$\mathcal{L}(G_T, \hat{G}_T) = \begin{cases} -\log \sigma(e \cdot \hat{e}), & \text{if } G_T = \hat{G}_T \\ -\log \sigma(1 - e \cdot \hat{e}), & \text{if } G_T \neq \hat{G}_T \end{cases} \quad (1)$$

where  $\sigma$  refers to the Logistic function;  $e, \hat{e}$  are the representations for two graphs in one pair, respectively. After CT on TAG, we employ the updated model called **TAGSim** for computing structure similarity.

## 2.5 Fine-tuned Structure-aware Representation for ICL

Considering that using fine-tuned relation representation can achieve promising performance for RE in ICL settings (Wan et al., 2023), we adopt a fine-tuned model for retrieving ICL demonstrations. As current RE models that capture context and entity information show their effectiveness, we combine AMR graph and text input into a single model architecture to capture both semantics and structure connections of the input data, following previous works (Schrack et al., 2022; Li et al., 2022; Guru-rajya et al., 2023).

To better utilize both AMR graph and textual information, we propose to adopt a feature fusion architecture, called **FTSim** similar to the Hier (Bai

et al., 2021). In this setting, the sentence and overall AMR graph of input are fed to the textual-based model and graph encoder, respectively. We employ a marker-based approach PURE (Zhong and Chen, 2021) to encode a sentence by adding special entity markers surrounding two entities. We employ AMRSim to model implicit associations in AMR graph. After computing node representations and token embeddings, the mean pool of node representations corresponding to two entities is added to the token embeddings of the beginning entity markers. We then feed this fused representation into a two hidden layers multi-layer perceptron (MLP) network with a ReLU activation between the layers, before applying softmax for the classification.

### 3 Experiments

#### 3.1 Dataset

We evaluate our model on four RE datasets. Two general domain RE datasets: SemEval 2010 Task 8 (Hendrickx et al., 2010) and ACE05<sup>2</sup>, one temporal RE dataset: TimeBank-Dense (Cassidy et al., 2014), and one scientific domain dataset: SciERC (Luan et al., 2018). Due to the cost of running the model in the API with GPT, following Wan et al. (2023), we sample a subset from the original test set for ACE05 dataset (due to its large size) in our main results.

#### 3.2 Baseline Methods

To ensure that our methods are comparable with baselines, we group baselines into two types: those with non-finetuned retrievers and those with fine-tuned retrievers. For the baselines, we select gpt-3.5-turbo and gpt-4 via the OpenAI API.

**Baselines with Non fine-tuned Retrievers** : We implement three categories of Baselines with Non-finetuned Retrievers:

1. **GPT-Random**: We randomly selected few-shot ICL demonstrations with additional constraints to ensure a more uniform label distribution for the selected demonstrations from the training data.
2. **GPT-Sent**: We adopt SimCSE (Gao et al., 2021), the state-of-the-art method for sentence similarity tasks to retrieve demonstrations.
3. **GPT-RE\_Entity+**: We adopt the entity-prompted sentence embedding proposed by

Wan et al. (2023) that incorporates both entity pair and contextual information for retrieval.

**Baselines with Fine-tuned Retrievers** : We implement **GPT-RE\_FT** (Wan et al., 2023) as the baseline with a fine-tuned retriever. GPT-RE\_FT employs representations encoded by PURE (Zhong and Chen, 2021), an entity marker-based RE model for retrieval.

## 4 Results

### 4.1 Main Results

Table 1 presents the experimental results on the RE datasets. **TAG-ICL** denotes our TAG representation-based ICL and **FTS-ICL** denotes our fine-tuned structure representation-based ICL. Compared with baselines utilizing non fine-tuned retrievers, we can observe that TAG-ICL consistently outperforms baselines on all four datasets. This shows the effectiveness and generality of TAG representation for selecting more relevant ICL demonstrations. FTS-ICL outperforms baselines with fine-tuned retrievers on three datasets (SemEval, SciERC, TB-Dense), it achieves 0.57%, 1.05%, and 1.43% improvement, respectively. The results indicate that the fine-tuned structure representation benefits from both structural and semantic information. Consequently, FTS-ICL achieves SOTA performance on the SemEval and TB-Dense datasets while delivering competitive results on the SciERC and ACE05 datasets.

### 4.2 Ablation Study

We perform the ablation study on CT and fusion feature, the results are shown in Table 2.

**Impact of the self-supervised training**: We conduct experiments without the additional training phase to investigate the effect of CT on TAG. The results indicate that CT on TAG significantly improves performance, demonstrating that CT can enhance the graph encoder’s modeling capability of TAG.

**Impact of fusion feature**: We conduct experiments To illustrate the effect of the fusion feature in fine-tuned settings. Although fine-tuned graph representation performs worse than sentence embedding, it shows that the model incorporating AMR better captures the relation than the text-only system.

<sup>2</sup><https://catalog.ldc.upenn.edu/LDC2006T06>

Method	Retriever	GPT	SemEval	SciERC	TB-DENSE	ACE05
ICL w/ Non finetuned Retriever						
GPT-Random	-	3.5-turbo	52.05	17.35	22.97	6.95
GPT-Sent	SimCSE	3.5-turbo	65.37	21.64	23.21	5.46
GPT-RE_Entity+	SimCSE	3.5-turbo	66.21	21.90	23.53	10.07
		4	80.25	26.15	31.19	13.10
TAG-ICL (Ours)	TAGSim	3.5-turbo	68.63	22.73	27.39	11.32
		4	<b>84.68</b>	<b>27.57</b>	<b>35.10</b>	<b>14.65</b>
ICL w/ Fine-tuned Retriever						
GPT-RE_FT	PURE	3.5-turbo	89.73	64.53	65.64	66.81
		4	91.46	67.15	67.58	<b>68.59</b>
FTS-ICL (Ours)	FTSim	3.5-turbo	90.33	65.14	66.72	65.83
		4	<b>92.03</b>	<b>68.20</b>	<b>69.01</b>	67.29

Table 1: **Main results on four RE datasets.** All results are given by Micro-F1 in 10-shot ICL settings.

Dataset	SemEval	TB-DENSE
ICL w/ Non fine-tuned Retriever		
TAG-ICL	<b>68.63</b>	<b>27.39</b>
<i>w/o CT</i>	65.37	24.37
ICL w/ Fine-tuned Retriever		
FTS-ICL	<b>90.33</b>	<b>66.72</b>
<i>w/o SentEmb</i>	88.42	64.86
<i>w/o AMR</i>	89.73	65.64

Table 2: **Ablation study.** *w/o CT* indicates that the retriever does not apply additional CT. *w/o AMR* indicates that the retriever doesn’t incorporate AMR graph for fine-tuning. We show the 10-shot results from gpt-3.5-turbo.

### 4.3 Effect of the Number of Few-shot Demonstrations

We investigated the effect of the number of few-shot demonstrations on performance. Figure 3 shows the results: TAG-ICL achieves a more significant improvement with fewer demonstrations compared to non fine-tuned baselines, indicating that our method requires shorter prompt for achieving promising performance; FTS-ICL achieves better performance throughout all  $k$ -shots than GPT-RE\_FT, demonstrating the effectiveness of incorporating AMR graph.

## 5 Conclusions

In this work, we employ two AMR-enhanced semantic representations for ICL on RE: (1) TAG-ICL can benefit from the trimmed AMR graph and self-supervised training and consistently shows improvements to sentence embedding-based baselines; (2) fine-tuned ICL framework achieves SOTA on Semeval and TB-Desnse, which incorporates AMR graph information to enrich the RE representation for selecting high-quality ICL demonstra-

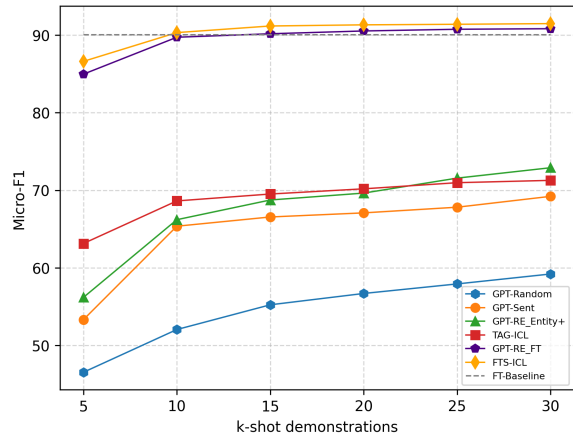


Figure 3: Performance for the different number of few-shot examples on SemEval.

tions.

## References

- Xuefeng Bai, Yulong Chen, Linfeng Song, and Yue Zhang. 2021. [Semantic representation for dialogue modeling](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 4430–4445, Online. Association for Computational Linguistics.
- Laura Banarescu, Claire Bonial, Shu Cai, Madalina Georgescu, Kira Griffitt, Ulf Hermjakob, Kevin Knight, Philipp Koehn, Martha Palmer, and Nathan Schneider. 2013. Abstract meaning representation for sembanking. In *Proceedings of the 7th linguistic annotation workshop and interoperability with discourse*, pages 178–186.
- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. 2020. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901.

- Fredrik Carlsson, Amaru Cuba Gyllensten, Evangelia Gogoulou, Erik Ylipää Hellqvist, and Magnus Sahlgren. 2021. [Semantic re-tuning with contrastive tension](#). In *International Conference on Learning Representations*.
- Taylor Cassidy, Bill McDowell, Nathanael Chambers, and Steven Bethard. 2014. [An annotation framework for dense event ordering](#). In *Proceedings of the 52nd Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 501–506, Baltimore, Maryland. Association for Computational Linguistics.
- Tianyu Gao, Xingcheng Yao, and Danqi Chen. 2021. [SimCSE: Simple contrastive learning of sentence embeddings](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 6894–6910, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Sireesh Gururaja, Ritam Dutt, Tinglong Liao, and Carolyn Rosé. 2023. [Linguistic representations for fewer-shot relation extraction across domains](#). In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 7502–7514, Toronto, Canada. Association for Computational Linguistics.
- Ridong Han, Tao Peng, Chaohao Yang, Benyou Wang, Lu Liu, and Xiang Wan. 2023. Is information extraction solved by chatgpt? an analysis of performance, evaluation criteria, robustness and errors. *arXiv preprint arXiv:2305.14450*.
- Xuanli He, Yuxiang Wu, Oana-Maria Camburu, Pasquale Minervini, and Pontus Stenetorp. 2023. Using natural language explanations to improve robustness of in-context learning for natural language inference. *arXiv preprint arXiv:2311.07556*.
- Iris Hendrickx, Su Nam Kim, Zornitsa Kozareva, Preslav Nakov, Diarmuid Ó Séaghdha, Sebastian Padó, Marco Pennacchiotti, Lorenza Romano, and Stan Szpakowicz. 2010. [SemEval-2010 task 8: Multi-way classification of semantic relations between pairs of nominals](#). In *Proceedings of the 5th International Workshop on Semantic Evaluation*, pages 33–38, Uppsala, Sweden. Association for Computational Linguistics.
- Zhilei Hu, Zixuan Li, Xiaolong Jin, Long Bai, Saiping Guan, Jiafeng Guo, and Xueqi Cheng. 2023. [Semantic structure enhanced event causality identification](#). In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 10901–10913, Toronto, Canada. Association for Computational Linguistics.
- Bernal Jimenez Gutierrez, Nikolas McNeal, Clayton Washington, You Chen, Lang Li, Huan Sun, and Yu Su. 2022. [Thinking about GPT-3 in-context learning for biomedical IE? think again](#). In *Findings of the Association for Computational Linguistics: EMNLP 2022*, pages 4497–4512, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Shichen Li, Zhongqing Wang, Xiaotong Jiang, and Guodong Zhou. 2022. [Cross-domain sentiment classification using semantic representation](#). In *Findings of the Association for Computational Linguistics: EMNLP 2022*, pages 289–299, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Jiachang Liu, Dinghan Shen, Yizhe Zhang, Bill Dolan, Lawrence Carin, and Weizhu Chen. 2022. [What makes good in-context examples for GPT-3?](#) In *Proceedings of Deep Learning Inside Out (DeeLIO 2022): The 3rd Workshop on Knowledge Extraction and Integration for Deep Learning Architectures*, pages 100–114, Dublin, Ireland and Online. Association for Computational Linguistics.
- Yi Luan, Luheng He, Mari Ostendorf, and Hannaneh Hajishirzi. 2018. [Multi-task identification of entities, relations, and coreference for scientific knowledge graph construction](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 3219–3232, Brussels, Belgium. Association for Computational Linguistics.
- Nils Reimers and Iryna Gurevych. 2019. [Sentence-BERT: Sentence embeddings using Siamese BERT-networks](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 3982–3992, Hong Kong, China. Association for Computational Linguistics.
- Nikolaus Schrack, Ruixiang Cui, Hugo López, and Daniel Hershcovich. 2022. [Can AMR assist legal and logical reasoning?](#) In *Findings of the Association for Computational Linguistics: EMNLP 2022*, pages 1555–1568, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Ziyi Shou and Fangzhen Lin. 2023. [Evaluate AMR graph similarity via self-supervised learning](#). In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 16112–16123, Toronto, Canada. Association for Computational Linguistics.
- Xiaofei Sun, Xiaoya Li, Jiwei Li, Fei Wu, Shangwei Guo, Tianwei Zhang, and Guoyin Wang. 2023. [Text classification via large language models](#). In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 8990–9005, Singapore. Association for Computational Linguistics.
- Zhen Wan, Fei Cheng, Zhuoyuan Mao, Qianying Liu, Haiyue Song, Jiwei Li, and Sadao Kurohashi. 2023. [GPT-RE: In-context learning for relation extraction using large language models](#). In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 3534–3547, Singapore. Association for Computational Linguistics.

Zixuan Zhang and Heng Ji. 2021. [Abstract Meaning Representation guided graph encoding and decoding for joint information extraction](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 39–49, Online. Association for Computational Linguistics.

Zexuan Zhong and Danqi Chen. 2021. [A frustratingly easy approach for entity and relation extraction](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 50–61, Online. Association for Computational Linguistics.