
Mixture of Scales: Memory-Efficient Token-Adaptive Binarization for Large Language Models

Dongwon Jo¹ Taesu Kim² Yulhwa Kim^{3*} Jae-Joon Kim^{1*}

¹ Seoul National University ² SqueezeBits Inc. ³ Sungkyunkwan University
{dongwonjo, kimjaejuon}@snu.ac.kr
{taesu.kim}@squeezebits.com
{yulhwakim}@skku.edu

Abstract

Binarization, which converts weight parameters to binary values, has emerged as an effective strategy to reduce the size of large language models (LLMs). However, typical binarization techniques significantly diminish linguistic effectiveness of LLMs. To address this issue, we introduce a novel binarization technique called Mixture of Scales (BinaryMoS). Unlike conventional methods, BinaryMoS employs multiple scaling experts for binary weights, dynamically merging these experts for each token to adaptively generate scaling factors. This token-adaptive approach boosts the representational power of binarized LLMs by enabling contextual adjustments to the values of binary weights. Moreover, because this adaptive process only involves the scaling factors rather than the entire weight matrix, BinaryMoS maintains compression efficiency similar to traditional static binarization methods. Our experimental results reveal that BinaryMoS surpasses conventional binarization techniques in various natural language processing tasks and even outperforms 2-bit quantization methods, all while maintaining similar model size to static binarization techniques.

1 Introduction

Though large language models (LLMs) have delivered impressive results in a variety of natural language processing (NLP) tasks, their massive size often complicates deployment. One common method to compress LLMs is through the quantization of weight parameters, which reduces model sizes by lowering the precision of weight values [1, 8, 2, 30, 31, 32, 33, 3, 4]. Existing quantization approaches such as GPTQ [2], AWQ [3], and OWQ [4] have successfully managed to reduce model sizes by converting 16-bit floating point weights to 4-bit representations, achieving a fourfold decrease in size. Binarization pushes this concept even further by reducing weight values to 1-bit, resulting in a 16-fold size reduction.

However, such aggressive compression through binarization drastically limits the representational capacity of weights, leading to a significant degradation in the linguistic capabilities of LLMs. To address this limitation and improve the accuracy of binarized LLMs, recent research has actively explored binarization techniques tailored for LLMs [29, 5, 6, 7]. Nonetheless, previous efforts often compromise the inherent advantages of binarization by introducing high memory overhead, and they continue to struggle to achieve sufficient accuracy with binarized LLMs.

In this paper, we propose a novel binarization technique named as Mixture of Scales (BinaryMoS). Typical binarization methods use scaling factors to control the effective values of binarized weights. Although these scaling factors occupy a tiny fraction of the overall model size, they are crucial

*Corresponding Author

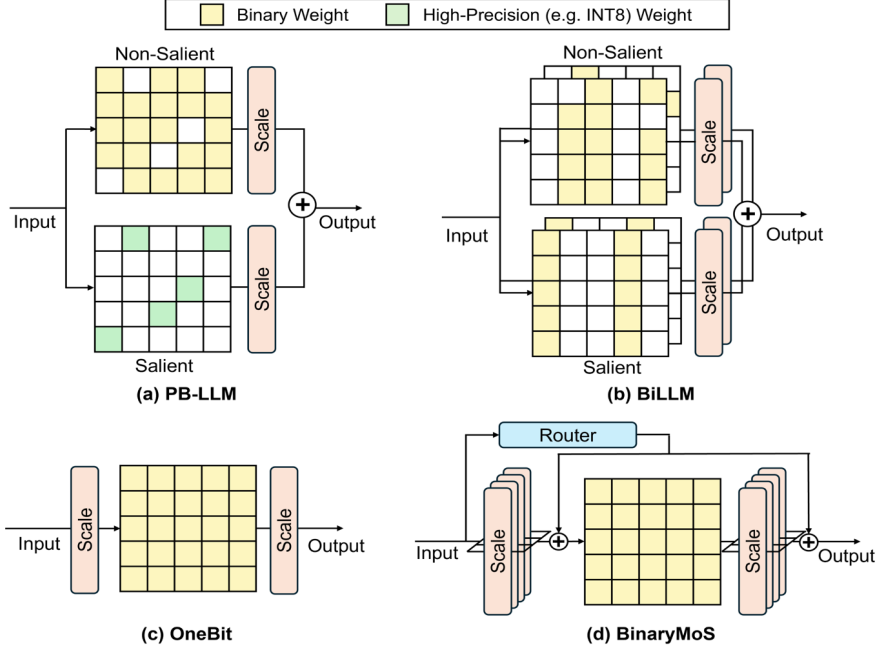


Figure 1: A brief overview of various LLM binarization methods. PB-LLM involves both a binary weight matrix and a high-precision, sparse weight matrix, and BiLLM stores four types of binary weight matrices. OneBit simplifies the layer structure by introducing scaling factors for input and output dimensions respectively. BinaryMoS introduces multiple scaling experts to enhance the capacity of binarized models.

in reducing binarization error. BinaryMoS advances the functionality of these scaling factors by incorporating token-adaptive scaling factors. Inspired by the Mixture of Experts (MoE) approach [26, 27, 34], which employs multiple expert layers to enhance the model capacity, BinaryMoS adopts multiple scaling factors as experts to improve the representational capacity of binarized LLMs in a memory-efficient way. During inference, BinaryMoS linearly combines these scaling experts based on the context to generate token-adaptive scaling factors, thus dynamically adjusting the represented values of binarized weights to maximize the expressive power of the model. As a result, BinaryMoS can improve the linguistic performance of binarized LLMs with minimal memory overhead.

2 Background

2.1 Binarization of LLMs

Binarization stands out as an extreme yet effective method for reducing model sizes in deep learning. This method achieves size reduction by transforming high-precision weight parameters into 1-bit values. The binarization process is typically governed by the following equation:

$$W_B = \alpha \cdot \text{Sign}(W_{FP} - \overline{W}_{FP}) \quad (1)$$

Here, $W_{FP} \in \mathbb{R}^{n \times m}$ is the full-precision weight matrix of a linear layer where n and m represent the size of output and input dimension, respectively, and $W_B \in \mathbb{R}^{n \times m}$ denotes its binarized version. $\alpha \in \mathbb{R}^n$ represents scaling factors that are responsible for adjusting the binary weight values along the output dimension. In general, the scaling factors are analytically derived as the absolute mean of FP weight values to minimize the $L2$ error between full-precision and binarized weights, and these scaling factors play a vital role in bridging the gap between the original full-precision weights and their binarized counterparts.

While binarization has been effectively applied in traditional deep learning models like Convolutional Neural Networks (CNNs) for image classification without losing accuracy [9, 11, 10, 12], LLMs tend to be more sensitive to such extreme quantization, often experiencing significant accuracy degradation with standard binarization techniques. Therefore, various binarization techniques tailored for LLMs

have been developed, as shown in Figure 1. PB-LLM [5] partially binarizes weight parameters while maintaining salient weight parameters as high-precision values (e.g., Float16 or INT8). However, this method results in considerable memory overhead. For instance, quantizing 10% of weight parameters as INT8 while binarizing the remaining 90% results in an average bit-width of 1.7 bits for the weight parameters, which is closer to 2 bits than 1 bit.

Furthermore, despite this partial binarization strategy of PB-LLM, the significant information loss inherent in binarization still causes considerable accuracy degradation. To reduce the binarization error and enhance accuracy, BiLLM [6] adopts a more refined approach to assigning scaling factors. Assuming that weight parameters follow a bell-shaped distribution, BiLLM categorizes weight parameters based on their proximity to the mean value: concentrated weights, close to the mean, and sparse weights, distant from the mean. Distinct scaling factors are then assigned to each group to minimize binarization errors. Then, to reduce the memory overhead associated with maintaining information of salient weights, BiLLM preserves this information by binarizing the difference between the binarized values and their full-precision counterparts. Consequently, each salient weight is represented by two 1-bit values, effectively amounting to a 2-bit representation. Despite significantly reducing binarization error, BiLLM complicates the structure of binarized LLMs, adding complexity to the inference process. This complexity arises from the need to manage additional sparse and salient weights alongside regular concentrated weights, requiring extra matrix multiplication during inference.

Meanwhile, unlike conventional binarization methods that typically employ scaling factors only for the output dimension of weights, OneBit [7] enhances the binarization process by incorporating scaling factors for both the input and output dimensions. This dual-dimension scaling approach addresses binarization errors across both dimensions, potentially enhancing model accuracy. Additionally, the size of each scaling vector is substantially smaller compared to the weight matrix, making this approach memory efficient. For instance, in linear layers with a hidden dimension of h , the weight matrix size is $h \times h$, while each scaling vector is only $h \times 1$. Therefore, doubling these scaling factors adds a negligible memory overhead to the network. Moreover, as this approach of dual-dimensional scaling efficiently preserves enough information to significantly reduce binarization errors, OneBit eliminates the need to store separate information for salient weights, thereby simplifying the model structure. The result of matrix multiplication Y of a linear layer using the OneBit approach can be defined as follows:

$$Y = X[S_{in}^T \odot \text{Sign}(W_{FP}^T) \odot S_{out}] = [(X \odot S_{in})\text{Sign}(W_{FP}^T)] \odot S_{out} \quad (2)$$

Here, $X \in \mathbb{R}^{k \times m}$ is the matrix of input activation where k represents batch size, while $S_{in} \in \mathbb{R}^{1 \times m}$ and $S_{out} \in \mathbb{R}^{1 \times n}$ denote the scaling factors for input and output dimensions, respectively. As outlined in Equation 2, processing scaling factors for both input and output dimension can be simplified to scaling input and output of the linear layer before and after matrix multiplication, respectively.

Despite advances in binarization techniques for LLMs, a notable accuracy gap still exists between full-precision models and their binarized counterparts. Therefore, bridging this gap without sacrificing the fundamental benefits of binarization, particularly low memory usage, remains an important challenge in the field of LLM compression.

2.2 Mixture of Experts

The MoE approach is a widely adopted strategy to boost the capabilities of deep learning models by integrating multiple specialized experts into a single framework [26, 27, 34]. Typically, the MoE approach for LLMs involves duplication of layers and selecting the appropriate layers among these duplicates for a specific task during inference. In the MoE setup, the router is a key to selecting the appropriate expert. It generally consists of a linear layer followed by a softmax function, which calculates and assigns scores to each expert. During the inference, only the experts with the highest score are selected and processed.

While integrating the MoE approach with binarized LLMs offers potential for improving model accuracy, it presents a substantial memory trade-off. The duplication of layers inherent in MoE increases the model size proportionally with the number of experts, thus diminishing the memory efficiency benefits gained from binarization. To address these challenges, we propose BinaryMoS, a novel binarization technique that aims to enhance model capacity while maintaining memory efficiency. This approach leverages scaling factors as experts, improving accuracy of binarized

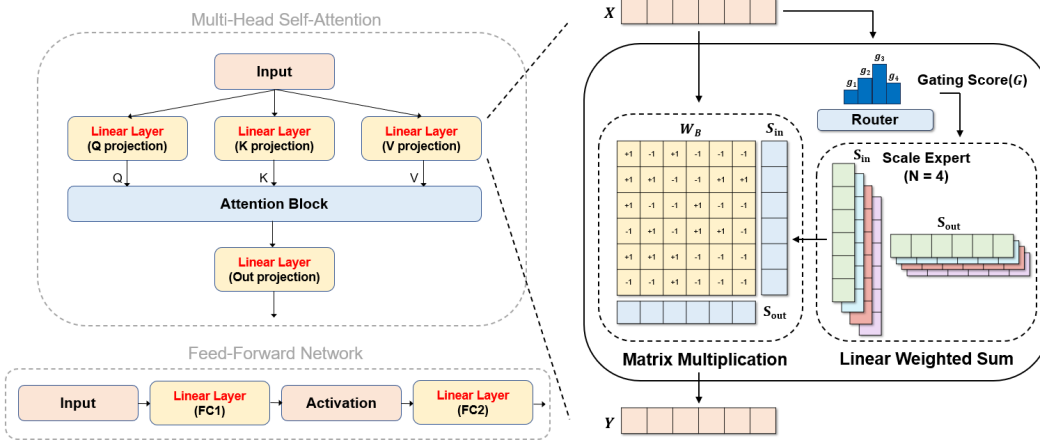


Figure 2: Illustration of the proposed BinaryMoS scheme. The proposed BinaryMoS introduces a mixture of scale approach to generate token-adaptive scaling factors.

LLMs without the extensive memory overhead associated with traditional MoE configurations. In the following section, we will delve deeper into how BinaryMoS operates and its benefits over conventional techniques.

3 Proposed BinaryMoS

3.1 Binarization with Mixture of Scale

An overview of the proposed BinaryMoS is presented in Figure 2. Unlike previous binarization techniques that utilize a single scaling vector per input or output dimension, BinaryMoS integrates the concept of experts from the MoE framework into the scaling factors and utilizes multiple scaling experts for each dimension. As discussed in Section 2.1, although the size of scaling factors is relatively small, they play a crucial role in preserving the accuracy of binarized models. Therefore, introducing multiple scaling experts incurs minimal memory overhead while effectively leveraging the advantages of the MoE strategy to enhance the capabilities of binarized models.

In the MoE framework, the number of experts selected corresponds directly to the number of layers processed. As a result, the typical MoE framework selects only one or two experts per inference stage to manage the increased processing burden associated with more experts being selected. On the other hand, the scaling factors of binarized LLMs are solely involved in linear operations with matrix multiplication, as detailed in Equation 2. This linearity allows for the efficient management of multiple scaling experts by linearly combining them before executing the matrix multiplication. Hence, instead of selecting only a few experts, as done in the conventional MoE framework, BinaryMoS dynamically generates instructions on how to combine these scaling experts based on the context. This approach overcomes the limitations of fixed expert choices in typical MoE setups by enabling the creation of effectively infinite token-adaptive scaling factors through linear combinations. Consequently, by optimally utilizing the representational power of multiple scaling experts, BinaryMoS maximizes the potential of binarized models while maintaining memory efficiency.

3.2 Router Design

In order to generate the token-adaptive scaling factors, the proposed BinaryMoS designs the router for processing the following operations:

$$G = \text{Softmax}(XW_R) \quad (3)$$

$$\hat{S}_{in} = GS_{in}, \quad \hat{S}_{out} = GS_{out} \quad (4)$$

Here, $W_R \in \mathbb{R}^{m \times e}$ represents the weight parameters of router's linear layer, where e denotes the number of experts. $S_{in} \in \mathbb{R}^{e \times m}$ and $S_{out} \in \mathbb{R}^{e \times n}$ denote the scaling experts for input and output dimension, respectively. Initially, the router computes the gating score G , which represents

Table 1: Comparison of memory requirements for deploying Float16 and binarized models, with the number in parentheses denoting the compression ratio of binarized models over Float16 models.

Model	Float16	PB-LLM	BiLLM	OneBit	BinaryMoS
LLaMA-1/2-7B	13.51 GB	2.78 GB (4.86×)	2.28 GB (5.93×)	1.37 GB (9.86×)	1.40 GB (9.65×)
LLaMA-1/2-13B	26.20 GB	5.02 GB (5.22×)	4.06 GB (6.45×)	2.29 GB (11.44×)	2.33 GB (11.24×)

the significance of each scaling expert, using input activations and router weights, as outlined in Equation 3. Notably, as the gating scores are generated with the softmax function, the sum of gating scores for the scaling experts equals 1. These scores are used to linearly combine the scaling experts, resulting in the creation of token-adaptive scaling factors \hat{S}_{in} and \hat{S}_{out} , as shown in Equation 4. Then, by replacing the static scaling factors S_{in} and S_{out} from Equation 2 with token-adaptive scaling factors, the result of matrix multiplication \hat{Y} in a linear layer using the BinaryMoS approach can be revised as follows:

$$\hat{Y} = [(X \odot \hat{S}_{in})\text{Sign}(W_{FP}^T)] \odot \hat{S}_{out} \quad (5)$$

We empirically find that using four scaling experts each for the input and output dimensions provides the optimal compromise between increasing model size and improving accuracy. Consequently, the proposed BinaryMoS utilizes four scaling experts for each dimension to enhance accuracy while maintaining efficiency.

3.3 Impact of BinaryMos on LLM Compression

The proposed BinaryMoS introduces additional memory overhead due to multiple scaling experts and the weights of the router. However, this overhead is relatively minor. For instance, in the LLaMA-1/2-7B model [16] with a hidden dimension h of 4096, the weight matrix for the linear layers is typically 4096×4096 . If BinaryMoS adopts 4 scaling experts, this translates to four α 's, each of dimension 4096×1 , for both input and output dimensions. Additionally, the weights of the router would be 4096×4 . Compared to the previous OneBit method, which requires a single α for both input and output dimensions, the additional components in BinaryMoS total 4096×10 parameters. The number of these extra parameters constitutes only 0.2% of the original weight parameters.

For a comprehensive examination of the impact of various binarization techniques, including BinaryMoS, on LLM compression, we evaluate the memory requirements of LLaMA models with Float16 parameters and after applying different binarization methods, as detailed in Table 1. Following standard practice, all binarization techniques exclude the embedding layer and lm-head from binarization. Our analysis reveals that BinaryMoS significantly reduces the memory footprint of models, achieving compression ratios ranging from $9.65 \times$ to $11.24 \times$. As model size increases, the relative impact of additional parameters diminishes and the proportion of the unbinarized part decreases. Hence, we can achieve higher compression ratios for larger models. For instance, the original LLaMA-1/2-13B model, requiring 26.20 GB for deployment, is impractical for edge devices due to its size. However, BinaryMoS reduces this model to just 2.33 GB, representing an 11.24-fold decrease in memory requirements. This significant reduction facilitates deployment on edge devices with typically limited memory capacities of 4 GB.

In contrast, PB-LLM and BiLLM methods achieve relatively lower compression ratios of around $5 \times$ and $6 \times$, respectively. This is primarily due to two reasons: first, PB-LLM and BiLLM methods must retain salient weight information, increasing the average bitwidth of weight parameters. Second, the handling of sparse weight matrices in these methods introduces overhead in indexing sparse weight matrices, limiting the achievable compression ratio. OneBit achieves the highest compression ratio by only introducing dual-dimension scaling factors. Remarkably, BinaryMoS achieves a comparable compression ratio to OneBit, despite incorporating additional components for scaling experts. While the memory requirement of binarized models with BinaryMoS increases by only 2% compared to OneBit, the inclusion of scaling experts offers much greater potential to significantly improve perplexity.

This analysis demonstrates that although BinaryMoS introduces additional parameters, the relative increase in memory requirement is modest. This makes BinaryMoS a viable option for enhancing accuracy of binarized models without imposing a significant memory burden.

3.4 Quantization-Aware Knowledge Distillation

Following training strategies adopted for network compression [13, 14], we adopt the knowledge distillation (KD) to transfer the knowledge of a full-precision teacher model to a binarized student model. We employ the cross entropy (CE) loss to distill the logit knowledge. This is calculated using the following equation:

$$\mathcal{L}_{CE} = -\frac{1}{n} \sum_c \sum_{i=1}^n p_c^{\mathcal{T}}(X_i) \log(p_c^{\mathcal{S}}(X_i)) \quad (6)$$

Here, \mathcal{S} and \mathcal{T} represent the student and teacher models respectively. n denotes batch size, and c is the number of classes. Additionally, to minimize the distributional discrepancies in layer outputs, we incorporate a mean-squared error (MSE) based layer-to-layer (L2L) loss as follows:

$$\mathcal{L}_{L2L} = \sum_{l=1}^L \text{MSE}(\mathbf{H}_l^{\mathcal{T}}, \mathbf{H}_l^{\mathcal{S}}) \quad (7)$$

In this loss, $\mathbf{H}_l^{\mathcal{T}}$ and $\mathbf{H}_l^{\mathcal{S}}$ are the output logits from the l -th layer of the teacher and student models, respectively. The total loss function, integrating both CE and L2L distillation losses, is defined as:

$$\mathcal{L} = \mathcal{L}_{CE} + \alpha \cdot \mathcal{L}_{L2L} \quad (8)$$

where α is a hyperparameter that balances the contributions of the CE and L2L losses. For the training of BinaryMoS, we empirically set $\alpha = 10$.

4 Experiments

4.1 Experimental Settings

Models and Evaluation Datasets. In our study, we evaluate BinaryMoS on various models, including those from the LLaMA-1 [16], LLaMA-2 [17], and OPT [15] families. Specifically, we utilize the OPT models with 125M and 1.3B parameters, and the LLaMA-1 and LLaMA-2 models with 7B and 13B parameters for our evaluations. We measure language modeling capabilities of these models by evaluating their perplexity on the WikiText2 [24] and C4 [25] datasets. Additionally, we assess zero-shot accuracy on various Common Sense Reasoning Tasks such as BoolQ [19], PIQA [20], HellaSwag [21], WinoGrande [22], ARC-e, ARC-c [23]), utilizing the open-source LLM evaluation framework, LM-Evaluation-Harness [35].

Training Details. We initialize the parameters of binarized models using those from pre-trained models, which serve as teacher models for KD. For the training dataset, a mixed dataset composed of the WikiText2 training dataset and a selected partition from the C4 training dataset, with a sequence length of 2048. The training is conducted over three epochs using the AdamW [18] optimizer, with hyperparameters set to $\beta_1 = 0.9$, $\beta_2 = 0.999$, and zero weight decay. We implement a cosine decay learning rate scheduler, preceded by a warm-up phase constituting 0.03 of the total training duration. All training sessions are conducted on NVIDIA A100 GPUs.

Baselines. We compare BinaryMoS against previous LLM binarization methods, including PB-LLM [5], BiLLM [6], and OneBit [7], ensuring that all implementations adhere to the details provided in their respective papers. PB-LLM and BiLLM utilize the Post-Training Quantization (PTQ) approach for model calibration through the Optimal Brain Quantizer (OBQ) based method of GPTQ [2]. For PB-LLM, which allows variable ratios of salient weights to enhance accuracy, we have set the ratio of salient weights to 10% to ensure the average bit width of weight parameters remains below 2 bits. OneBit employs a Quantization-Aware Training (QAT) approach, and for fairness, its training setup is aligned with that of BinaryMoS. Given the significant accuracy improvements demonstrated by BinaryMoS over traditional binarization techniques, we also include a comparison with 2-bit quantization methods with PTQ approach, such as GPTQ [2] and OmniQuant [28], to broaden the evaluation scope.

4.2 Analysis on the Number of Scaling Experts

To determine the optimal number of scaling experts for BinaryMoS, which effectively maintains the accuracy of binarized LLMs while minimizing memory usage, we conduct evaluations with

Table 2: The impact of the numbers of scaling experts on the proposed BinaryMoS. Quick assessment conducted using the LLaMA-1-7B model trained on one-third of the training data.

# of Experts	Perplexity ↓		Zero-shot Accuracy ↑						Average
	Wiki2	C4	BoolQ	PIQA	Hella.	WinoG.	ARC-e	ARC-c	
1	9.33	12.54	60.27	67.84	46.77	52.09	38.38	27.98	48.89
2	9.19	12.18	62.69	68.55	48.36	55.09	40.23	28.92	50.64
4	8.92	11.85	60.51	67.46	49.95	55.24	41.16	29.35	50.61
8	9.17	12.28	58.68	67.46	47.51	53.67	39.52	29.43	49.38

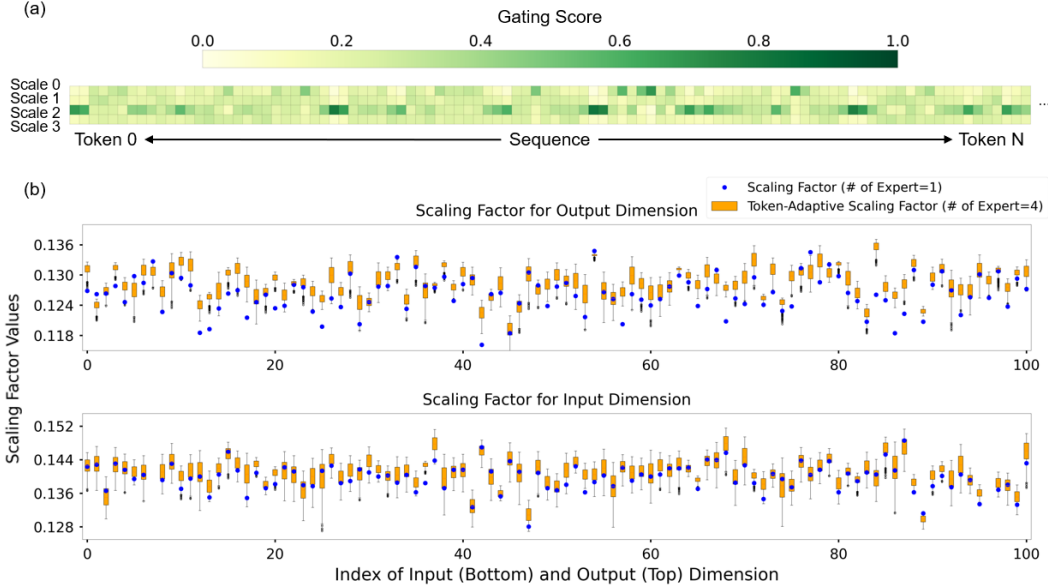


Figure 3: (a) Gating scores of 4 scaling experts in 18th layer of LLaMA-1-7B model for each token in the input sequence. (b) Distribution of values of token-adaptive scaling factors. The boxplot visually presents the distribution of token-adaptive scaling factors among processed tokens. The box spans the interquartile range, indicating the middle 50% of the scaling factors. Extending from the box are whiskers that reach the furthest data points within 1.5 times the interquartile range, providing insight into the overall range of the data.

LLaMA-1-7B using varying numbers of scaling experts. This evaluation is conducted using only one-third of the training data for quick assessment. As shown in Table 2, performance metrics, including perplexity and accuracy, generally improve as the number of experts increases from 1 to 4. However, a further increase to 8 experts leads to a decline in model performance. This decline arises from the challenge of training routers to appropriately assign scales to tokens as the number of scales increases. Based on these observations, we choose to employ 4 experts in the BinaryMoS approach.

4.3 Analysis on the Token-Adaptive Scaling Factors

In this section, we explore the effectiveness of the proposed mixture of scale approach in generating token-adaptive scaling factors. To accomplish this, we analyze the gating scores for scaling experts and the scaling factors derived from these scores. For this analysis, we utilize the LLaMA-1-7B model and input sequences sampled from the C4 dataset.

Figure 3 showcases the gating scores and resulting token-adaptive scaling factors for out projection of the 18th layer across tokens of the input sequence. The experimental results reveal substantial variation in the gating scores for each expert across tokens. As depicted in Figure 3(b), while conventional binarization methods with static scaling factors, akin to having a single expert, offer a fixed scaling factor, the scaling experts of BinaryMoS successfully generate a diverse range of scaling factors. This highlights the efficacy of the mixture of scale approach, which adaptively determines the

Table 3: Perplexity and zero-shot accuracy results of Float16 and binarized LLMs.

Model	Method	Wbits	Perplexity ↓		Zero-shot Accuracy ↑						
			Wiki2	C4	BoolQ	PIQA	Hella.	WinoG.	ARC-e	ARC-c	Average
OPT-125M	Float16	16	27.65	24.60	55.47	62.02	31.33	50.19	39.98	22.86	43.64
	PB-LLM	1	3233.63	1509.33	37.83	50.60	26.67	50.43	27.02	23.63	36.02
	BiLLM	1	2989.53	1769.26	37.82	50.59	25.75	51.30	27.65	23.63	36.12
	OneBit	1	39.45	35.58	61.92	60.01	27.01	50.43	35.81	21.84	42.84
	BinaryMoS	1	36.46	33.13	61.83	60.17	27.16	51.38	36.74	22.95	43.37
OPT-1.3B	Float16	16	14.62	14.72	57.82	72.42	53.70	59.51	50.97	29.52	53.99
	PB-LLM	1	272.83	175.42	62.17	54.24	27.25	50.27	27.98	23.72	40.94
	BiLLM	1	69.45	63.92	61.92	59.52	33.81	49.32	34.38	22.35	43.55
	OneBit	1	20.36	20.76	57.85	66.53	39.21	54.61	42.80	23.97	47.50
	BinaryMoS	1	18.45	18.83	60.34	68.66	41.99	53.99	44.87	26.19	49.34
LLaMA-1-7B	Float16	16	5.68	7.08	73.21	77.42	72.99	66.85	52.53	41.38	64.06
	PB-LLM	1	198.37	157.35	60.51	53.53	27.23	49.17	27.48	26.02	40.66
	BiLLM	1	41.66	48.15	62.23	58.65	34.64	51.14	33.08	25.68	44.24
	OneBit	1	8.48	10.49	62.50	70.40	54.03	55.32	41.07	30.88	52.36
	BinaryMoS	1	7.97	9.72	64.59	71.82	58.18	58.88	42.09	31.31	54.48
LLaMA-1-13B	Float16	16	5.09	6.61	68.47	79.05	76.24	70.17	59.85	44.54	66.39
	PB-LLM	1	35.83	39.79	62.17	58.70	33.97	52.17	31.86	23.63	43.75
	BiLLM	1	14.56	16.67	62.53	68.17	52.24	59.43	41.91	29.94	52.37
	OneBit	1	7.65	9.56	63.30	71.98	60.61	59.43	42.85	32.42	55.10
	BinaryMoS	1	7.16	8.81	63.82	73.88	64.05	60.93	44.28	33.11	56.68
LLaMA-2-7B	Float16	16	5.47	6.97	71.07	76.87	72.95	67.16	53.45	40.78	63.71
	PB-LLM	1	76.75	85.92	62.17	52.82	26.87	50.11	26.89	24.31	40.53
	BiLLM	1	27.72	36.34	62.14	59.19	35.18	53.11	34.22	26.54	45.06
	OneBit	1	8.60	10.74	63.06	70.40	54.24	56.67	40.82	29.35	52.42
	BinaryMoS	1	7.88	9.75	65.02	71.55	59.41	56.18	41.84	30.03	54.01
LLaMA-2-13B	Float16	16	4.88	6.47	68.99	79.05	76.62	69.77	57.95	44.20	66.10
	PB-LLM	1	155.25	151.15	37.82	53.26	28.89	49.48	28.28	23.72	36.91
	BiLLM	1	20.71	27.19	62.20	62.51	38.05	56.35	40.69	27.73	47.92
	OneBit	1	7.56	9.67	65.66	71.60	60.07	56.91	45.76	31.74	55.29
	BinaryMoS	1	7.08	8.91	66.12	73.72	63.80	58.98	45.71	33.19	57.09

scaling factor for each token, leading to a wider representation range. Consequently, we can expect that BinaryMoS effectively enhances the capacity of binarized models and improves model accuracy.

4.4 Perplexity and Accuracy Results of Binarized Models

The perplexity and zero-shot accuracy results of previous binarization methods and the proposed BinaryMoS are presented in Table 3. BinaryMoS consistently outperforms earlier binarization techniques across all metrics, effectively narrowing the performance disparity with their Float16 counterparts.

In particular, smaller LLMs such as OPT-125M and OPT-1.3B typically face challenges in maintaining linguistic capabilities under model compression. Previous methods like PB-LLM and BiLLM result in significant increases in perplexity, often exceeding 1000 for the OPT-125M model. While OneBit made substantial improvements, perplexity increases remained above 10. BinaryMoS, however, significantly enhances these outcomes by keeping the increase in perplexity below 10. Moreover, it boosts the accuracy of binarized models and diminishes the zero-shot accuracy gap to within 0.3% compared to Float16 models. The distinct advantage of BinaryMoS over previous approaches, especially OneBit, lies in its use of scaling experts. This evaluation underlines the efficacy of the BinaryMoS with mixture of scales approach.

Table 4: Perplexity and zero-shot accuracy results for 2-bit quantization methods and BinaryMoS.

		Perplexity ↓ (Wikitext2)					
Method	Wbits	OPT-125M	OPT-1.3B	LLaMA-1-7B	LLaMA-1-13B	LLaMA-2-7B	LLaMA-2-13B
GPTQ	2	660.52	125.29	45.73	15.20	40.23	32.87
OmniQuant	2	245.47	28.82	9.75	7.84	11.20	8.25
BinaryMoS	1	36.46	18.45	7.97	7.16	7.88	7.08
		Perplexity ↓ (C4)					
Method	Wbits	OPT-125M	OPT-1.3B	LLaMA-1-7B	LLaMA-1-13B	LLaMA-2-7B	LLaMA-2-13B
GPTQ	2	213.60	45.43	27.87	15.15	31.37	26.23
OmniQuant	2	390.30	33.81	13.01	10.43	15.46	11.06
BinaryMoS	1	33.13	18.83	9.72	8.81	9.75	8.91
		Average Zero-shot Accuracy ↑					
Method	Wbits	OPT-125M	OPT-1.3B	LLaMA-1-7B	LLaMA-1-13B	LLaMA-2-7B	LLaMA-2-13B
GPTQ	2	37.59	40.36	43.75	49.65	43.31	45.03
OmniQuant	2	36.54	46.43	51.58	56.42	49.54	54.24
BinaryMoS	1	43.37	49.34	54.48	56.68	54.01	57.09

4.5 Comparison between BinaryMoS and 2-bit Quantization

Since BinaryMoS consistently outperforms other binarization methods, we proceed to compare it with conventional 2-bit quantization techniques, GPTQ and OmniQuant. While these two approaches entail lower calibration overhead for quantization due to their use of the PTQ approach, they differ in their quantization methods. GPTQ and OmniQuant utilize a group-wise quantization approach, employing groups of 128 weights to finely quantize parameters and minimize quantization errors. Consequently, the memory demand during inference for these methods is more than double that of BinaryMoS. The comparison results, presented in Table 4, reveal that BinaryMoS even outperforms these 2-bit quantization methods, despite its lower memory requirement during inference. This once again underscores the effectiveness of integrating scaling experts.

5 Discussion and Future Work

BinaryMoS significantly improves the accuracy of binarized LLMs by increasing their representational capability with mixture of scales. This MoS approach holds promise for extension to multi-bit quantization, as multi-bit quantization techniques also involve scaling factors for regulating quantization step size. However, in this paper, our study does not delve into the effectiveness of the mixture of scales on multi-bit quantization schemes, leaving this avenue for future exploration.

Though BinaryMoS adopts the concept of MoE, it does not fully leverage advanced training techniques established in the field of MoE [26, 27, 34]. These advanced methods optimize routing functions and balance token assignments among experts, thereby enhancing MoE model accuracy. Thus, investigating these training techniques is another topic for future research.

6 Conclusion

This paper introduces BinaryMoS, a novel binarization technique designed to enhance the representation capability of binarized LLMs while preserving the fundamental advantage of binarization—low memory usage. BinaryMoS adopts the mixture of scale approach to dynamically adjust the scaling factors of binary weight values in a token-adaptive manner. Given that scaling factors play a crucial role in reducing binarization error and occupy a small portion of binarized models, this approach effectively mitigates information loss associated with binarization with minimal memory overhead. Our experimental findings demonstrate that BinaryMoS surpasses existing binarization approaches and even outperforms 2-bit quantization methods in both perplexity and zero-shot tasks.

References

- [1] Shiyao Li, Xuefei Ning, Luning Wang, Tengxuan Liu, Xiangsheng Shi, Shengen Yan, Guohao Dai, Huazhong Yang, Yu Wang, “Evaluating Quantized Large Language Models”, *arXiv preprint arXiv:2402.18158*, 2024.
- [2] Elias Frantar, Saleh Ashkboos, Torsten Hoefler, Dan Alistarh, “GPTQ: Accurate Post-Training Quantization for Generative Pre-trained Transformers”, *International Conference on Learning Representations (ICLR)*, 2023.
- [3] Ji Lin, Jiaming Tang, Haotian Tang, Shang Yang, Wei-Ming Chen, Wei-Chen Wang, Guangxuan Xiao, Xingyu Dang, Chuang Gan, Song Han, “AWQ: Activation-aware Weight Quantization for LLM Compression and Acceleration”, *arXiv preprint arXiv:2306.00978*, 2023.
- [4] Changhun Lee, Jungyu Jin, Taesu Kim, Hyungjun Kim, Eunhyeok Park, “OWQ: Outlier-Aware Weight Quantization for Efficient Fine-Tuning and Inference of Large Language Models”, *Proceedings of the AAAI Conference on Artificial Intelligence (AAAI)*, 2024.
- [5] Yuzhang Shang, Zhihang Yuan, Qiang Wu, Zhen Dong, “PB-LLM: Partially Binarized Large Language Models”, *International Conference on Learning Representations (ICLR)*, 2024.
- [6] Wei Huang, Yangdong Liu, Haotong Qin, Ying Li, Shiming Zhang, Xianglong Liu, Michele Magno, Xiaojuan Qi, “BiLLM: Pushing the Limit of Post-Training Quantization for LLMs”, *International Conference on Machine Learning (ICML)*, 2024.
- [7] Yuzhuang Xu, Xu Han, Zonghan Yang, Shuo Wang, Qingfu Zhu, Zhiyuan Liu, Weidong Liu, Wanxiang Che, “OneBit: Towards Extremely Low-bit Large Language Models”, *arXiv preprint arXiv:2402.11295*, 2024.
- [8] Xunyu Zhu, Jian Li, Yong Liu, Can Ma, and Weiping Wang, “A survey on model compression for large language models”, *arXiv preprint arXiv:2308.07633*, 2023.
- [9] Haotong Qin, Ruihao Gong, Xianglong Liu, Xiao Bai, Jingkuan Song, and Nicu Sebe, “Binary neural networks: A survey”, *arXiv preprint arXiv:2004.03333*, 2020.
- [10] Zechun Liu, Wenhan Luo, Baoyuan Wu, Xin Yang, Wei Liu, and Kwang-Ting Cheng, “Bi-Real Net: Binarizing Deep Network Towards Real-Network Performance”, *Proceedings of the European Conference on Computer Vision (ECCV)*, 2018.
- [11] Mohammad Rastegari, Vicente Ordonez, Joseph Redmon, Ali Farhadi, “XNOR-Net: ImageNet Classification Using Binary Convolutional Neural Networks”, *Proceedings of the European Conference on Computer Vision (ECCV)*, 2016.
- [12] Zechun Liu, Zhiqiang Shen, Marios Savvides, Kwang-Ting Cheng, “ReActNet: Towards Precise Binary Neural Network with Generalized Activation Functions”, *Proceedings of the European Conference on Computer Vision (ECCV)*, 2020.
- [13] Zechun Liu, Barlas Oguz, Changsheng Zhao, Ernie Chang, Pierre Stock, Yashar Mehdad, Yangyang Shi, Raghuraman Krishnamoorthi, Vikas Chandra, “LLM-QAT: Data-Free Quantization Aware Training for Large Language Models”, *arXiv preprint arXiv:2305.17888*, 2023.
- [14] Wei Zhang, Lu Hou, Yichun Yin, Lifeng Shang, Xiao Chen, Xin Jiang, Qun Liu, “TernaryBERT: Distillation-aware Ultra-low Bit BERT”, *arXiv preprint arXiv:2009.12812*, 2020/
- [15] Susan Zhang, Stephen Roller, Naman Goyal, Mikel Artetxe, Moya Chen, Shuohui Chen, Christopher Dewan, Mona Diab, Xian Li, Xi Victoria Lin, Todor Mihaylov, Myle Ott, Sam Shleifer, Kurt Shuster, Daniel Simig, Punit Singh Koura, Anjali Sridhar, Tianlu Wang, Luke Zettlemoyer, “OPT: Open Pre-trained Transformer Language Models”, *arXiv preprint arXiv:2205.01068*, 2022.
- [16] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, Aurelien Rodriguez, Armand Joulin, Edouard Grave, Guillaume Lample, “LLaMA: Open and Efficient Foundation Language Models”, *arXiv preprint arXiv:2302.13971*, 2023.
- [17] Touvron, Hugo and Martin, Louis and Stone, Kevin and Albert, Peter and Almahairi, Amjad and Babaei, Yasmine and Bashlykov, Nikolay and Batra, Soumya and Bhargava, Prajjwal and Bhosale, Shruti and others, “Llama 2: Open Foundation and Fine-Tuned Chat Models”, *arXiv preprint arXiv:2307.09288*, 2023.

- [18] Ilya Loshchilov, Frank Hutter, “Decoupled Weight Decay Regularization”, *International Conference on Learning Representations (ICLR)*, 2019.
- [19] Christopher Clark, Kenton Lee, Ming-Wei Chang, Tom Kwiatkowski, Michael Collins, Kristina Toutanova, “BoolQ: Exploring the Surprising Difficulty of Natural Yes/No Questions”, *arXiv preprint arXiv:1905.10044*, 2019.
- [20] Yonatan Bisk, Rowan Zellers, Ronan Le Bras, Jianfeng Gao, Yejin Choi, “PIQA: Reasoning about Physical Commonsense in Natural Language”, *Proceedings of the AAAI Conference on Artificial Intelligence (AAAI)*, 2020.
- [21] Rowan Zellers, Ari Holtzman, Yonatan Bisk, Ali Farhadi, Yejin Choi, “HellaSwag: Can a Machine Really Finish Your Sentence?”, *arXiv preprint arXiv:1905.07830*, 2019.
- [22] Keisuke Sakaguchi, Ronan Le Bras, Chandra Bhagavatula, Yejin Choi, “WinoGrande: An Adversarial Winograd Schema Challenge at Scale”, *arXiv preprint arXiv:1907.10641*, 2019.
- [23] Peter Clark, Isaac Cowhey, Oren Etzioni, Tushar Khot, Ashish Sabharwal, Carissa Schoenick, Oyvind Tafjord, “Think you have Solved Question Answering? Try ARC, the AI2 Reasoning Challenge”, *arXiv preprint arXiv:1803.05457*, 2018.
- [24] Stephen Merity, Caiming Xiong, James Bradbury, Richard Socher, “Pointer Sentinel Mixture Models”, *arXiv preprint arXiv:1609.07843*, 2016.
- [25] Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, Peter J. Liu, “Exploring the Limits of Transfer Learning with a Unified Text-to-Text Transformer”, *arXiv preprint arXiv:1910.10683*, 2019.
- [26] Noam Shazeer, Azalia Mirhoseini, Krzysztof Maziarz, Andy Davis, Quoc Le, Geoffrey Hinton, Jeff Dean, “Outrageously Large Neural Networks: The Sparsely-Gated Mixture-of-Experts Layer”, *arXiv preprint arXiv:1701.06538*, 2017.
- [27] William Fedus, Barret Zoph, Noam Shazeer, “Switch Transformers: Scaling to Trillion Parameter Models with Simple and Efficient Sparsity”, *arXiv preprint arXiv:2101.03961*, 2021.
- [28] Wenqi Shao, Mengzhao Chen, Zhaoyang Zhang, Peng Xu, Lirui Zhao, Zhiqian Li, Kaipeng Zhang, Peng Gao, Yu Qiao, Ping Luo, “OmniQuant: Omnidirectionally Calibrated Quantization for Large Language Models”, *International Conference on Learning Representations (ICLR)*, 2024.
- [29] Hongyu Wang, Shuming Ma, Li Dong, Shaohan Huang, Huaijie Wang, Lingxiao Ma, Fan Yang, Ruiping Wang, Yi Wu, Furu Wei, “BitNet: Scaling 1-bit Transformers for Large Language Models”, *arXiv preprint arXiv:2310.11453*, 2023.
- [30] Tim Dettmers, Artidoro Pagnoni, Ari Holtzman, Luke Zettlemoyer, “QLoRA: Efficient Fine-tuning of Quantized LLMs”, *Advances in Neural Information Processing Systems (NeurIPS)*, 2023.
- [31] Tim Dettmers, Ruslan Svirschevski, Vage Egiazarian, Denis Kuznedelev, Elias Frantar, Saleh Ashkboos, Alexander Borzunov, Torsten Hoefler, Dan Alistarh, “SpQR: ASparse-Quantized Representation for Near-Lossless LLM Weight Compression”, *arXiv preprint arXiv:2306.03078*, 2023.
- [32] Sehoon Kim, Coleman Hooper, Amir Gholami, Zhen Dong, Xiuyu Li, Sheng Shen, Michael W. Mahoney, Kurt Keutzer, “SqueezeLLM: Dense-and-Sparse Quantization”, *International Conference on Machine Learning (ICML)*, 2024.
- [33] Jerry Chee, Yaohui Cai, Volodymyr Kuleshov, Christopher De Sa, “QuIP: 2-Bit Quantization of Large Language Models With Guarantees”, *Advances in Neural Information Processing Systems (NeurIPS)*, 2023.
- [34] Barret Zoph, Irwan Bello, Sameer Kumar, Nan Du, Yanping Huang, Jeff Dean, Noam Shazeer, William Fedus, “ST-MoE: Designing Stable and Transferable Sparse Expert Models”, *arXiv preprint arXiv:2202.08906*, 2022.
- [35] Subhabrata Mukherjee, Xiaodong Liu, Guoqing Zheng, Saghar Hosseini, Hao Cheng, Greg Yang, Christopher Meek, Ahmed Hassan Awadallah, Jianfeng Gao, “Few-Shot Learning Evaluation in Natural Language Understanding”, *Thirty-fifth Conference on Neural Information Processing Systems Datasets and Benchmarks Track (Round 2)*, 2021.

A Appendix

A.1 Ablation Study on Datasets

To determine the optimal dataset for training binarized models, we conducted a comparative analysis using various training datasets, as summarized in Table 5. The results indicate that models trained solely on the WikiText2 dataset, due to its relatively small dataset size, tend to exhibit overfitting tendencies and struggle to generalize to other datasets. While these models demonstrate considerable perplexity improvement on the WikiText2 evaluation, their perplexity on the C4 dataset and zero-shot accuracy is notably poor. Conversely, models trained exclusively on the C4 dataset perform well across a wide range of tasks, except for the evaluation on WikiText2. Following the approach of previous research [13], we also experiment with a generated dataset synthesized using the LLaMA-1-7B model. Although this dataset generally performs satisfactorily across various language modeling tasks, its performance lags behind that of the C4 dataset. Therefore, to enhance overall model performance, we opt to train the models on a mixed dataset comprising both C4 and WikiText2. Moreover, the accessibility of both C4 and WikiText2 as open-source datasets further facilitates their adoption for training purposes.

Table 5: Evaluation of binarized LLaMA-1-7B model trained with various training datasets. We train the model on a subset of the dataset with the same training step. †: Generated dataset synthesized by LLaMA-1-7B model. ‡: Mixed dataset of Wikitext2 and C4.

Datasets	Perplexity ↓		Zero-shot Accuracy ↑						
	Wiki2	C4	BoolQ	PIQA	HellaSwag	WinoGrande	ARC-e	ARC-c	Avg
Generated †	12.54	13.04	60.51	66.10	45.91	54.69	41.41	27.90	49.42
Wiki2	9.65	28.61	57.95	57.67	36.78	54.45	38.46	26.62	45.32
C4	13.76	11.97	60.33	67.79	49.69	53.74	39.26	29.52	50.06
Mixed ‡	8.92	11.85	60.51	67.46	49.95	55.24	41.16	29.35	50.61